

	1	2	3	4	5	6	
<b>PRODUCT LABEL</b>							
A							
	2	3	4	5	6	7	
	14	15	16	17	11	12	
B							
	1	2	3	4	5	6	
C							
	1	2	3	4	5	6	
D							
	1	2	3	4	5	6	

**GLBOX HD200**

Mac Add.: XXXXXXXXXXXXXXXX

GLBOX ID: 444 XXX XXXX

Model: STNE4C7A82GDL

FCC ID: ZPA-TELSEY3070

Designed in ITALY  
Made in CHINA

**CE** 

HDMI™  
HIGH-DEFINITION MULTIMEDIA INTERFACE

This device complies with Part 15 of the FCC rules subject to the following two conditions: 1) This device may not cause harmful interference. 2) This device must accept all interference received, including interference that may cause undesired operation.

NOTE1: The Product Serial number "GLBOX ID" is a progressive number (10 digit) that will starts from 444 501 0001 and increase in step by 1

NOTE2: for each production, a range of MAC addresses and SN will be supplied by Telsey.

NOTE3: not mandatory, if required has to be put in the position indicated, if not leave an empty space.

**SUPPORT SPECIFICATIONS**

**Label size:** Label size : 65x40 mm; in any case mandatory requirement to be considered: "the size must be capable of HOST all the fields ABOVE reported".

**Material :** Durable vinyl with permanent adhesive

**Colour:** White (different colours can be employed up on request).

**Image density** >= 300DPI

**DURABILITY**

The printed label shall be durable and legible for all the life of the products; compliance to this requirement is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

**FIELD NAME ATTRIBUTES**

ITEM	FIELD NAME	Font/Barcode				
		Gender Flag	Value	Family/weight	Height (length)	Width
2	GLBOX logo	BITMAP	"Telsey Logo"	-	not less than 10 mm	-
3	MAC Address Barcode	VARIABLE	<<ref. NOTE2 and 3>>	CODE 128B	not less than 3 mm	
4	MAC Address	MIXED	"MAC Add.:"<<ref. NOTE2>>	Arial Bold	1.5 mm	Regular (1.0)
5	GLBOX ID barcode	VARIABLE	<<ref. NOTE1>>	CODE 128B	not less than 3 mm	
6	GLBOX ID Serial Number	MIXED	"SN :"<<ref. NOTE1>>	Arial, Bold	1.5 mm	Regular (1.0)
7	Design	FIXED	"Designed in ITALY"	Arial	1.5 mm	Regular (1.0)
9	Made in	MIXED	"Made in ...." complete with the country name	Arial	1.5 mm	Regular (1.0)
11	Wheeled bin logo (WEEE)	BITMAP	-	-	not less than 5 mm	-
12	Allert Logo (!)	BITMAP	<<ref. NOTE3>>	--	not less than 5 mm	-
13	HDMI Logo	BITMAP	-	--	not less than 5 mm	-
14	Model	MIXED	STNE4C7A82GDL	Arial, Bold	2 mm	Regular (1.0)
15	CE Logo	BITMAP	-	--	not less than 5 mm	-
16	FCC ID	MIXED	ZPA-TELSEY3070	Arial, Bold	2 mm	Regular (1.0)
17	FCCnote	MIXED	"This device complies with Part 15 of the FCC rules subject to the following two conditions: 1) This device may not cause harmful interference. 2) This device must accept all interference received, including interference that may cause undesired operation."	Arial, Bold	1.5 mm	Regular (1.0)

**TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768**

	PROJECT	TP470				
SCALE	1:1					
DATE	17/05/2011	DRAWING CODE				
TECH. DES.	Girardi D.	PRODUCT CODE				
		STNE4C7A82GDL				
		REV				
		1				
This drawing must not be reproduced without our written consent.		SIZE	A2	SHEET	1 OF 7	+0

# SINGLE PACKAGE LABEL



ITEM	FIELD NAME	FIELD NAME ATTRIBUTES			
		Gender Flag	Value	Font/Barcode	
				Family/weight	Height (length)
2	GLBOX logo	BITMAP	"Telsey Logo"	-	not less than 10 mm
3	MAC Address Barcode	VARIABLE	<<ref. NOTE2 and 3>>	CODE 128B	not less than 3 mm
4	MAC Address	MIXED	"MAC Add.:"<<ref. NOTE2>>	Arial Bold	1.5 mm
5	GLBOX ID barcode	VARIABLE	<<ref. NOTE1>>	CODE 128B	not less than 3 mm
6	GLBOX ID Serial Number	MIXED	"SN :"<<ref. NOTE1>>	Arial, Bold	1.5 mm
7	Design	FIXED	"Designed in ITALY"	Arial	1.5 mm
9	Made in	MIXED	"Made in ...." complete with the country name	Arial	1.5 mm
11	Wheeled bin logo (WEEE)	BITMAP	-	-	not less than 5 mm
12	Allert Logo (!)	BITMAP	<<ref. NOTE3>>	--	not less than 5 mm
13	HDMI Logo	BITMAP	-	--	not less than 5 mm
14	FCC Logo	MIXED	-	-	not less than 5 mm
15	CE Logo	BITMAP	-	--	not less than 5 mm

**NOTE1:** The Product Serial number "GLBOX ID" is a progressive number (10 digit) that will starts from 444 501 0001 and increase in step by 1

**NOTE2:** for each production, a range of MAC addresses and SN will be supplied by Telsey.

**NOTE3:** not mandatory, if required has to be put in the position indicated, if not leave an empty space.

## SUPPORT SPECIFICATIONS

*Label size:* Label size : 65x40 mm; in any case mandatory requirement to be considered: "the size must be capable of HOST all the fields ABOVE reported".

*Material :* POLYESTER (plastic)

*Colour:* White (different colours can be employed up on request).

*Image density* >= 300DPI


## DURABILITY

The printed label shall be durable and legible for all the life of the products; compliance to this requirement is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

	PROJECT	TP470
	TECH. DES.	Girardi D.
SCALE	1:1	
DATE	17/05/2011	DRAWING CODE
		SPLAB_STNE4C7A82GDL
		STNE4C7A82GDL
REV		1
This drawing must not be reproduced without our written consent.		SIZE
		A2
		SHEET
		2 OF 7
		+0

# SNS LABEL

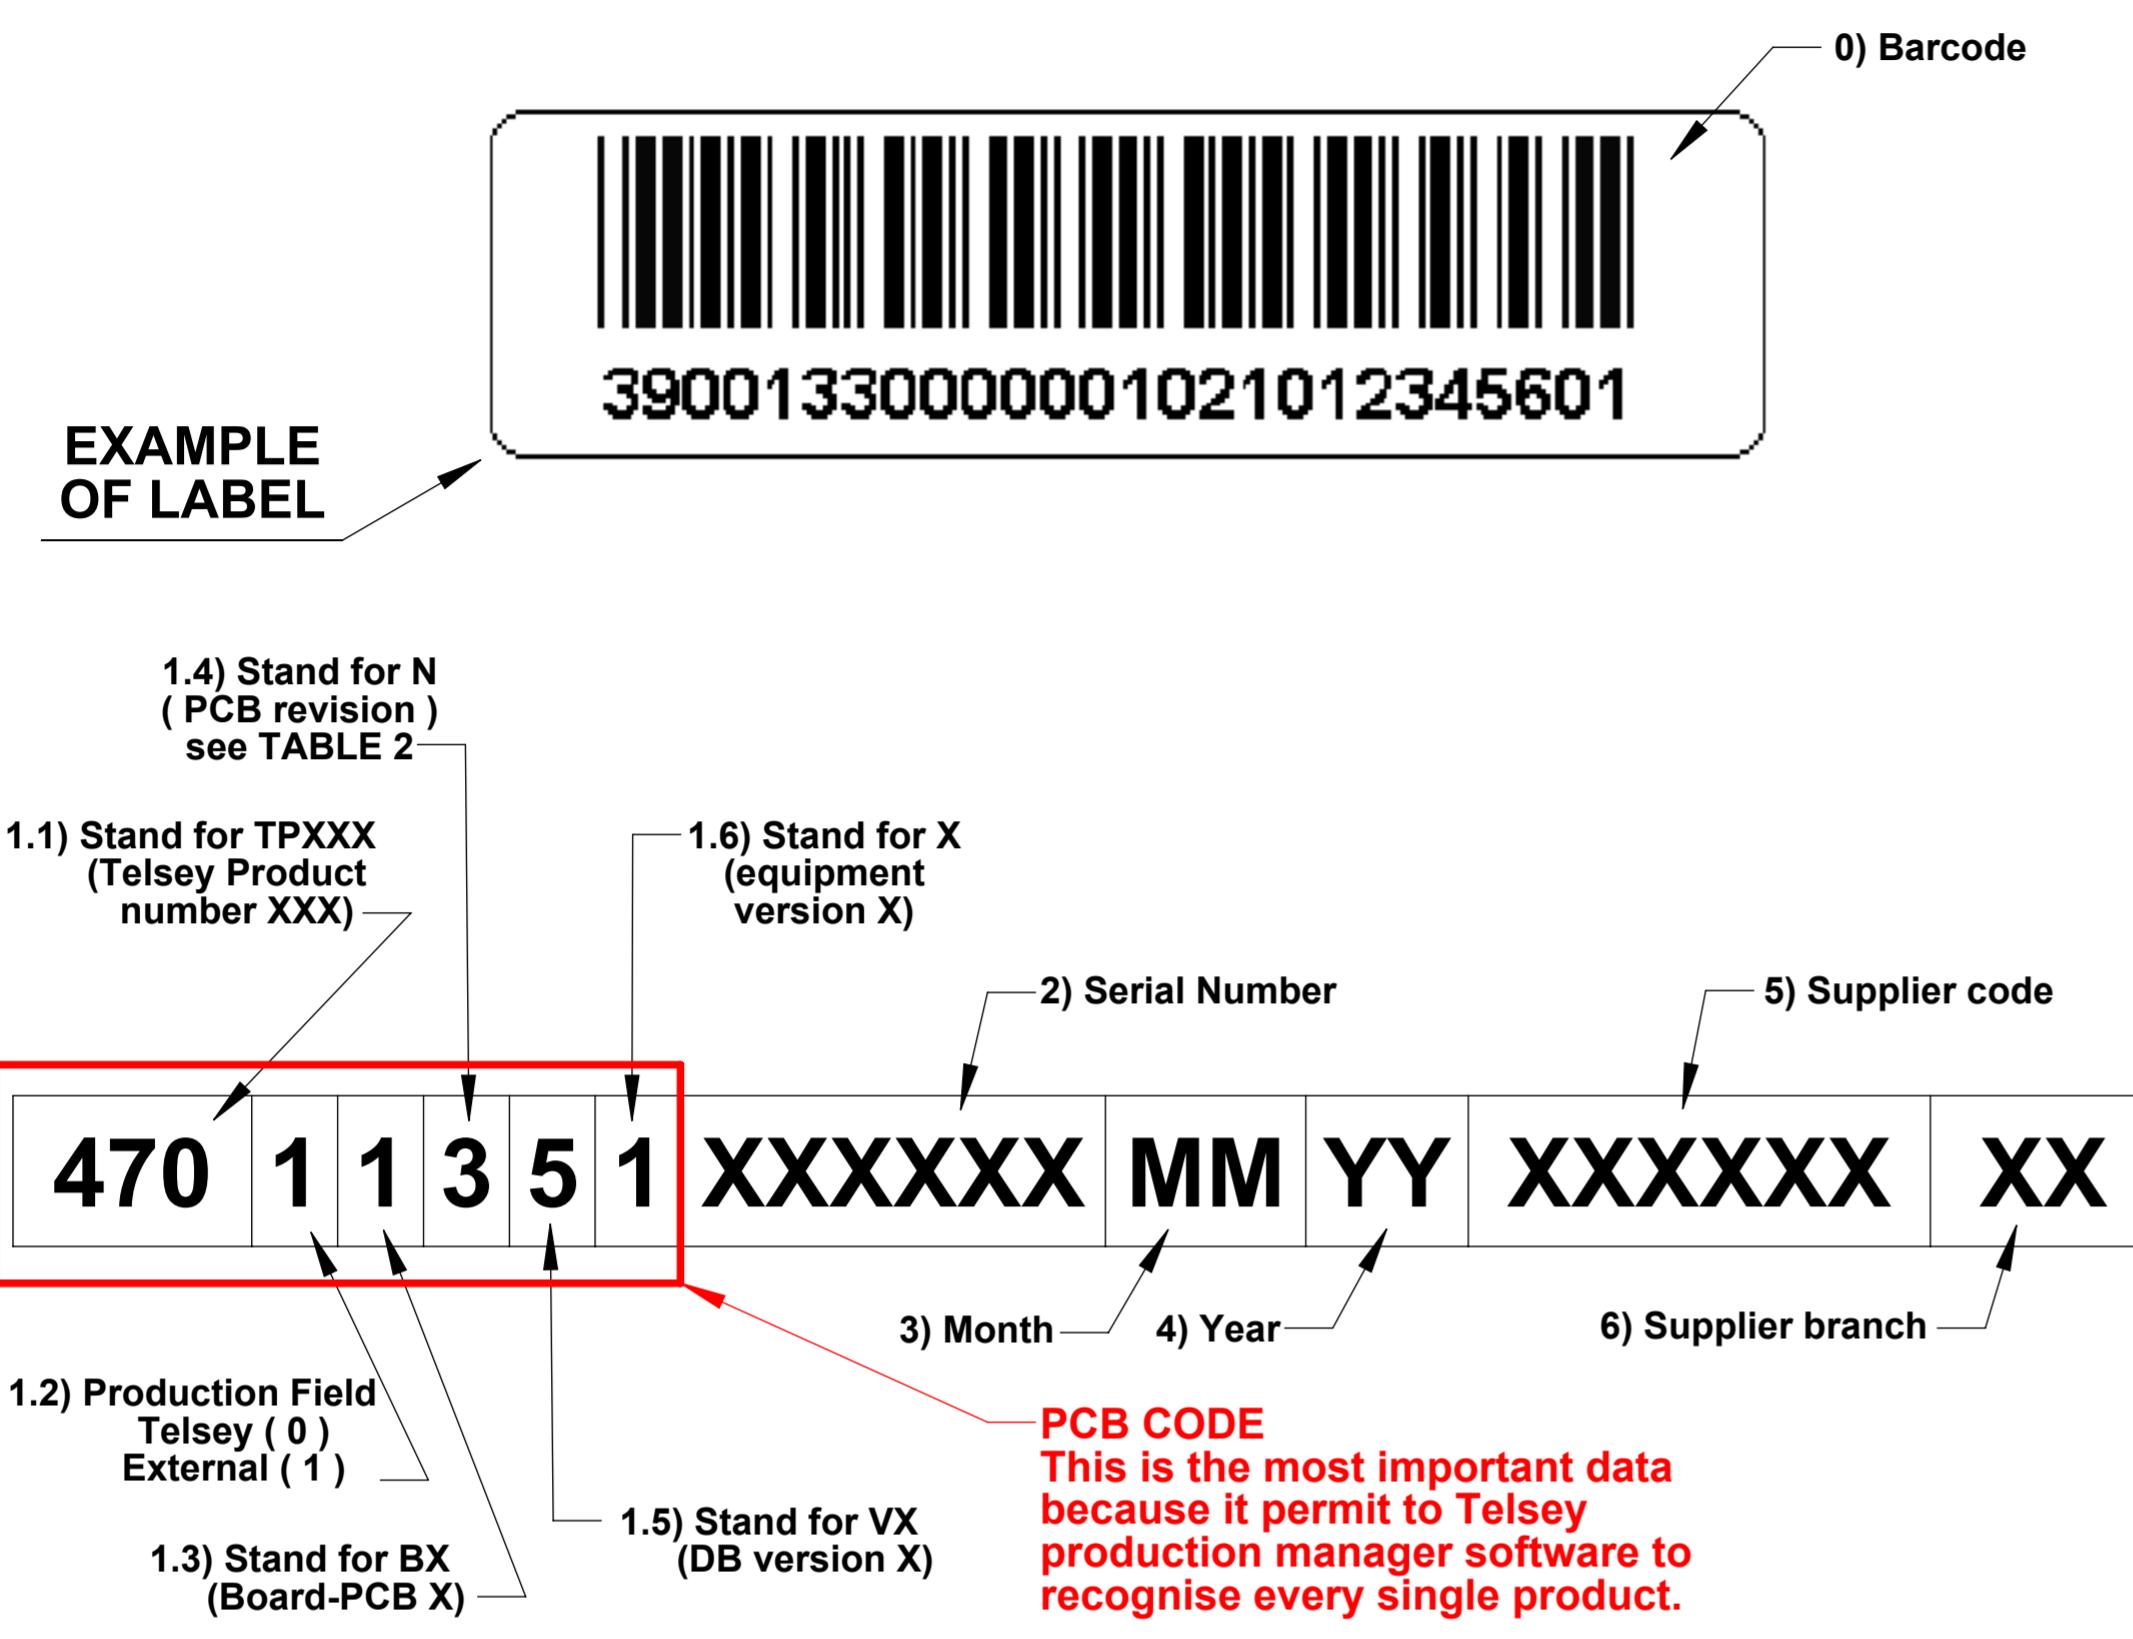

NOTE1: Must be compiled by all field from 1.1 to 6

NOTE2: Serial number is a progressive number. It starts from "000001" each month "MM" and it is increased in step of 1

NOTE3: The "supplier code" of Telsey management system (removing the "F" character), it is shown on the PURCHASE ORDER (see example on the right side of this page).

## SUPPORT SPECIFICATIONS

**Label size:** Label size : 50x12.5 mm or THE VENDOR PREFERRED CHOICE; in any case mandatory requirement to be considered: "the size must be capable of HOST all the TELSEY fields ABOVE reported".

**Material :** POLYESTER (plastic)

**Colour:** White (different colours can be employed up on request).

**Image density** >= 300DPI

## DURABILITY


The printed label shall be durable and legible for all the life of the products; compliance to this requirement is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

Field Number	FIELD NAME	FIELD NAME ATTRIBUTES				
		Gender Flag	Value	Font/Barcode		
				Family/weight	Height (length)	Width
0	Barcode	VARIABLE	<<ref. NOTE1>>	128C	6.5mm, must be readable with CCD barcode reader	-
1.1	Telsey Product	VARIABLE	470	Arial	2 mm	Regular (1.0)
1.2	Production Field	VARIABLE	1	Arial	2 mm	Regular (1.0)
1.3	Board	VARIABLE	1	Arial	2 mm	Regular (1.0)
1.4	PCB Rev	VARIABLE	3	Arial	2 mm	Regular (1.0)
1.5	DB Ver	VARIABLE	5	Arial	2 mm	Regular (1.0)
1.6	Equip. Ver	VARIABLE	1	Arial	2 mm	Regular (1.0)
2	SN	VARIABLE	<<ref. NOTE2>>	Arial	2 mm	Regular (1.0)
3	Month	VARIABLE	Month of production MM= month example: 06 for june	Arial	2 mm	Regular (1.0)
4	Year	VARIABLE	Year of production YY= year example: 10 for 2010	Arial	2 mm	Regular (1.0)
5	Supplier code	VARIABLE	<<ref. NOTE3>>	Arial	2 mm	Regular (1.0)
6	Supplier branch	VARIABLE	01	Arial	2 mm	Regular (1.0)

TABLE 2

Revision letter	Code
A	1
B	2
C	3
...	...
X	N

## Example of Supplier Code

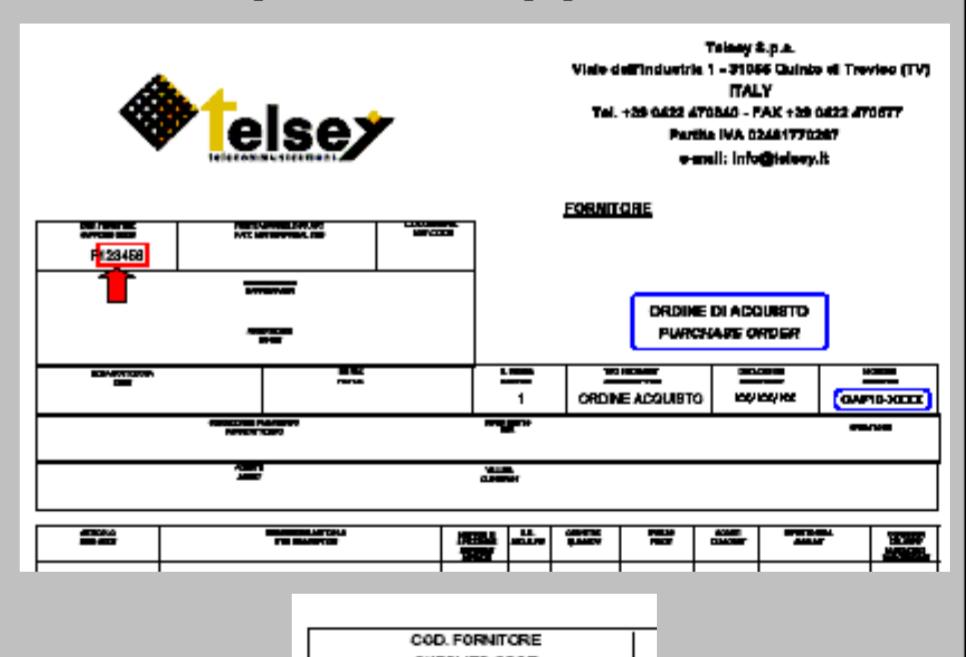

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

Telsey	PROJECT	TP470	
		TECH. DES.	Girardi D.
SCALE	1:1	REV	
DATE	17/05/2011	DRAWING CODE	PRODUCT CODE
		SPLAB_STNE4C7A82GDL	STNE4C7A82GDL
This drawing must not be reproduced without our written consent.		SIZE	A2
		SHEET	3 OF 7

## WARRANTY LABEL



**1) Field GLBOX logo**  
 Type: Bitmap  
 Height: 6.5mm

**2) Field Warranty**  
 Type: alphanumeric  
 Value: WARRANTY VOID IF REMOVED  
 Font: Arial, H2, L 83%, Bold

### Specifications:

**Label size:** 25,4 x 12,7mm  
**Material:** Glossy Metallized Permanent Polyester -  
 TAMPER RESISTANT or TAMPER EVIDENT  
**Image density:** 300DPI

### Features :

- Ultra chemical resistance (ethanol, IPA, acetone, MEX, thinner, xylene, brake-fluid, water)
- 100°C corrugated cardboard scrape resistance
- Scratch resistance
- Thermal printing becomes possible even in processes where many solvents are used.

### Applications :

- For all equipment

## GIFTBOX LABEL



### Support Specifications:

**Label size:** 51 x 25mm  
**Material:** Paper  
**Colour:** White  
**Image density:** 300DPI

ITEM	FIELD NAME	FIELD NAME ATTRIBUTES				
		Gender Flag	Value	Font/Barcode		
ITEM	FIELD NAME			Family/weight	Height (length)	Width
1	MAC Address Barcode	VARIABLE	<<ref. NOTE2>>	CODE 128B	not less than 5 mm	
2	MAC Address	MIXED	"MAC Add.:"<<ref. NOTE2>>	Arial Bold	3 mm	Regular (1.0)
3	GLBOX ID barcode	VARIABLE	<<ref. NOTE1>>	CODE 128B	not less than 5 mm	
4	GLBOX ID	MIXED	"SN :"<<ref. NOTE1>>	Arial Bold	3 mm	Regular (1.0)

**NOTE1:** The Product Serial number "GLBOX ID" is a progressive number (10 digit) that will starts from 444 501 0001 and increase in step by 1

**NOTE2:** for each production, a range of MAC addresses and SN will be supplied by Telsey.

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

PROJECT TP470

TECH. DES. Girardi D.

SCALE 1:1

DATE 17/05/2011 DRAWING CODE SPLAB\_STNE4C7A82GDL

PRODUCT CODE STNE4C7A82GDL


REV 1

This drawing must not be reproduced without our written consent.

SIZE A2

SHEET 4 OF 7

# MULTIPACKAGE LABEL

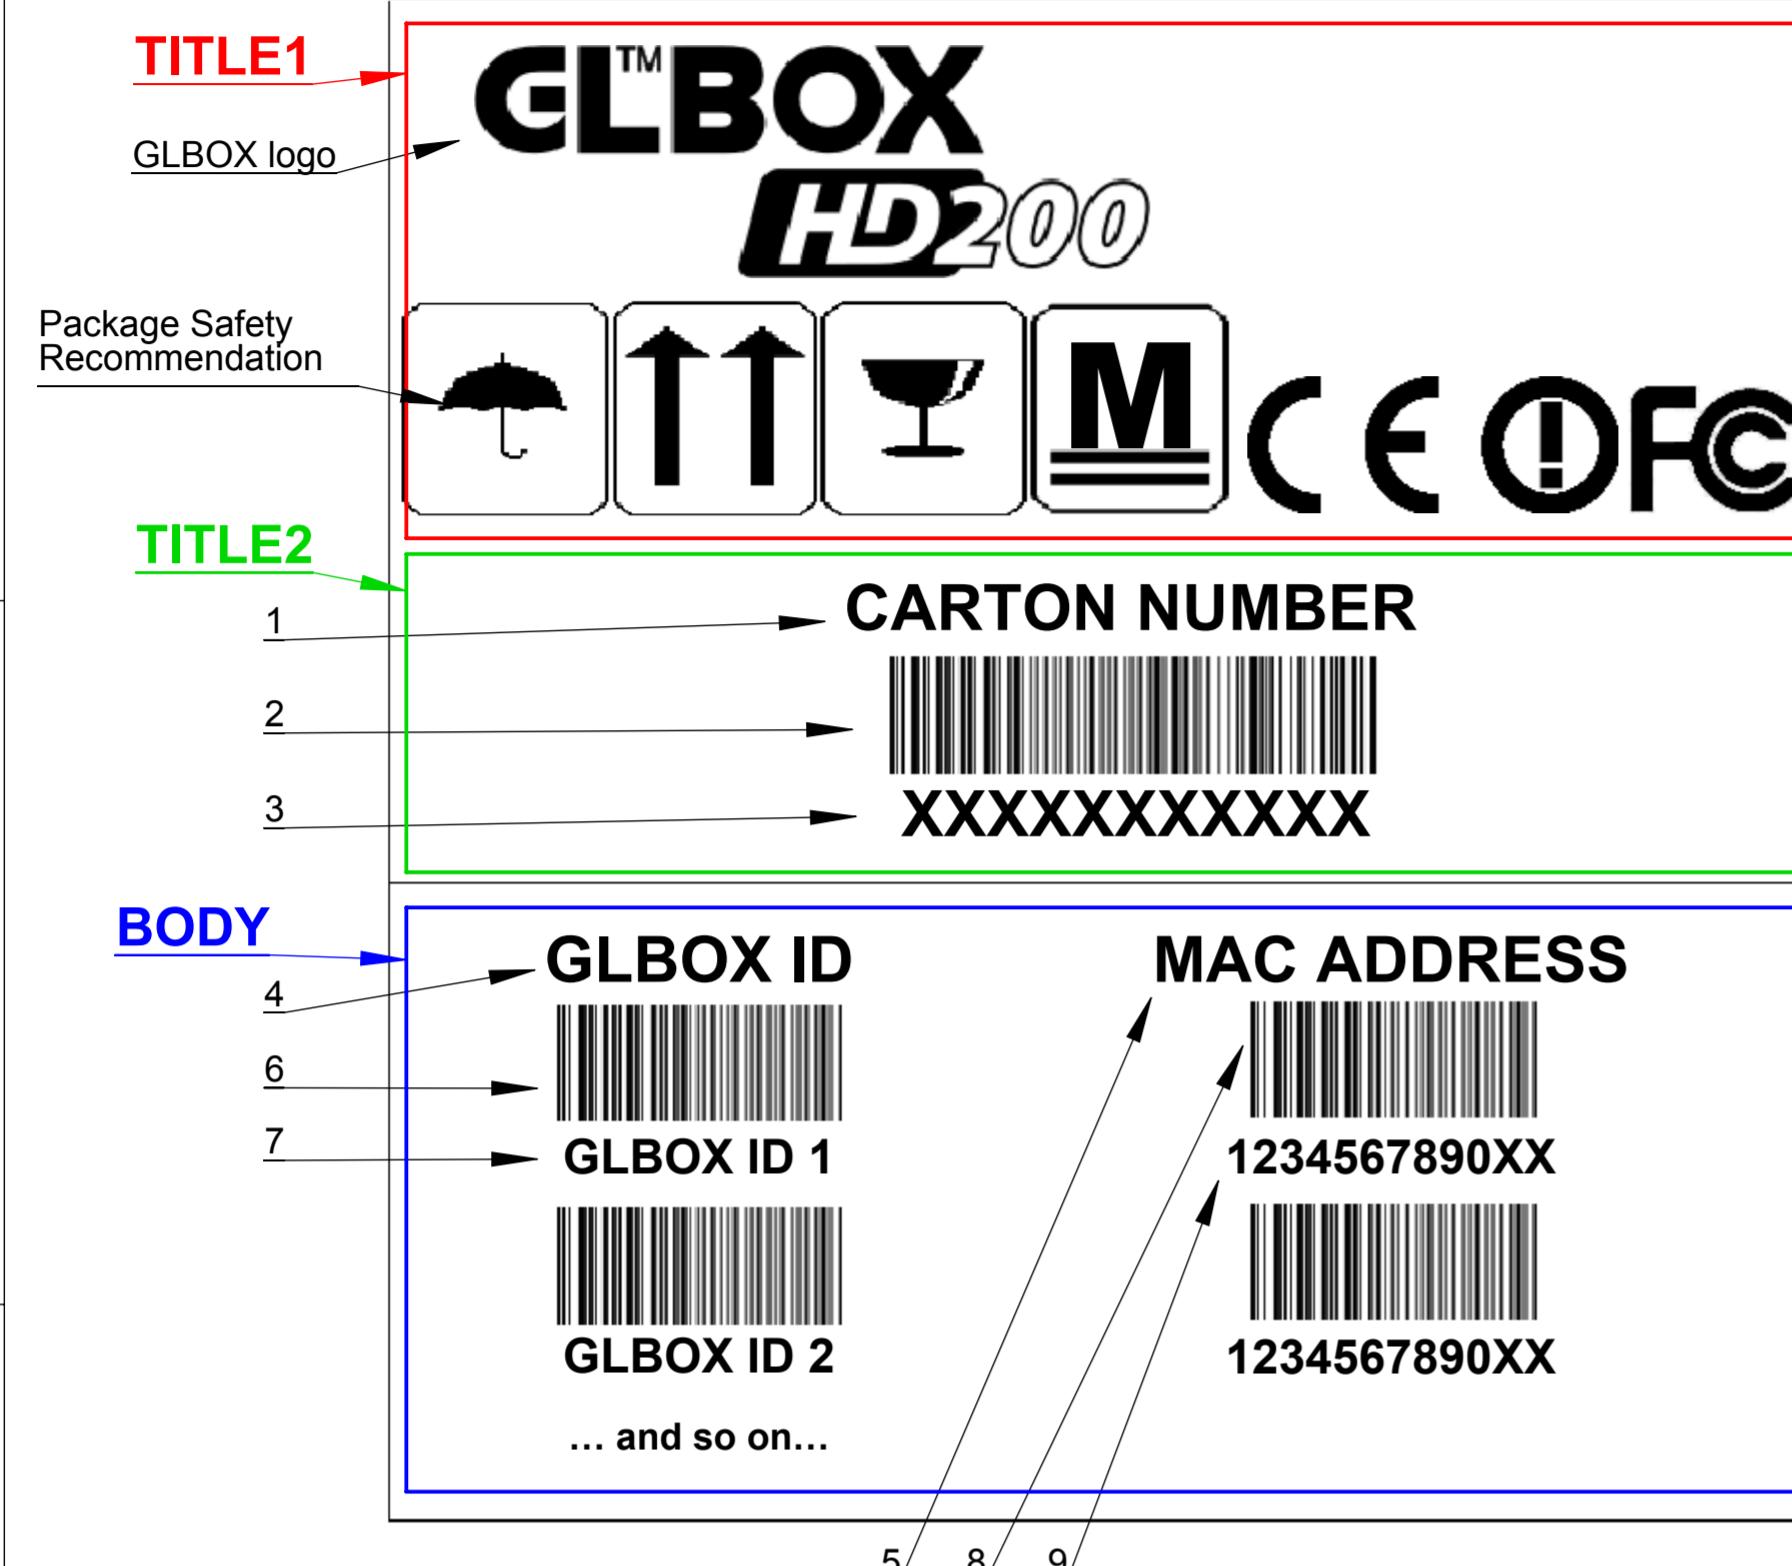

## TITLE1


Dimension of the images in this area shall be not less than 15 mm in height; each width shall be in reference to the expected proportion of the images itself;  
**NOTE, It is defined a mandatory prescription:** no deformation from the prescribed proportions is admitted.  
 Field: GLBOX logo



Package Safety Recommendation

## TITLE2

### CARTON NUMBER

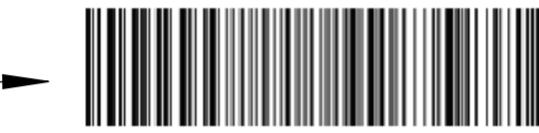

XXXXXXXXXXXX

## BODY

### GLBOX ID



GLBOX ID 1



GLBOX ID 2

... and so on...

### MAC ADDRESS



1234567890XX



1234567890XX

## Package safety recommendation

In this area are contained different information:


- the First one (package safety recommendation) gives it the name;
- A second is the product mandatory markings (one or more) to permit the product themselves to be recognized suitable to enter into the specific market were they are intended to be addressed (e.g.: CE mark; GOST mark; UL mark and so on..)

Note that, if not differently reported into the specific customization guide, the product default certify is the CE marking recognizing.

## Field package safety recommendation

Type: Bitmap Image

Height min : 9mm

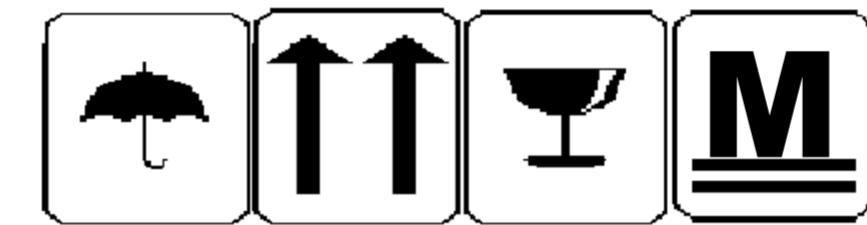

## Product Mandatory Markings

To report, the logo (one or more) defined as necessary to formalize that the products are in compliance with the mandatory applicable certification; note that the European Community EMC/EMI/SAFETY mandatory rules (reported below) evidence is the default; if different prescription are present, they shall be found in the specific document "customization guide".

**NOTE: IN ANY CASE; ALWAYS**, as told, proportions respect is mandatory, if differences are apported, the logo shall be considered as counteracted/ not valid.

For the CE logo one; two different implementation are considered: the basic logo (the default) and the Alert one, to be employed on the radio (e.g.:WI FI) products (if required into the specific customization guide).

default logo



; Ce+Alert logo



FCC Logo



## BODY

The products contained into the multiple package shall be identified in this area

All the information shall be both in BAR CODE and in literal.

Depending on the product, the data to be reported shall be:

### 1)Barcode and literal "MAC Address and Serial Number" (default choice for product with MAC ADDRESS)

**Note:** in case of more that one MAC ADDRESS/unit, the MAC Address to be reported shall be the first.

2) Telsey Serial Number (default choice for products with no MAC address)

3) other identifier, if so required into the specific "Customization Guide".

4) none if , if so permitted into the specific "Customization Guide".

## SUPPORT SPECIFICATIONS

Label size: Label size : 89x127 mm; in any case mandatory requirement to be considered: "the size must be capable of HOST all the TELSEY fields ABOVE reported".

Material : Paper

Colour: White (different colours can be employed up on request).

Image density >= 300DPI

The specific is defined as : The label shall at least be structured in three main areas.

In each area, at minimum the subsequent minimum set of information shall be present:

### TITLE1: where to found:

- GLBOX logo
- Package Safety Recommendation

### TITLE2: where to place

- Carton number

In literal and in bar code.

### BODY:

- The area Where to put the product identifiers; (e.g.: "mac address and serial number) of each product into the multiple box.

**NOTE1:** the package safety recommendation may be put OUTSIDE the label, (e.g.: printed in the box or in another label); in such cases the requirement is to maintain the possibility, with a single check, to reach all the information (the labels/information shall be reasonably near the one to the others).

**NOTE2:** the information of the BODY area may be contained in more than one single foil, it is required to maintain the possibility to identify, in each foil the package information.

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

	PROJECT	TP470
	STB F8L IP WiFi USB_M	
SCALE	1:1	
DATE	17/05/2011	DRAWING CODE
		PRODUCT CODE
		SPLAB_STNE4C7A82GDL
		STNE4C7A82GDL
TECH. DES.	Girardi D.	REV
		1
This drawing must not be reproduced without our written consent.		SIZE A2
		SHEET 5 OF 7

## MULTIPACKAGE LABEL

Field Number	FIELD NAME	FIELD NAME ATTRIBUTES				
		Gender Flag	Value	Font/Barcode		
Field Number	FIELD NAME			Family/weight	Height (length)	Width
1	Carton number	FIXED	CARTON NUMBER	Arial Bold	not less than 3 mm	Regular (1.0)
2	Carton number Barcode	VARIABLE	--	CODE 128B	not less than 7 mm	-
3	Carton number	MIXED	progressive number (11 digit) that will starts from 00000010001 and increase in step by 1	Arial Bold	not less than 3 mm	Regular (1.0)
4	GLBOX ID	FIXED	"GLBOX ID"	Arial Bold	not less than 2.5 mm	Regular (1.0)
5	MAC ADDRESS	FIXED	"MAC ADDRESS"	Arial Bold	not less than 2.5 mm	Regular (1.0)
6	GLBOX ID Barcode	VARIABLE	All serial number of equipment in box	CODE 128B	not less than 7 mm	-
7	GLBOX ID serial	MIXED	All serial number of equipment in box	Arial Bold	not less than 2 mm	Regular (1.0)
8	Mac Address Barcode	VARIABLE	All mac address of equipment in box	CODE 128B	not less than 7 mm	-
9	Mac Address	MIXED	All mac address of equipment in box	Arial Bold	not less than 2 mm	Regular (1.0)

C

A

B

B

C

C

D


D

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

	PROJECT	TP470
	STB F8L IP WiFi USB_M	
SCALE	1:1	
DATE	17/05/2011	DRAWING CODE

TECH. DES.	Girardi D.
PRODUCT CODE	STNE4C7A82GDL
REV	1
This drawing must not be reproduced without our written consent.	
SIZE	A2
SHEET	6 OF 7

# PALLET LABEL

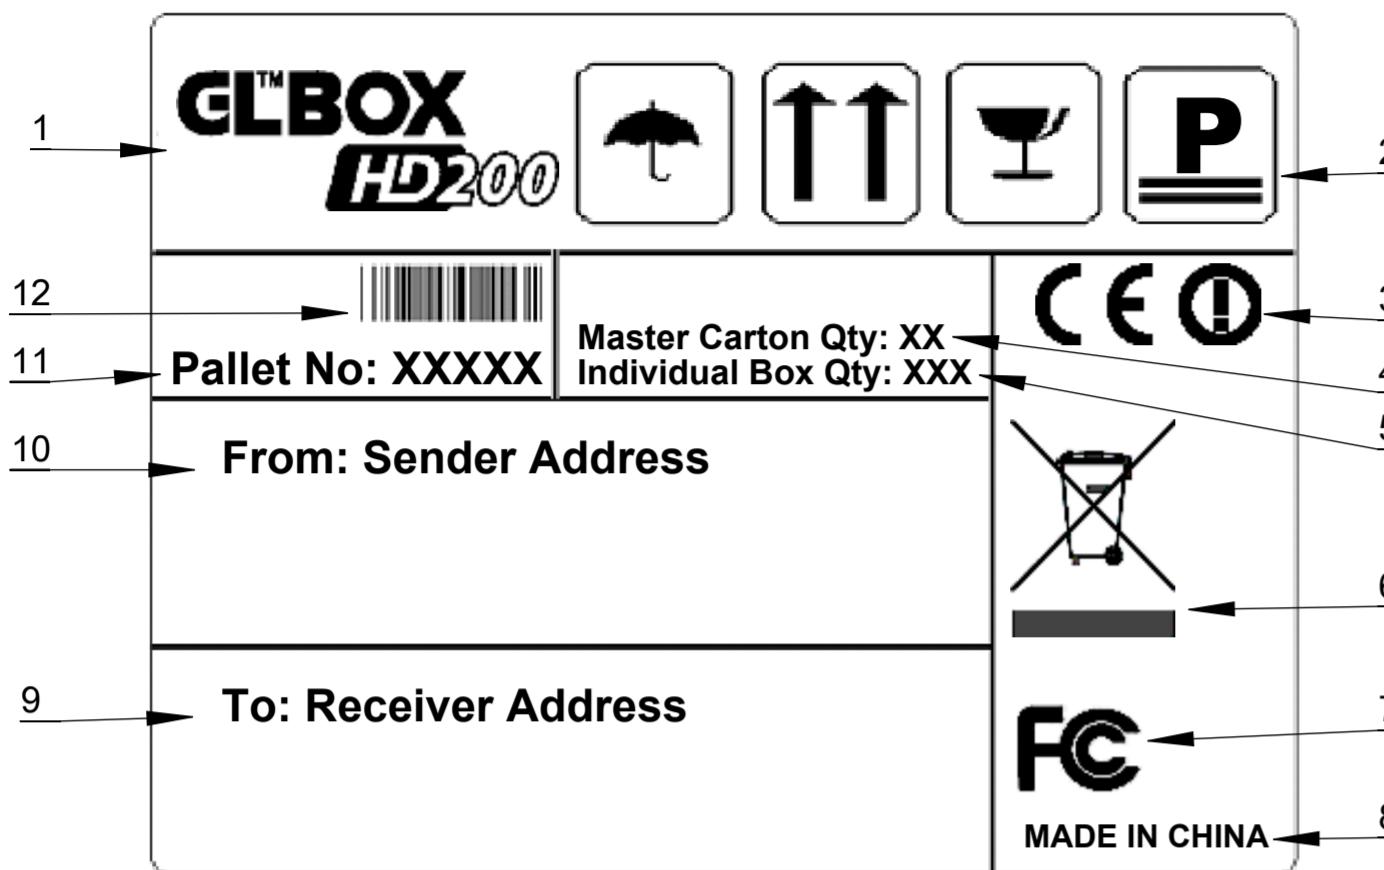

- NOTE1: Label support specification

Label size: Label size : 432x279 mm; in any case mandatory requirement to be considered: "the size must be capable of HOST all the fields ABOVE reported".

Material : Paper


Colour: White (different colours can be employed up on request).

Image density >= 300DPI

- NOTE2: GLBOX Logo



- NOTE3: Package safety information

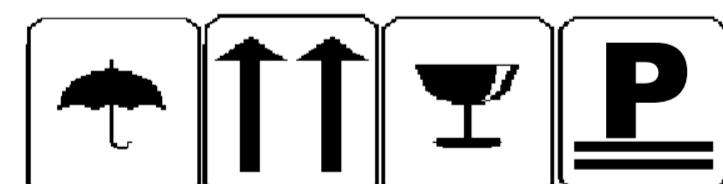

- NOTE4: CE LOGO

The logo defined as necessary to formalize on the product and their packages that the product themselves are in compliances with the European Community EMC/EMI/SAFETY mandatory rules.

NOTE: proportions are mandatory to be respected, if differences are included, the logo is considered as counteracted/ not valid.



Field Number	FIELD NAME	Gender Flag	FIELD NAME ATTRIBUTES			
			Value	Font/Barcode		
				Family/ weight	Height (length)	Width
1	GLBOX logo	BITMAP	see NOTE2	--	40mm	normal
2	Package Safety Recommendation	BITMAP	see NOTE3	--	35 mm	normal
3	CE LOGO	BITMAP	see NOTE4	--	20 mm	normal
4	Multiple qty	FIXED	"Master Carton Qty:" number of multiple package in the pallet	CODE 128B	10 mm	50 max
5	Single qty	FIXED	"Individual Box Qty:" number of single package in the pallet	CODE 128B	10 mm	50 max
6	Wheeled-Bin logo (WEEE)	BITMAP		--	40 mm	normal
7	FCC Logo	BITMAP	-	--	20 mm	-
8	Made in	FIXED	"MADE IN ..." complete with the country name	Arial Bold	7 mm	normal
9	Receiver	FIXED	"To:" Address of the Receiver	Arial Bold	7 mm	normal
10	Sender	FIXED	"From:" Address of the Sender	CODE 128B	7 mm	60 max
11	Pallet number	MIXED	"Pallet No:" progressive number (5 digit) that will starts from 00001 and increase in step by 1	Arial Bold	8.5 mm	Regular (1.0)
12	Pallet number barcode	CODE 128B	--	CODE 128B	15 mm	-

TOLERANCE UNLESS OTHERWISE SPECIFIED IN ACCORDING TO: COARSE ISO 2768

	PROJECT	TP470
	STB F8L IP WiFi USB_M	
SCALE	1:1	TECH. DES.
DATE	17/05/2011	DRAWING CODE
		PRODUCT CODE
		SPLAB_STNE4C7A82GDL
		STNE4C7A82GDL
		REV
		1
This drawing must not be reproduced without our written consent.		SIZE
A2		SHEET
7 OF 7		