

FCC TEST REPORT

For

COBAN Technologies, Inc.

Body Worn Camera

Model No.: FCS-X1-BWC, FOCUS X1

Prepared For : COBAN Technologies, Inc.
Address : 11375 W. Sam Houston Parkway S. # 800, Houston, Texas, United States
77031

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180719006-01

Date of Test : Jul. 20~Aug. 08, 2018

Date of Report : Aug. 09, 2018

Contents

1. General Information.....	6
1.1. Client Information.....	6
1.2. Description of Device (EUT).....	6
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	7
1.5. List of channels.....	8
1.6. Description Of Test Setup.....	9
1.7. Test Equipment List.....	10
1.8. Measurement Uncertainty.....	11
1.9. Description of Test Facility.....	11
2. Summary of Test Results.....	12
3. Conducted Emission Test.....	13
3.1. Test Standard and Limit.....	13
3.2. Test Setup.....	13
3.3. Test Procedure.....	13
3.4. Test Data.....	13
4. Radiation Spurious Emission and Band Edge.....	18
4.1. Test Standard and Limit.....	18
4.2. Test Setup.....	18
4.3. Test Procedure.....	19
4.4. Test Data.....	20

5. Maximum Peak Output Power Test.....	32
5.1. Test Standard and Limit.....	32
5.2. Test Setup.....	32
5.3. Test Procedure.....	32
5.4. Test Data.....	32
6. 6DB Occupancy Bandwidth Test.....	36
6.1. Test Standard and Limit.....	36
6.2. Test Setup.....	36
6.3. Test Procedure.....	36
6.4. Test Data.....	36
7. Power Spectral Density Test.....	44
7.1. Test Standard and Limit.....	44
7.2. Test Setup.....	44
7.3. Test Procedure.....	44
7.4. Test Data.....	44
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	51
8.1. Test Standard and Limit.....	51
8.2. Test Setup.....	51
8.3. Test Procedure.....	51
8.4. Test Data.....	51
9. Antenna Requirement.....	62
9.1. Test Standard and Requirement.....	62
9.2. Antenna Connected Construction.....	62

APPENDIX I -- TEST SETUP PHOTOGRAPH.....	63
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	65
APPENDIX III -- INTERNAL PHOTOGRAPH.....	69

TEST REPORT

Applicant : COBAN Technologies, Inc.
 Manufacturer : Shenzhen Eeyelog Technology Co.,Ltd
 Product Name : Body Worn Camera
 Model No. : FCS-X1-BWC, FOCUS X1
 Trade Mark : COBAN
 Rating(s) : Input: DC 5V, 2.5A (Via adapter Input: AC 100-240V,50/60 Hz, 0.35A; Output: DC 5V, 2.5A); DC 3.7V, 4250mAh Battery inside

Test Standard(s) : FCC Part15 Subpart C 2017, Section 15.247
 Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Jul. 20~Aug. 08, 2018

Prepared by



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Calvin Liss

(Supervisor / Calvin Liu)

Approved & Authorized Signer

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	COBAN Technologies, Inc.
Address	:	11375 W. Sam Houston Parkway S. # 800, Houston, Texas, United States 77031
Manufacturer	:	Shenzhen Eeyelog Technology Co.,Ltd
Address	:	2-4th Floor, ComplexBuilding, BaoYunda Logistic Center, Xixiang Street, Baoan District, Shenzhen, Guangdong Province, China 518101

1.2. Description of Device (EUT)

Product Name	:	Body Worn Camera	
Model No.	:	FCS-X1-BWC, FOCUS X1 (Note: All samples are the same except the name, so we prepare “FCS-X1-BWC” for test only.)	
Trade Mark	:	COBAN	
Test Power Supply	:	AC 120V/60Hz via adapter / AC 240V/60Hz via adapter; DC 3.7V battery inside.	
Test Sample No.	:	S1, S2	
Product Description	:	Operation Frequency:	802.11b/ g/ n(HT20) 2412-2462MHz 802.11n(HT40) 2422-2452MHz
	:	Number of Channel:	11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40)
	:	Modulation Type:	802.11b CCK; 802.11g/n OFDM
	:	Antenna Type:	PIFA Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

RADIATED EMISSION TEST (BELOW 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	CCK	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

EUT configure mode	Test Mode
-	Keeping TX+ Charging Mode

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.


Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5

1.5. List of channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

1.6. Description Of Test Setup

CE

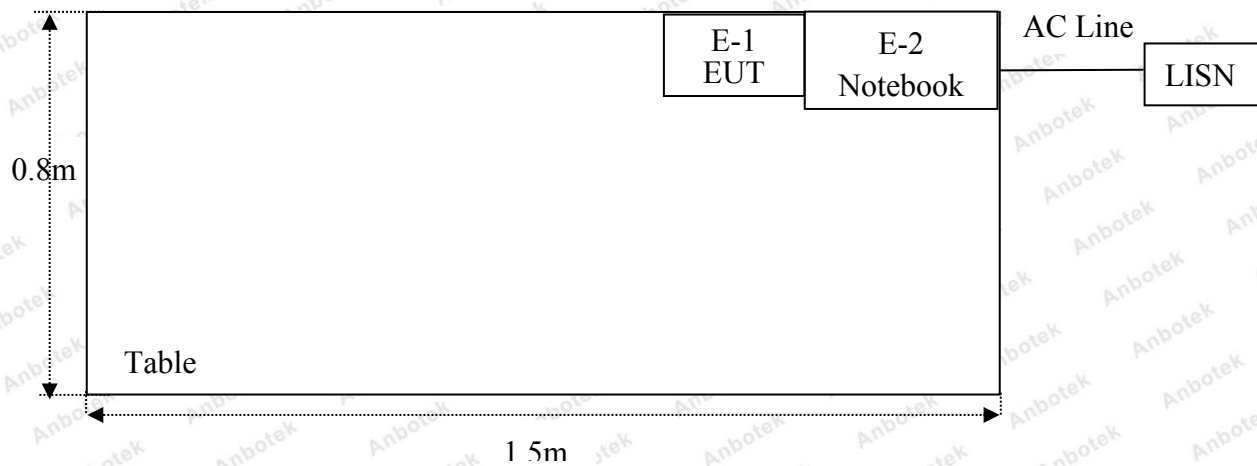

RE

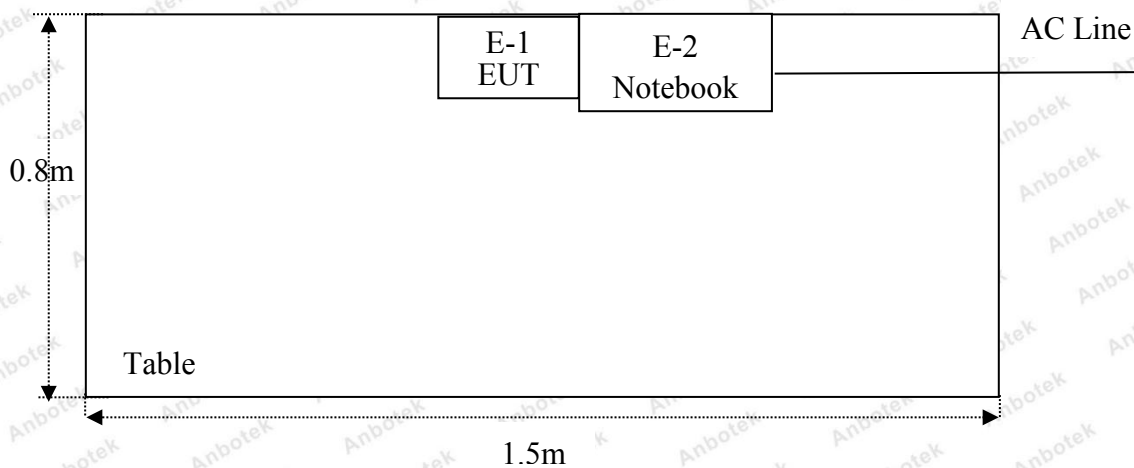

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location


All Emissions tests were performed at Shenzhen Anbotech Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3.1. Test Standard and Limit

3.2. Test Setup

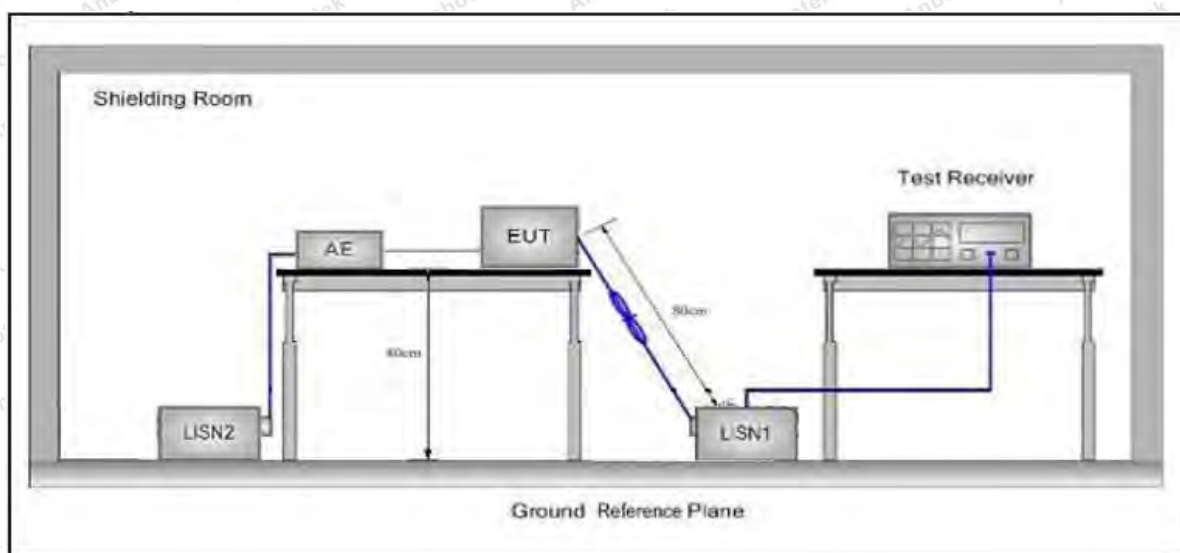


The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

3.4. Test Data

Please to see the following pages.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 120V/60Hz for adapter
Comment: Live Line
Tem.: 22.2°C Hum.: 60%

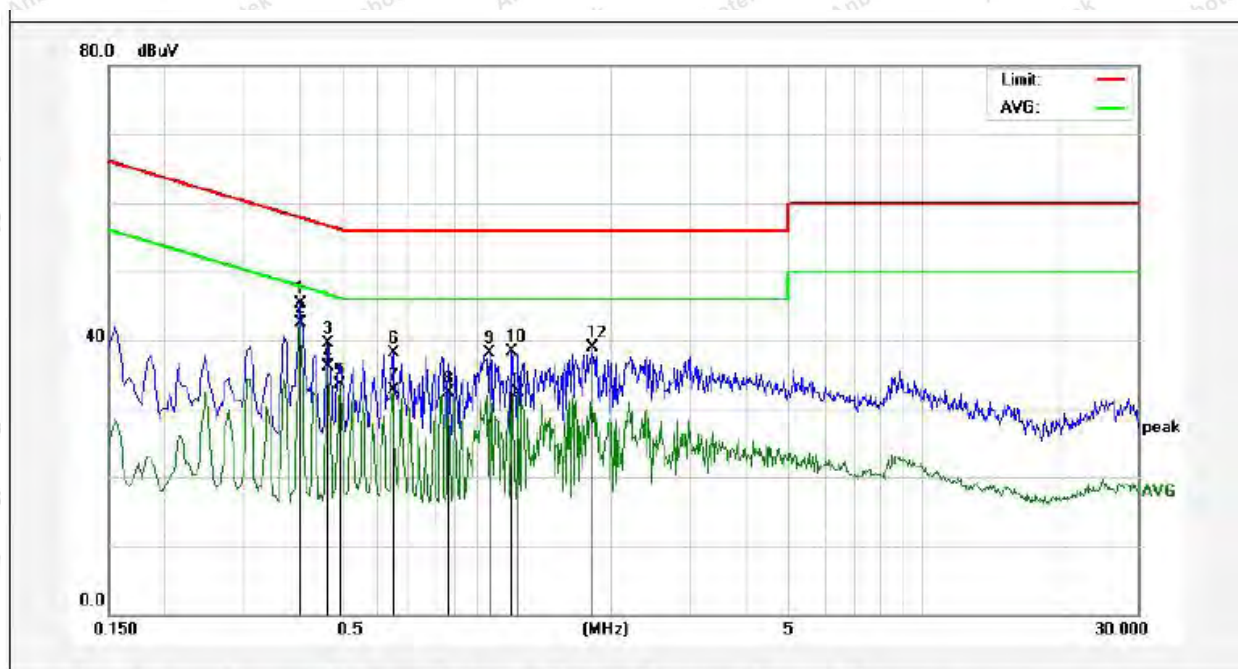

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4020	25.44	19.94	45.38	57.81	-12.43	QP	
2	0.4020	22.61	19.94	42.55	47.81	-5.26	AVG	
3	0.4620	19.61	19.96	39.57	56.66	-17.09	QP	
4	0.4620	16.05	19.96	36.01	46.66	-10.65	AVG	
5	0.4940	13.44	19.98	33.42	46.10	-12.68	AVG	
6	0.6500	18.17	20.02	38.19	56.00	-17.81	QP	
7	0.6500	12.70	20.02	32.72	46.00	-13.28	AVG	
8	0.8620	12.15	20.08	32.23	46.00	-13.77	AVG	
9	1.0660	18.07	20.12	38.19	56.00	-17.81	QP	
10	1.1940	18.22	20.12	38.34	56.00	-17.66	QP	
11	1.2380	12.14	20.12	32.26	46.00	-13.74	AVG	
12	1.8180	18.73	20.14	38.87	56.00	-17.13	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 120V/60Hz for adapter
Comment: Neutral Line
Tem.: 22.2°C Hum.: 60%

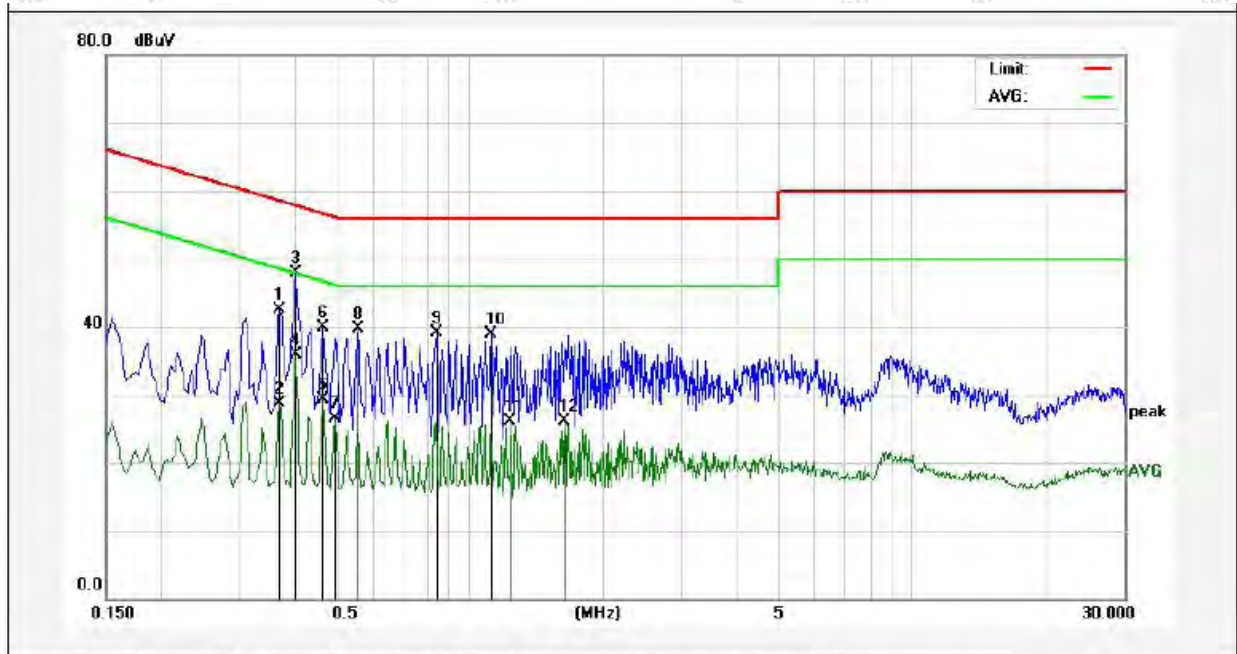

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3700	22.63	19.92	42.55	58.50	-15.95	QP	
2	0.3700	8.78	19.92	28.70	48.50	-19.80	AVG	
3	0.4020	27.87	19.94	47.81	57.81	-10.00	QP	
4	0.4020	15.89	19.94	35.83	47.81	-11.98	AVG	
5	0.4620	9.37	19.96	29.33	46.66	-17.33	AVG	
6	0.4660	19.88	19.96	39.84	56.58	-16.74	QP	
7	0.4940	6.52	19.98	26.50	46.10	-19.60	AVG	
8	0.5580	19.68	20.00	39.68	56.00	-16.32	QP	
9	0.8380	18.97	20.08	39.05	56.00	-16.95	QP	
10	1.1140	18.75	20.12	38.87	56.00	-17.13	QP	
11	1.2340	6.06	20.12	26.18	46.00	-19.82	AVG	
12	1.6340	6.00	20.13	26.13	46.00	-19.87	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 240V/60Hz for adapter
Comment: Live Line
Tem.: 22.2°C Hum.: 60%

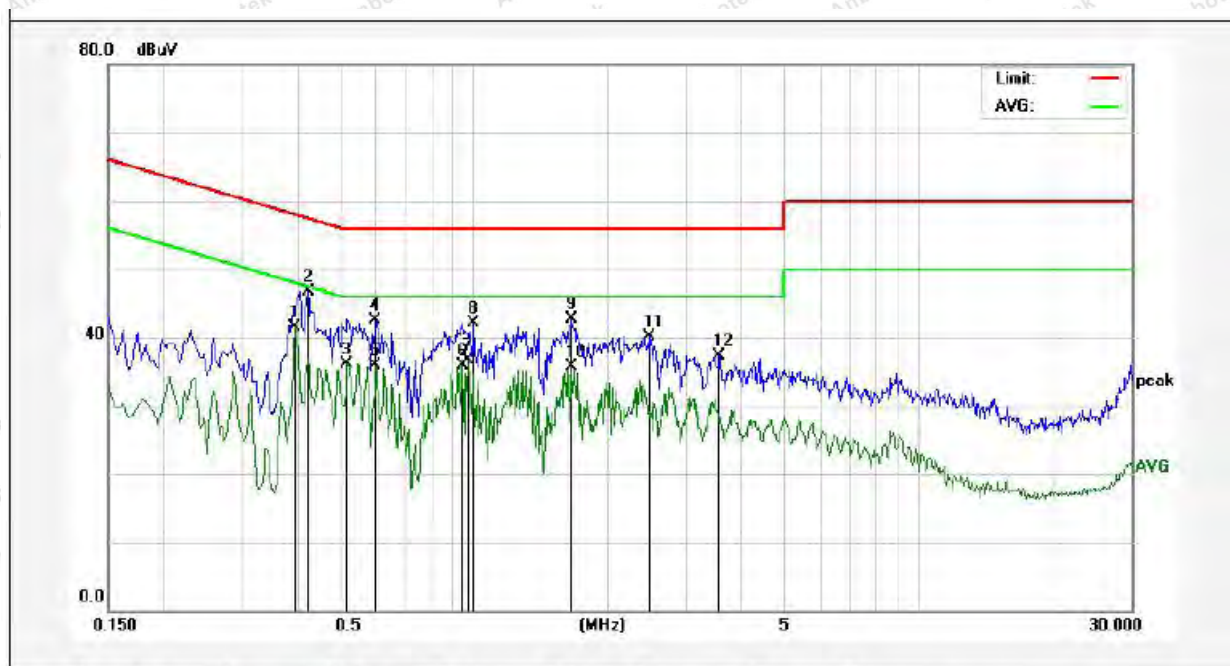

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3940	21.49	19.93	41.42	47.98	-6.56	AVG	
2	0.4220	26.70	19.94	46.64	57.41	-10.77	QP	
3	0.5180	16.06	19.99	36.05	46.00	-9.95	AVG	
4	0.5980	22.46	20.01	42.47	56.00	-13.53	QP	
5	0.5980	15.95	20.01	35.96	46.00	-10.04	AVG	
6	0.9420	15.82	20.10	35.92	46.00	-10.08	AVG	
7	0.9660	16.56	20.11	36.67	46.00	-9.33	AVG	
8	0.9980	21.91	20.12	42.03	56.00	-13.97	QP	
9	1.6460	22.55	20.13	42.68	56.00	-13.32	QP	
10	1.6460	15.51	20.13	35.64	46.00	-10.36	AVG	
11	2.4739	20.02	20.15	40.17	56.00	-15.83	QP	
12	3.5500	17.16	20.17	37.33	56.00	-18.67	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 240V/60Hz for adapter
Comment: Neutral Line
Tem.: 22.2°C Hum.: 60%

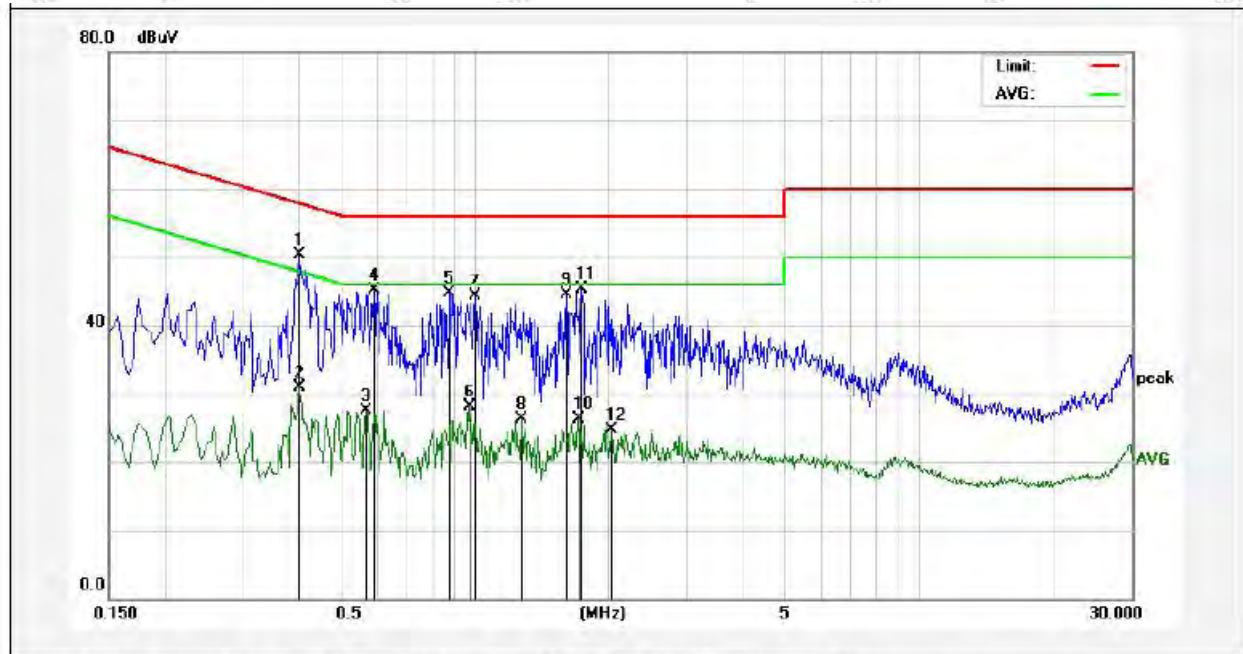

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4020	30.36	19.94	50.30	57.81	-7.51	QP	
2	0.4020	10.92	19.94	30.86	47.81	-16.95	AVG	
3	0.5700	7.52	20.00	27.52	46.00	-18.48	AVG	
4	0.5940	25.09	20.01	45.10	56.00	-10.90	QP	
5	0.8780	24.70	20.09	44.79	56.00	-11.21	QP	
6	0.9660	7.93	20.11	28.04	46.00	-17.96	AVG	
7	1.0020	24.15	20.12	44.27	56.00	-11.73	QP	
8	1.2700	6.27	20.13	26.40	46.00	-19.60	AVG	
9	1.6019	24.44	20.13	44.57	56.00	-11.43	QP	
10	1.7020	6.12	20.13	26.25	46.00	-19.75	AVG	
11	1.7420	25.25	20.13	45.38	56.00	-10.62	QP	
12	2.0300	4.59	20.14	24.73	46.00	-21.27	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3
Remark: (1)The lower limit shall apply at the transition frequency. (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

4.2. Test Setup

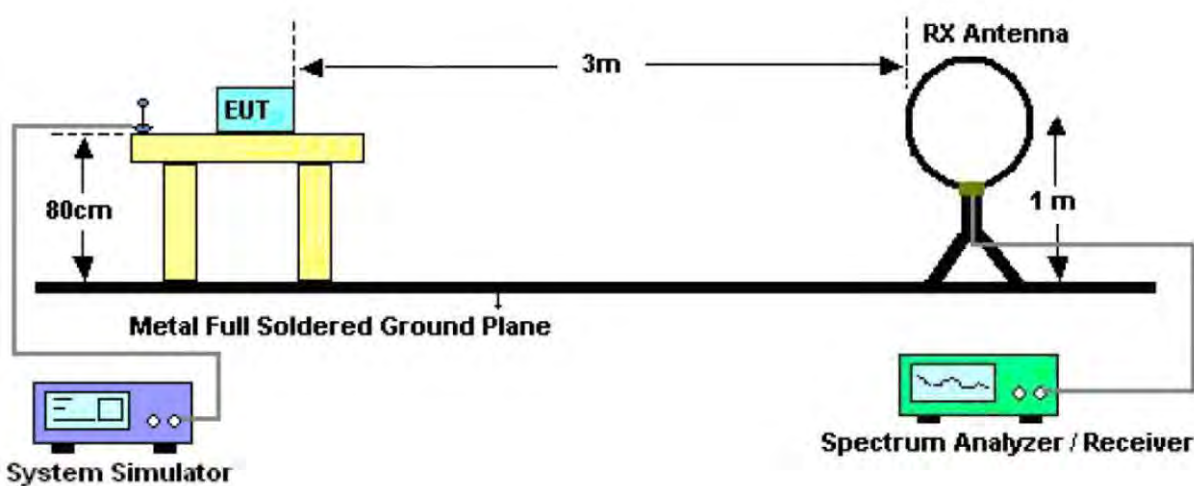


Figure 1. Below 30MHz

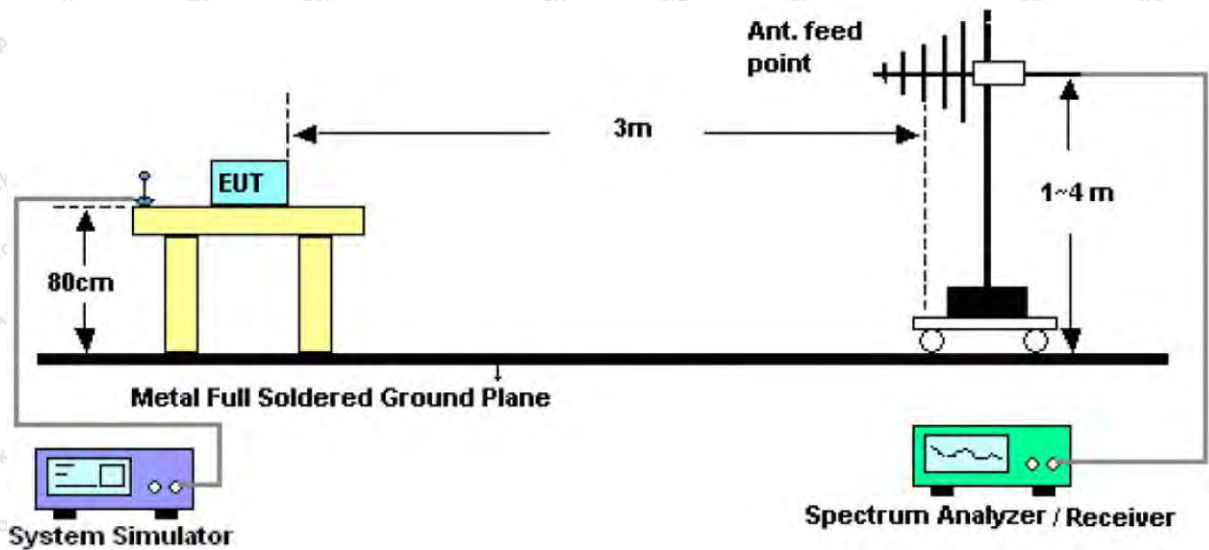


Figure 2. 30MHz to 1GHz

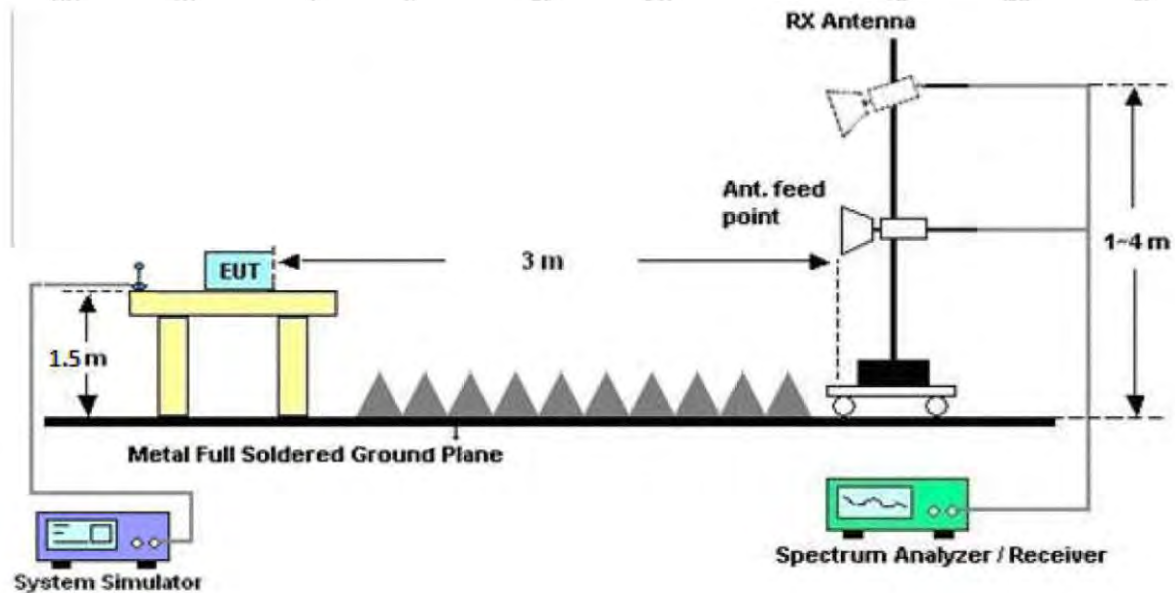


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for

maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.: SZAWW180719006-01 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC 120V/60Hz for adapter
Test Mode: Keeping TX+ Charging Polarization: Horizontal
Mode



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.4237	42.71	-18.42	24.29	40.00	-15.71	QP	300	0	
2	40.8445	38.18	-14.54	23.64	40.00	-16.36	QP	300	63	
3	72.5916	52.76	-21.22	31.54	40.00	-8.46	QP	300	125	
4	126.3285	45.18	-21.57	23.61	43.50	-19.89	QP	300	196	
5	146.3735	44.60	-21.40	23.20	43.50	-20.30	QP	300	234	
6	230.0985	42.06	-18.40	23.66	46.00	-22.34	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW180719006-01 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC 120V/60Hz for adapter
Test Mode: Keeping TX+ Charging Polarization: Vertical
Mode



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.6377	48.61	-17.36	31.25	40.00	-8.75	QP	300	0	
2	38.3462	47.24	-14.26	32.98	40.00	-7.02	QP	300	64	
3	67.9128	52.70	-19.01	33.69	40.00	-6.31	QP	300	123	
4	125.4457	51.34	-16.14	35.20	43.50	-8.30	QP	300	196	
5	141.8262	51.17	-17.47	33.70	43.50	-9.80	QP	300	266	
6	226.8934	49.70	-14.03	35.67	46.00	-10.33	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW180719006-01 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC 240V/60Hz for adapter
Test Mode: Keeping TX+ Charging Mode Polarization: Horizontal



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.3173	44.99	-18.45	26.54	40.00	-13.46	QP	300	0	
2	38.6160	42.38	-15.12	27.26	40.00	-12.74	QP	300	62	
3	74.6568	54.98	-21.54	33.44	40.00	-6.56	QP	300	115	
4	124.1330	50.22	-21.50	28.72	43.50	-14.78	QP	300	175	
5	169.5990	45.38	-19.62	25.76	43.50	-17.74	QP	300	226	
6	230.0985	43.44	-18.40	25.04	46.00	-20.96	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW180719006-01 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC 240V/60Hz for adapter
Test Mode: Keeping TX+ Charging Mode Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.4371	47.66	-13.67	33.99	40.00	-6.01	QP	300	0	
2	46.3402	47.07	-14.66	32.41	40.00	-7.59	QP	300	154	
3	77.8653	53.73	-20.13	33.60	40.00	-6.40	QP	300	196	
4	126.3285	53.15	-16.27	36.88	43.50	-6.62	QP	300	211	
5	169.5988	53.42	-16.58	36.84	43.50	-6.66	QP	300	284	
6	229.2931	52.01	-13.93	38.08	46.00	-7.92	QP	300	360	

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	41.04	34.13	6.61	34.09	47.69	74.00	-26.31	V
7236.00	34.69	37.14	7.74	34.51	45.06	74.00	-28.94	V
9648.00	33.05	39.35	9.26	34.80	46.86	74.00	-27.14	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	39.59	34.13	6.61	34.09	46.24	74.00	-27.76	H
7236.00	34.38	37.14	7.74	34.51	44.75	74.00	-29.25	H
9648.00	32.60	39.35	9.26	34.80	46.41	74.00	-27.59	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	30.07	34.13	6.61	34.09	36.72	54.00	-17.28	V
7236.00	23.54	37.14	7.74	34.51	33.91	54.00	-20.09	V
9648.00	23.38	39.35	9.26	34.80	37.19	54.00	-16.81	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	29.09	34.13	6.61	34.09	35.74	54.00	-18.26	H
7236.00	22.95	37.14	7.74	34.51	33.32	54.00	-20.68	H
9648.00	22.34	39.35	9.26	34.80	36.15	54.00	-17.85	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.97	34.35	6.67	34.09	46.90	74.00	-27.10	V
7311.00	34.68	37.21	7.77	34.53	45.13	74.00	-28.87	V
9748.00	34.01	39.45	9.33	34.80	47.99	74.00	-26.01	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	40.35	34.35	6.67	34.09	47.28	74.00	-26.72	H
7311.00	33.27	37.21	7.77	34.53	43.72	74.00	-30.28	H
9748.00	33.88	39.45	9.33	34.80	47.86	74.00	-26.14	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.77	34.35	6.67	34.09	37.70	54.00	-16.30	V
7311.00	22.98	37.21	7.77	34.53	33.43	54.00	-20.57	V
9748.00	23.25	39.45	9.33	34.80	37.23	54.00	-16.77	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	30.43	34.35	6.67	34.09	37.36	54.00	-16.64	H
7311.00	22.35	37.21	7.77	34.53	32.80	54.00	-21.20	H
9748.00	23.59	39.45	9.33	34.80	37.57	54.00	-16.43	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	45.95	34.57	6.74	34.09	53.17	74.00	-20.83	V
7386.00	35.64	37.29	7.80	34.55	46.18	74.00	-27.82	V
9848.00	37.51	39.55	9.41	34.81	51.66	74.00	-22.34	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	45.09	34.57	6.74	34.09	52.31	74.00	-21.69	H
7386.00	34.46	37.29	7.80	34.55	45.00	74.00	-29.00	H
9848.00	33.64	39.55	9.41	34.81	47.79	74.00	-26.21	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	36.78	34.57	6.74	34.09	44.00	54.00	-10.00	V
7386.00	25.53	37.29	7.80	34.55	36.07	54.00	-17.93	V
9848.00	25.99	39.55	9.41	34.81	40.14	54.00	-13.86	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	35.39	34.57	6.74	34.09	42.61	54.00	-11.39	H
7386.00	23.83	37.29	7.80	34.55	34.37	54.00	-19.63	H
9848.00	22.89	39.55	9.41	34.81	37.04	54.00	-16.96	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20N),n(HT40N) mode, and found the 802.11b mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

Radiated Band Edge:

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.63	29.15	3.41	34.01	50.18	74.00	-23.82	H
2400.00	60.64	29.16	3.43	34.01	59.22	74.00	-14.78	H
2390.00	53.31	29.15	3.41	34.01	51.86	74.00	-22.14	V
2400.00	62.43	29.16	3.43	34.01	61.01	74.00	-12.99	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.40	29.15	3.41	34.01	36.95	54.00	-17.05	H
2400.00	46.69	29.16	3.43	34.01	45.27	54.00	-8.73	H
2390.00	40.22	29.15	3.41	34.01	38.77	54.00	-15.23	V
2400.00	47.82	29.16	3.43	34.01	46.40	54.00	-7.60	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.28	29.28	3.53	34.03	51.06	74.00	-22.94	H
2500.00	48.12	29.30	3.56	34.03	46.95	74.00	-27.05	H
2483.50	54.54	29.28	3.53	34.03	53.32	74.00	-20.68	V
2500.00	50.62	29.30	3.56	34.03	49.45	74.00	-24.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.76	29.28	3.53	34.03	37.54	54.00	-16.46	H
2500.00	34.87	29.30	3.56	34.03	33.70	54.00	-20.30	H
2483.50	40.71	29.28	3.53	34.03	39.49	54.00	-14.51	V
2500.00	36.75	29.30	3.56	34.03	35.58	54.00	-18.42	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.40	27.53	5.47	33.92	49.48	74.00	-24.52	H
2400.00	59.00	27.55	5.49	29.93	62.11	74.00	-11.89	H
2390.00	52.00	27.53	5.47	33.92	51.08	74.00	-22.92	V
2400.00	60.46	27.55	5.49	29.93	63.57	74.00	-10.43	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.52	27.53	5.47	33.92	36.60	54.00	-17.40	H
2400.00	45.68	27.55	5.49	29.93	48.79	54.00	-5.21	H
2390.00	39.24	27.53	5.47	33.92	38.32	54.00	-15.68	V
2400.00	46.71	27.55	5.49	29.93	49.82	54.00	-4.18	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.53	29.28	3.53	34.03	49.31	74.00	-24.69	H
2500.00	46.75	29.30	3.56	34.03	45.58	74.00	-28.42	H
2483.50	52.53	29.28	3.53	34.03	51.31	74.00	-22.69	V
2500.00	49.03	29.30	3.56	34.03	47.86	74.00	-26.14	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.70	29.28	3.53	34.03	36.48	54.00	-17.52	H
2500.00	34.04	29.30	3.56	34.03	32.87	54.00	-21.13	H
2483.50	39.54	29.28	3.53	34.03	38.32	54.00	-15.68	V
2500.00	35.87	29.30	3.56	34.03	34.70	54.00	-19.30	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.69	27.53	5.47	33.92	49.77	74.00	-24.23	H
2400.00	59.38	27.55	5.49	29.93	62.49	74.00	-11.51	H
2390.00	52.30	27.53	5.47	33.92	51.38	74.00	-22.62	V
2400.00	60.92	27.55	5.49	29.93	64.03	74.00	-9.97	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.73	27.53	5.47	33.92	36.81	54.00	-17.19	H
2400.00	45.92	27.55	5.49	29.93	49.03	54.00	-4.97	H
2390.00	39.47	27.53	5.47	33.92	38.55	54.00	-15.45	V
2400.00	46.97	27.55	5.49	29.93	50.08	54.00	-3.92	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.93	29.28	3.53	34.03	49.71	74.00	-24.29	H
2500.00	47.07	29.30	3.56	34.03	45.90	74.00	-28.10	H
2483.50	53.00	29.28	3.53	34.03	51.78	74.00	-22.22	V
2500.00	49.40	29.30	3.56	34.03	48.23	74.00	-25.77	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.95	29.28	3.53	34.03	36.73	54.00	-17.27	H
2500.00	34.23	29.30	3.56	34.03	33.06	54.00	-20.94	H
2483.50	39.81	29.28	3.53	34.03	38.59	54.00	-15.41	V
2500.00	36.07	29.30	3.56	34.03	34.90	54.00	-19.10	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	49.60	27.53	5.47	33.92	48.68	74.00	-25.32	H
2400.00	57.92	27.55	5.49	29.93	61.03	74.00	-12.97	H
2390.00	51.13	27.53	5.47	33.92	50.21	74.00	-23.79	V
2400.00	59.16	27.55	5.49	29.93	62.27	74.00	-11.73	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	36.95	27.53	5.47	33.92	36.03	54.00	-17.97	H
2400.00	45.02	27.55	5.49	29.93	48.13	54.00	-5.87	H
2390.00	38.60	27.53	5.47	33.92	37.68	54.00	-16.32	V
2400.00	45.99	27.55	5.49	29.93	49.10	54.00	-4.90	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	49.37	29.28	3.53	34.03	48.15	74.00	-25.85	H
2500.00	45.86	29.30	3.56	34.03	44.69	74.00	-29.31	H
2483.50	51.21	29.28	3.53	34.03	49.99	74.00	-24.01	V
2500.00	47.98	29.30	3.56	34.03	46.81	74.00	-27.19	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.00	29.28	3.53	34.03	35.78	54.00	-18.22	H
2500.00	33.50	29.30	3.56	34.03	32.33	54.00	-21.67	H
2483.50	38.76	29.28	3.53	34.03	37.54	54.00	-16.46	V
2500.00	35.30	29.30	3.56	34.03	34.13	54.00	-19.87	V

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	DC 3.7V
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	24℃
Humidity	:	55%RH


Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (PK) (dBm)	Limit dBm	Results
TX 802.11b Mode				
CH01	2412	16.85	30	PASS
CH06	2437	16.95	30	PASS
CH11	2462	16.85	30	PASS
TX 802.11g Mode				
CH01	2412	15.45	30	PASS
CH06	2437	15.86	30	PASS
CH11	2462	15.49	30	PASS
TX 802.11n(20) Mode				
CH01	2412	14.78	30	PASS
CH06	2437	14.23	30	PASS
CH11	2462	14.64	30	PASS
TX 802.11n(40) Mode				
CH03	2422	13.66	30	PASS
CH06	2437	13.74	30	PASS
CH09	2452	13.56	30	PASS

**Note: For power test the duty cycle is 100% in continuous transmitting mode.
Please see the plot of next page**


Duty Cycle




802.11b mode

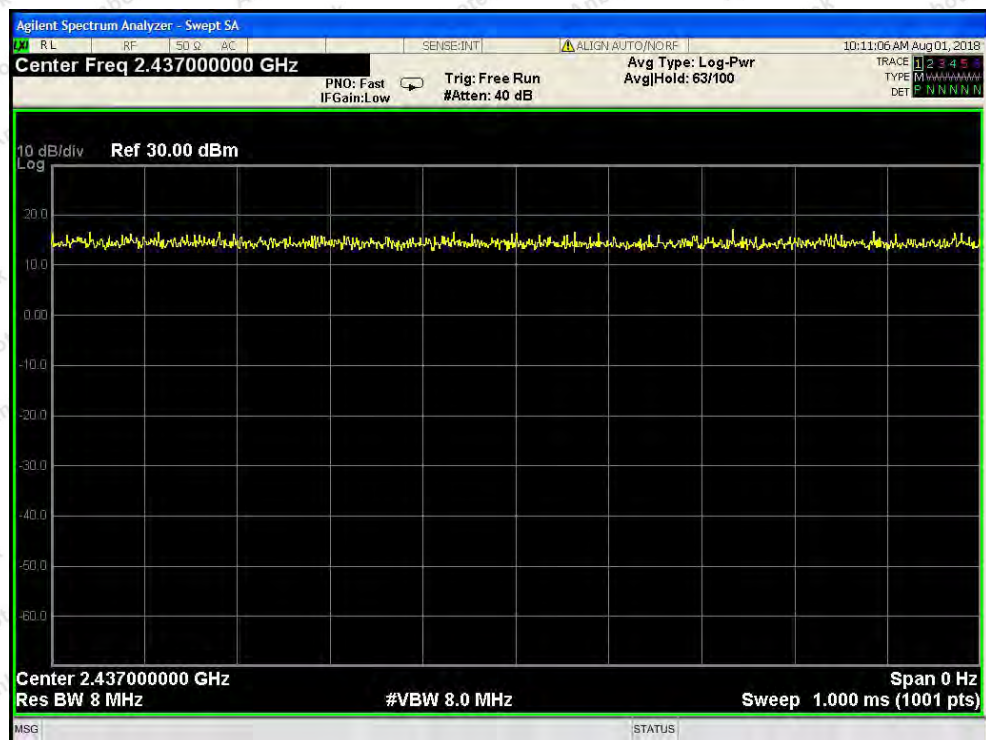

802.11g mode

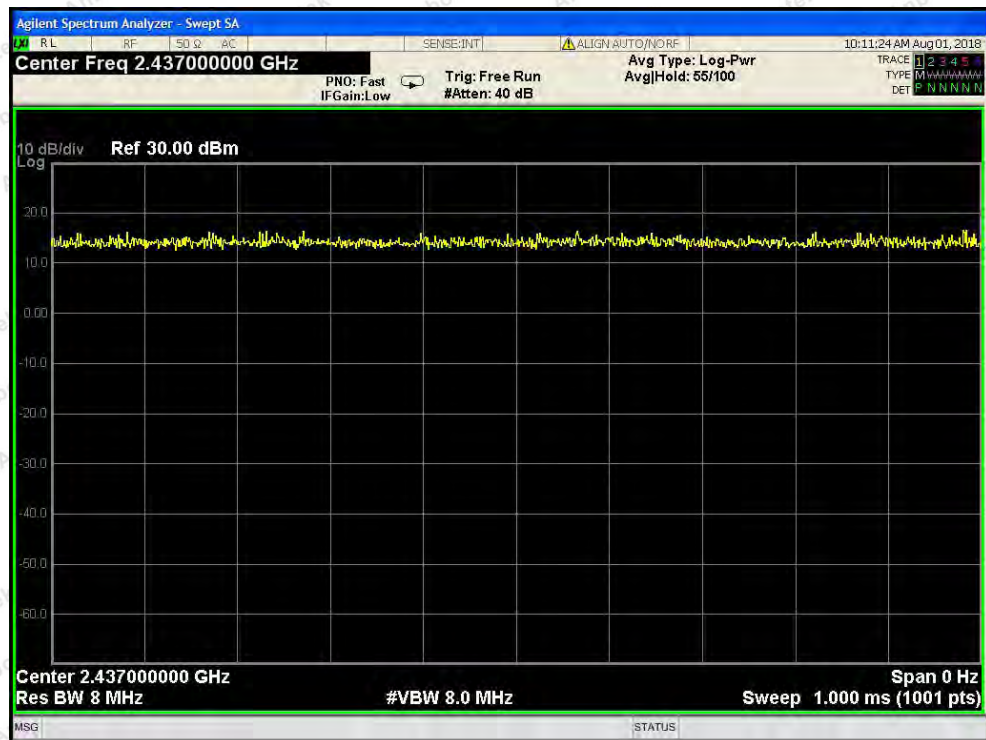

802.11n(HT20) mode

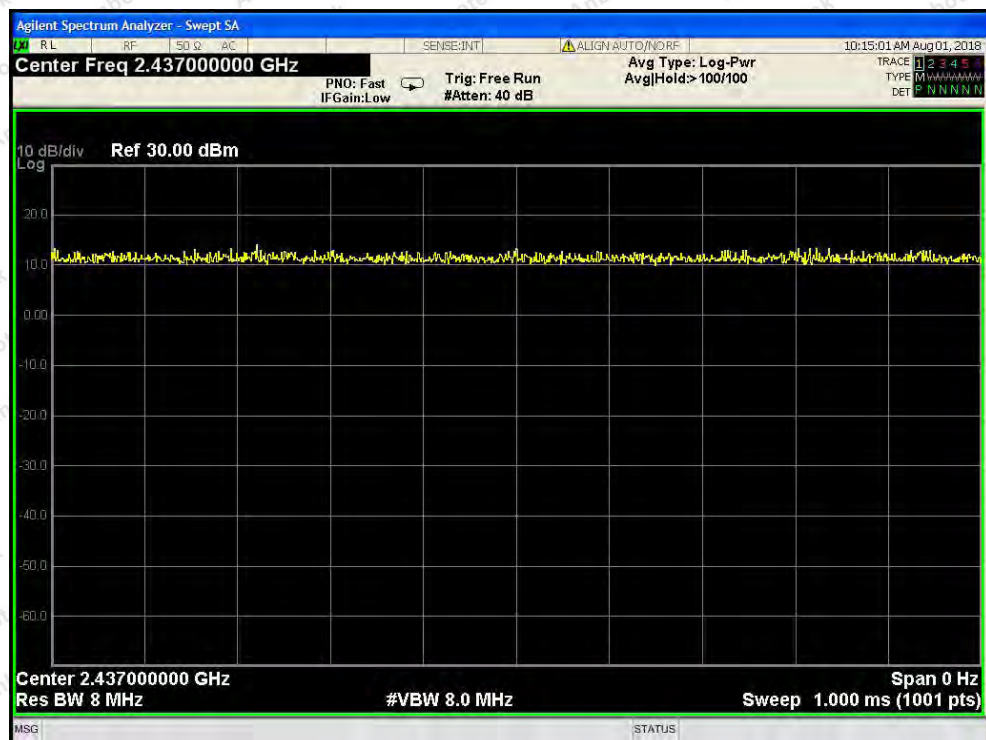


802.11n(HT40) mode

6. 6dB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW= 100kHz, VBW $\geq$ 3*RBW =300kHz
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Test Item	:	6dB Bandwidth	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 3.7V	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
802.11b	Low	2412	10.03	>500	PASS
	Middle	2437	9.06		PASS
	High	2462	9.04		PASS
802.11g	Low	2412	15.14	>500	PASS
	Middle	2437	15.12		PASS
	High	2462	15.12		PASS
802.11n20	Low	2412	15.13	>500	PASS
	Middle	2437	15.13		PASS
	High	2462	15.66		PASS
802.11n40	Low	2422	35.42	>500	PASS
	Middle	2437	35.45		PASS
	High	2452	35.39		PASS




802.11b mode : Lowest




802.11b mode : Middle



802.11b mode : Highest

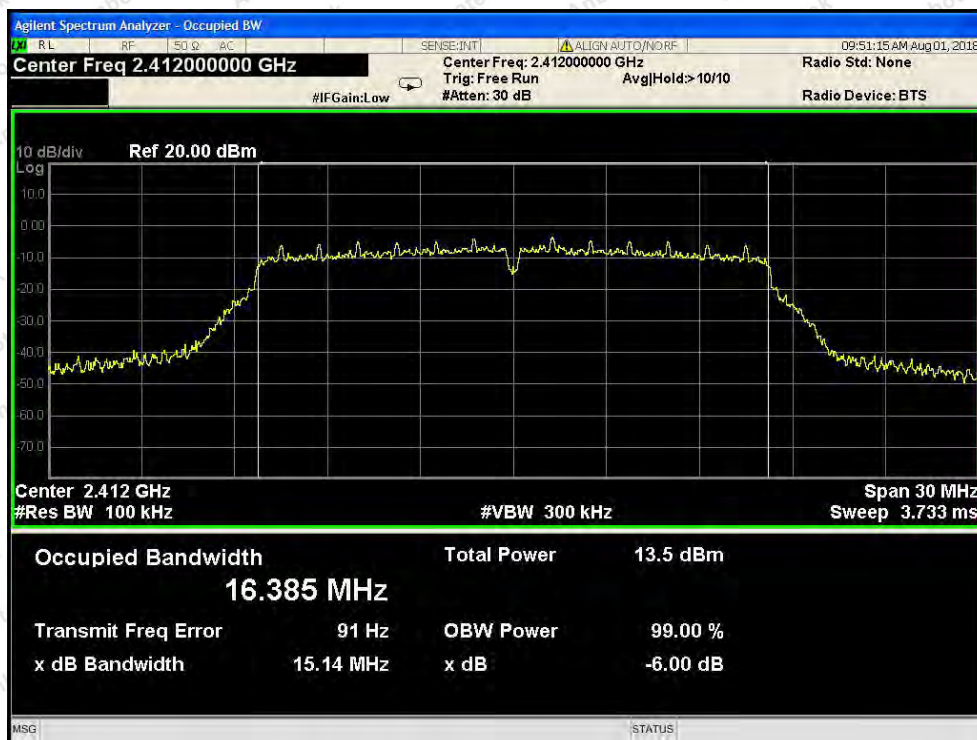


802.11g mode : Lowest

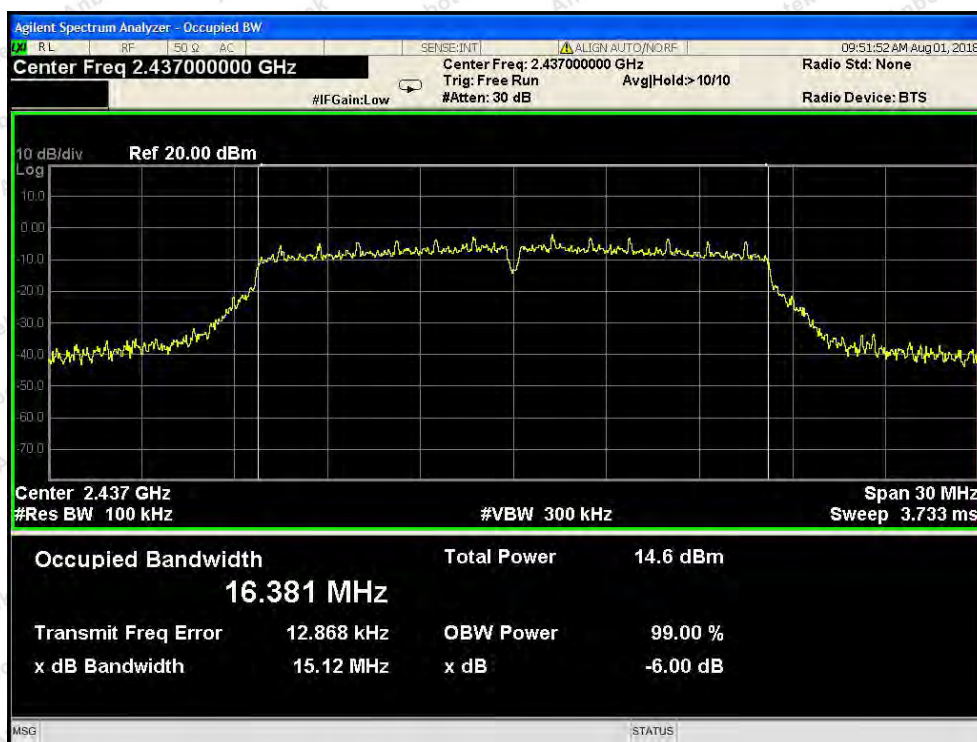

802.11g mode : Middle



802.11g mode : Highest

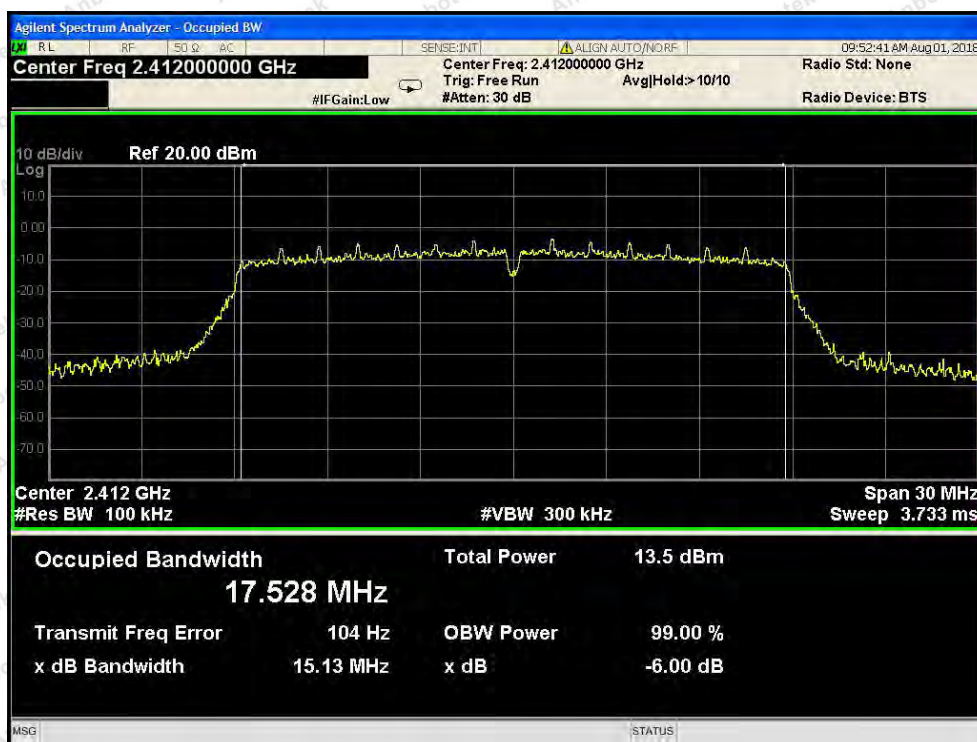

802.11n20 mode : Lowest




802.11n20 mode : Middle



802.11n20 mode : Highest



802.11n40 mode : Lowest

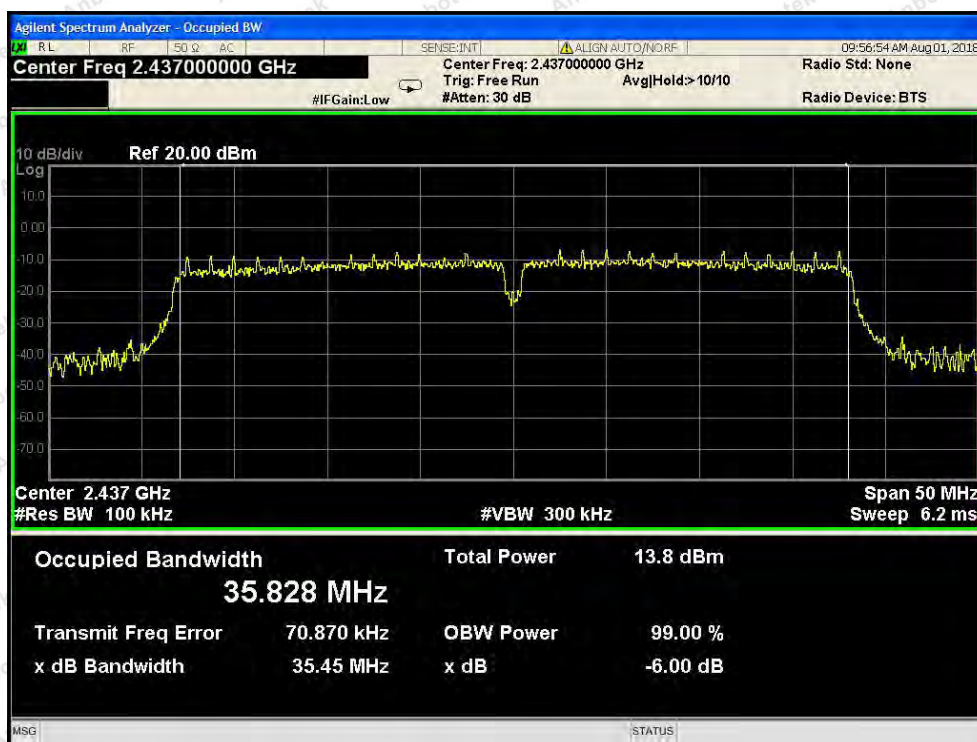

802.11n40 mode : Middle




802.11n40 mode : Highest

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Test Item : Power Spectral Density
Test Voltage : DC 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24°C
Humidity : 55%RH

Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
802.11b	Low	2412	-11.911	8.00	PASS
	Middle	2437	-12.305	8.00	PASS
	High	2462	-11.080	8.00	PASS
802.11g	Low	2412	-17.390	8.00	PASS
	Middle	2437	-16.722	8.00	PASS
	High	2462	-16.197	8.00	PASS
802.11n20	Low	2412	-18.785	8.00	PASS
	Middle	2437	-16.304	8.00	PASS
	High	2462	-15.544	8.00	PASS
802.11n40	Low	2422	-19.306	8.00	PASS
	Middle	2437	-18.273	8.00	PASS
	High	2452	-18.882	8.00	PASS



802.11b mode : Lowest



802.11b mode : Middle




802.11b mode : Highest





802.11g mode : Lowest






802.11g mode : Middle

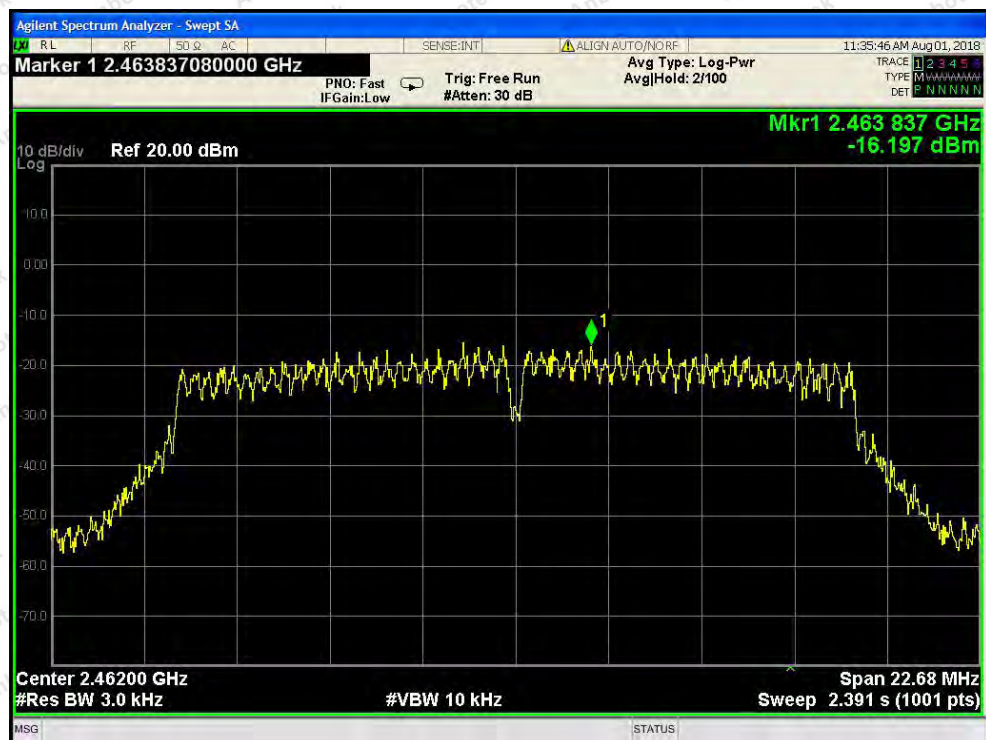

802.11g mode : Highest





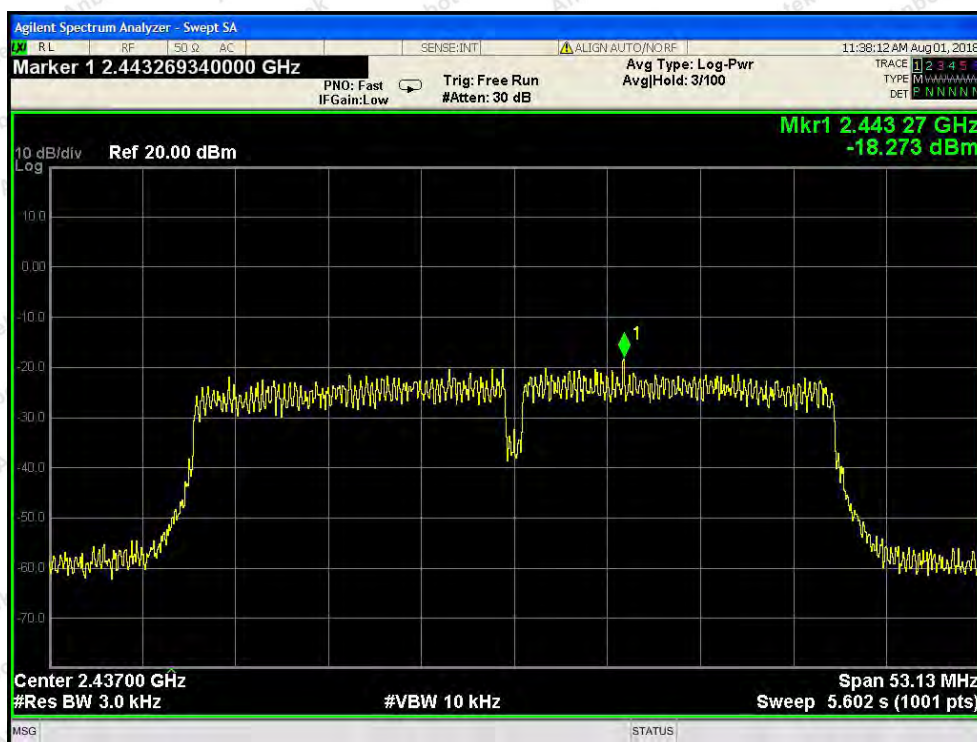

802.11n40 mode : Middle




802.11n40 mode : Highest

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Test Item : Band edge
Test Voltage : DC 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24℃
Humidity : 55%RH

Mode	Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
802.11b	2412	47.322	>20	PASS
	2462	60.576	>20	PASS
802.11g	2412	35.071	>20	PASS
	2462	16.249	>20	PASS
802.11n20	2412	37.226	>20	PASS
	2462	42.587	>20	PASS
802.11n40	2422	32.427	>20	PASS
	2452	33.275	>20	PASS



802.11b mode : Lowest



802.11b mode : Highest



802.11g mode : Lowest



802.11g mode : Highest



802.11n20 mode : Lowest



802.11n20 mode : Highest




802.11n40 mode : Lowest




802.11n40 mode : Highest


Conducted Emission Method

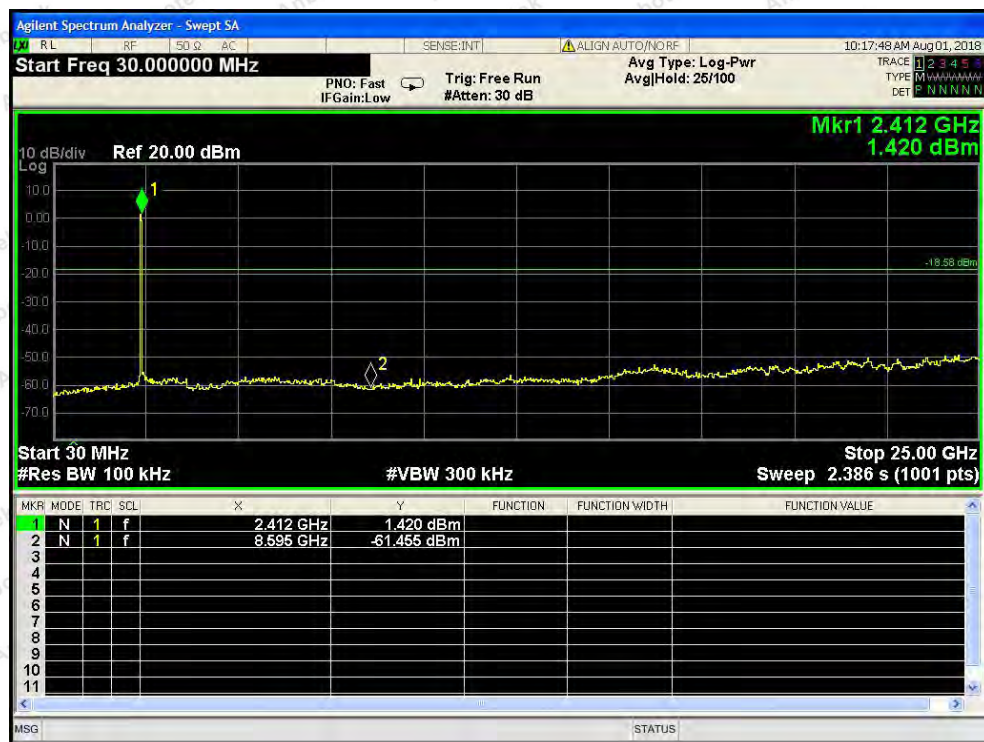


802.11b mode : Lowest

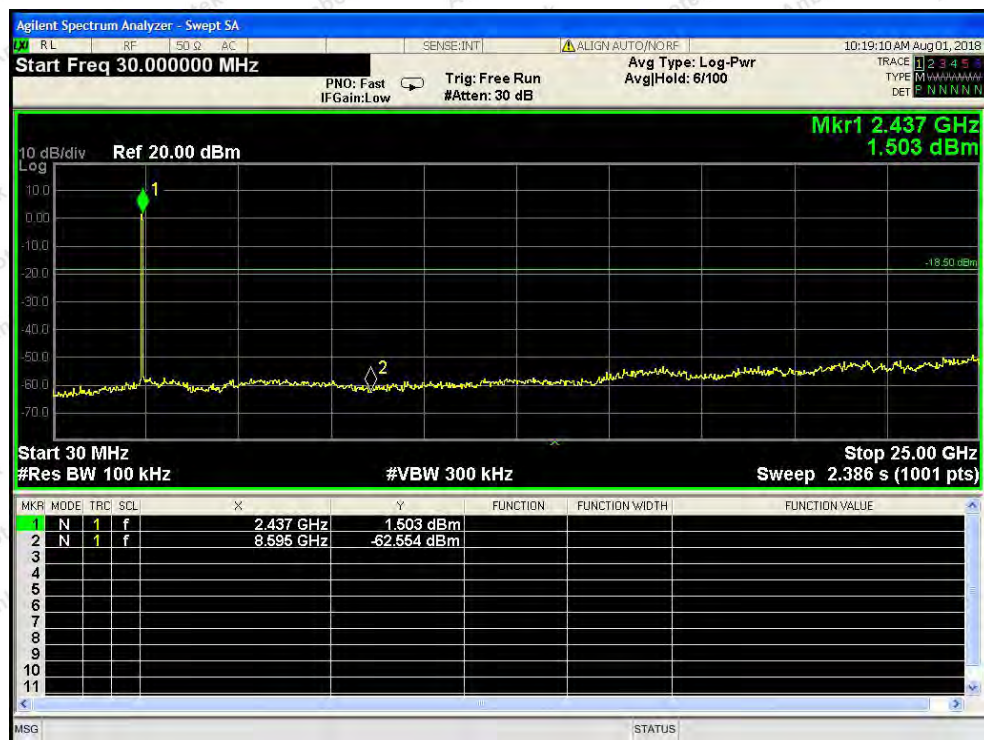


802.11b mode : Middle

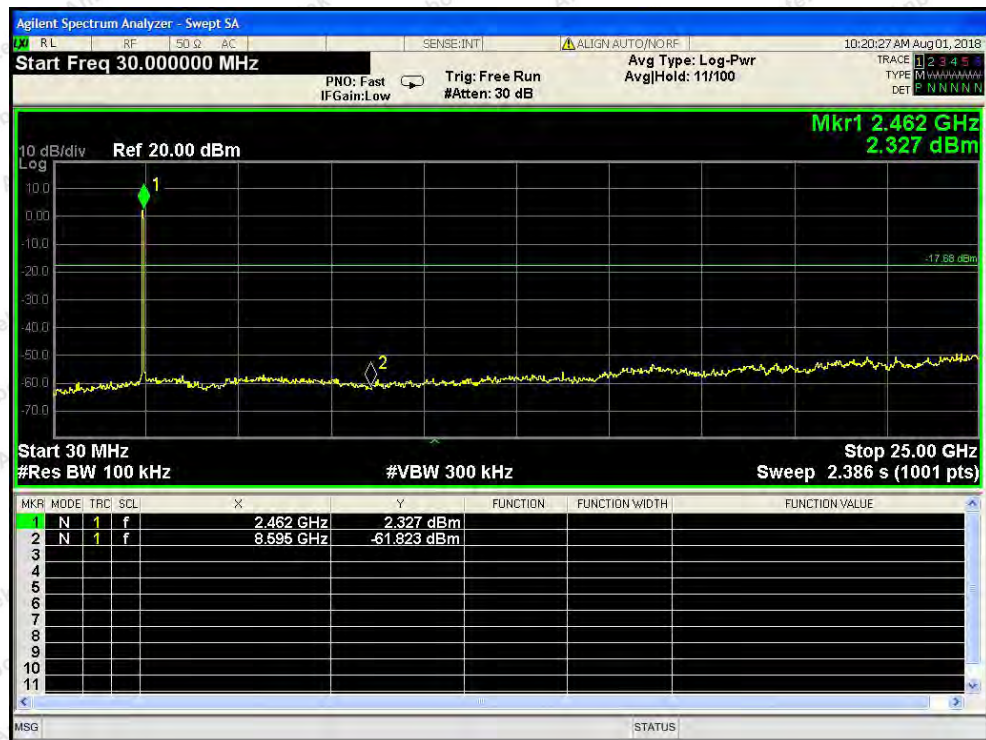


802.11b mode : Highest

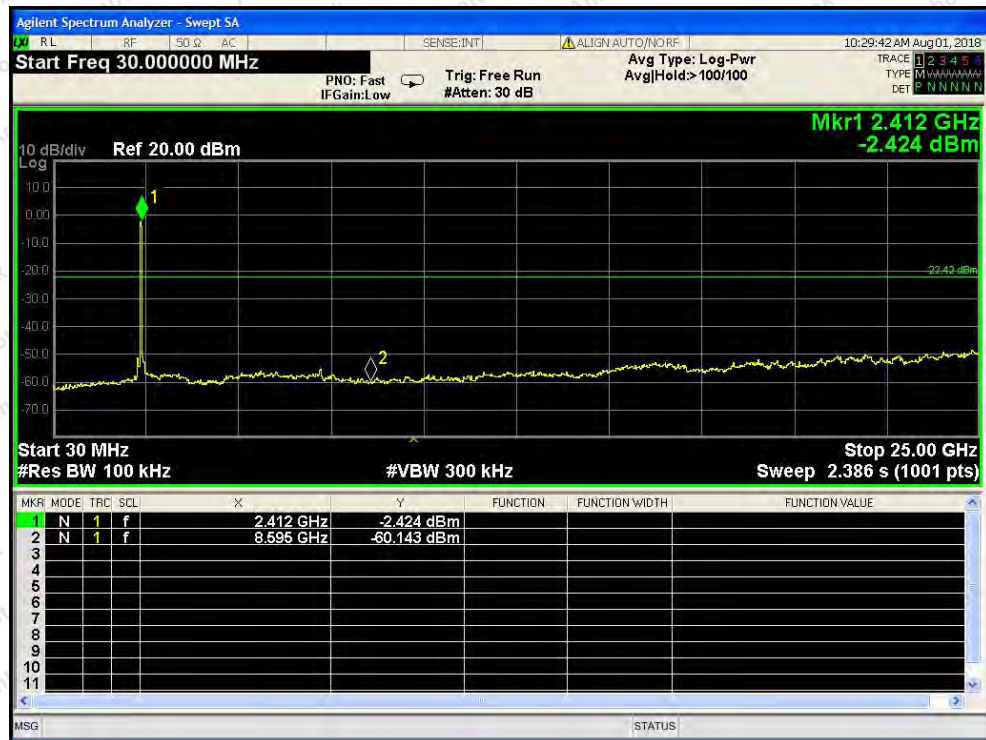


802.11g mode : Lowest

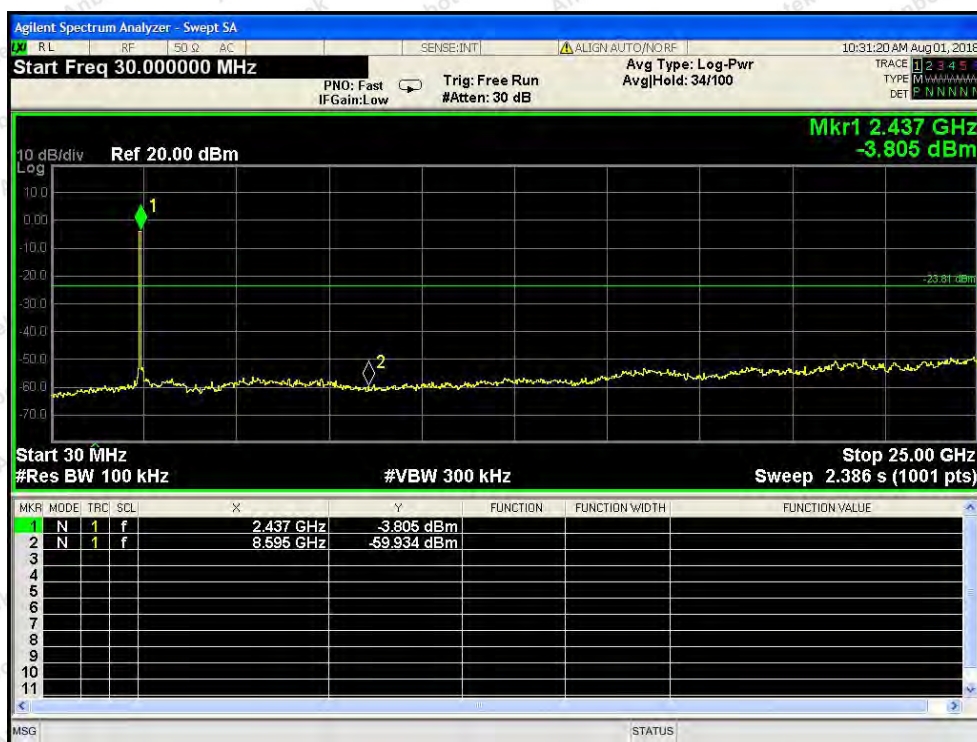


802.11g mode : Middle

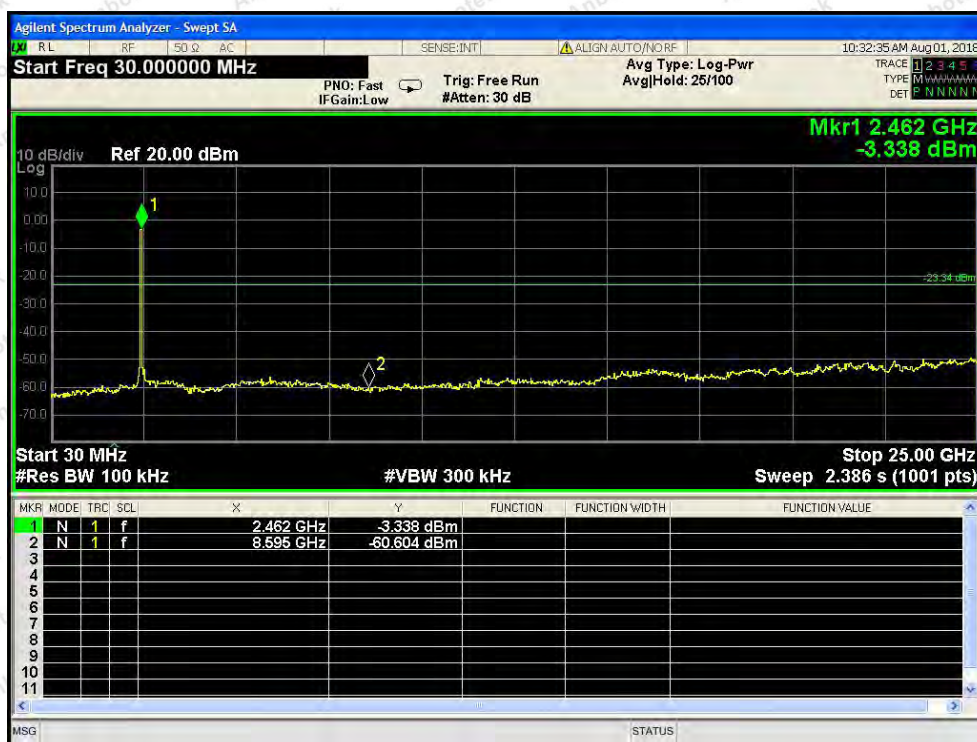


802.11g mode : Highest

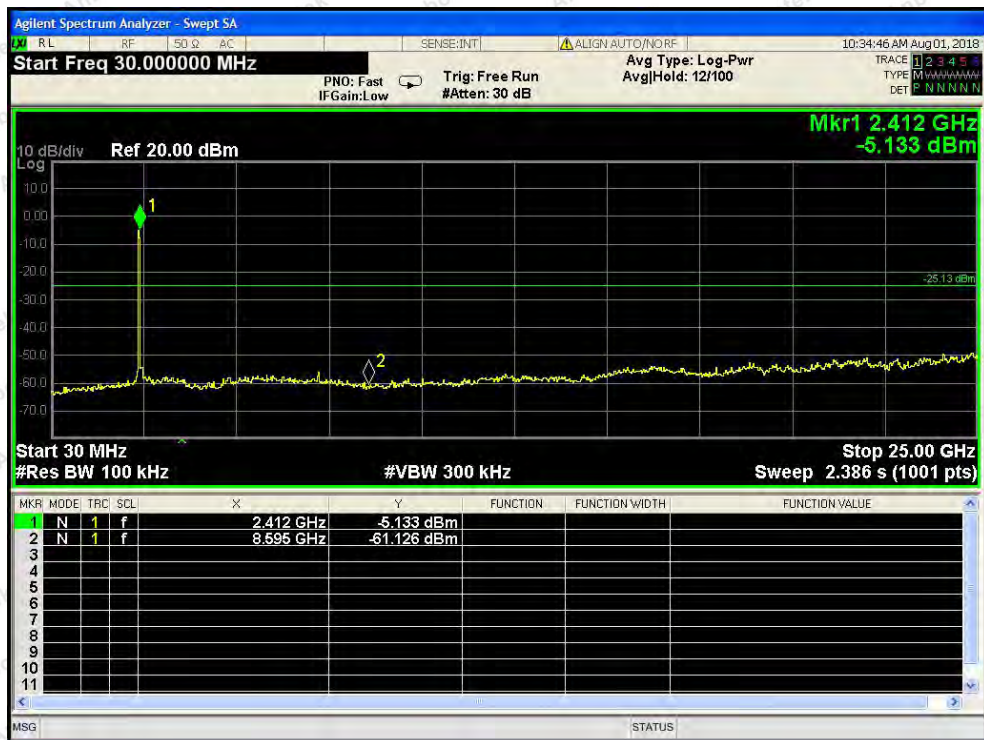


802.11n20 mode : Lowest

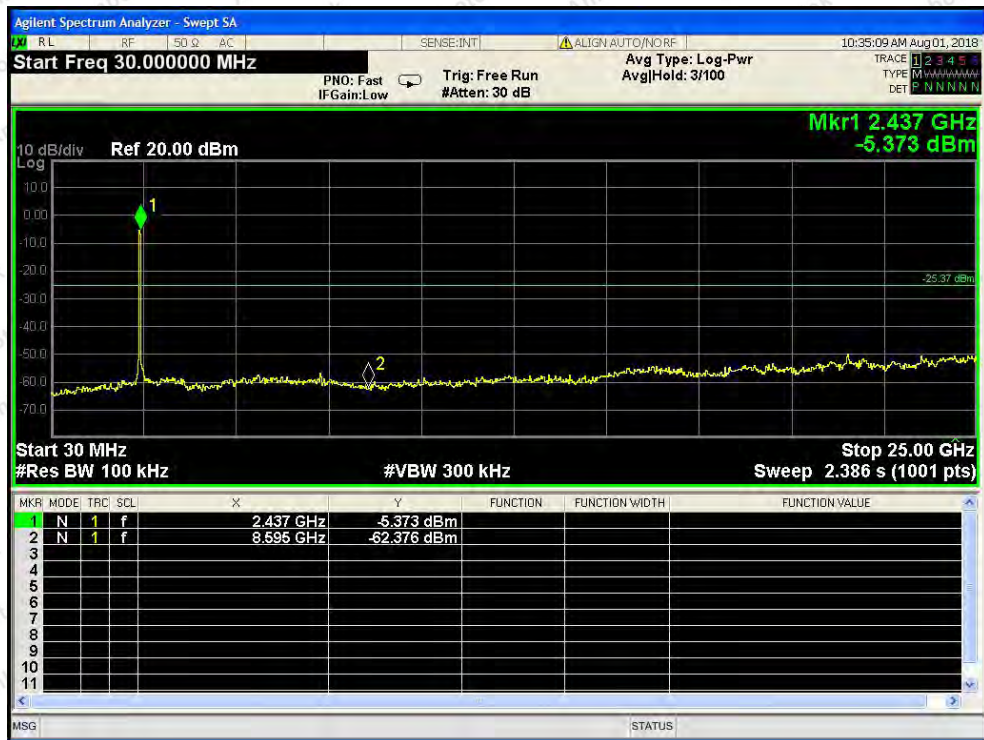


802.11n20 mode : Middle

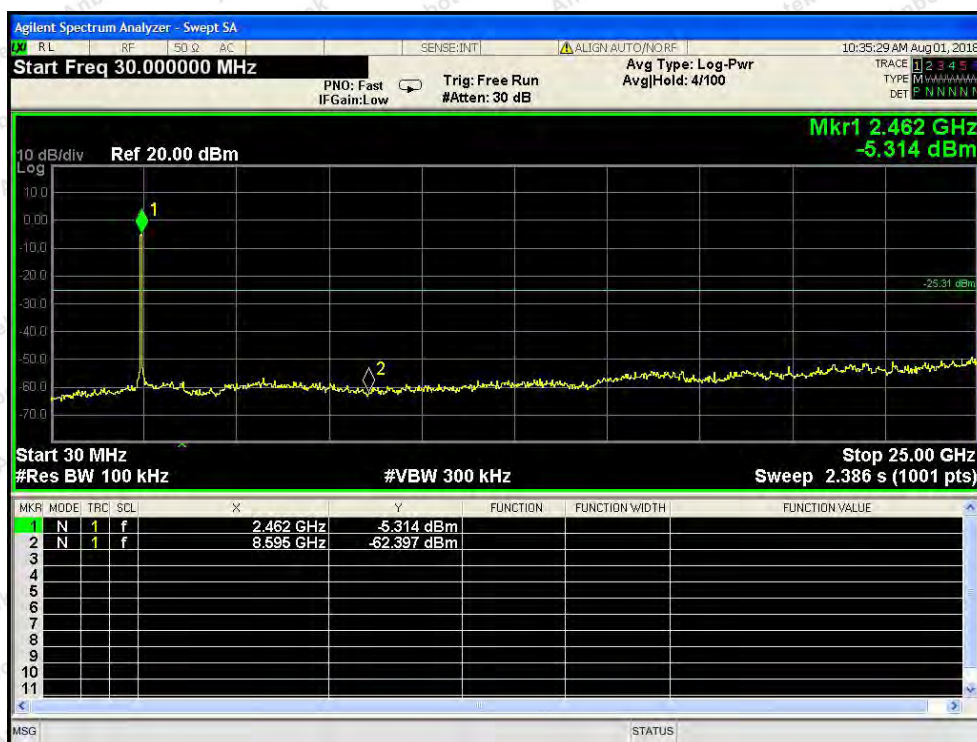


802.11n20 mode : Highest

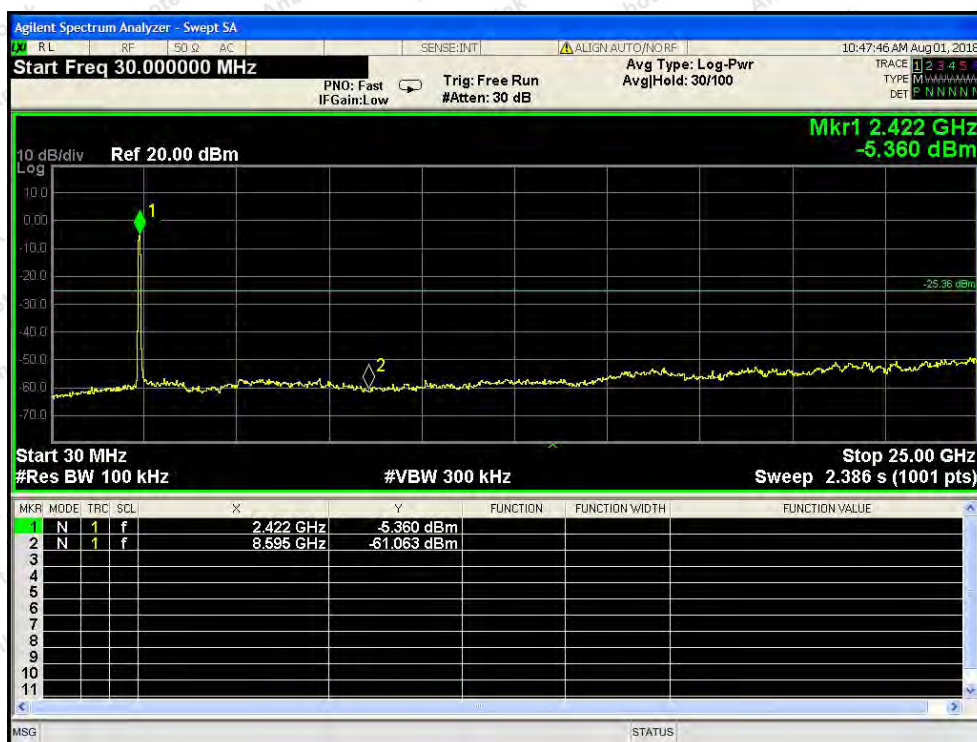

802.11n40 mode : Lowest

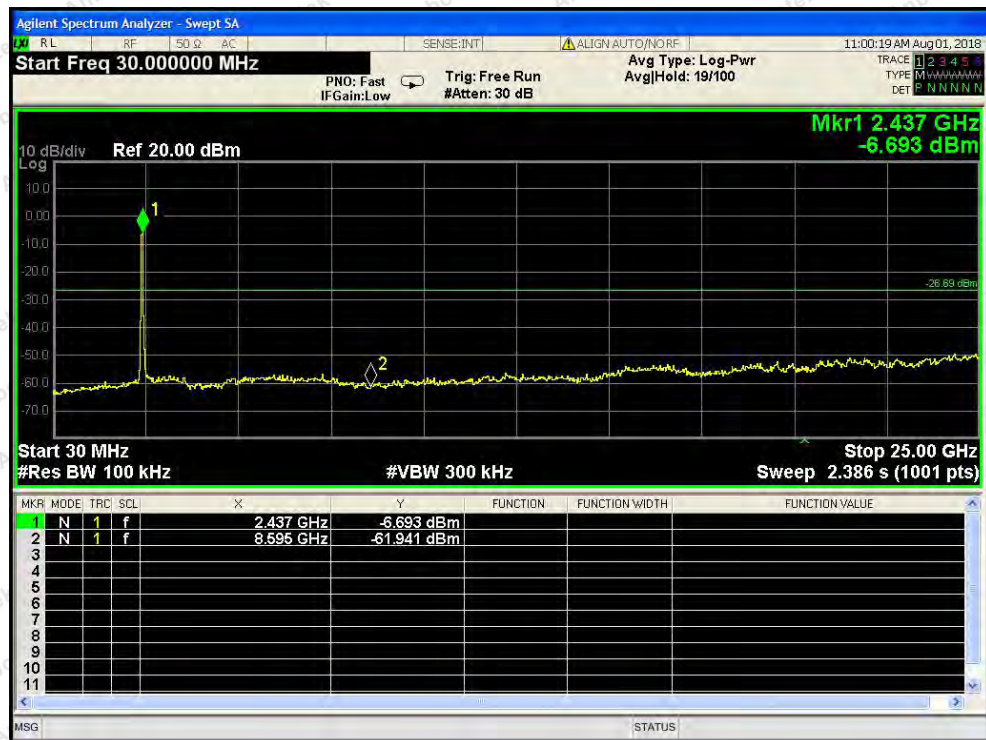

802.11n40 mode : Middle

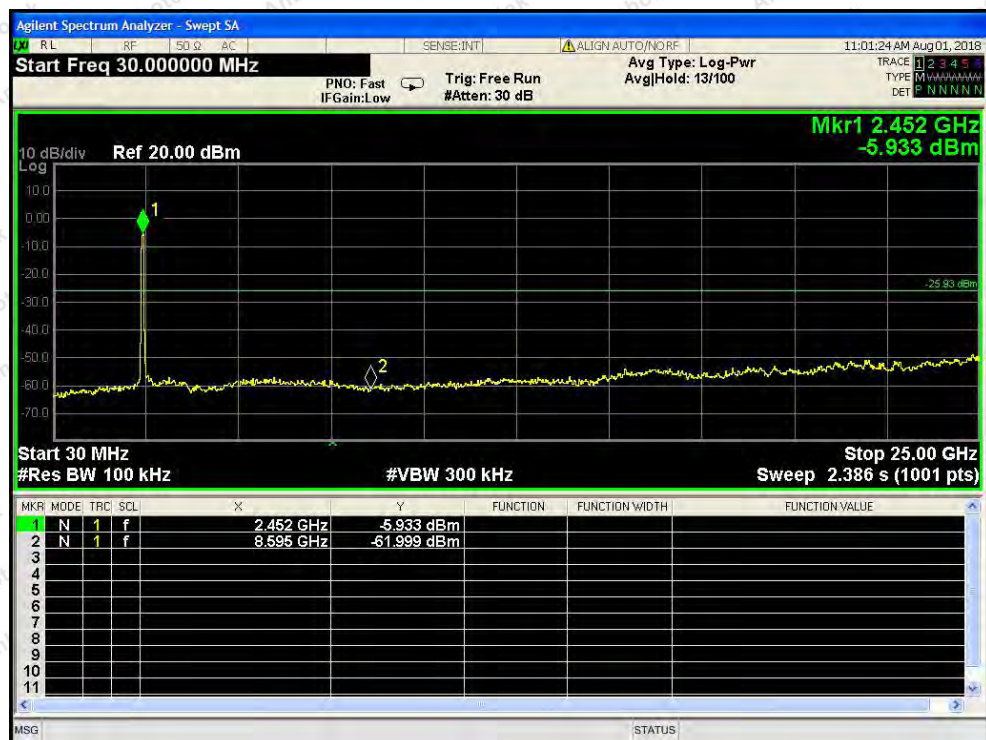

802.11n40 mode : Highest

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The WIFI antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 0 dBi It complies with the standard requirement.





APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

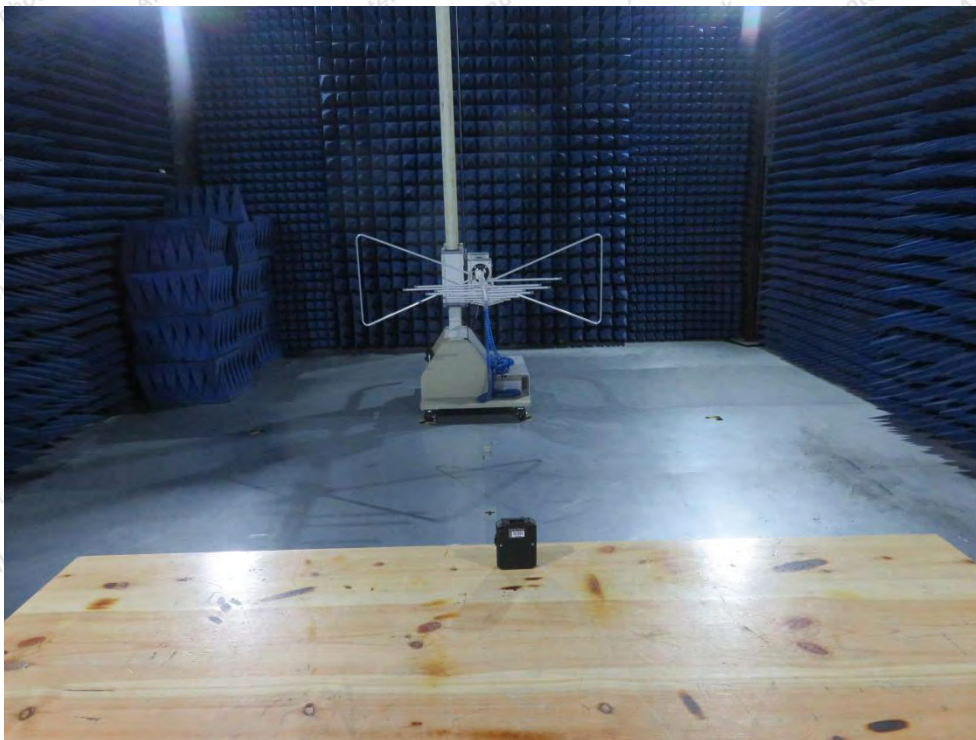

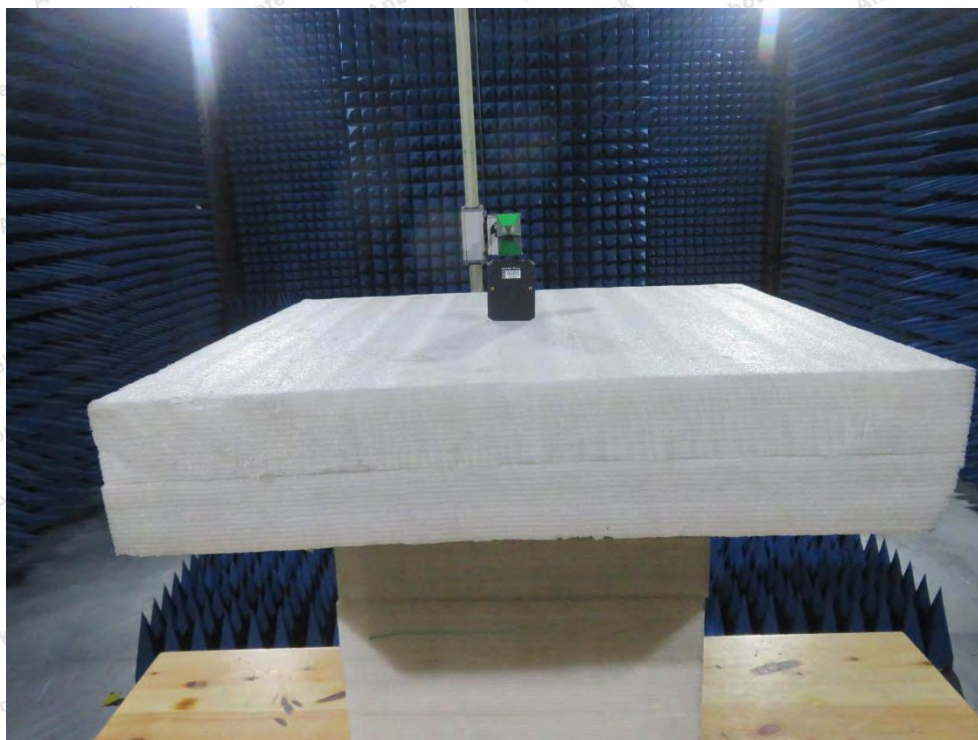

APPENDIX II -- EXTERNAL PHOTOGRAPH















APPENDIX III -- INTERNAL PHOTOGRAPH

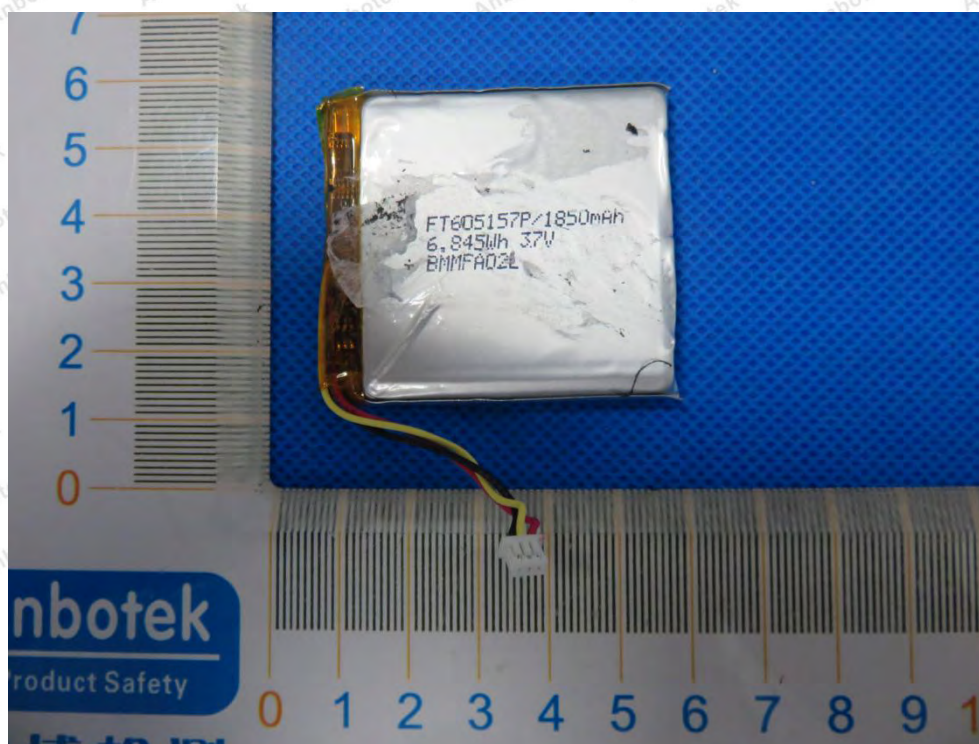
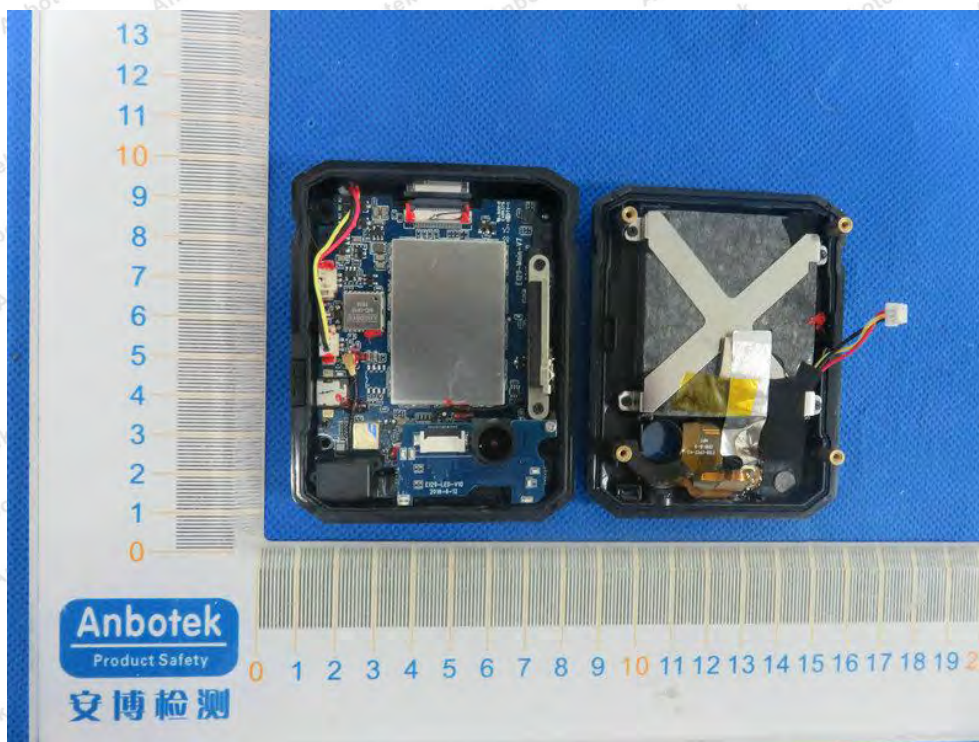



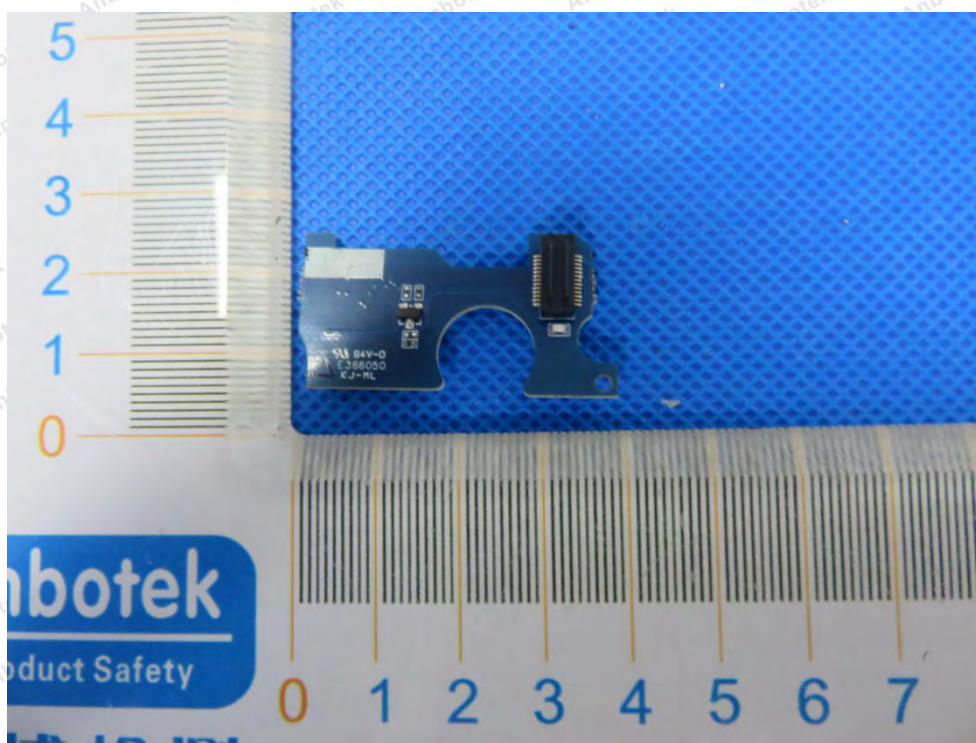


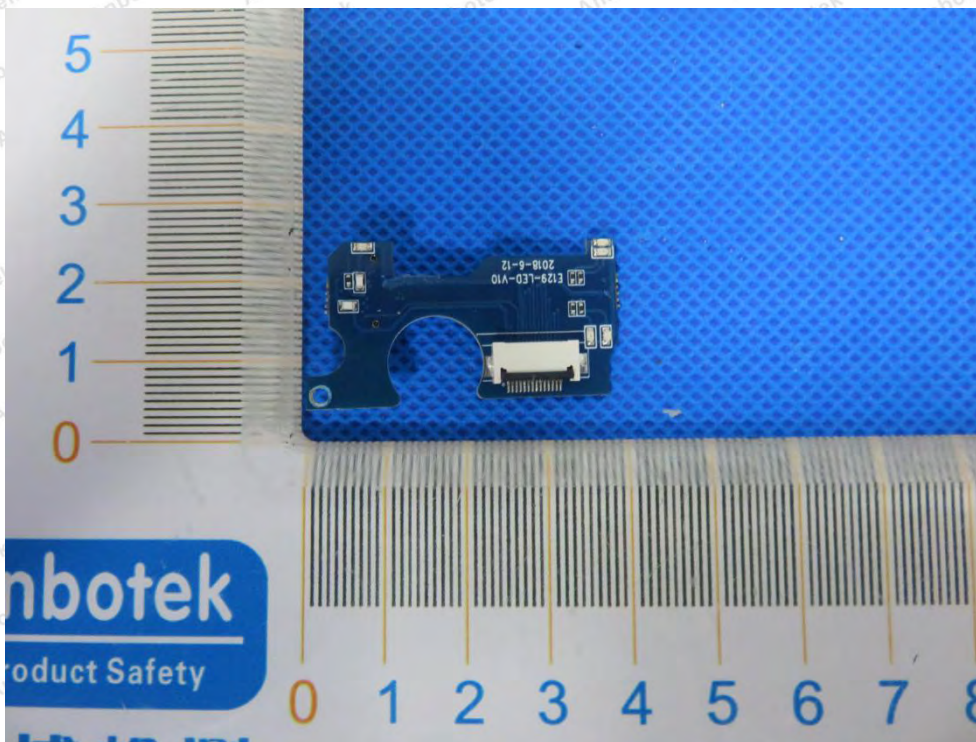




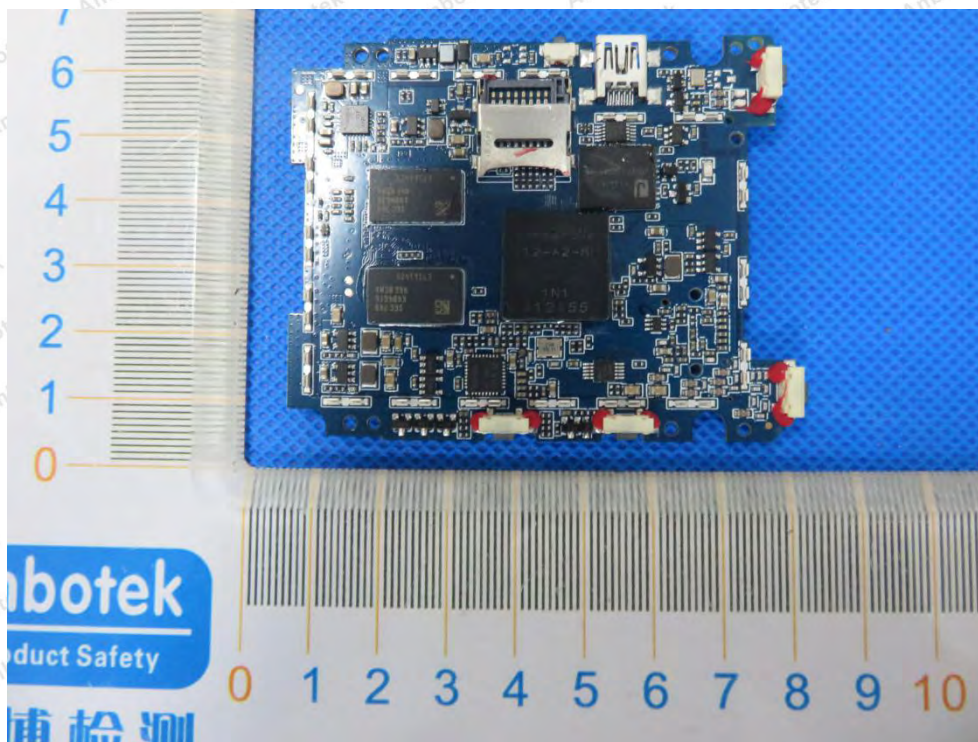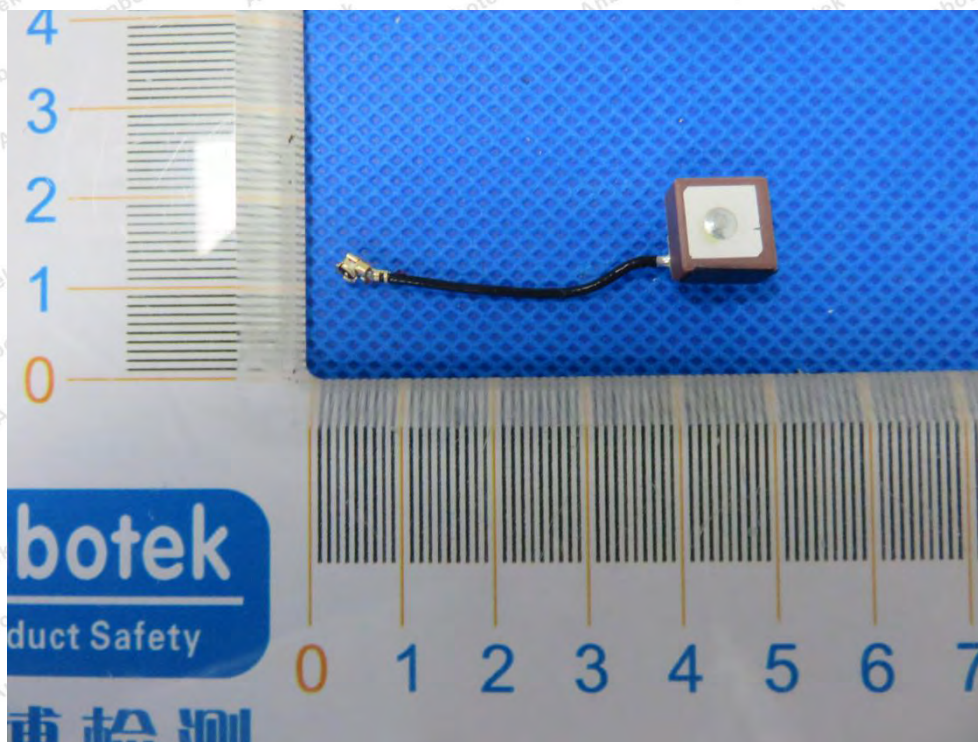

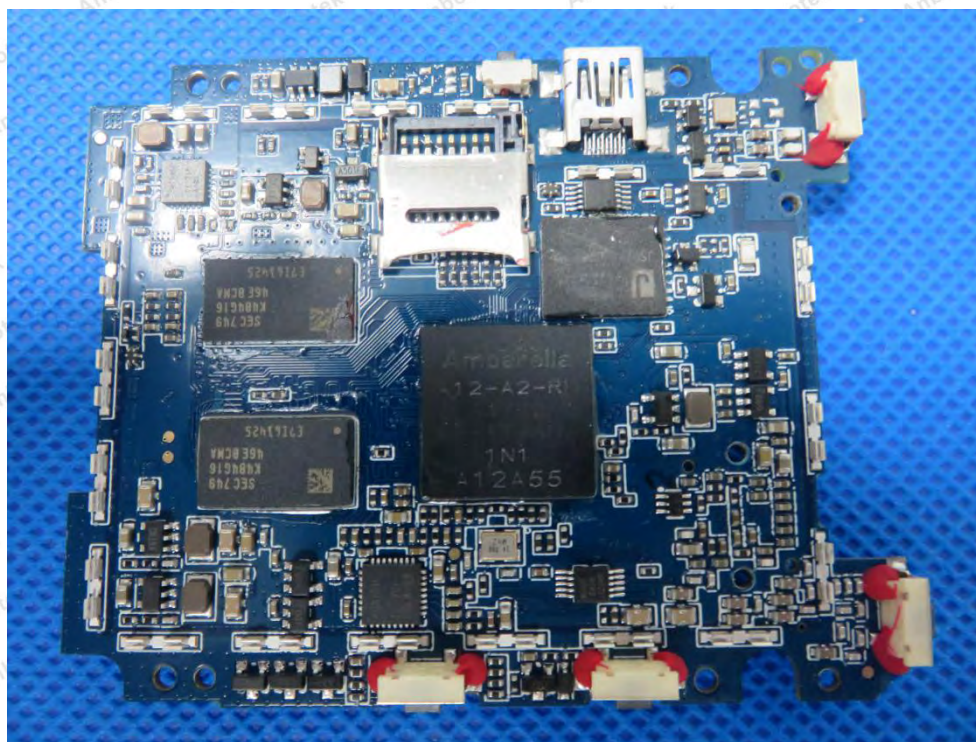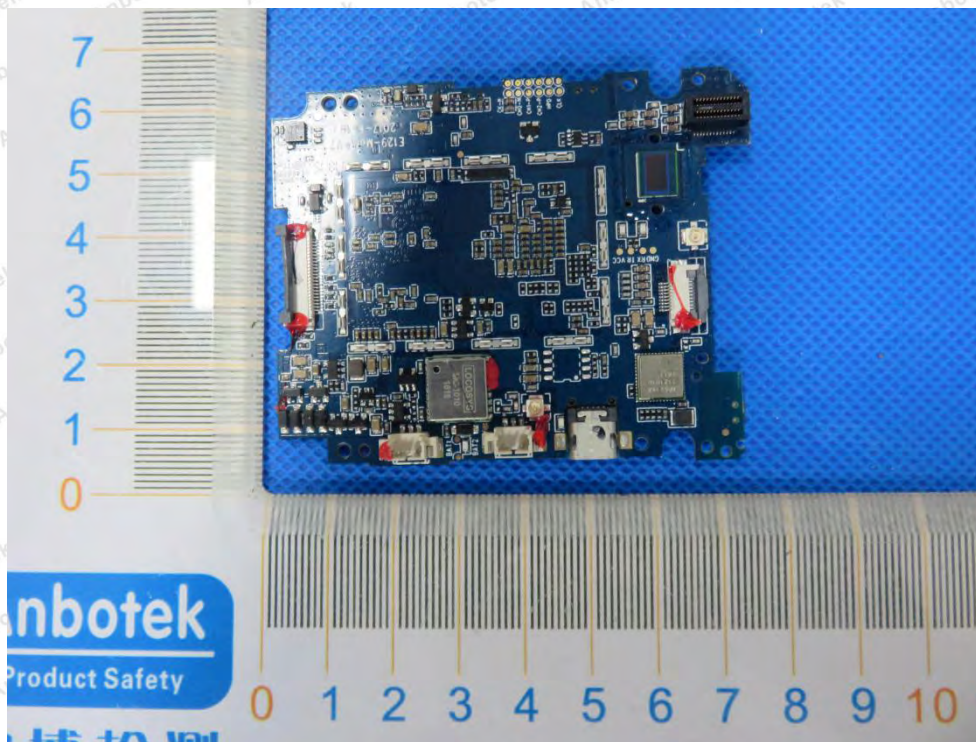

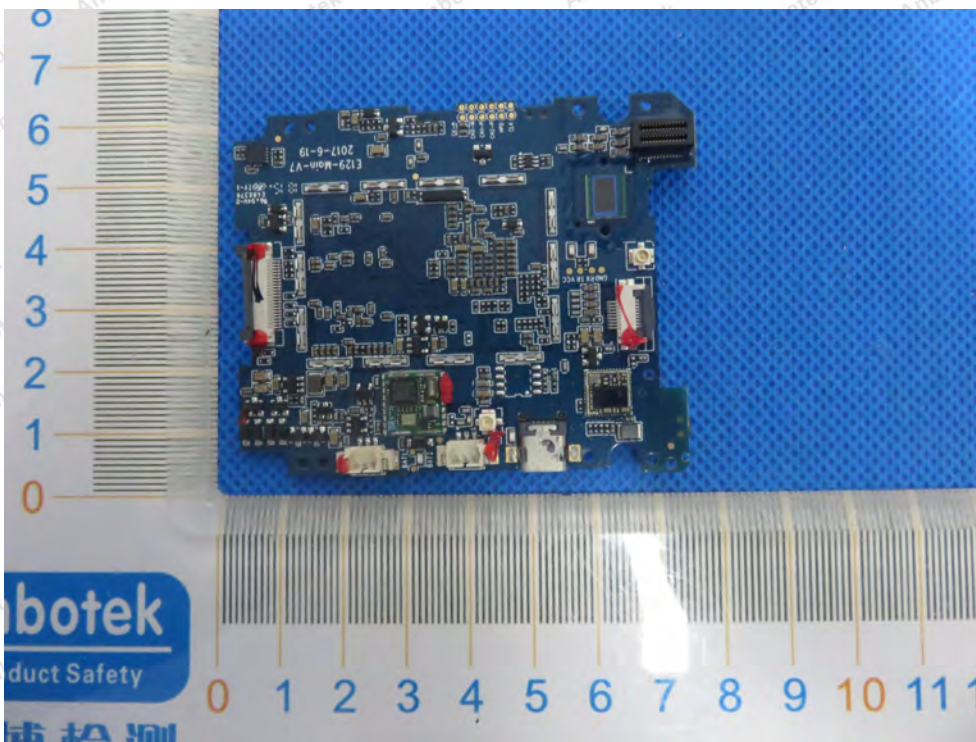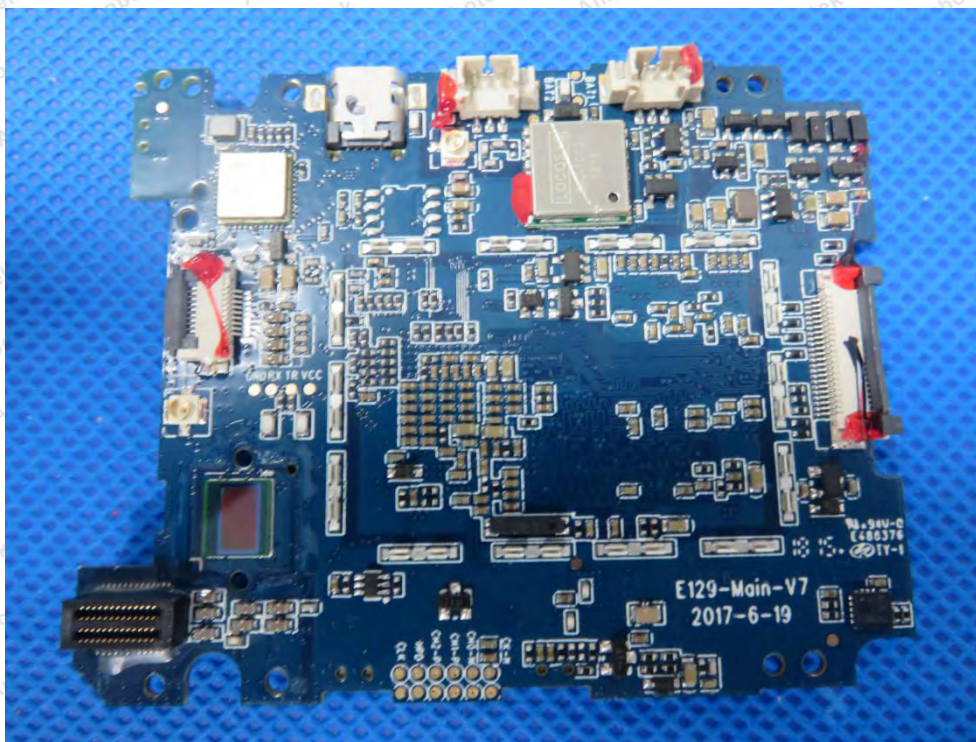

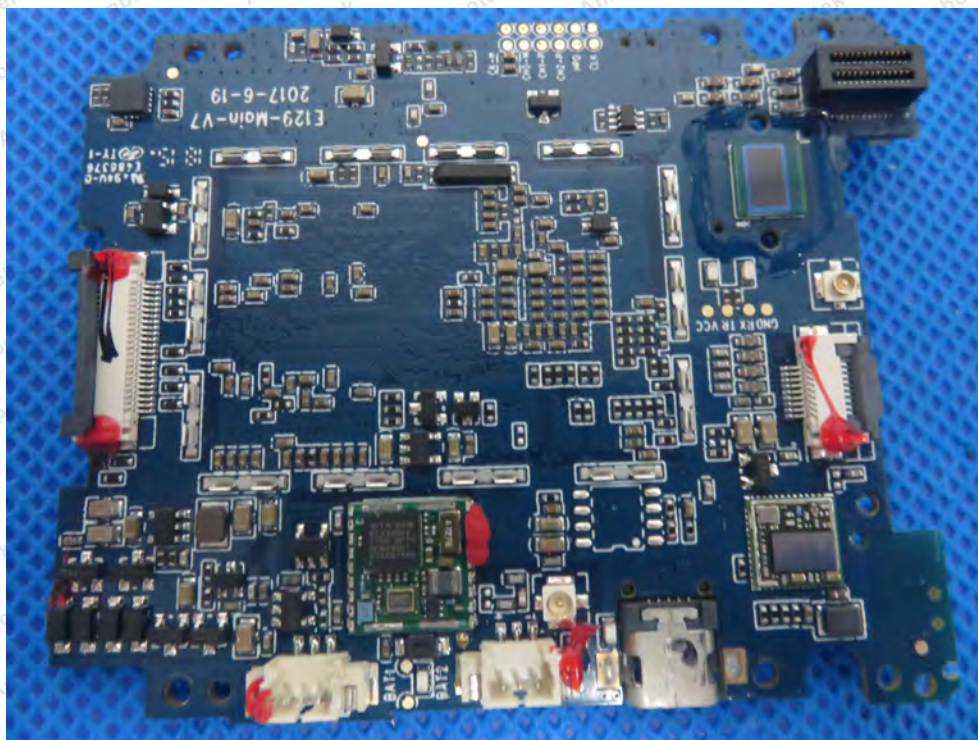

----- End of Report -----