

# Global EMC Inc. Labs

## EMC & RF Test Report

**GLOBAL EMC**

As per  
RSS 210 Issue 8:2010

&

FCC Part 15 Subpart C:2010

Unlicensed Intentional Radiators

On the

**ZPU-M400 / 9756A-M400**



---

Ashwani Malhotra  
Global EMC Inc.  
180 Brodie Dr, Unit 2  
Richmond Hill, ON L4B 3K8  
Canada  
Ph: (905) 883-3919

Testing produced for  
  
See Appendix A for full customer & EUT details.



LAB REGISTRATION #6844A-1



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Table of Contents

Table of Contents .....	2
Report Scope .....	3
Summary .....	4
Test Results Summary .....	5
Justifications, Descriptions, or Deviations .....	6
Applicable Standards, Specifications and Methods .....	7
Sample calculation(s) .....	8
Document Revision Status .....	8
Definitions and Acronyms .....	9
Testing Facility .....	10
Calibrations and Accreditations .....	10
Testing Environmental Conditions and Dates .....	11
Detailed Test Results Section .....	12
Spurious Radiated Emissions .....	13
Channel Carrier Separation for Frequency Hopping Systems .....	38
Maximum Peak Envelope Conducted Power .....	42
Antenna Spurious Radiated and Conducted Emissions ( - 20 dbc Requirement) .....	48
Frequency Occupancy for Frequency Hopping Systems .....	62
Number of Channels for Frequency Hopping Systems .....	66
Frequency Allocation Use for Frequency Hopping Systems .....	77
Maximum Permissible Exposure .....	81
Power Line Conducted Emissions .....	82
Appendix A – EUT Summary .....	89
Appendix B – EUT and Test Setup Photographs .....	90

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Report Scope

This report addresses the EMC verification testing and test results of the M400 Bluetooth module, herein referred to as EUT (Equipment Under Test) performed at Global EMC Labs.

The EUT was tested for compliance against the following standards:

RSS 210 Issue 8:2010/ FCC Part 15 Subpart C 15:2010

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.

Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	ZPU-M400
EUT Industry Canada Certification #, IC:	9756A-M400
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Ashwani Malhotra

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS 210 (Table 1)	Restricted Bands for intentional operation	QuasiPeak Average	Pass
FCC 15.207	Power line conducted emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-210 (Table 2)	Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.247(a)1 RSS-210 A8.2(a)	Channel Separation	2/3 of 20 dB Bandwidth or 25 kHz	Pass
FCC 15.247(a)1(iii) RSS-210 A8.2(a)	Number of channels and Occupancy time	Minimum 15 channels and 0.4s X number of channels	Pass
FCC 15.247(b)1 RSS-210 A8.4(4)	Max output power	< 125 mW	Pass
FCC 15.247(b)(4) RSS-210 A8.4(5)	Antenna Gain	< 6 dBi	Pass
FCC 15.247(d) RSS-210 A8.5	Antenna conducted spurious	< 20 dBc	Pass
FCC 15.247(f) RSS-210	Hybrid System requirements.	NA	Pass See justification and calculations
FCC 15.247(i) IC Safety code 6	Maximum Permissible Exposure	> 2.50 cm separation.	Pass See justification and calculations
<b>Overall Result</b>			<b>PASS</b>

All tests were performed by Ashwani Malhotra

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



### ***Justifications, Descriptions, or Deviations***

The following justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS 210 section 5.5), the unit uses an internal PCB antenna.

For the Restricted Bands of operation, the EUT is designed to only operate between 2402 – 2480.0MHz.

For the Antenna gain, the EUT uses a -3 dbi antenna. For the scope of this testing EUT was tested in 3 orthogonal axis in order to obtain the maximum emissions. EUT vertical produced maximum emissions. All testing was performed in this configuration.

For maximum permissible exposure, this device operates at less than 1 Watt at 2402 – 2480.0 MHz and is designed to operate in contact with personnel during normal operation. Output power is 6.6dbm (4.57 mW) which is below the 25mW threshold for 2.4 GHz equipment. No testing is required, however worst case calculated exposure compliance follows later in this report.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it. However the 15.247 (d) requirement of power density were met and are detailed in this test report.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Applicable Standards, Specifications and Methods***

ANSI C63.4:2003 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

CFR 47 FCC 15 - Code of Federal Regulations – Radio Frequency Devices

CISPR 22:1997 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

ICES-003:2004 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories

RSS 210:2010 - Issue 8: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power License-Exempt Radio communication Devices

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## ***Sample calculation(s)***

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

## ***Document Revision Status***

Revision 1 - August 24<sup>th</sup>, 2011. Initial report release.

Revision 2 - August 29<sup>th</sup>, 2011 Report updated for model name from m400 to M400 per RSS-Gen and FCC requirements. Also mentioned that EUT was tested in 3 orthogonal axis to maximize the emissions.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**AE** – Auxillary Equipment.

**BW** – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility

**EMI** – Electro-Magnetic Immunity

**EUT** – Equipment Under Test

**ITE** – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

**LISN** – Line impedance stabilization network

**NCR** – No Calibration Required

**RF** – Radio Frequency

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Testing Facility

Testing for EMC on the EUT was carried out at Global EMC labs in Toronto, Ontario, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

### ***Calibrations and Accreditations***

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## ***Testing Environmental Conditions and Dates***

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
August 1-5, 2011	All	AM	23.3-25.1°C	37-42%	101.1 -101.5 kPa

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Detailed Test Results Section

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Spurious Radiated Emissions***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limit(s) and Method**

The method is as defined in ANSI C63.4:2003.

The limits, as defined in 15.247(d) for unintentional radiated emissions apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the 'Spurious Conducted Emissions' requirements of -20 dBc or greater. See also 'Spurious Conducted Emissions' for further details.

30 MHZ – 88 MHz, 100 uV/m (40.0 dBuV/m<sup>1</sup>) at 3 m

88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m<sup>1</sup>) at 3 m

216 MHz – 960 MHz, 200 uV/m (46.4 dBuV/m<sup>1</sup>) at 3 m

Above 960 MHz, 500 uV/m (54.0 dBuV/m<sup>1</sup>) at 3 m

Above 1000 MHz, 500 uV/m (54.0 dBuV/m<sup>2</sup>) at 3m


<sup>1</sup>Limit is with 120 kHz measurement bandwidth and a using a Quasi Peak detector.

<sup>2</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector, scanned in accordance with 15.33 to above the 10<sup>th</sup> harmonic.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Typical Radiated Emissions Setup

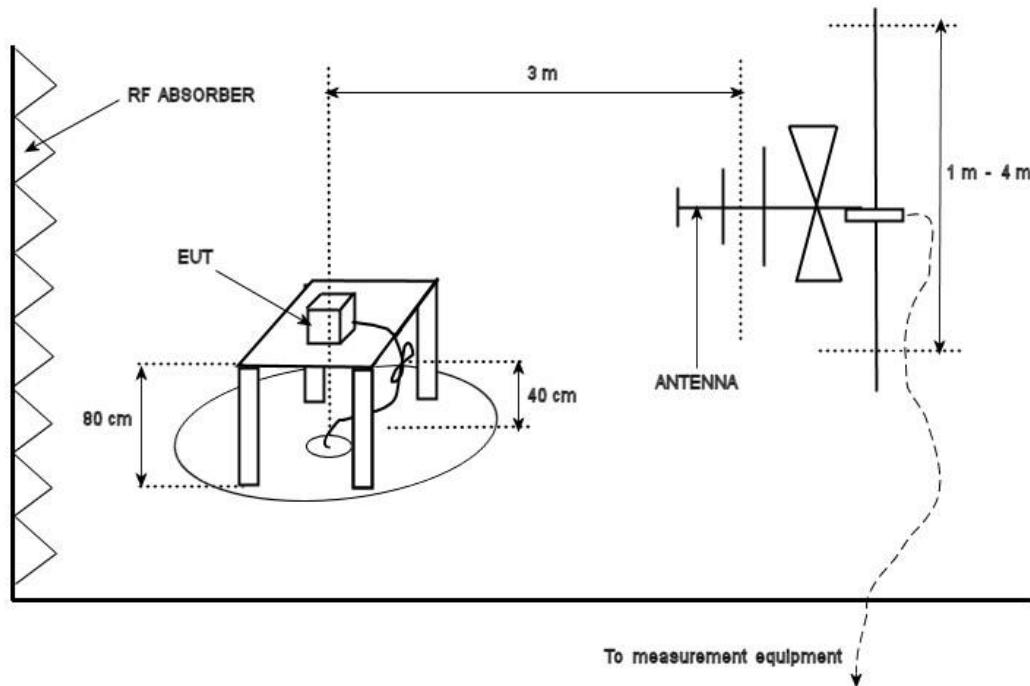

## Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a %95 confidence level.

## Preliminary Graphs


Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to a minimum of a 25 GHz.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 30MHz – 1 GHz  
Vertical – Peak Emissions Graph

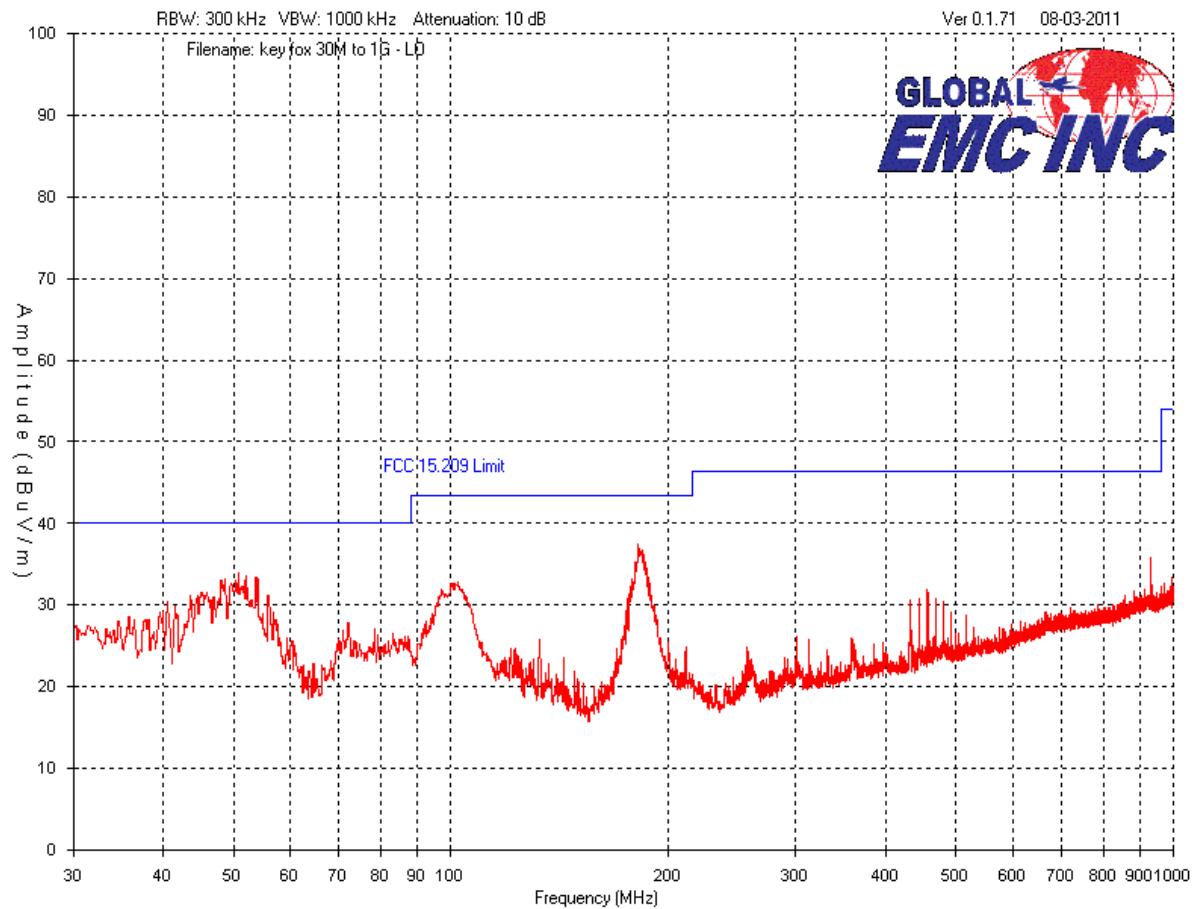

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 30MHz – 1 GHz  
Horizontal – Peak Emissions Graph

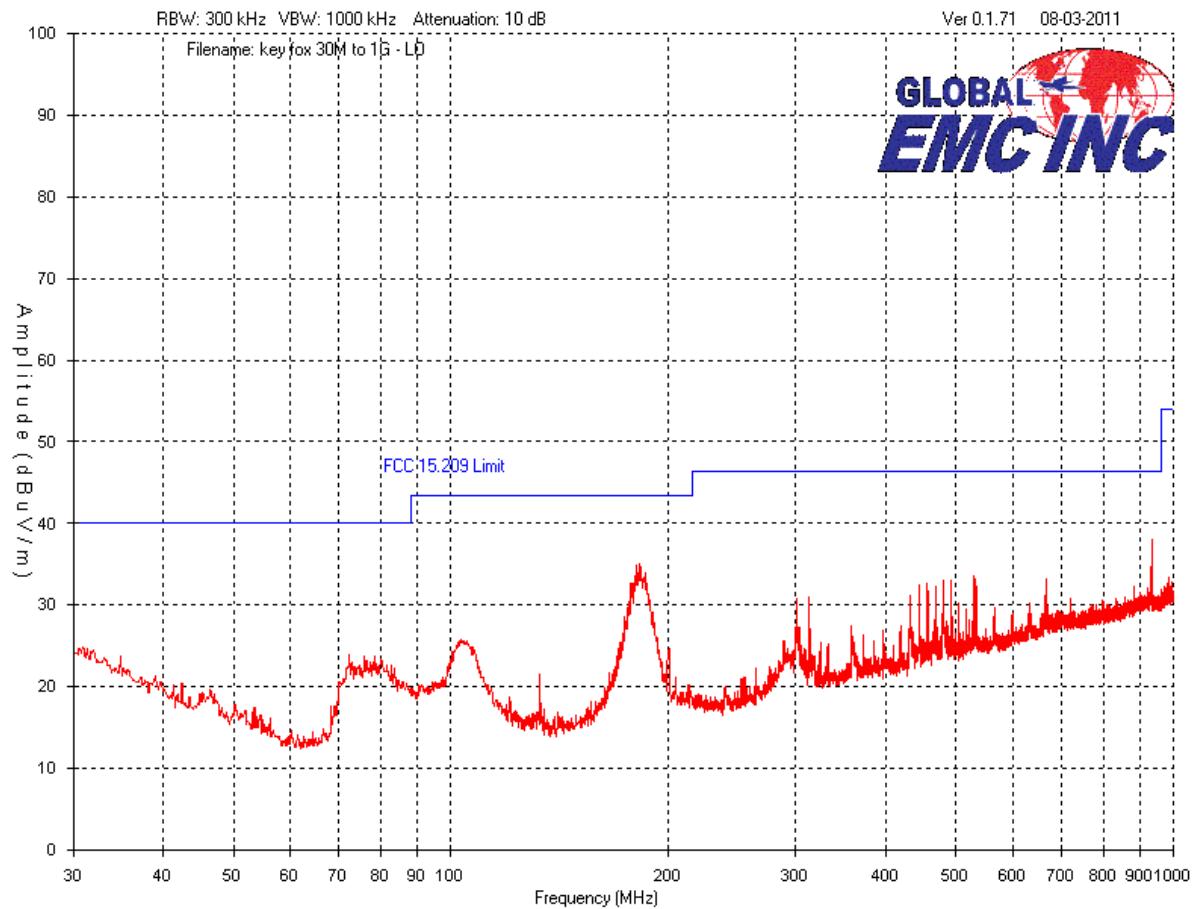

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 1 – 2 GHz  
Vertical – Peak Emissions Graph

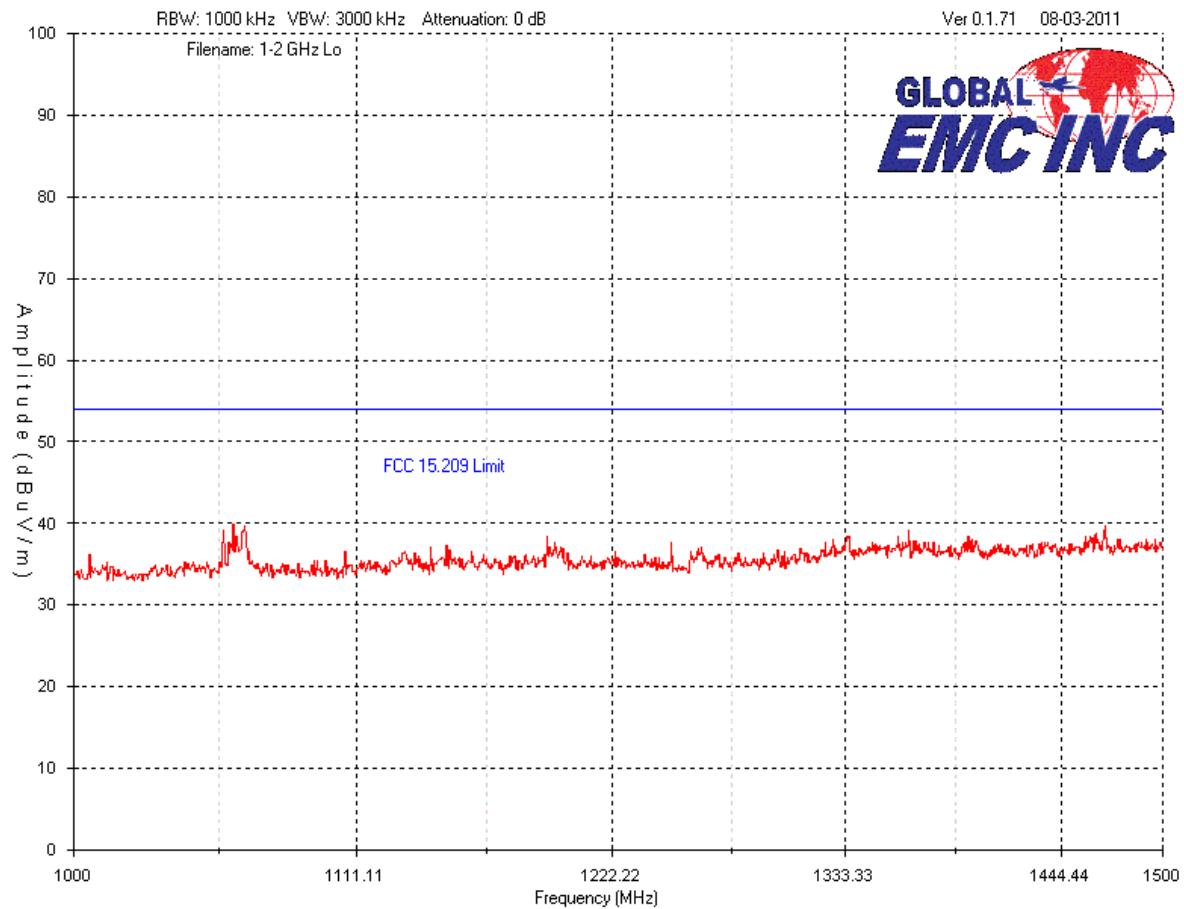

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 1 – 2 GHz  
Horizontal – Peak Emissions Graph

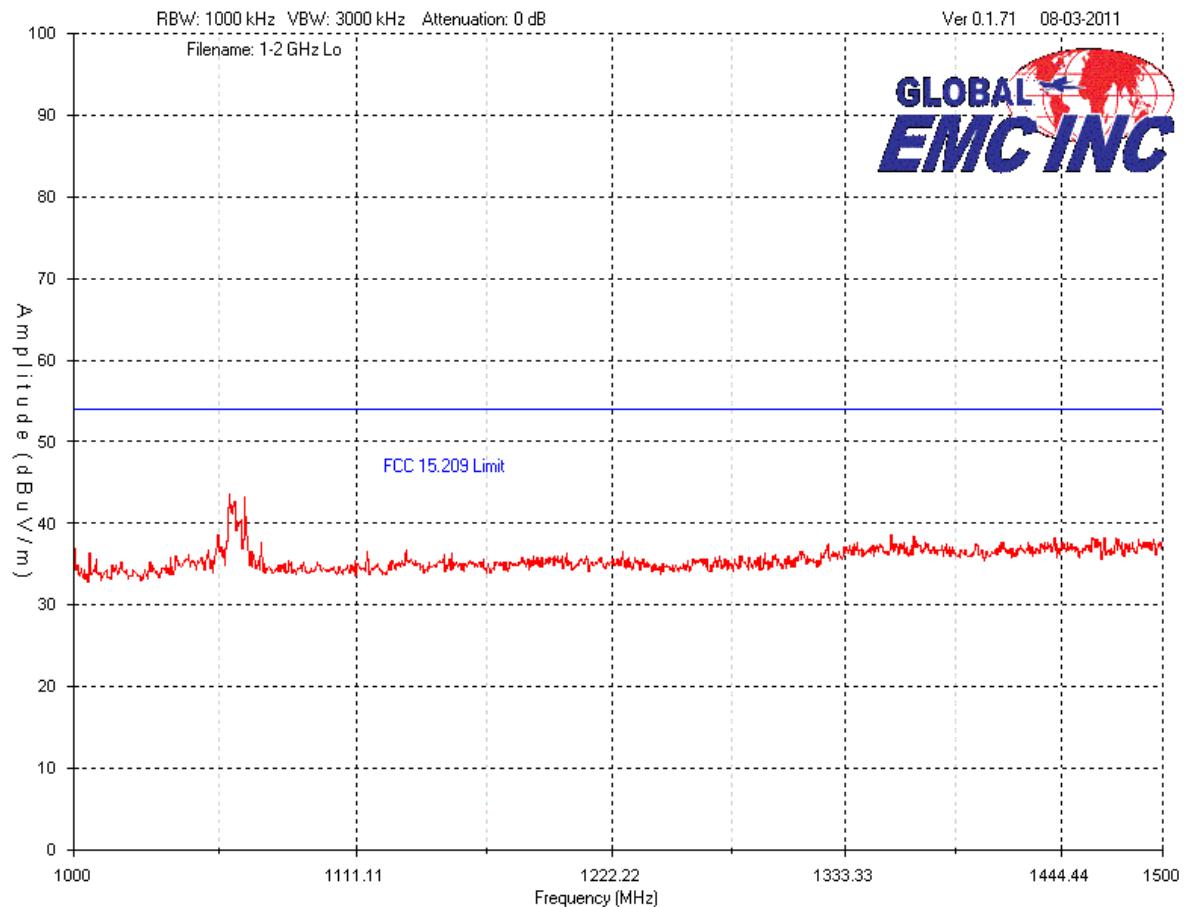

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 2-6 GHz  
Vertical – Peak Emissions Graph

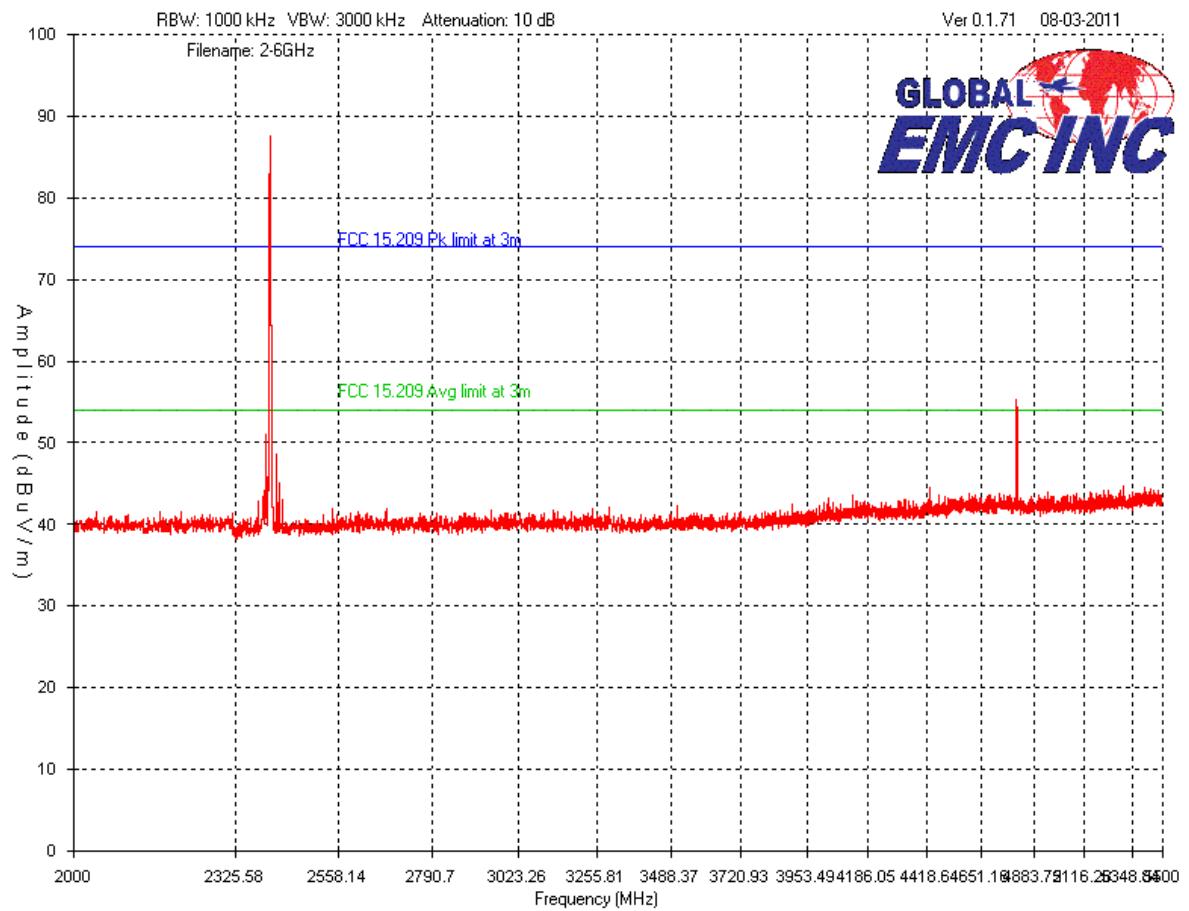

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Low Channel – 2-6 GHz  
Horizontal – Peak Emissions Graph

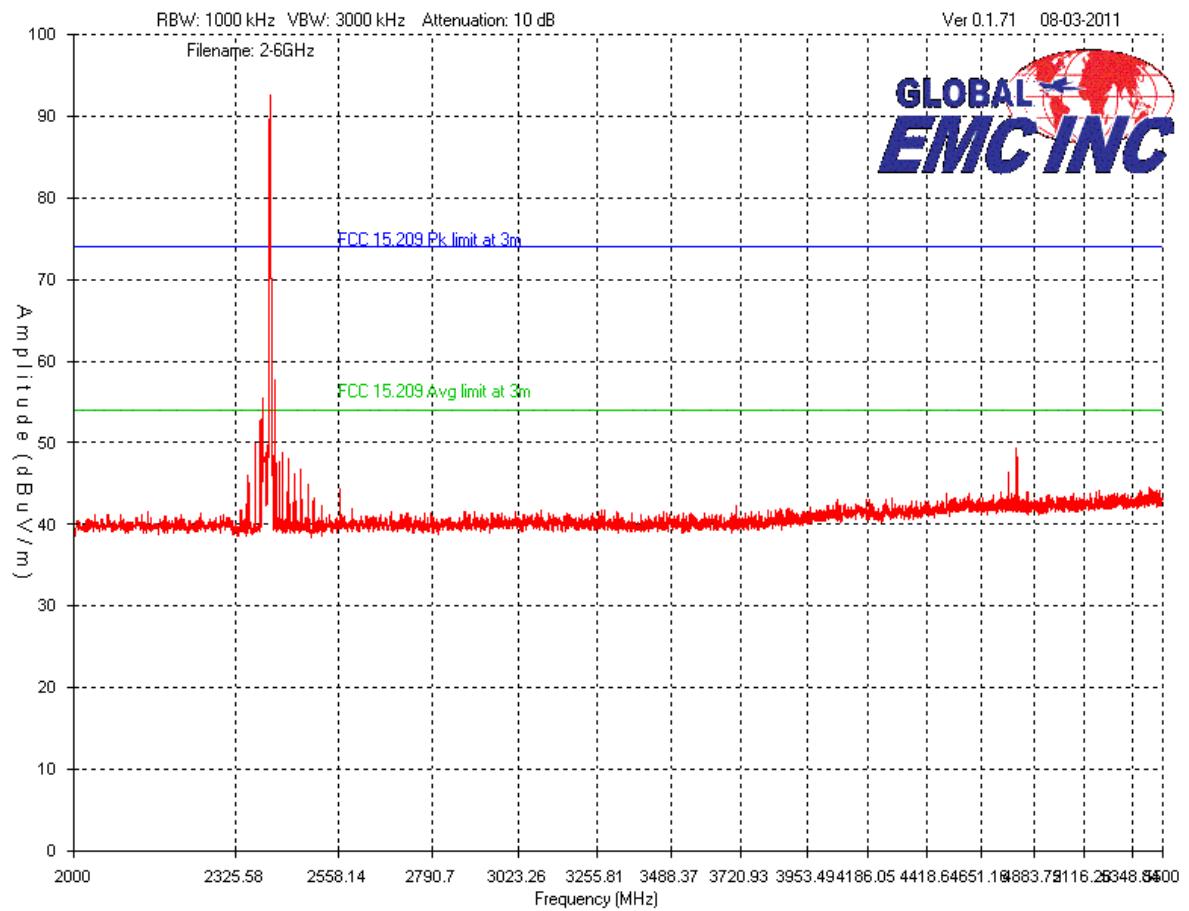

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Hop mode – 2-6 GHz  
Vertical – Peak Emissions Graph

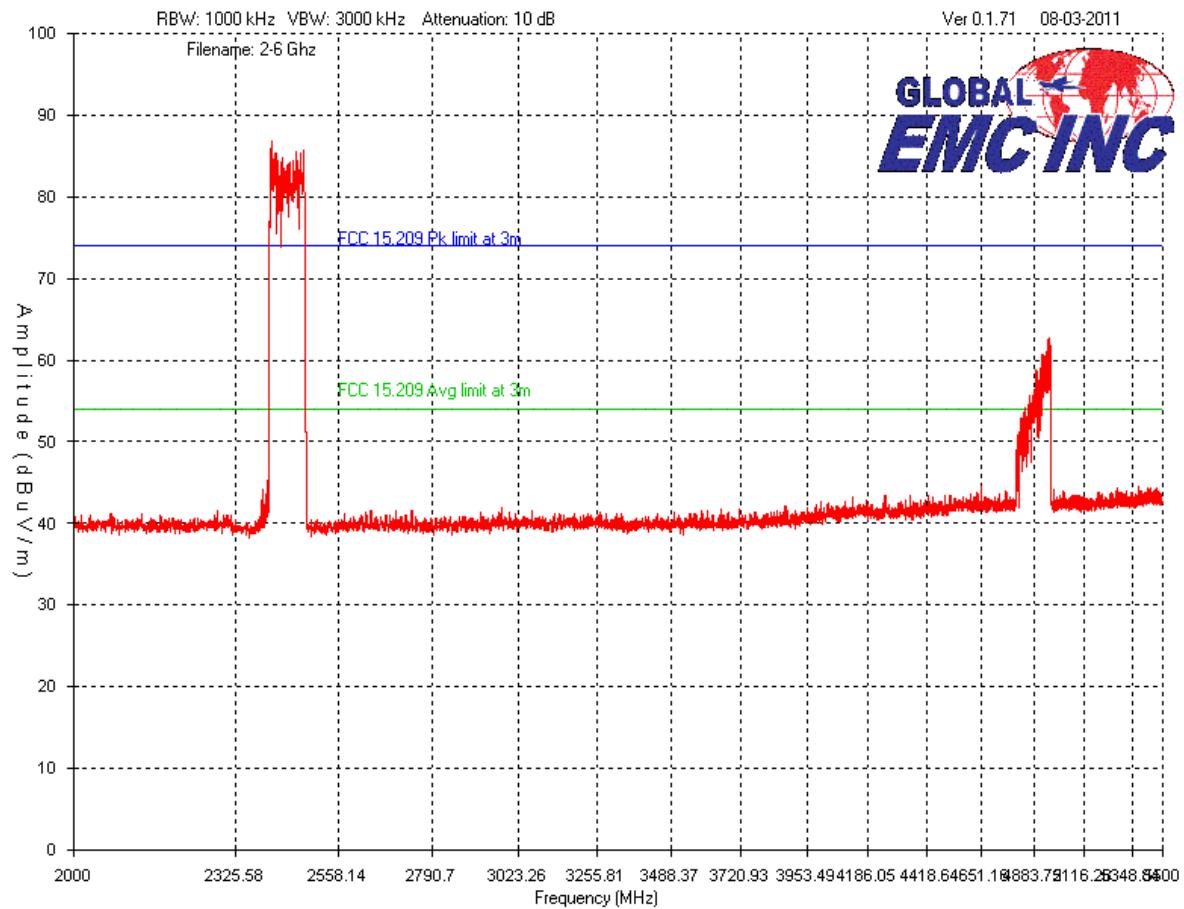

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Hop mode – 2-6 GHz  
Horizontal – Peak Emissions Graph

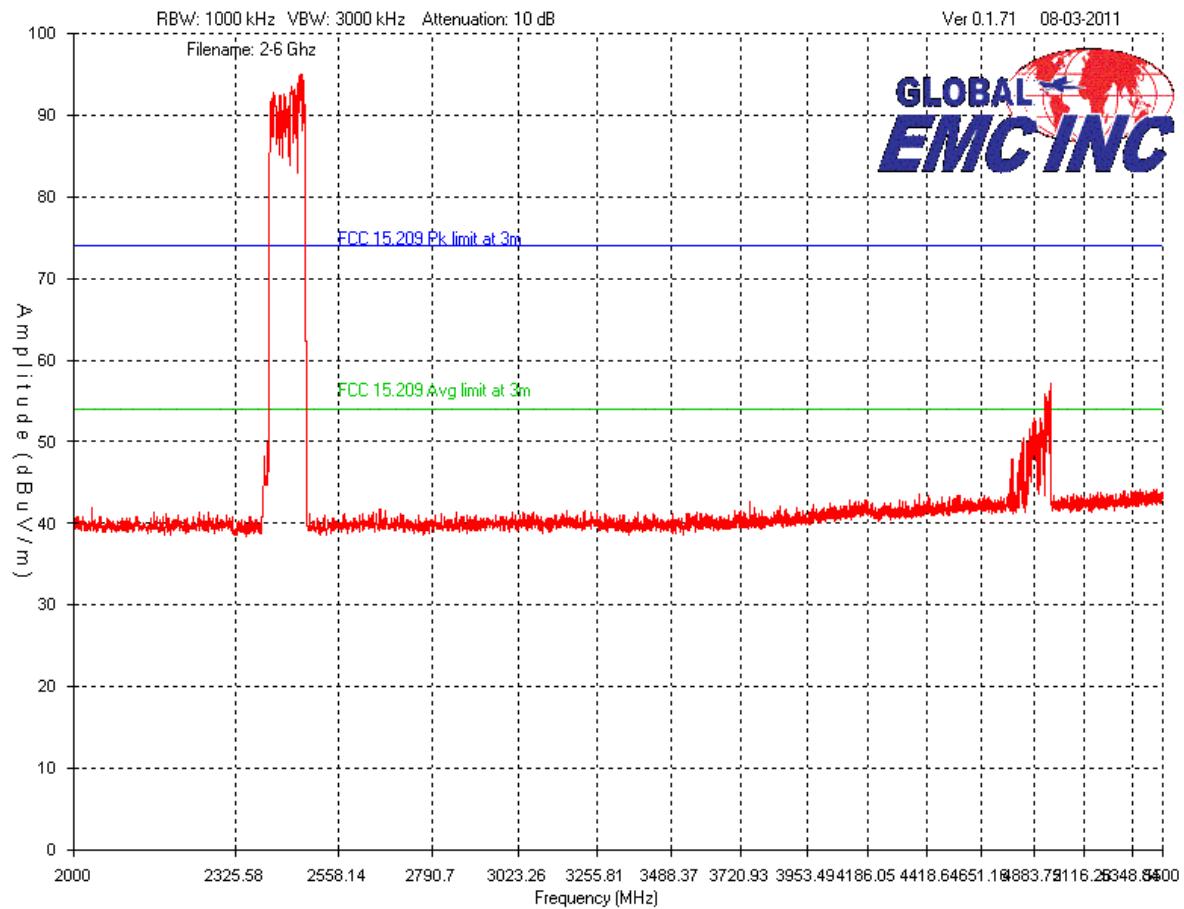

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Low channel  
Vertical peak Emissions  
2390 MHz

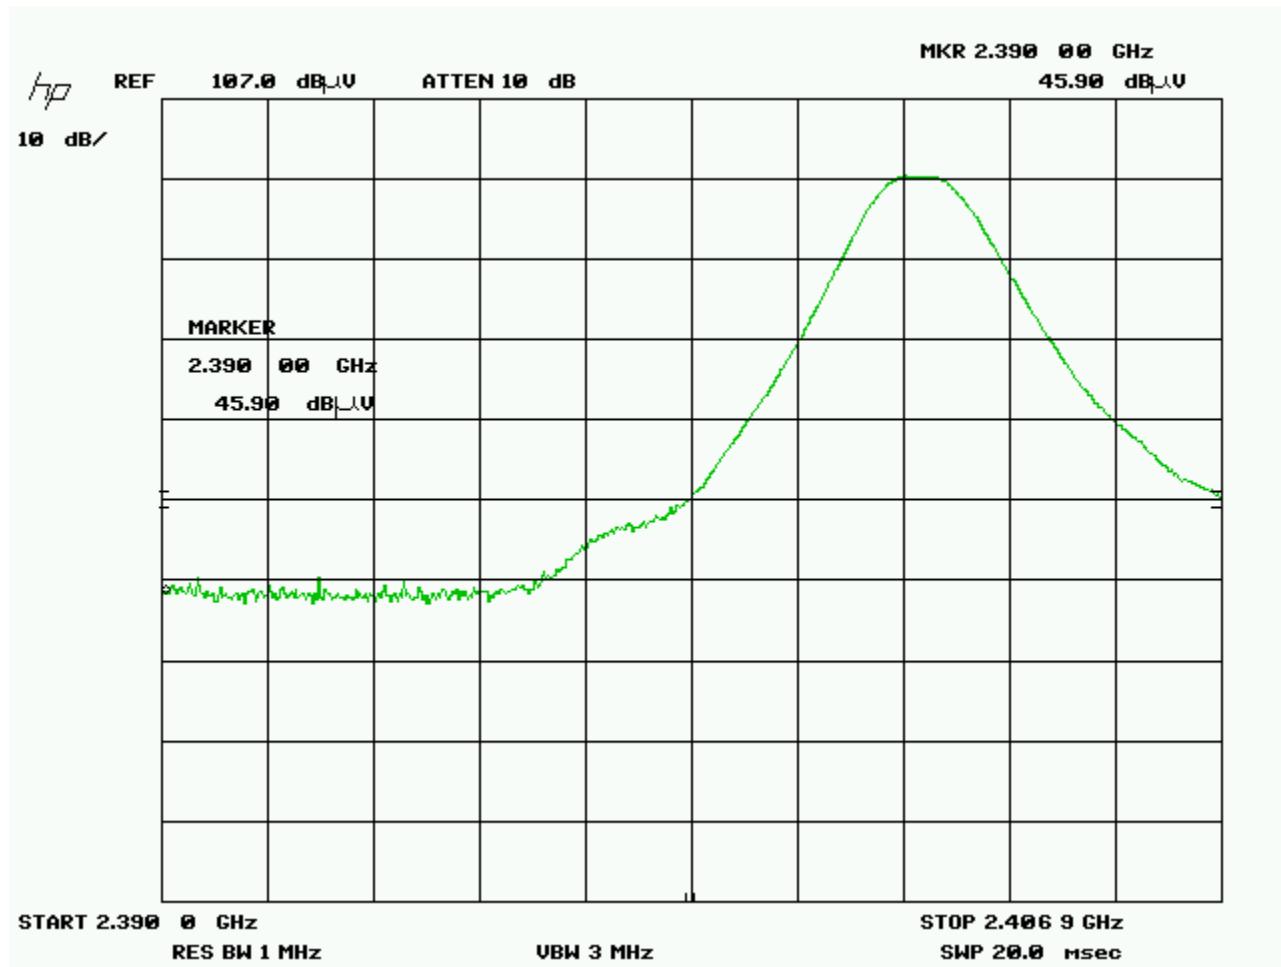

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Low channel  
 Vertical Avg Emissions  
 2390 MHz

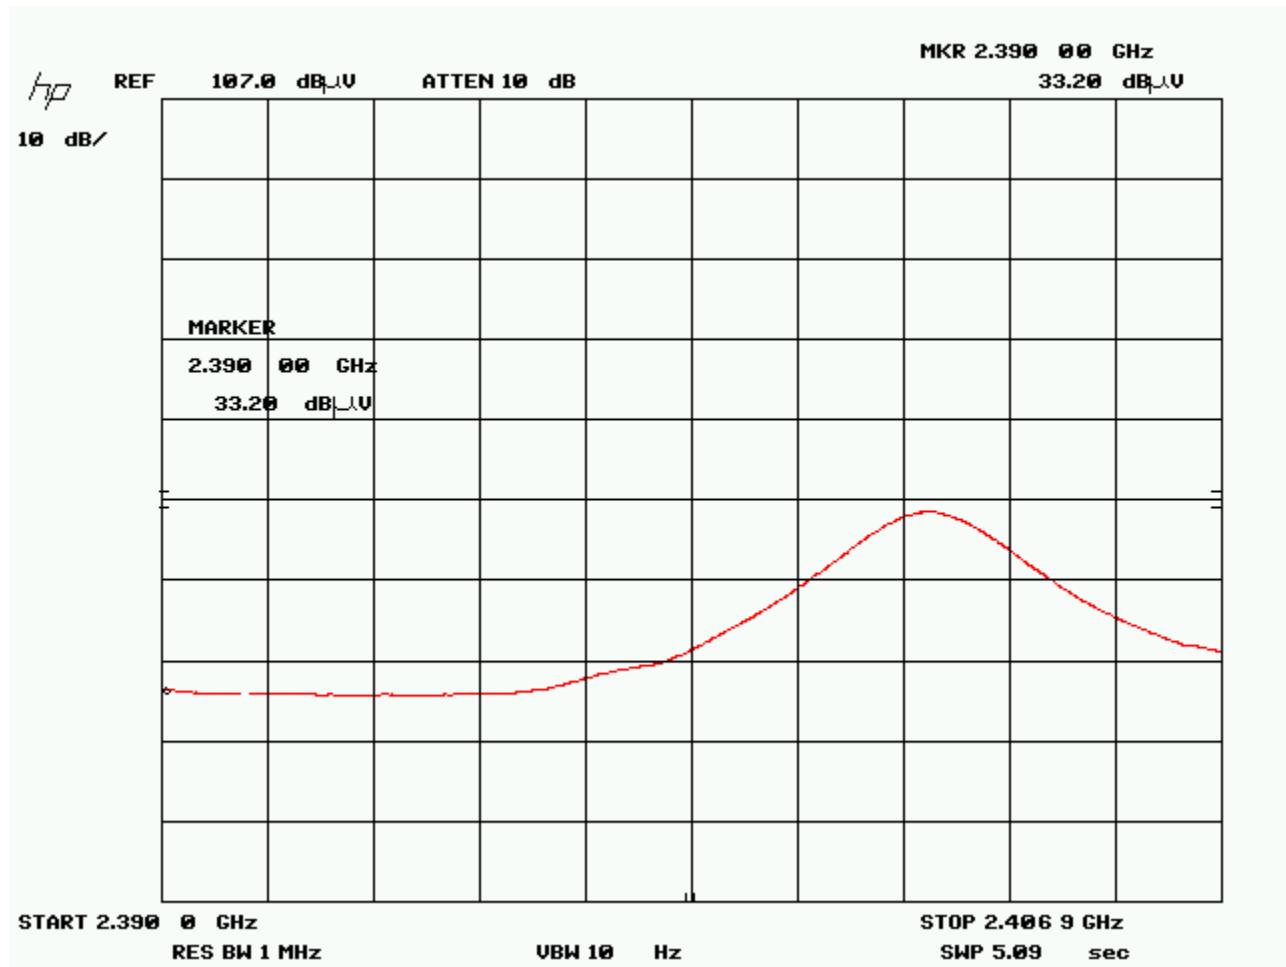

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Low channel  
Horizontal Peak Emissions  
2390 MHz

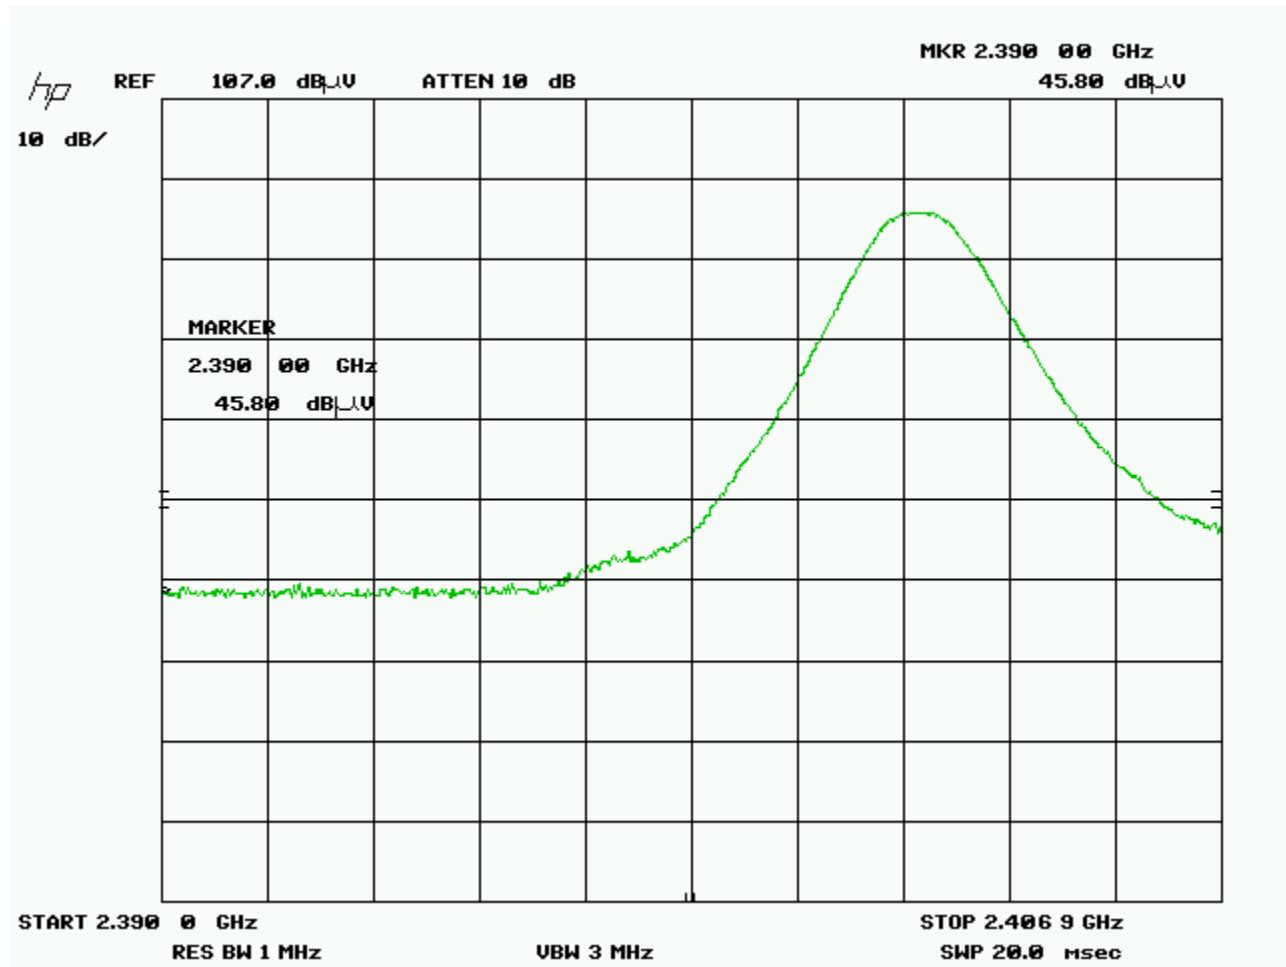

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Low channel  
Horizontal Avg Emissions  
2390 MHz

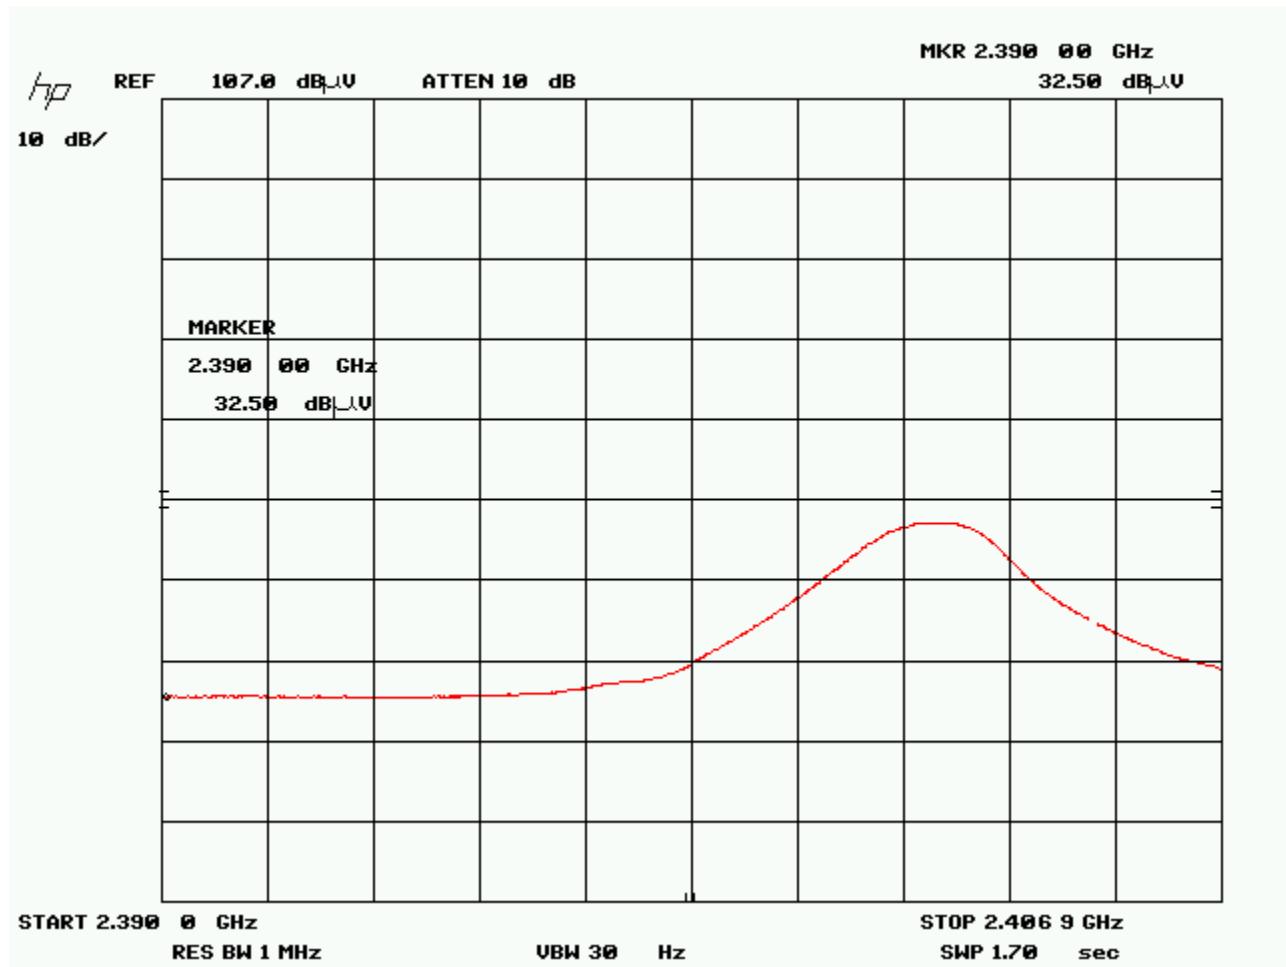

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Hi channel  
 Vertical Peak emissions  
 2483.5 MHz

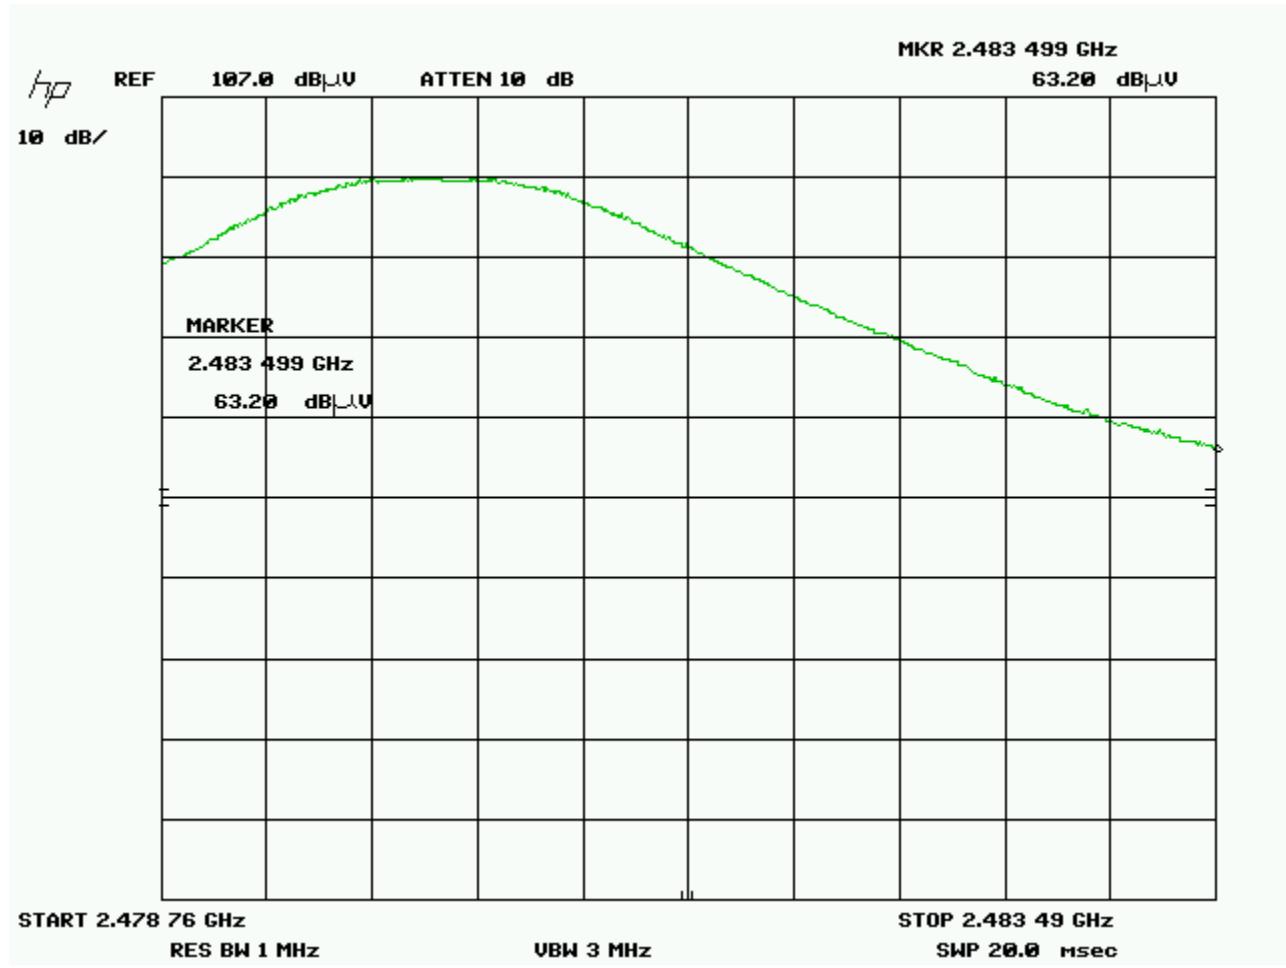

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Band Edge – Hi channel  
Vertical Avg emissions  
2483.5 MHz

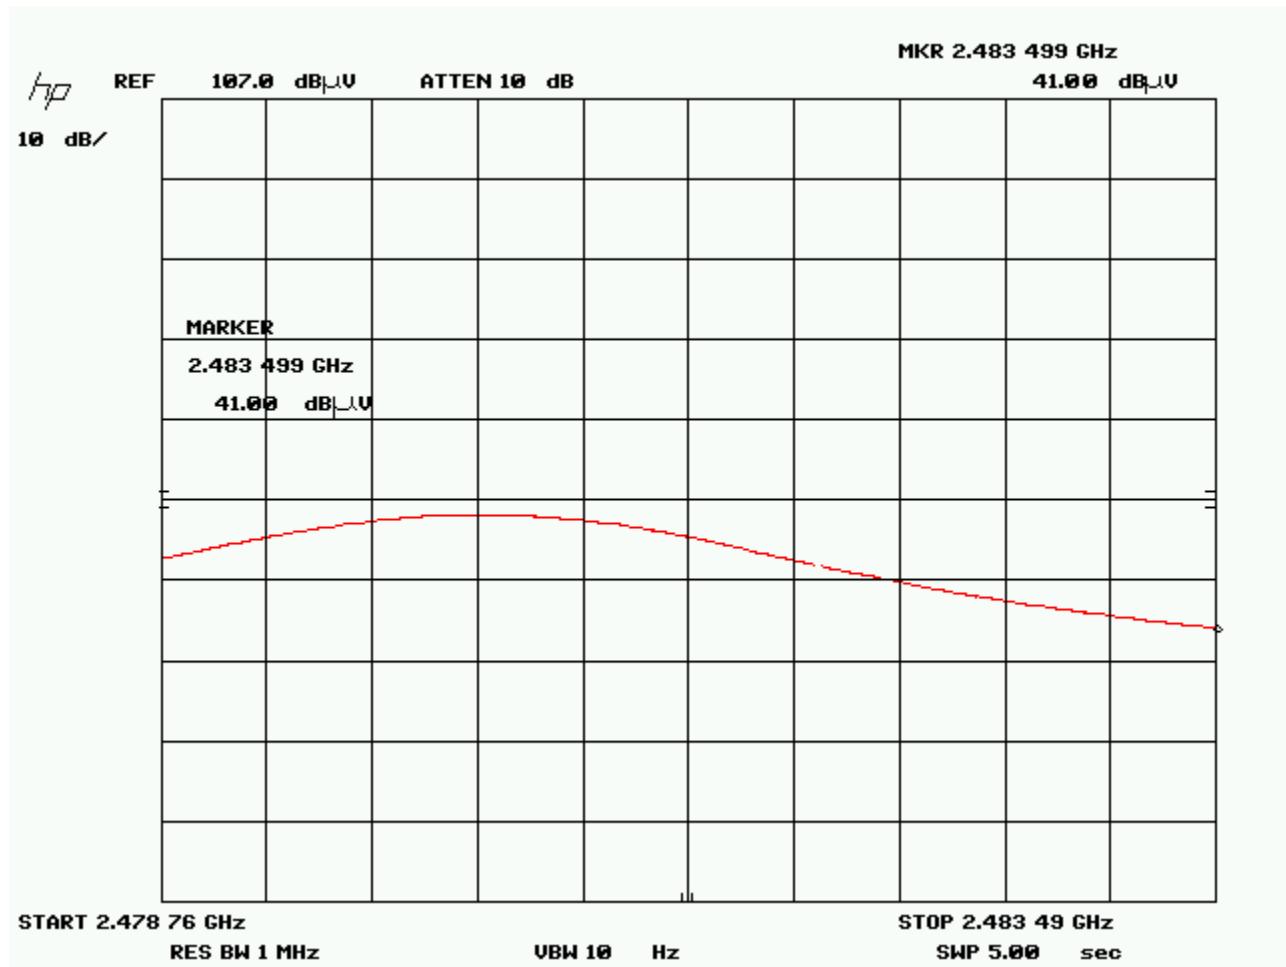

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Band Edge – Hi channel  
Horizontal peak 2483.5 MHz



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Band Edge – Hi channel  
Horizontal Avg 2483.5 MHz

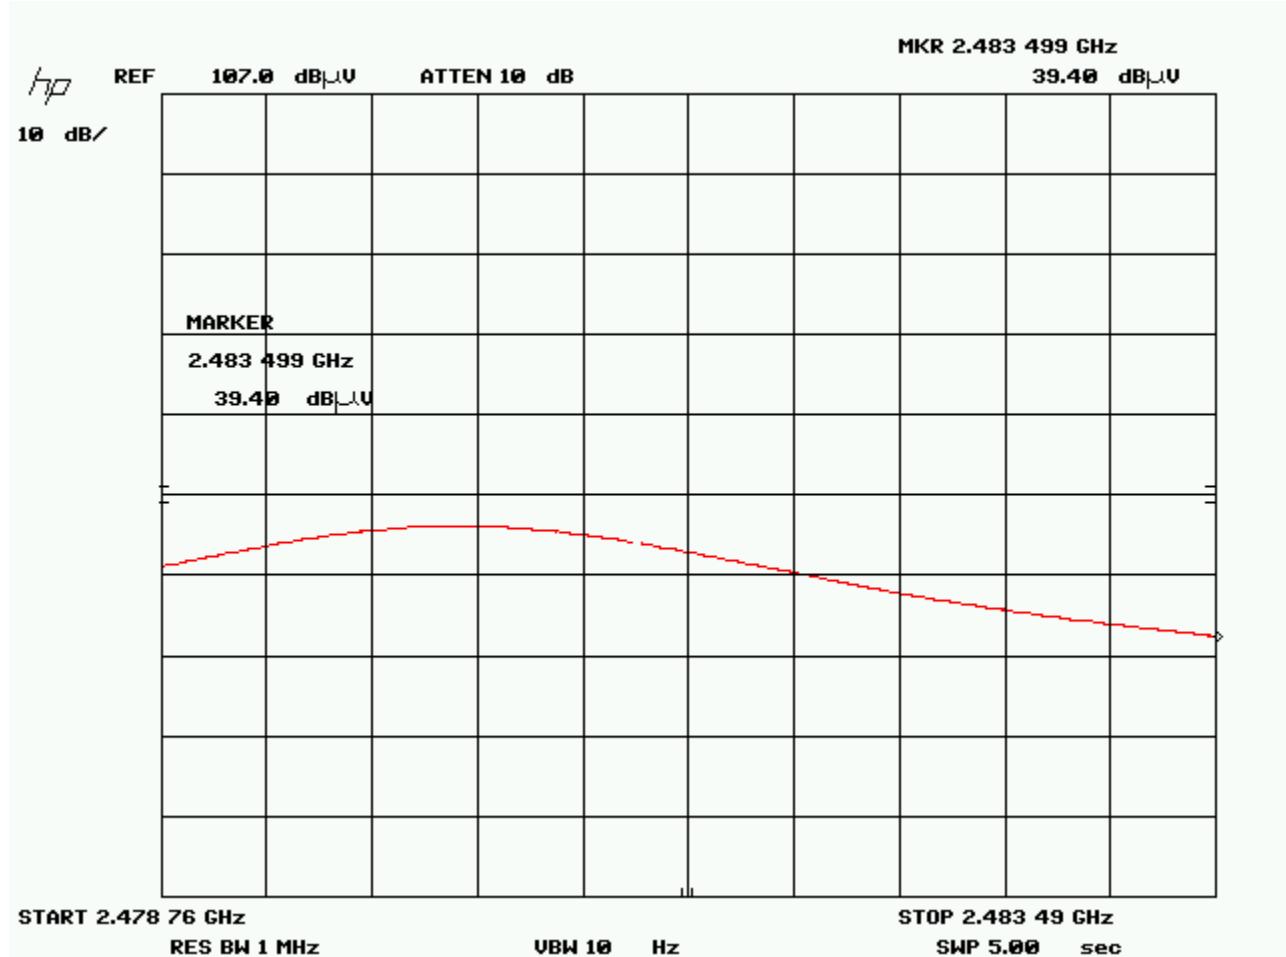

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010

The logo for Global EMC Inc. features the word "GLOBAL" in blue capital letters at the top, a stylized red globe graphic with a white star in the center, and the words "EMC INC" in large blue capital letters below the globe.

## Receiver

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Final Measurements

Note:

1. In accordance with 15.247(d), only radiated emissions exceeding the 15.209 limit that occur within the bands listed in 15.205, need to be verified with a quasi-peak detector or an average detector.

The requirement of -20dBc is verified by the conducted method; please see 'Spurious Antenna Conducted Emissions' section of this report.

Some of the frequencies shown on the peak graph do not fall within a restricted band as listed in FCC 15.205 and does not need to be verified.

For information purposes, the fundamental was measured to be 97.7 dBuV/m at 3 meters, and none of the unintentional radiated emissions that fall outside of the restricted bands exceeded the -20dBc (or 77.7 dBuV/m) requirement.

Worst case plots are shown above. Highest readings were recorded in Low channel and Hop mode is also shown in the above plots.

See 'Spurious Antenna Conducted Emissions' measurements for -20 dBc requirements. No other emissions above the 2<sup>nd</sup> harmonic were detected.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



### Radiated Emissions Measurements

Product category	Class A Group 1										
	Project Name / Number	M400									
Test Frequency (MHz)	Detection mode (Q-Peak)	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	Antenna factor dB	Cable loss dB + Preselecor	Attenuator dB	Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
Low Channel - EUT Vertical was worst case											
2402	Peak	Horz	93.0	31.6	4.0	0.0	36.0	92.6			PASS
2402	Avg	Horz	54.2	31.6	4.0	0.0	36.0	53.8			PASS
2402	Peak	Vert	98.2	31.5	4.0	0.0	36.0	97.7			PASS
2402	Avg	Vert	55.5	31.5	4.0	0.0	36.0	55.0			PASS
2390	Peak	Horz	45.8	31.6	4.0	0.0	36.0	45.4	74.0	28.6	PASS
2390	Avg	Horz	32.5	31.6	4.0	0.0	36.0	32.1	54.0	21.9	PASS
2390	Peak	Vert	45.9	31.5	4.0	0.0	36.0	45.4	74.0	28.6	PASS
2390	Avg	Vert	33.2	31.5	4.0	0.0	36.0	32.7	54.0	21.3	PASS
4804	Peak	Horz	56.2	30.0	4.0	0.0	36.0	54.2	74.0	19.8	PASS
4804	Avg	Horz	38.3	30.0	4.0	0.0	36.0	36.3	54.0	17.7	PASS
4804	Peak	Vert	50.8	30.0	4.0	0.0	36.0	48.8	74.0	25.2	PASS

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



4804	Avg	Vert	36.4	30.0	4.0	0.0	36.0	34.4	54.0	19.6	PASS
Mid channel											
2440	Peak	Horz	92.1	31.6	4.0	0.0	36.0	91.7			PASS
2440	Avg	Horz	52.7	31.6	4.0	0.0	36.0	52.3			PASS
2440	Peak	Vert	95.3	31.5	4.0	0.0	36.0	94.8			PASS
2440	Avg	Vert	54.4	31.5	4.0	0.0	36.0	53.9			PASS
4880	Peak	Horz	58.8	30.0	4.0	0.0	36.0	56.8	74.0	17.2	PASS
4880	Avg	Horz	38.9	30.0	4.0	0.0	36.0	36.9	54.0	17.1	PASS
4880	Peak	Vert	53.5	30.0	4.0	0.0	36.0	51.5	74.0	22.5	PASS
4880	Avg	Vert	37.1	30.0	4.0	0.0	36.0	35.1	54.0	18.9	PASS
High channel											
2480	Peak	Horz	92.2	31.6	4.0	0.0	36.0	91.8			PASS
2480	Avg	Horz	53.2	31.6	4.0	0.0	36.0	52.8			PASS
2480	Peak	Vert	96.5	31.5	4.0	0.0	36.0	96.0			PASS
2480	Avg	Vert	54.6	31.5	4.0	0.0	36.0	54.1			PASS
2483.5	Peak	Horz	58.1	31.6	4.0	0.0	36.0	57.7	74.0	16.3	PASS
2483.5	Avg	Horz	39.4	31.6	4.0	0.0	36.0	39.0	54.0	15.0	PASS
2483.5	Peak	Vert	63.2	31.5	4.0	0.0	36.0	62.7	74.0	11.3	PASS
2483.5	Avg	Vert	41.0	31.5	4.0	0.0	36.0	40.5	54.0	13.5	PASS
4960	Peak	Horz	64.3	30.0	4.0	0.0	36.0	62.3	74.0	11.7	PASS
4960	Avg	Horz	41.4	30.0	4.0	0.0	36.0	39.4	54.0	14.6	PASS
4960	Peak	Vert	58.7	30.0	4.0	0.0	36.0	56.7	74.0	17.3	PASS

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



4960	Avg	Vert	39.6	30.0	4.0	0.0	36.0	37.6	54.0	16.4	PASS
Hop on											
2390	Peak	Horz	45.2	31.6	4.0	0.0	36.0	44.8	74.0	29.2	PASS
2390	Avg	Horz	32.4	31.6	4.0	0.0	36.0	32.0	54.0	22.0	PASS
2390	Peak	Vert	46.6	31.5	4.0	0.0	36.0	46.1	74.0	27.9	PASS
2390	Avg	Vert	32.7	31.5	4.0	0.0	36.0	32.2	54.0	21.8	PASS
2483.5	Peak	Horz	55.8	31.6	4.0	0.0	36.0	55.4	74.0	18.6	PASS
2483.5	Avg	Horz	37.0	31.6	4.0	0.0	36.0	36.6	54.0	17.4	PASS
2483.5	Peak	Vert	63.2	31.5	4.0	0.0	36.0	62.7	74.0	11.3	PASS
2483.5	Avg	Vert	39.2	31.5	4.0	0.0	36.0	38.7	54.0	15.3	PASS
4960	Peak	Horz	63.2	30.0	4.0	0.0	36.0	61.2	74.0	12.8	PASS
4960	Avg	Horz	31.4	30.0	4.0	0.0	36.0	29.4	54.0	24.6	PASS
4923	Peak	Vert	57.1	30.0	4.0	0.0	36.0	55.1	74.0	18.9	PASS
4945	Avg	Vert	32.1	30.0	4.0	0.0	36.0	30.1	54.0	23.9	PASS

Frequency	Detector	Ant polarity	Raw Reading	Ant Factor	Cable loss	Preamp Gain	Level	FCC 15.109 - Class B 3 meter - QP Limit	FCC 15.109 - Class B - QP Margin
Receiver spurious									
44.744	QP	Vert	48.3	11.1	0.3	-30.1	29.6	40	10.4
48.042	QP	Vert	50.2	9.6	0.4	-30.1	30.1	40	9.9

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



35.82	QP	Vert	42.6	15.6	0.3	-30.1	28.4	40	11.6
480.662	QP	Vert	44.6	17.6	0.7	-30.2	32.7	46	13.3
132.529	QP	Vert	44.6	7.9	0.5	-30.2	22.8	43.5	20.7
468.537	QP	Vert	35	17.4	0.7	-30.2	22.9	46	23.1
40.8	QP	Vert	39.2	13.1	0.3	-30.1	22.5	40	17.5
930.16	QP	Vert	30.2	23.1	1.4	-29.8	24.9	46	21.1
192.669	QP	Horz	51	10.1	0.5	-30.3	31.3	43.5	12.2

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions\_Rev2.doc"

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## ***Channel Carrier Separation for Frequency Hopping Systems***

### **Purpose**

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

### **Limits**

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)

	902 to 928 MHz	2.4 to 2.4835 GHz	5.275 to 5.85 GHz
No conditions	25 kHz or 20 dB BW <sup>1</sup>	25 kHz or 20 dB BW <sup>1</sup>	25 kHz or 20 dB BW <sup>1</sup>
< 125 mW	25 kHz or 20 dB BW <sup>1</sup>	25 kHz or 2/3 of 20 dB BW <sup>1</sup>	25 kHz or 20 dB BW <sup>1</sup>

Note 1: Whichever is greater; The 20 dB BW of the system was measured to be 848 kHz, so a limit of 565 kHz (2/3 X 848) applies.

### **Results**

The EUT passed the requirements of channel carrier spacing exceeding the measured  $2/3 \times 20$  dB BW of the EUT. The  $2/3 \times 20$  dB BW previously measured was 565 kHz, and the device had a channel spacing of 996 kHz.


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Graph(s)

The graphs below show the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.


20 db Bandwidth

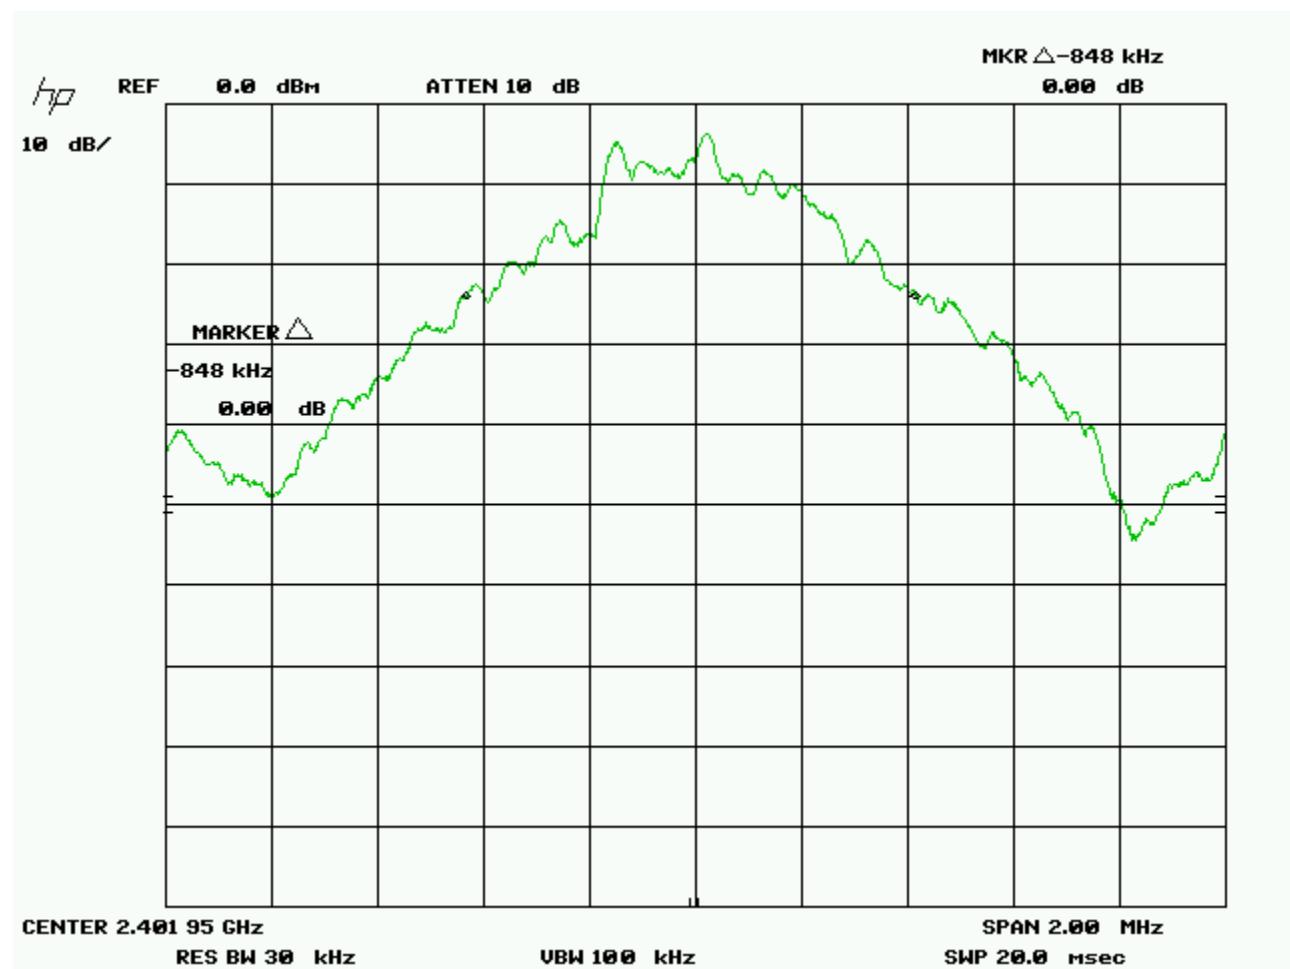

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



### Channel Separation

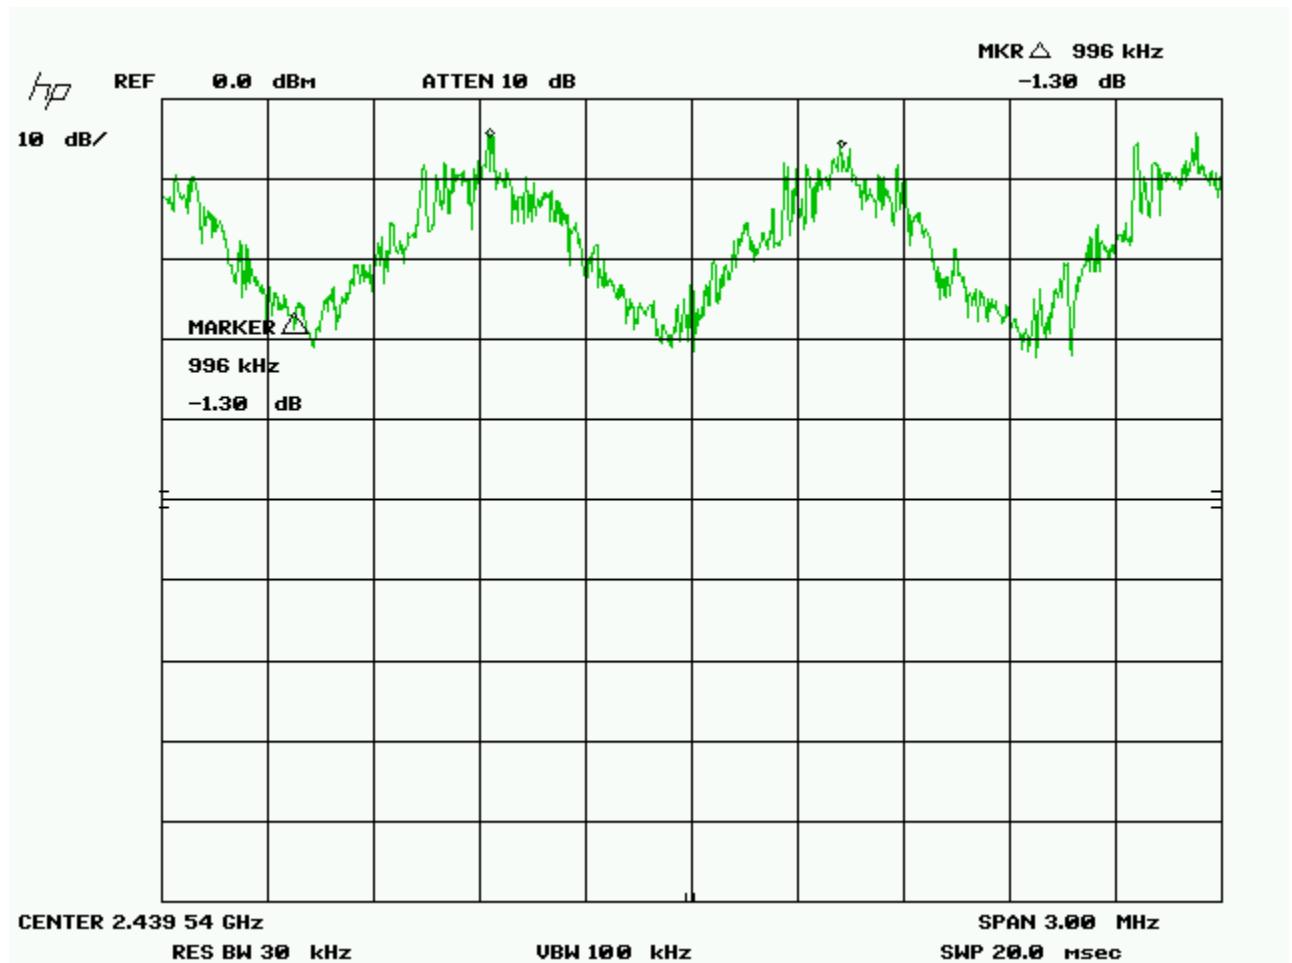

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test setup.

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Maximum Peak Envelope Conducted Power***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, that the maximum power does not exceed an amount which may create an excessive power level.

### **Limits**

The limits are defined in 15.247(b).

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt.

### **Results**

The EUT passed. The peak power measured was -3.4 dbm + 10 db (att) = 6.6 dbm (4.57mW).


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Table(s)

The tables shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. Note there was 10 dB of external attenuation taken during this measurement.

Low channel

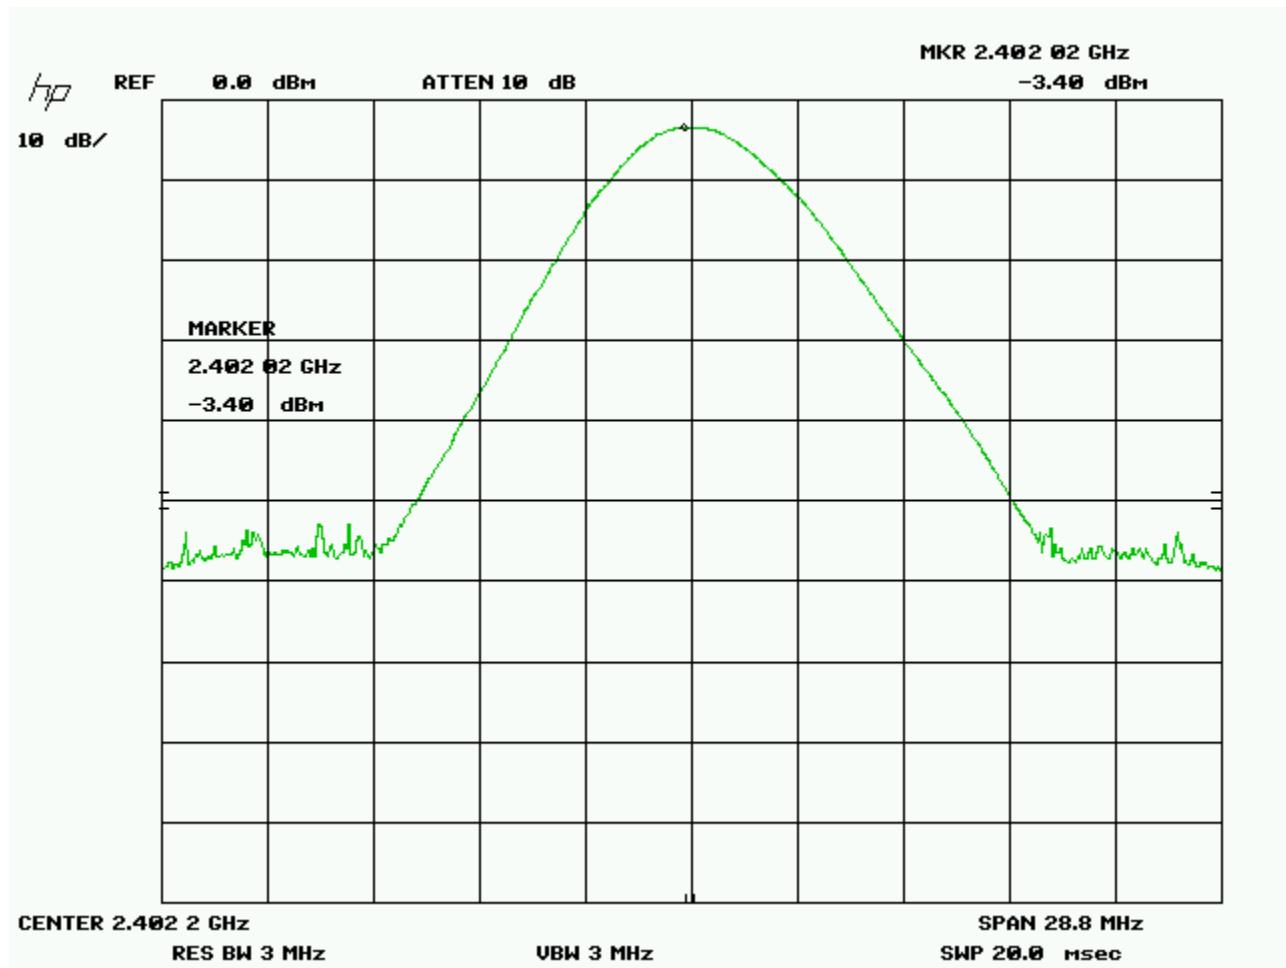

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Medium channel



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




High channel



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



### Hop mode

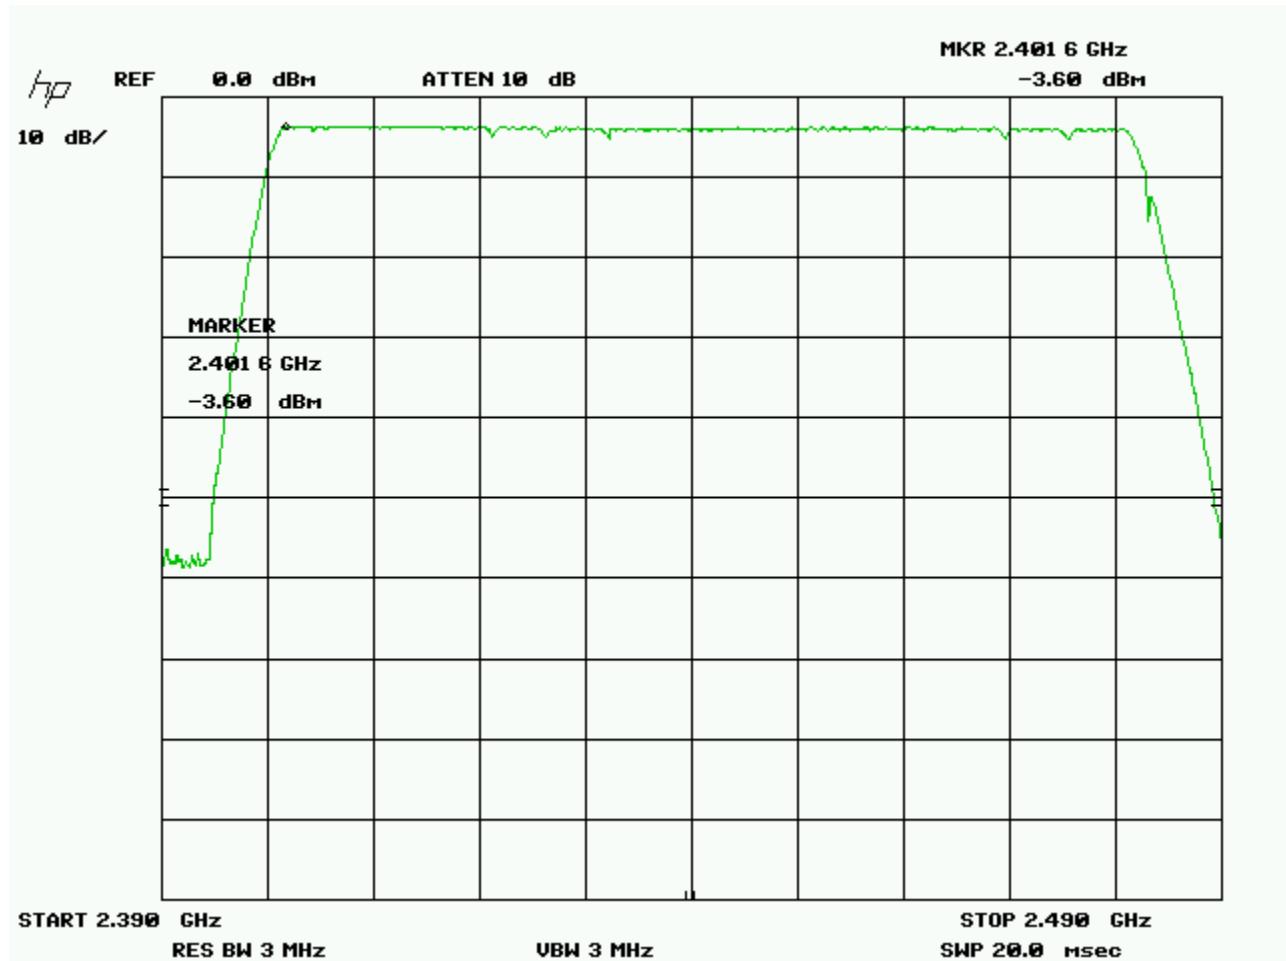

The calculated value is:

$$\begin{aligned}
 & -3.4 \text{ dBm} + 10 \text{ dB (attenuator)} \\
 & = 6.6 \text{ dbm} \\
 & = 4.57 \text{ mW}
 \end{aligned}$$

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Antenna Spurious Radiated and Conducted Emissions ( - 20 dbc Requirement)***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

### **Limits**

The limits are defined in 15.247(d). In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10<sup>th</sup> harmonic. This -20 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.

### **Results**

The EUT passed the limits. Low, middle and high band was measured. The worst case for each mode is presented as a graph for the spectrum. The -20 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band.

The -20 dBc requirement is also shown for the higher band edge at 2.4835 GHz in the high band.


### **Graph(s)**

The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. Note there was 20 dB of external attenuation taken during this measurement.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




9 kHz – 2.5 GHz Lo

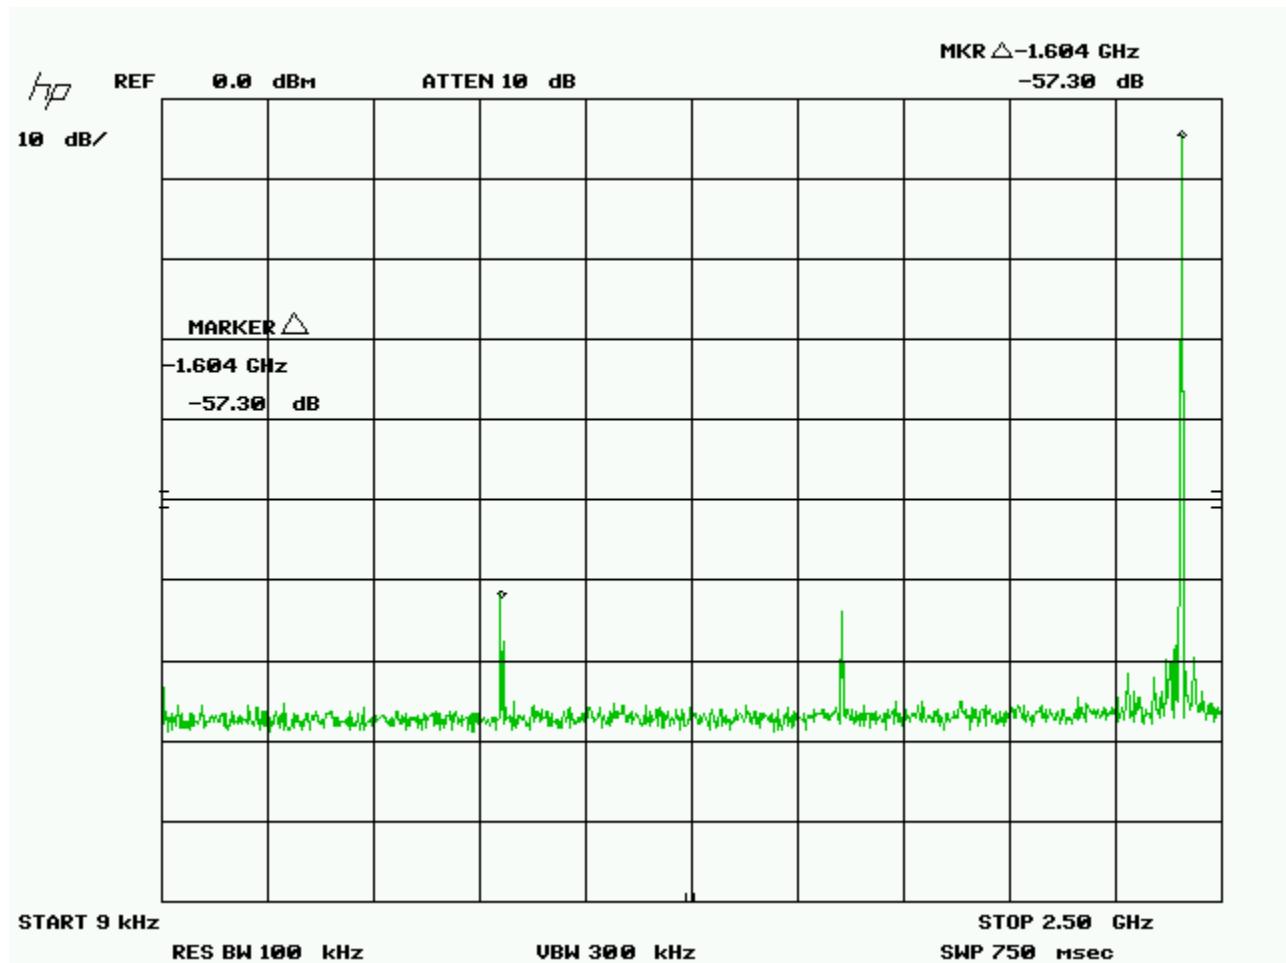

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




9 kHz – 2.5 GHz Med

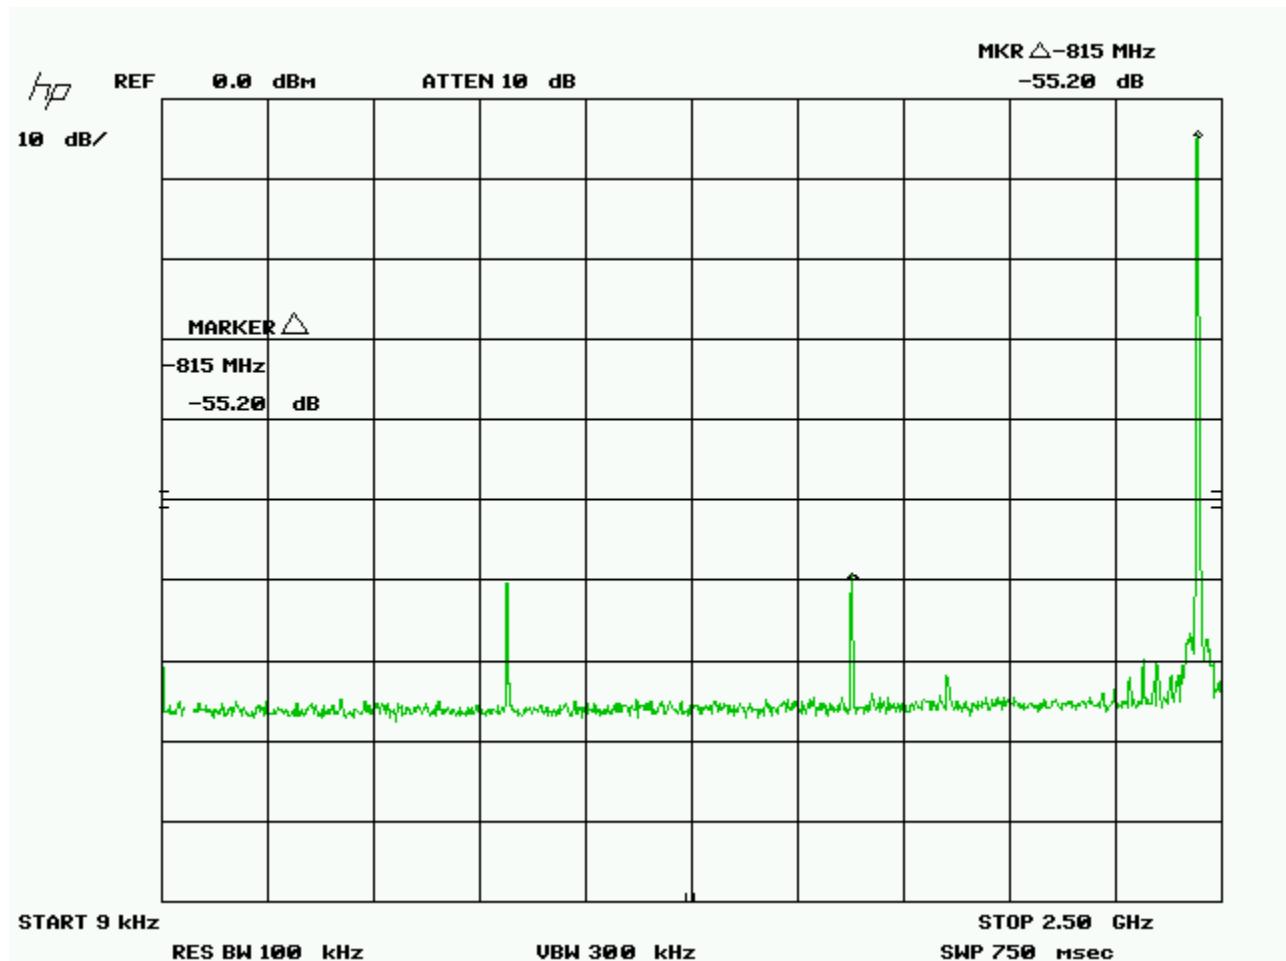

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




9 kHz – 2.5 GHz Hi

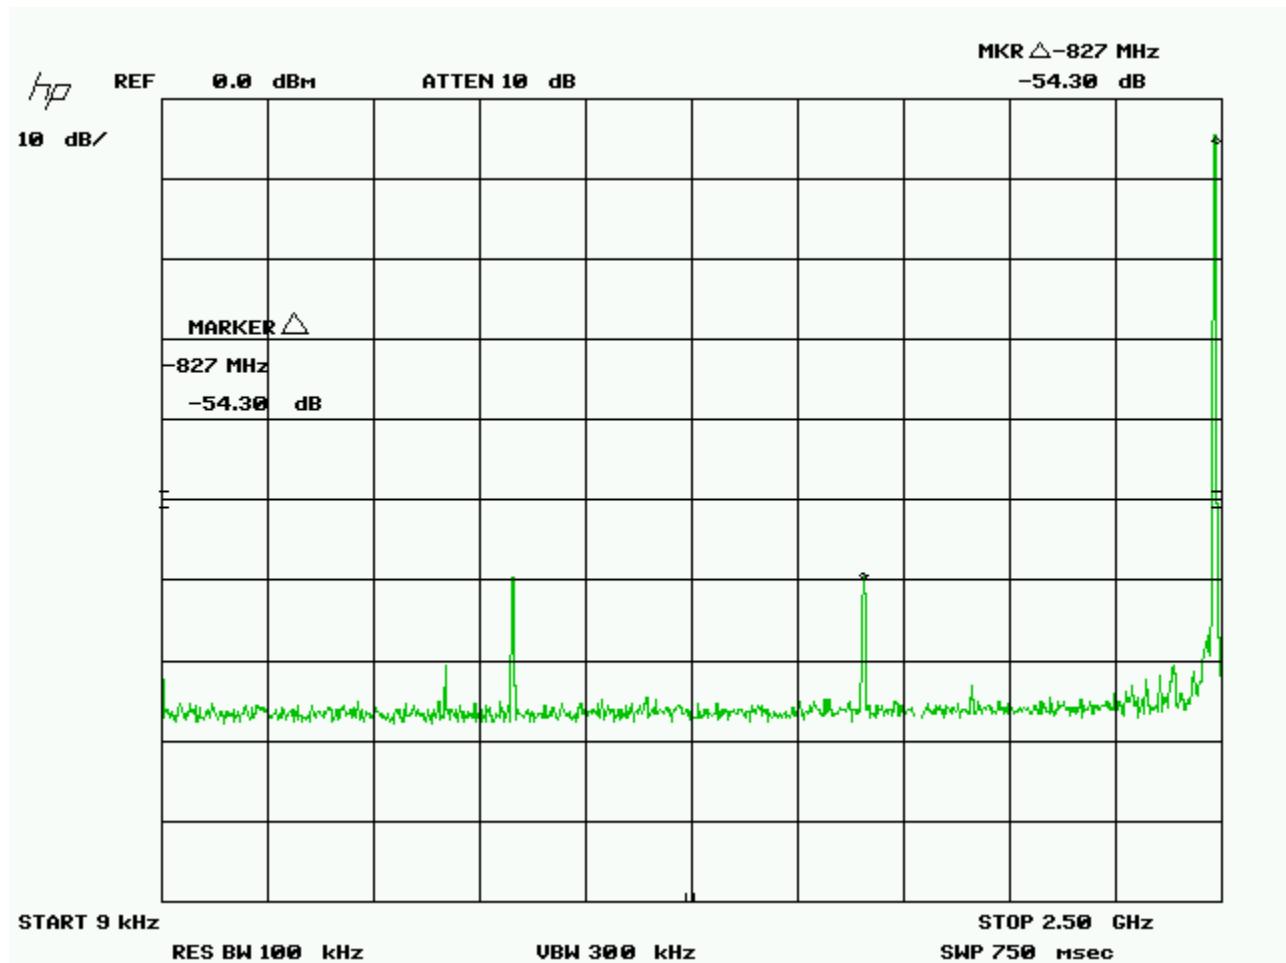

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




9 kHz – 2.5 GHz Hop

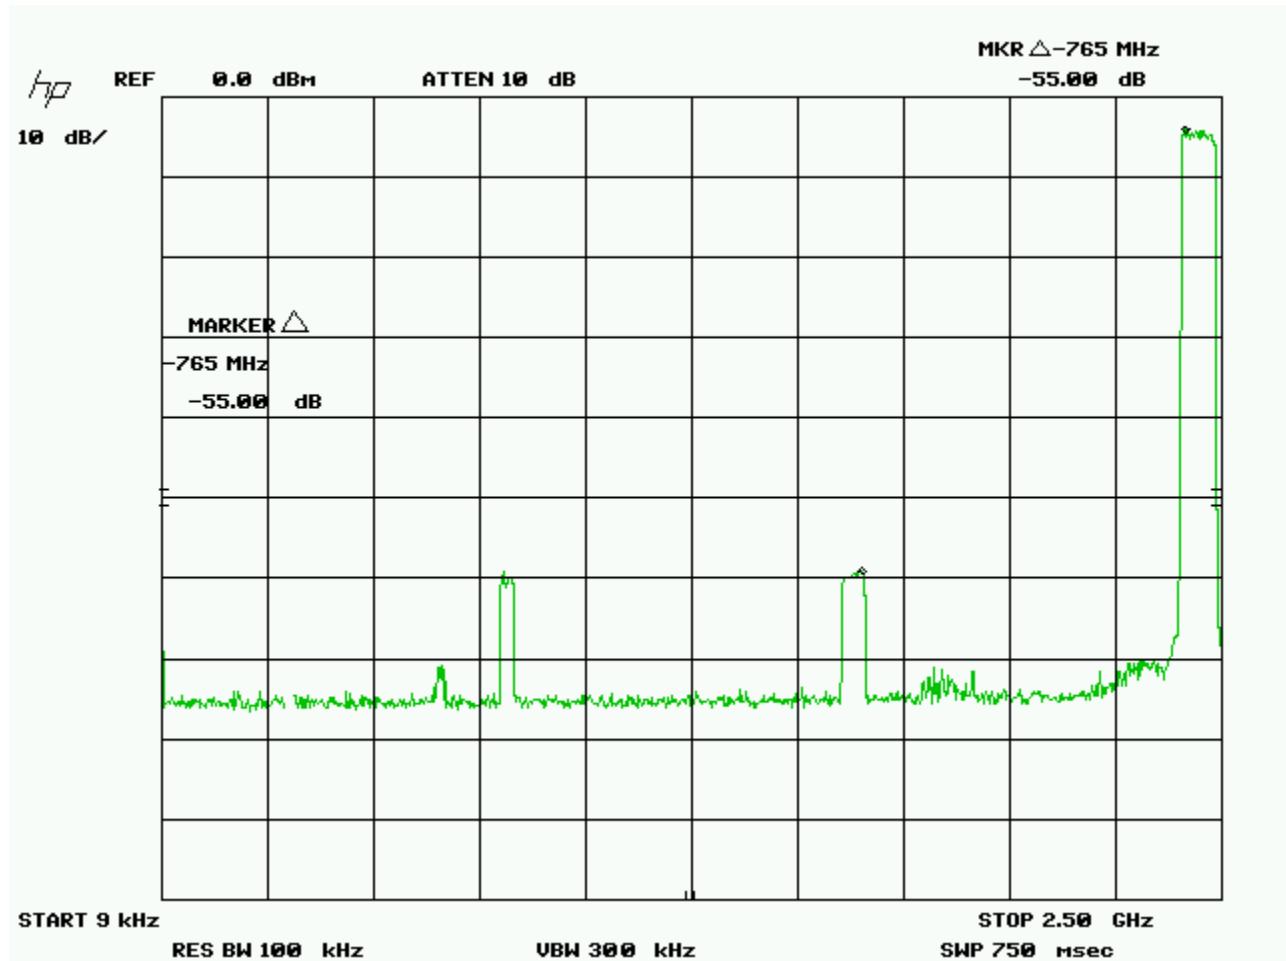

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



2.4 GHz – 24.0 GHz Lo

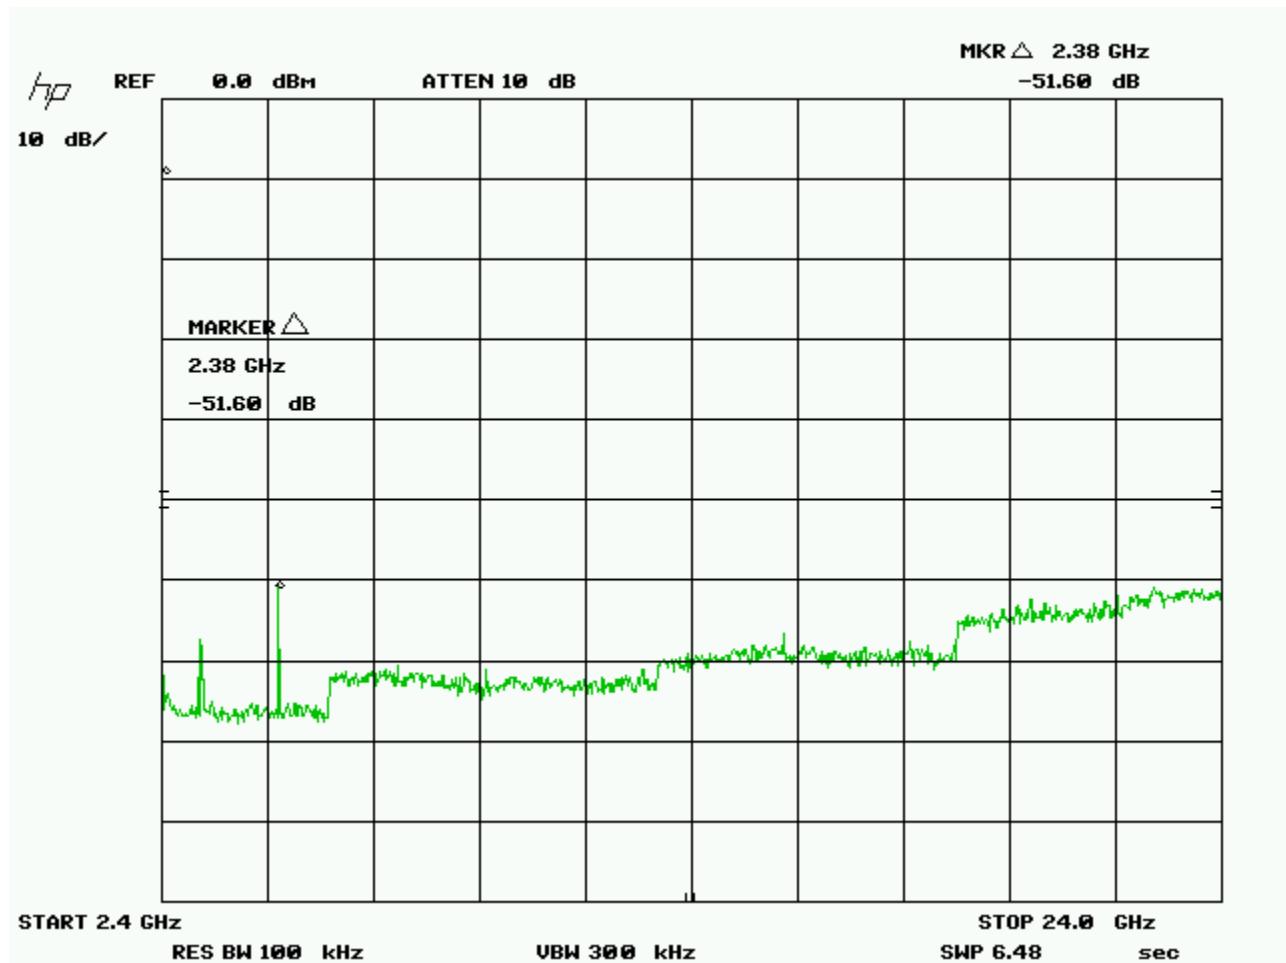

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



2.4 GHz – 24.0 GHz Med



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




2.4 GHz – 24.0 GHz Hi



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



2.3 GHz – 24.0 GHz Hop

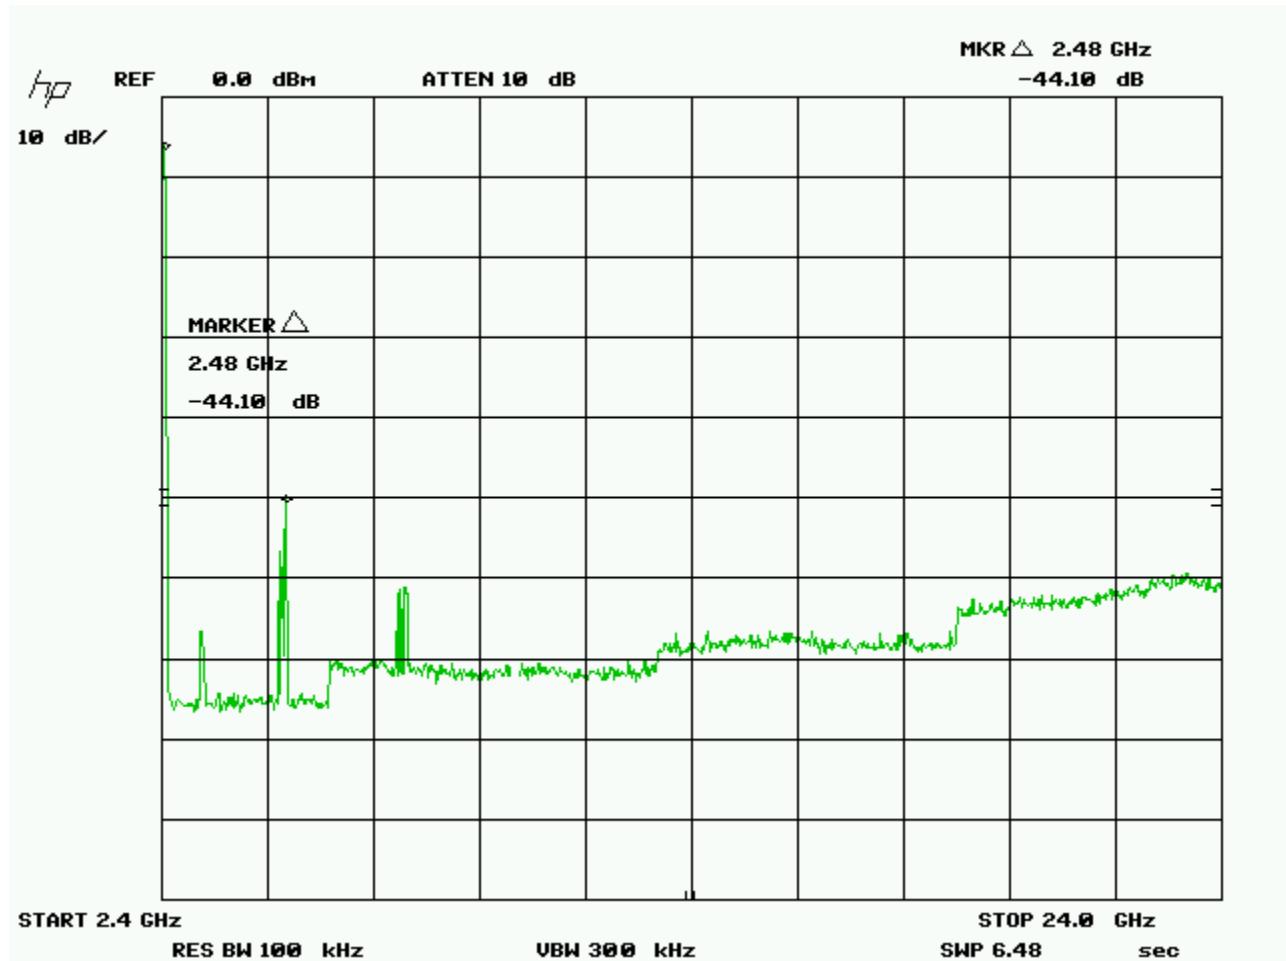

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




2483.5 MHz Band edge  
Hi Channel



Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




2483.5 MHz Band edge Hop Mode  
Peak emissions

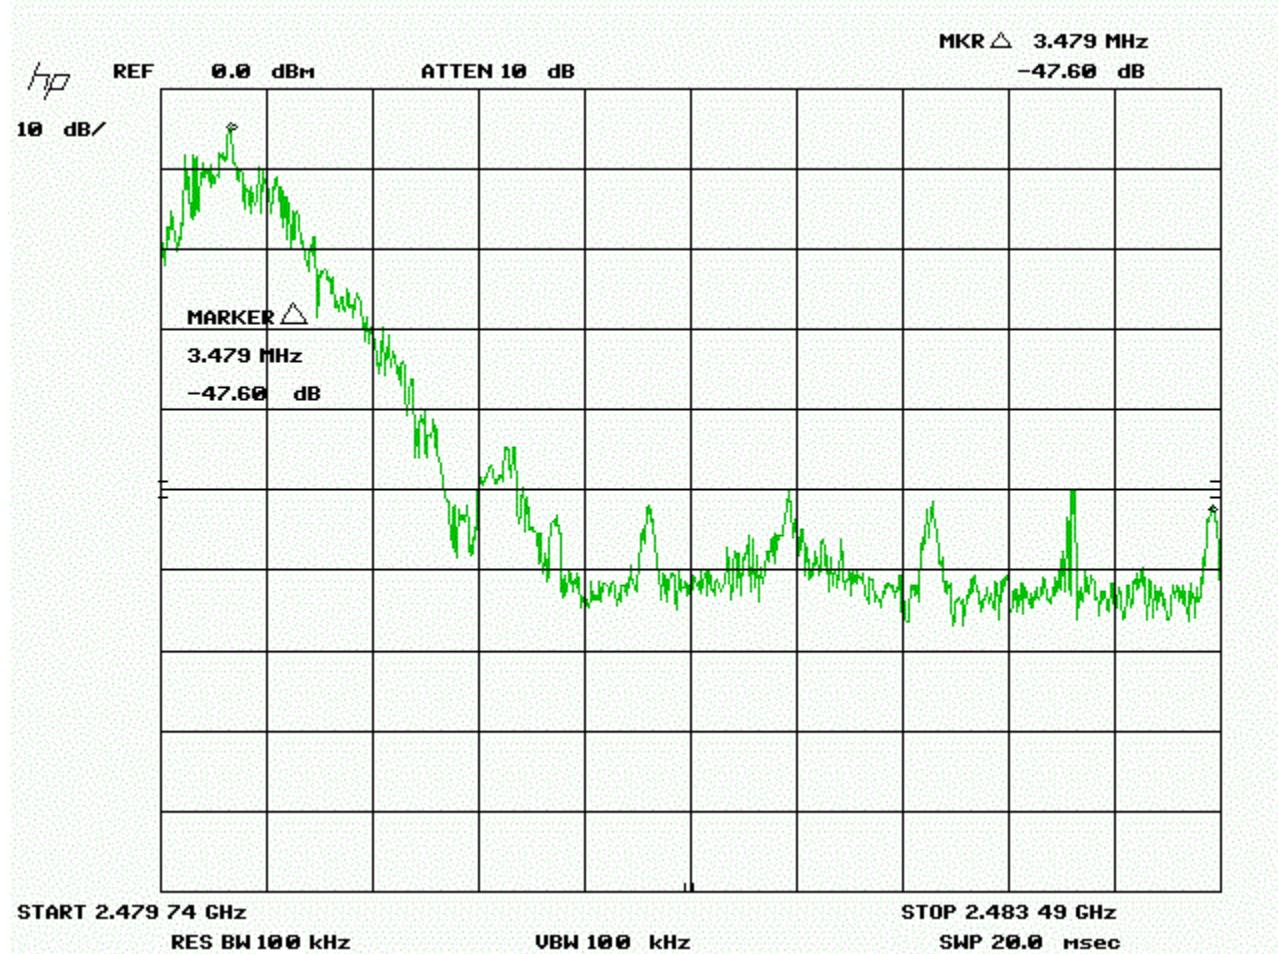

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




2400 MHz Band edge  
Lo Channel peak emissions

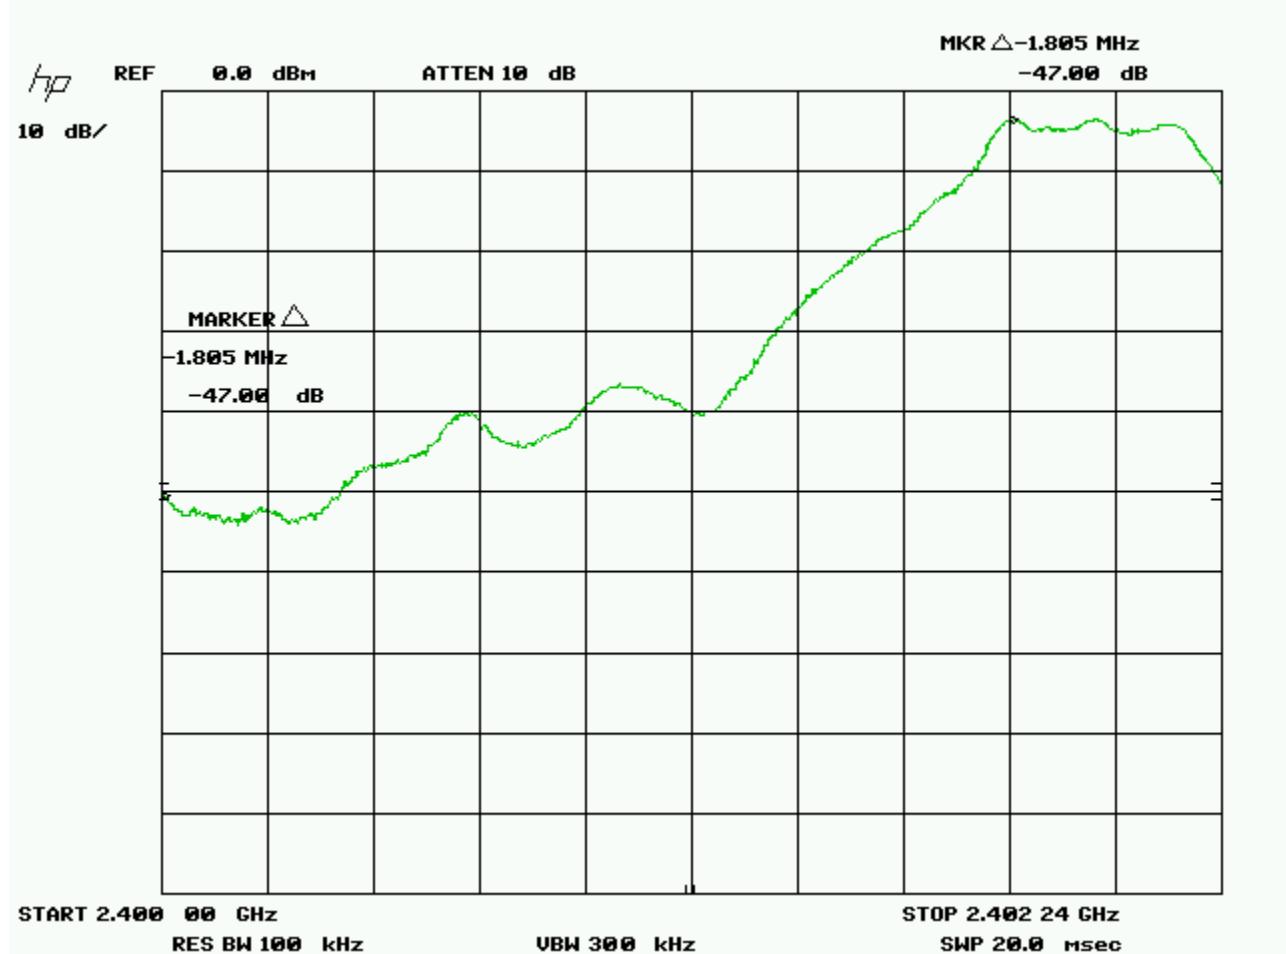

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



2400 MHz Band edge  
Hop Peak emissions

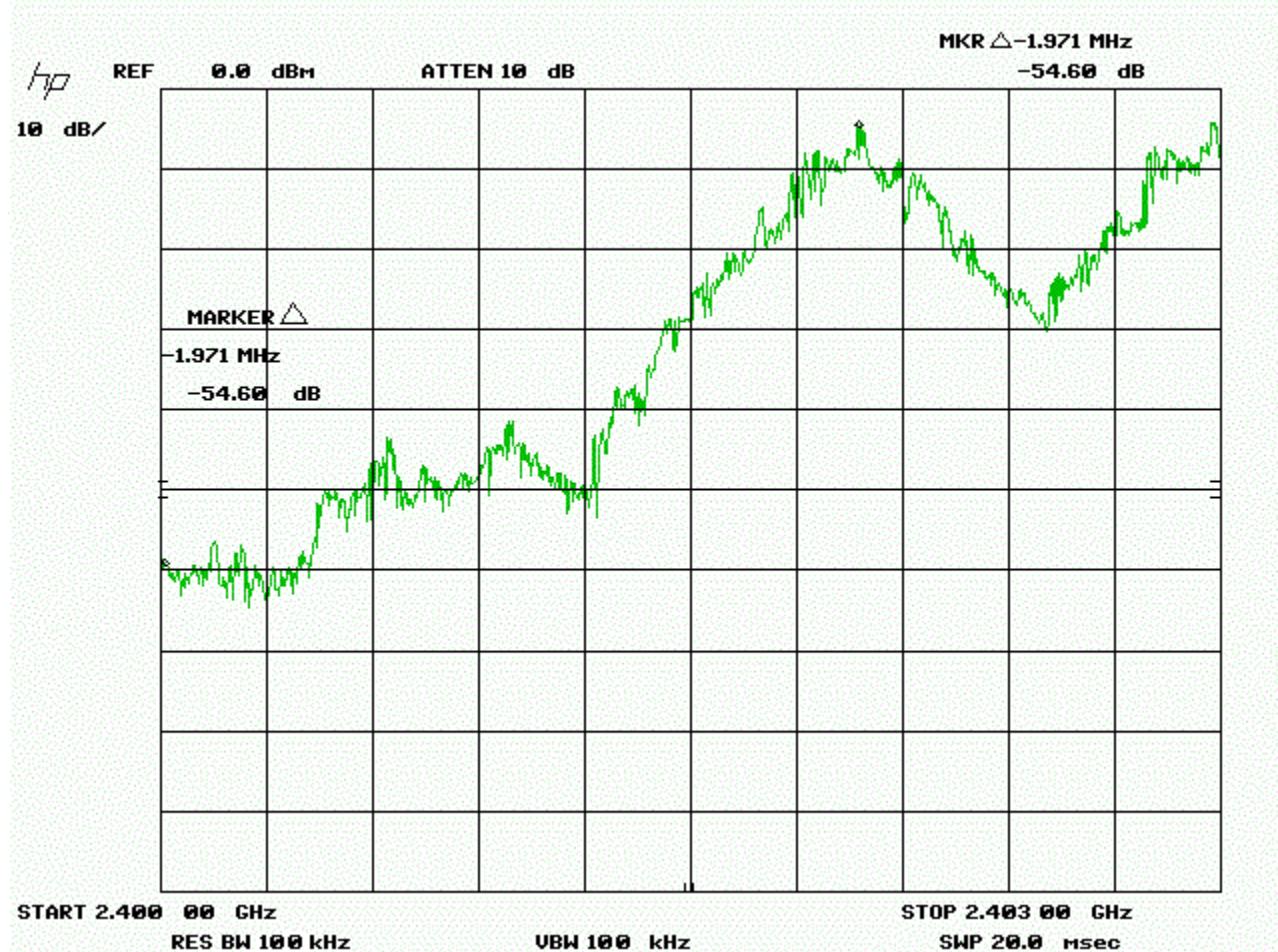

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

The frequency range of 22.5 – 25 GHz, the 10<sup>th</sup> harmonic and 9<sup>th</sup> harmonic where applicable, was additionally scanned using an alternate spectrum analyzer, in low, middle and high band for each mode. No emissions were detected at the 9<sup>th</sup> and 10<sup>th</sup> harmonic.

The plots show raw data and no correction factors are applied. They simply show a 20dbc differential between the peak and the band edge

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Frequency Occupancy for Frequency Hopping Systems***

### **Purpose**

The purpose of this test is to ensure that the RF energy of frequency hopping systems is hopping at a minimum defined rate. This helps ensure sufficient time off to enable other frequency hopping devices to co-operate within this allocated band.

### **Limits**

For 2400 – 2483.5 MHz systems, the limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)(iii).

For frequency hopping systems in 2400 – 2483.5 MHz, the unit shall use at least 15 channels. The average time of occupancy shall not be greater than 0.4s in a period of 0.4s X # of channels occupied.

### **Results**

The EUT passed the requirements. The EUT cycles through its pseudo-random generated list of hopping frequencies. There are 79 channels occupied in total. The average occupancy time is 0.38 ms per channel and each channel is repeated every 97.86 ms. The complete observation time is

$$\begin{aligned}
 &= \# \text{ of channels} \times 400 \text{ ms} \\
 &= 79 \times 400 \text{ ms} \\
 &= 31,600 \text{ ms} \\
 &= 31.6 \text{ s}
 \end{aligned}$$

$$\begin{aligned}
 \text{Number of time a channel is occupied in 31.6s} &= 31.6 \text{ s} / 97.86 \text{ ms} \\
 &= 36100 \text{ ms} / 97.86 \text{ ms} \\
 &= 323 \text{ times.}
 \end{aligned}$$

$$\begin{aligned}
 \text{Total occupancy time in 31.6 s is} \\
 &= 323 \times 0.38 \text{ ms} \\
 &= 122 \text{ ms}
 \end{aligned}$$

The EUT has an average occupancy of 122 msec within a 31.6 second period. This is under the 400 msec limit as per 15.247 (a) 1 (iii)


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Graph(s)

The first graph shown below shows the repeat time of the pseudorandom generated hopping list.


Hopping List repeat rate

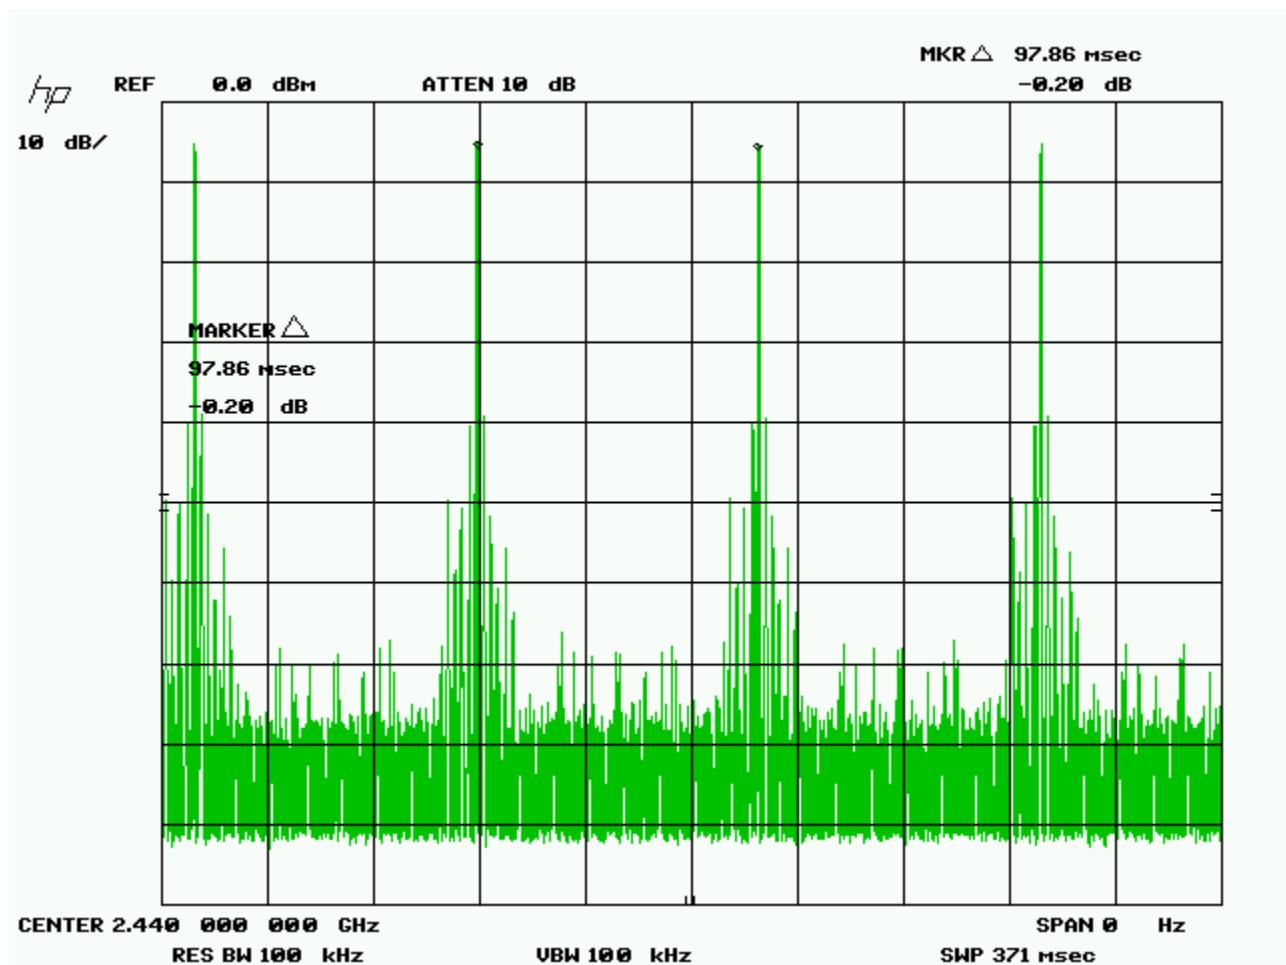

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



On time during each channel

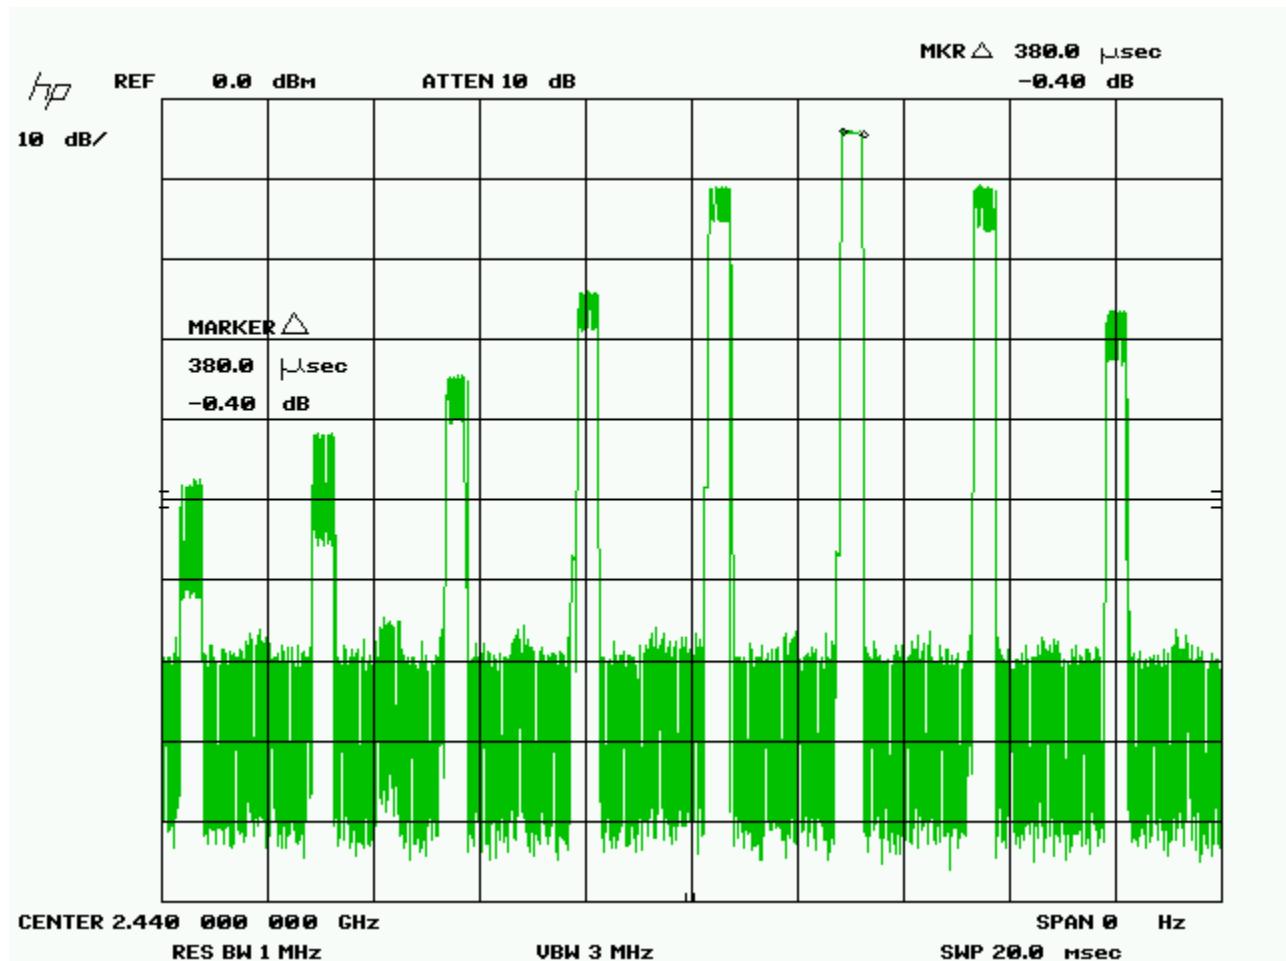

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350

Client	Endrelia / 2276427 Ontario Inc				
Product	ZPU-M400 / 9756A-M400				
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010				



Analyzer					
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M- 50OHM-MN- MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400- 10M-50OHM- MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400- 0.5M- 50OHM-MN- MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## ***Number of Channels for Frequency Hopping Systems***

### **Purpose**

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

### **Limits**

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)

	902 to 928 MHz	2.4 to 2.4835 GHz	5.275 to 5.85 GHz
No conditions	>= 50 channels	>= 15 channels	>= 75 channels
20 dB BW exceeds 250 kHz	>= 25 channels	>= 15 channels	>= 75 channels

### **Results**

The EUT passed the requirements of the number of channels. The number of channels the device occupies is 79 channels in the allocation band of 2402 MHz – 2480 MHz.


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Graph(s)

The graphs below show the number of occupied channels during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement.


Channel 1 – 8

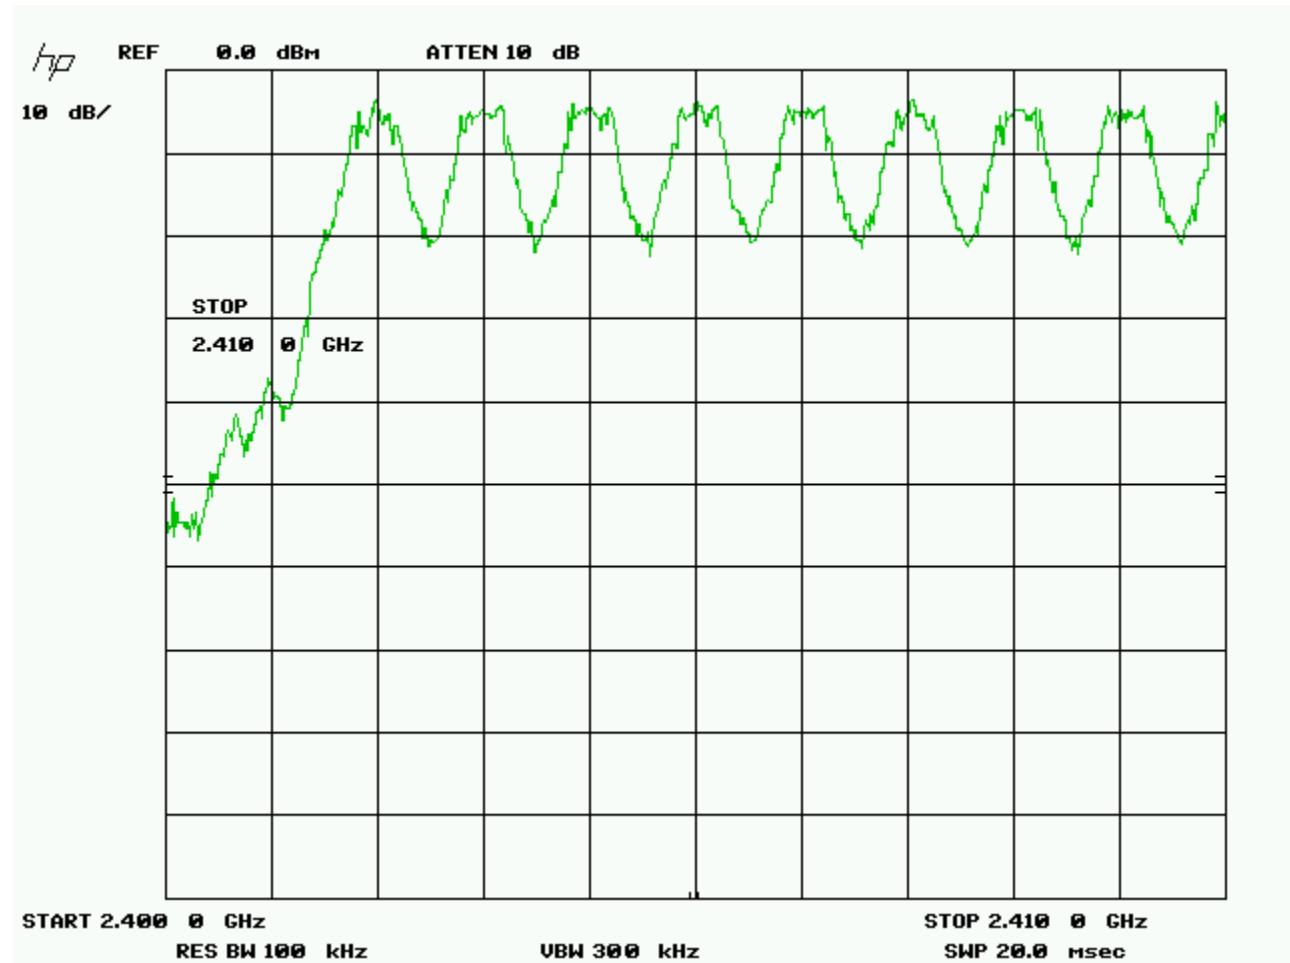

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




### Channel 9 – 18

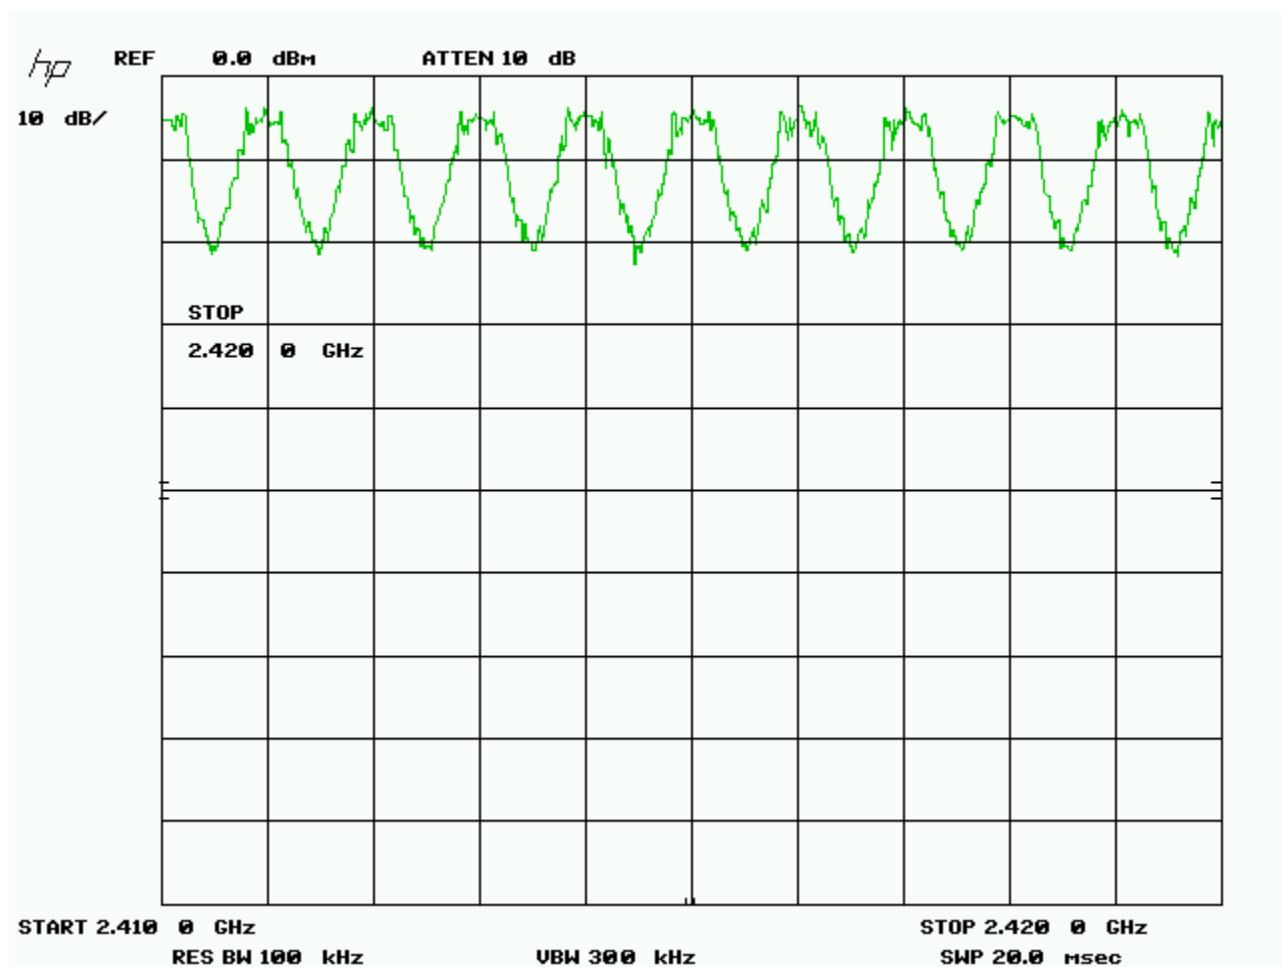

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Channel 19 – 28

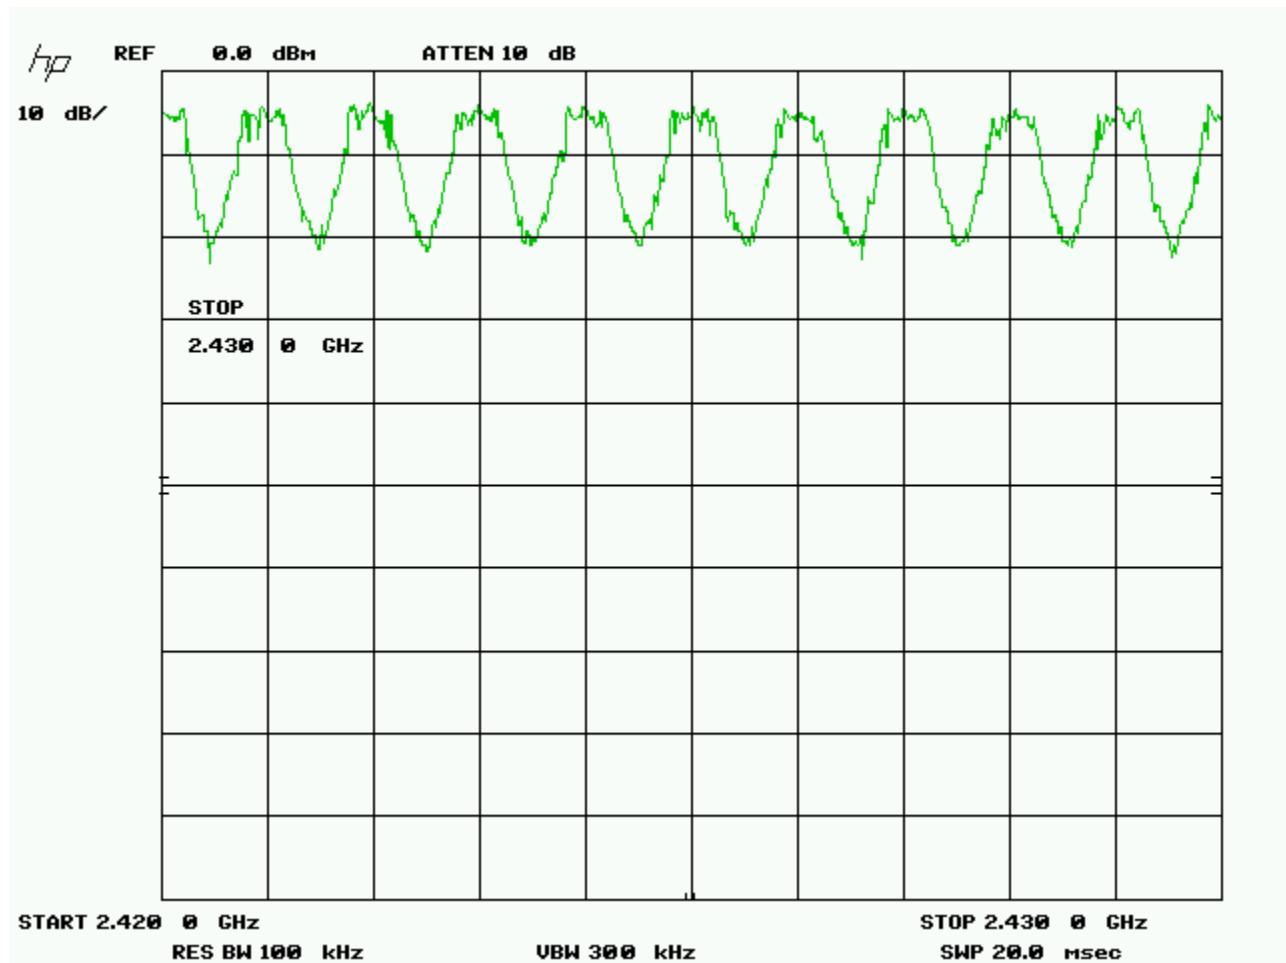

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Channel 29 – 38

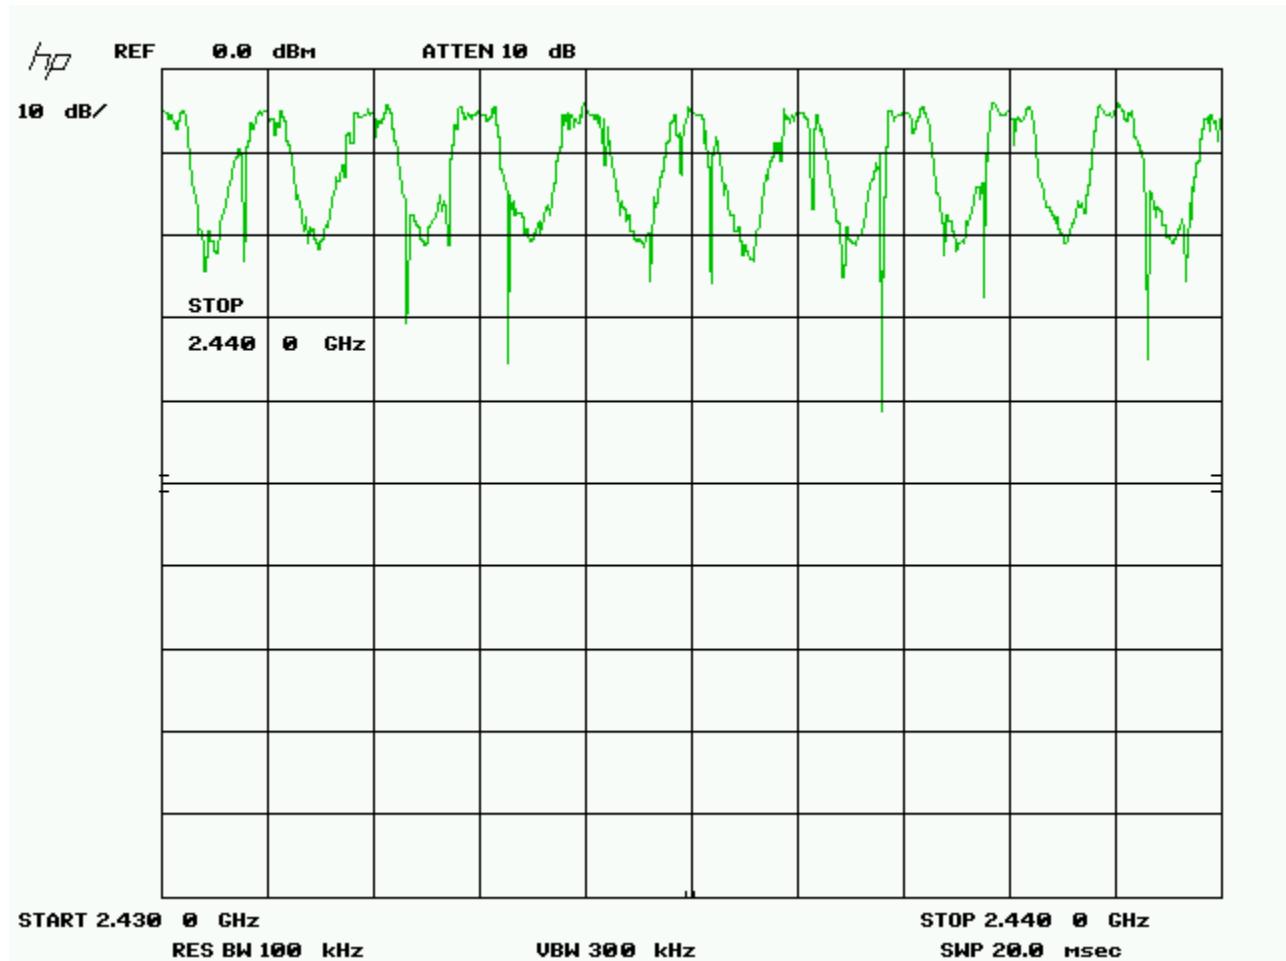

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Channel 39 – 48

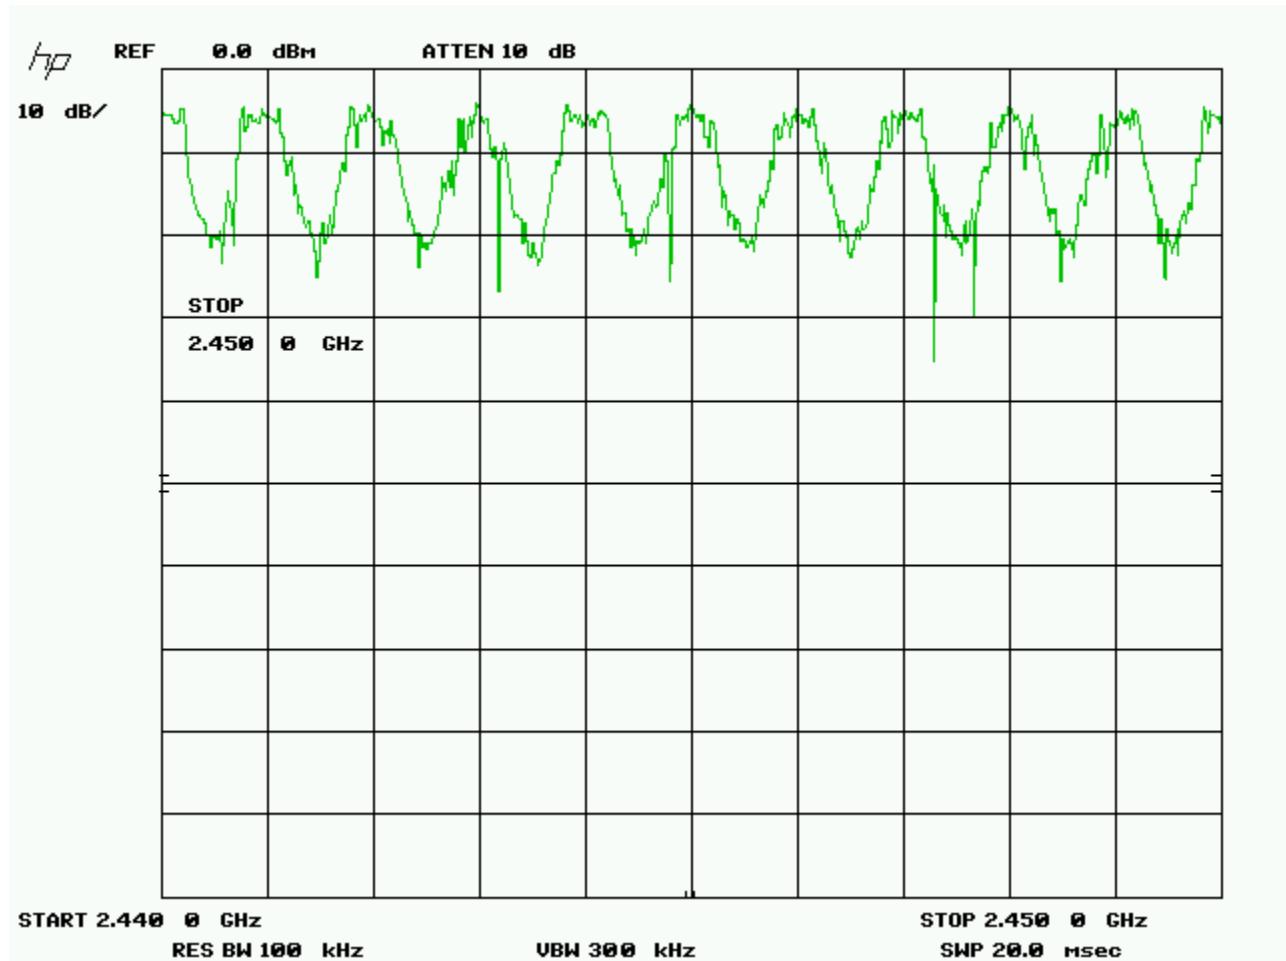

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Channel 49 – 58

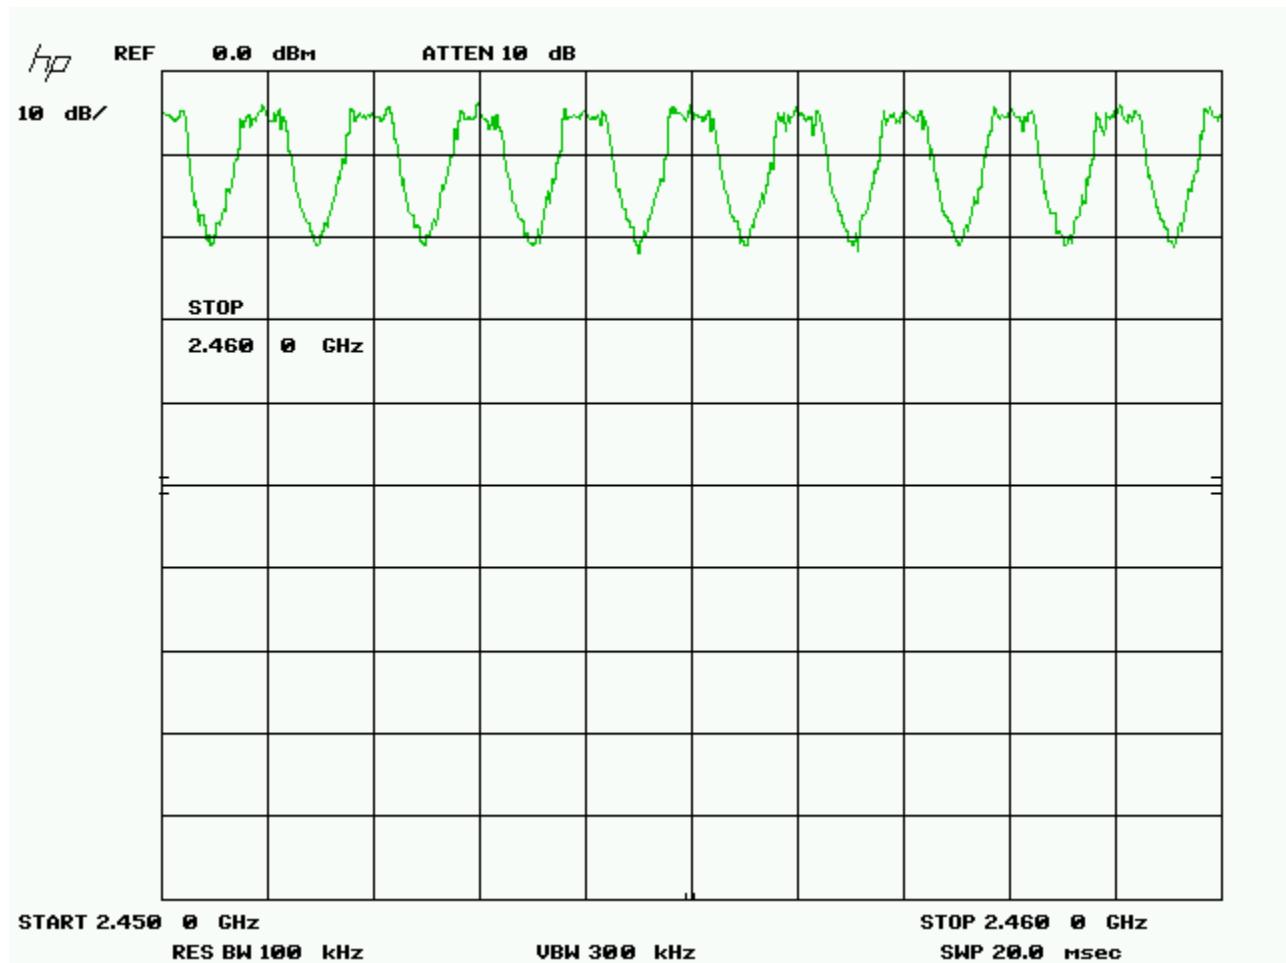

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




Channel 59 – 68

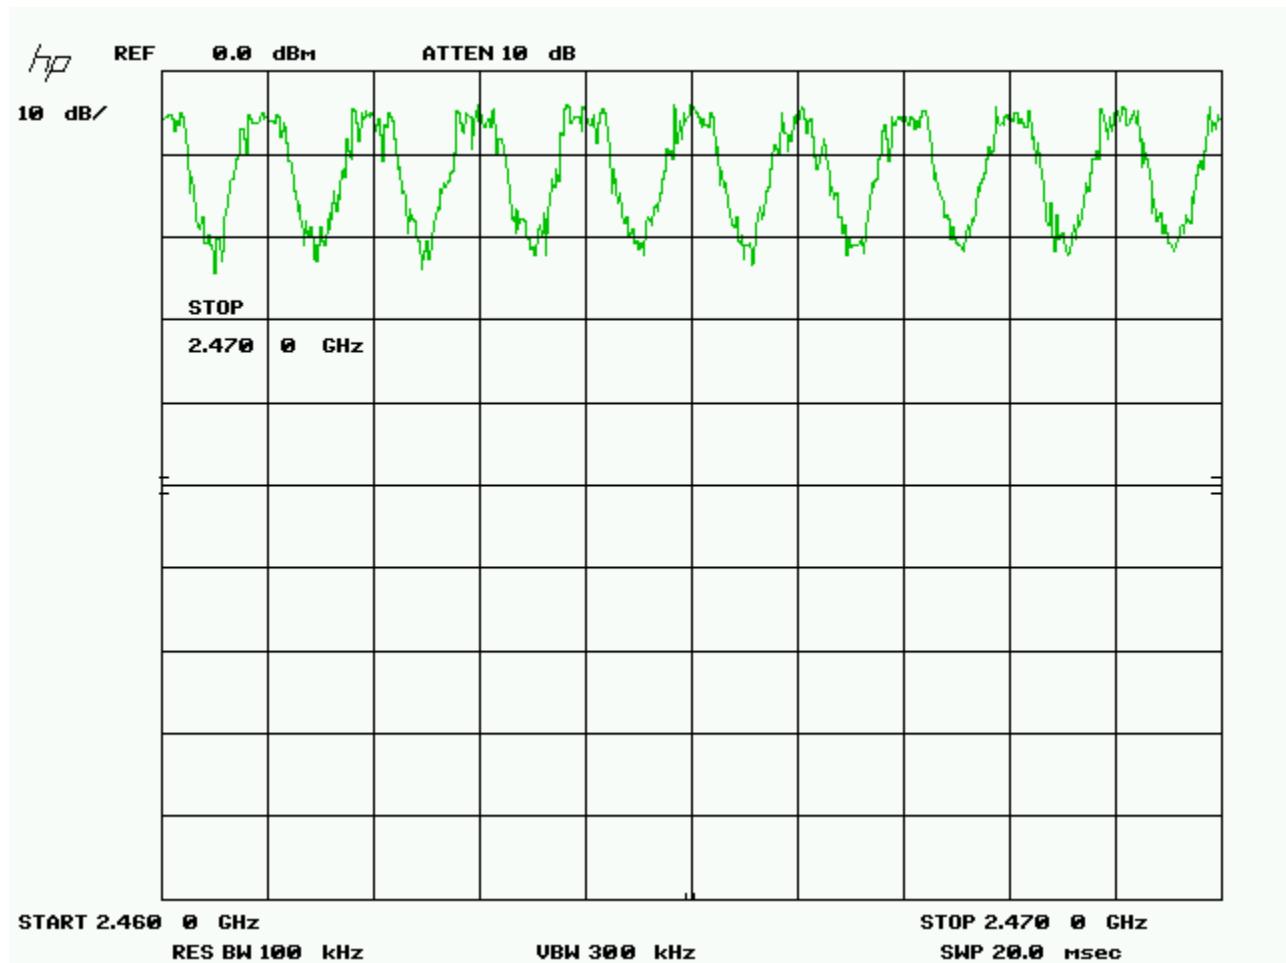

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Channel 69 – 78

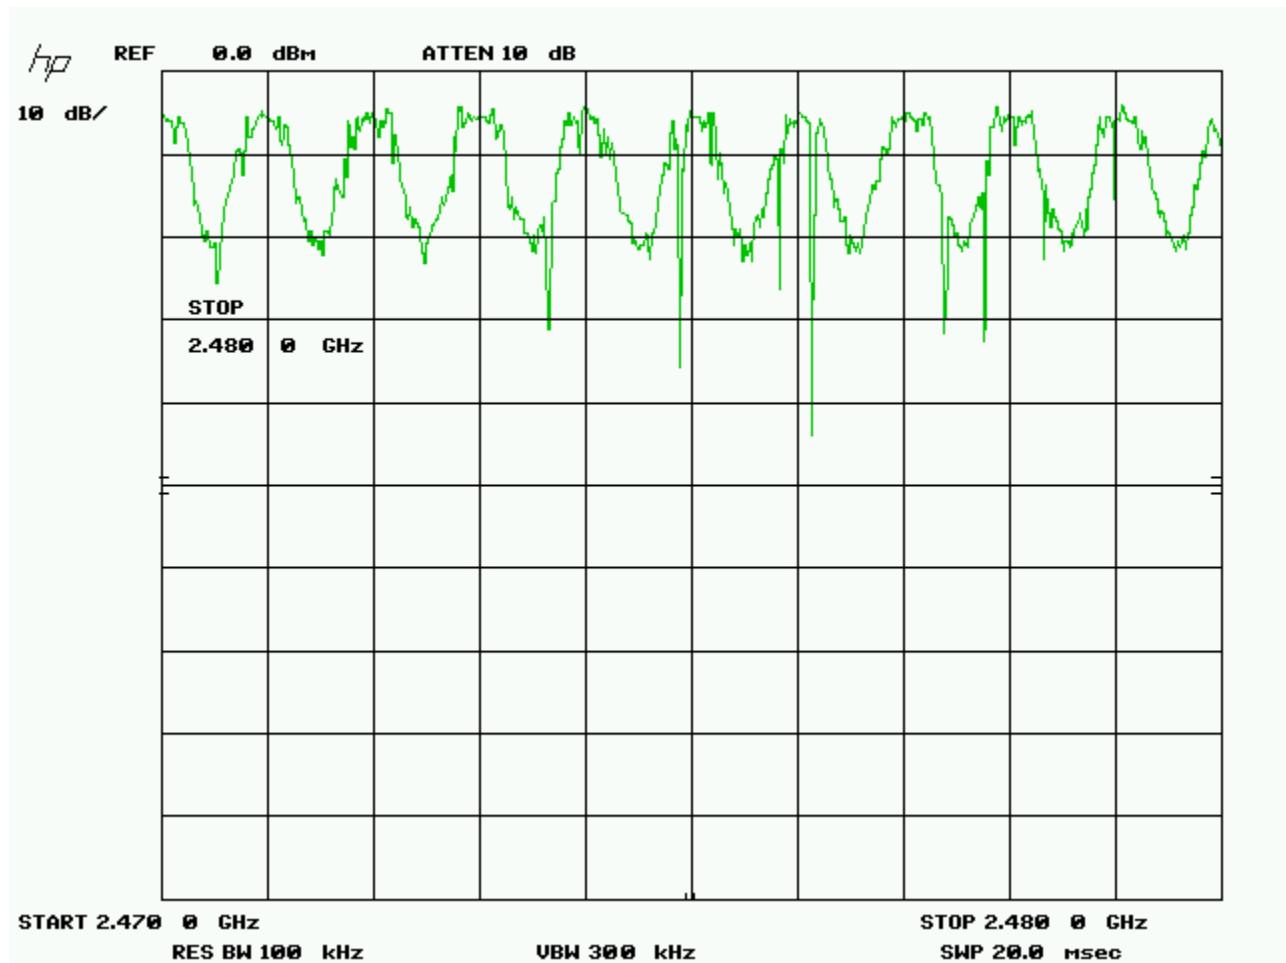


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



### Channel 79

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

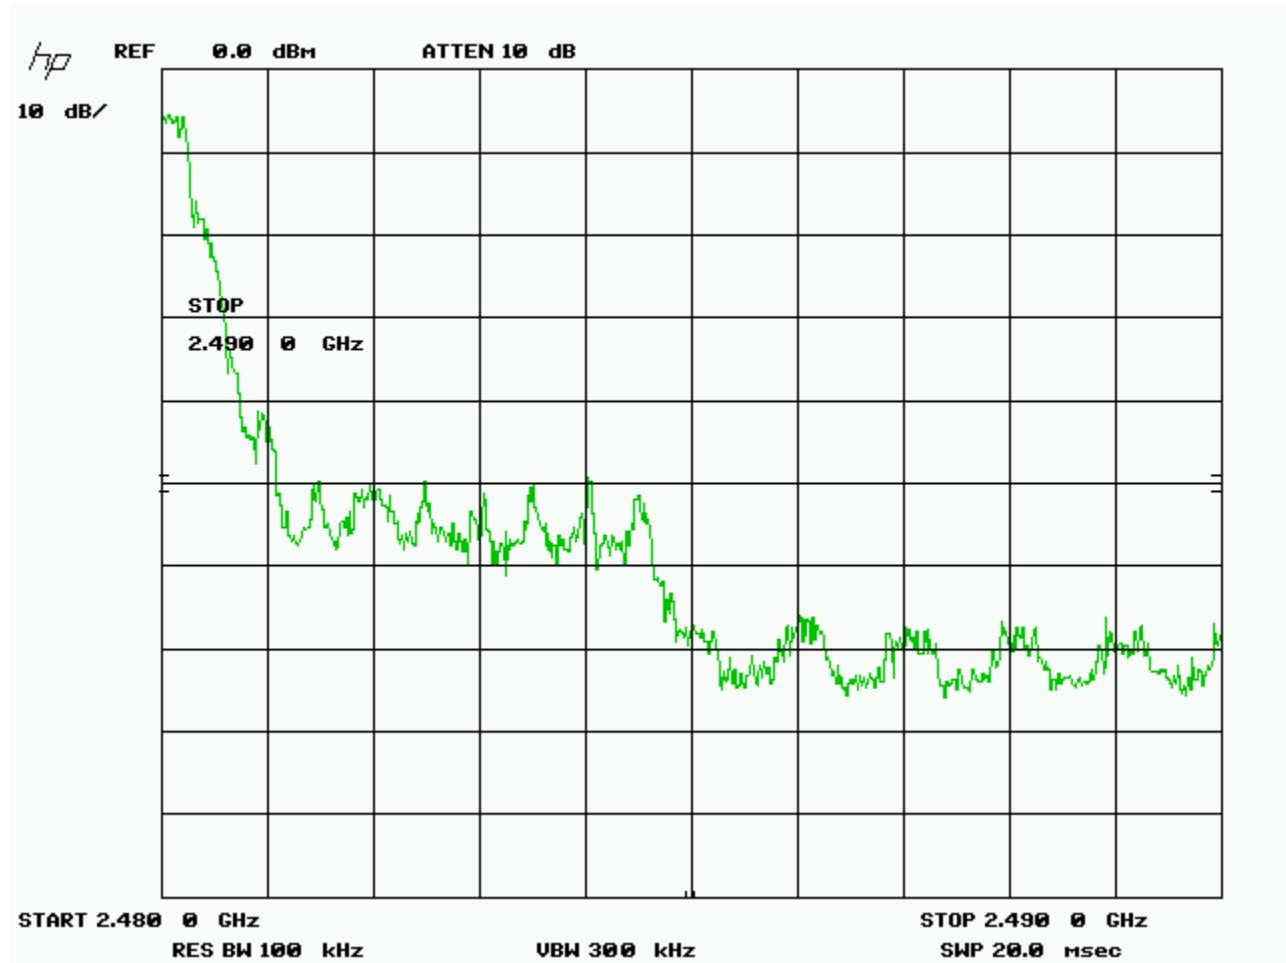

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## ***Frequency Allocation Use for Frequency Hopping Systems***

### **Purpose**

The purpose of this test is to ensure that the RF energy of frequency hopping systems is within the allocated band. If the lowest frequency used is lower then the lower 'band edge' frequency, then band edge measurements must be performed as part of the unintentional radiated limits. If the highest frequency used is higher then the upper 'band edge' frequency, then band edge measurements must be performed as part of the unintentional radiated limits. The upper and lower frequency limit is calculated by using detector BW used to measure the unintentional emissions at the lower and upper frequencies.

This also helps prevent unintentional interference with other devices.

### **Limits**

The limits are as defined in 47 CFR FCC Part 15 Section 15.247

	902 to 928 MHz	2.4 to 2.4835 GHz	5.275 to 5.85 GHz
15.209 Detector BW	120 kHz	1 MHz	1 MHz
Band edge	902.12 to 927.88 MHz	2.401 MHz to 2.4825 GHz	5.276 to 5.849 GHz

### **Results**

The EUT passed the requirements without requiring radiated emissions band edge measurements.


Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Graph(s)

The graphs below show the start frequency and the stop frequency of the occupied channels during normal operation of the EUT.


Start Frequency 2402.0 MHz

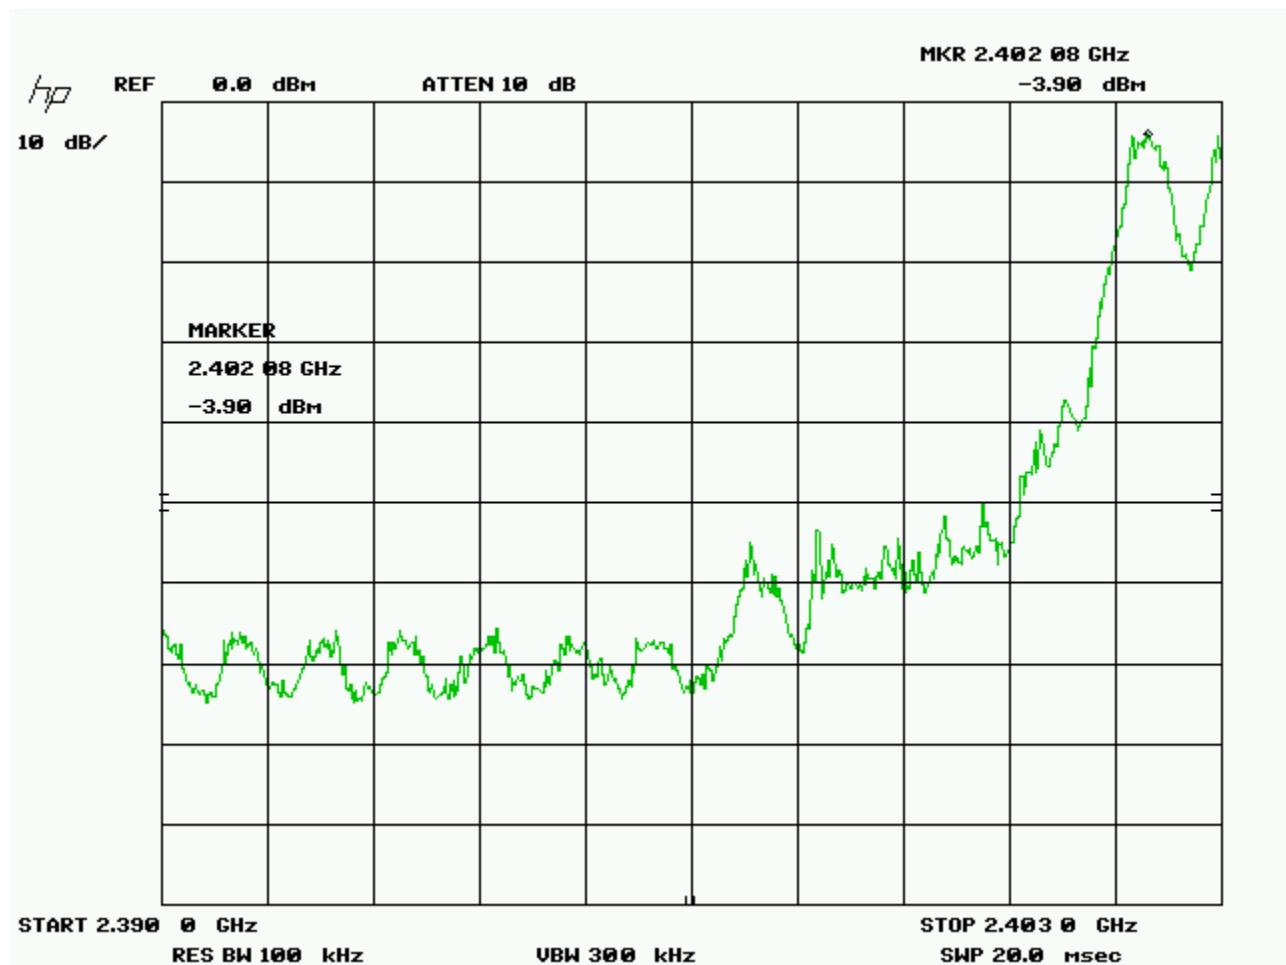

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Stop Frequency 2480.0 MHz

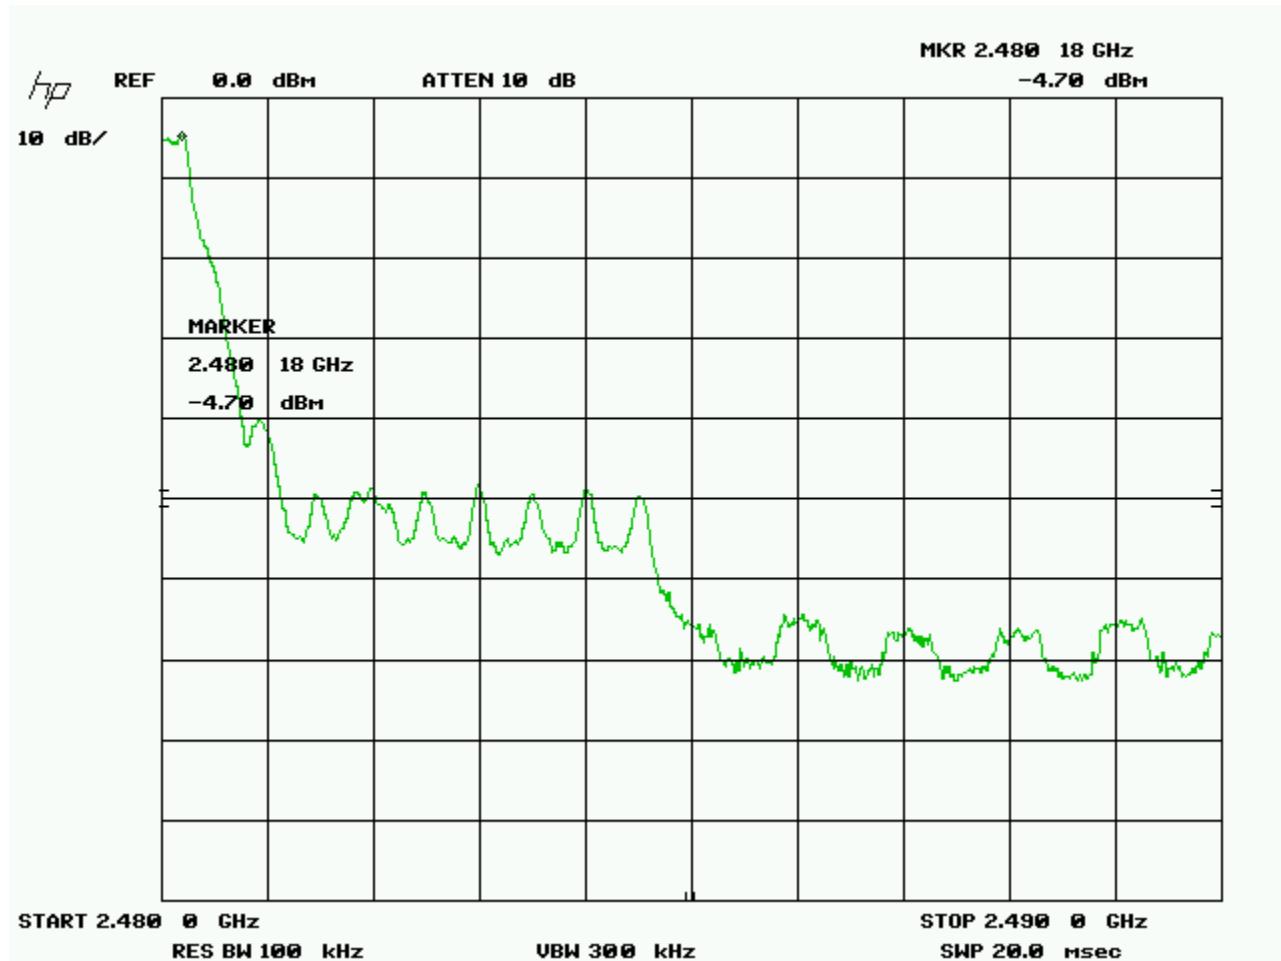

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350

Client	Endrelia / 2276427 Ontario Inc				
Product	ZPU-M400 / 9756A-M400				
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010				



Analyzer					
BiLog Antenna	3142-C	ETS	Jan 17, 2011	Jan 17, 2013	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Aug 25, 2010	Aug 25, 2012	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## **Maximum Permissible Exposure**

### **Purpose**

The purpose of this test is to ensure that the RF energy intentionally transmitted, in terms of power density emitted from the EUT at a stated operating distance does not exceed the limits listed below as defined in the applicable test standard, as calculated based upon readings obtained during testing. This helps protect human exposure to excessive RF fields.

### **Limit(s) and Method**

The limits, as defined in FCC 15.247(i) and FCC 1.1310 Table 1 (B) limits for general public exposure was applied. The limit for the frequency range of 1.5 GHz to 100 GHz was applied. This is a limit of 1.0 mW/cm<sup>2</sup>. The distance used for calculations was 20cm, as this is the minimum distance an operator will be from the EUT during normal operation, as stated by the manufacturer.

### **Results**

The EUT passed the requirements. The worst case calculated power density was 0.0014mW/cm<sup>2</sup>; this is significantly under the 1.0 mW/cm<sup>2</sup> requirement.

### **Calculations**

The maximum conducted output power as measured = 6.9dbm.

$$P_d = (P_t * G) / (4 * \pi * R^2)$$

Where Pt = 6.6 dbm or 4.57 mW as per Peak power conducted output

Where G = -3dBi, or numerically 0.5

Where R = 2.50 cm

$$P_d = (4.57 \times 0.5) / (4 \times \pi \times 2.50 \text{ cm}^2)$$

$$P_d = 0.029 \text{ mW/cm}^2$$

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## ***Power Line Conducted Emissions***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

### **Limits & Method**

The limits are as defined in 47 CFR FCC Part 15 Section 15.207

Method is as defined in ANSI C64:2003

Average Limits		QuasiPeak Limits	
150 kHz – 500 kHz	56 to 46 dBuV	150 kHz – 500 kHz	66 to 56 dBuV
500 kHz – 5 MHz	46 dBuV	500 kHz – 5 MHz	56 dBuV
5 MHz – 30 MHz	50 dBuV	500 kHz – 30 MHz	60 dBuV

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


Note: If the Peak or Quasi Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Both limits are applicable, and each is specified as being measured with a 9 kHz measurement bandwidth.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Typical Setup Diagram

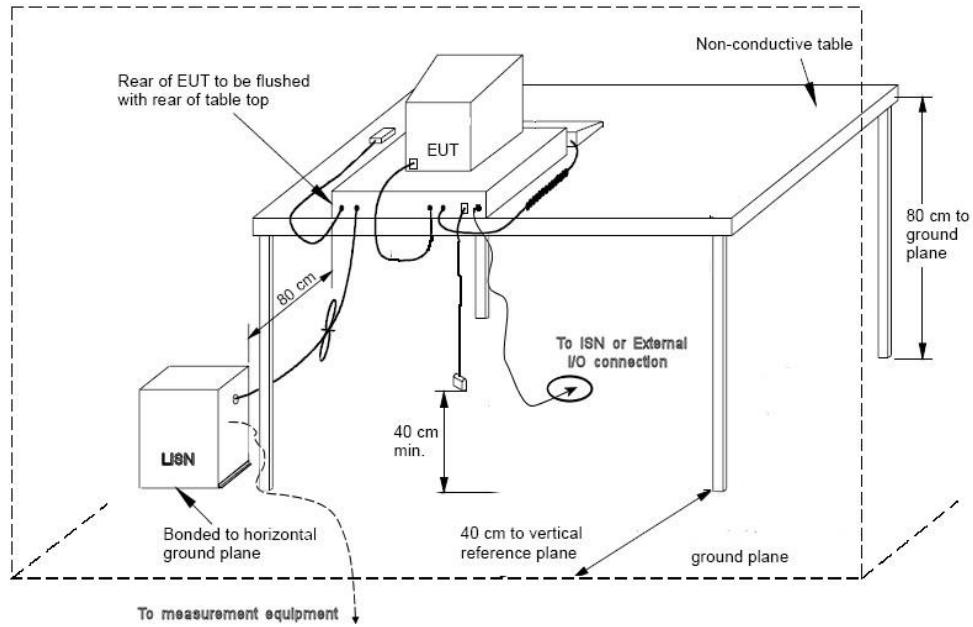

Note: The vertical reference plane is optional as per ANSI C63.4 section 5.2.2

## Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is  $+-3.6$  dB with a 'k=2' coverage factor and a %95 confidence level.


## Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector where applicable, please refer to the table. The graph shown below is a peak measurement graph, measured with a resolution bandwidth greater than or equal to the final required detector. These graphs are performed as a worst case measurement to enable the detection of frequencies of concern and for considerable time savings.

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010




120V 60Hz Line  
Peak emissions

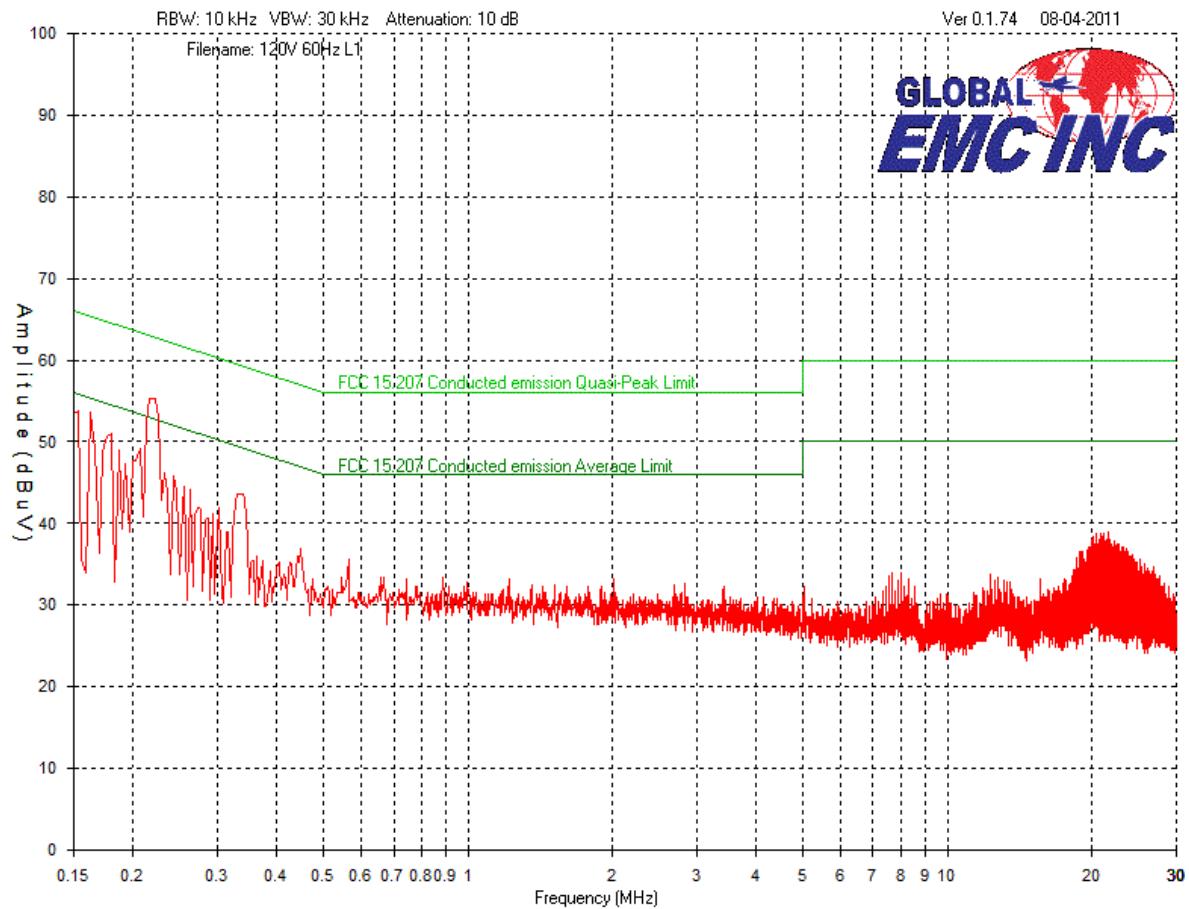

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



120V 60Hz Neutral  
Peak emissions

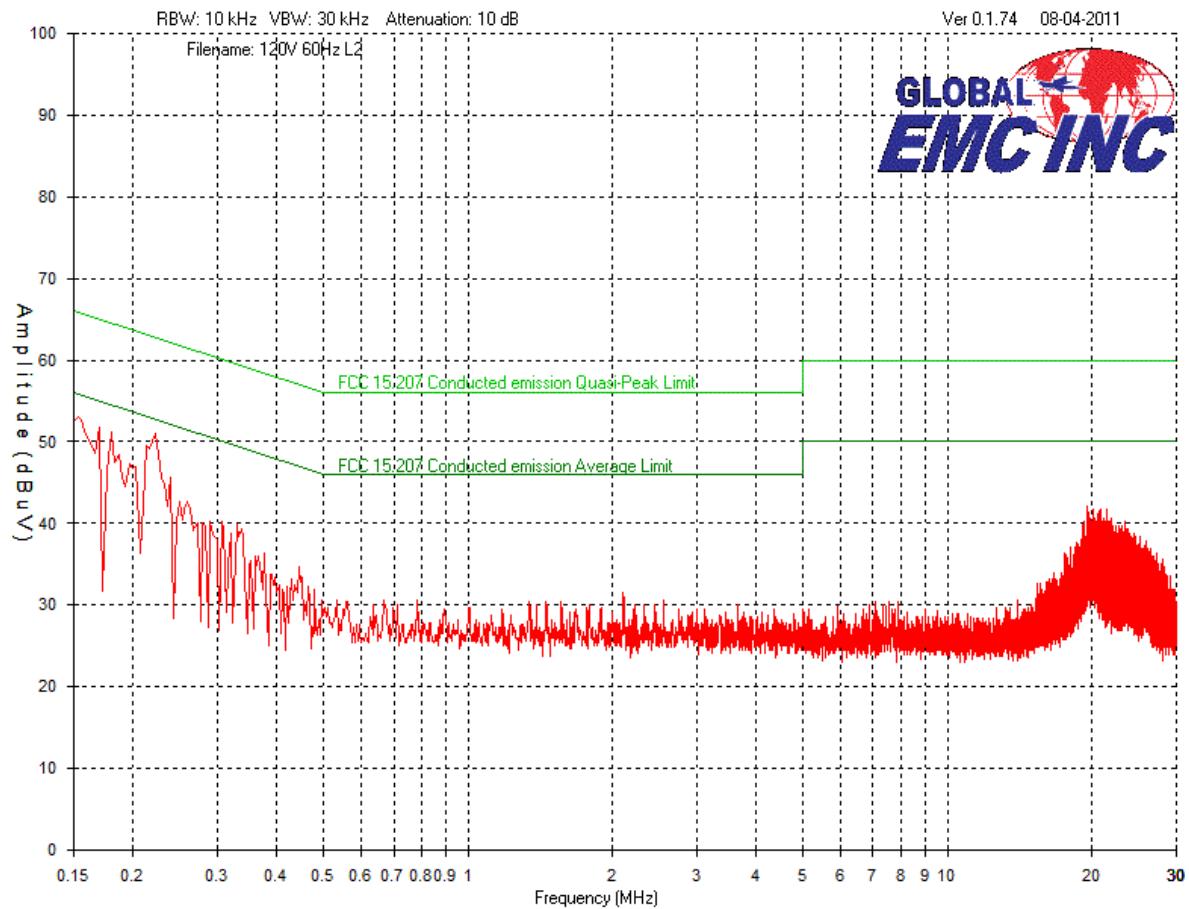

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Final Measurements

Conducted Emissions Measurements

Frequency	Detector	Raw Reading	Line	Attenuator	Cable Loss	LISN	Level	FCC 15.207 QP Limit	FCC 15.207 Avg Limit	FCC 15.207 QP Limit Margin	FCC 15.207 Avg Limit Margin
0.22506	QUASI-PEAK	38.6	L1	10	0.1	0.9	49.6	62.6	52.6	13	3
0.22506	AVERAGE	19	L1	10	0.1	0.9	30	62.6	52.6	32.6	22.6
0.15	QUASI-PEAK	34.9	L1	10	0.1	1.4	46.4	66	56	19.6	9.6
0.15	AVERAGE	10	L1	10	0.1	1.4	21.5	66	56	44.5	34.5
0.1526	QUASI-PEAK	35.1	L1	10	0.1	1	46.2	65.9	55.9	19.7	9.7
0.1526	AVERAGE	19	L1	10	0.1	1	30.1	65.9	55.9	35.8	25.8
0.22544	QUASI-PEAK	36.6	L2	10	0.1	0.9	47.6	62.6	52.6	15	5
0.22544	AVERAGE	18.8	L2	10	0.1	0.9	29.8	62.6	52.6	32.8	22.8
0.1533	SCAN	41.5	L2	10	0.1	1.5	53.1	65.8	55.8	12.7	2.7
0.15	PEAK	42.9	L2	10	0.1	1.5	54.5	66	56	11.5	1.5
0.15	QUASI-PEAK	35.5	L2	10	0.1	1.5	47.1	66	56	18.9	8.9

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



0.15	AVERAGE	9.3	L2	10	0.1	1.5	20.9	66	56	45.1	35.1
19.5931	QUASI-PEAK	19.7	L2	10	0.4	0.5	30.6	60	50	29.4	19.4
19.5931	AVERAGE	14.4	L2	10	0.4	0.5	25.3	60	50	34.7	24.7

Note:

1. See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up for the highest line conducted emission

Client	Endrelia / 2276427 Ontario Inc	
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
IFR Spectrum Analyzer	AN940	IFR	Dec 29, 2009	Dec 29, 2011	GEMC 6350
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb 03, 2011	Feb 03, 2013	GEMC 65
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



## Appendix A – EUT Summary

### General EUT Description

Client	
<b>Organization</b>	Endrelia / 2276427 Ontario Inc
<b>Contact</b>	Amandeep Singh
EUT Details	
<b>EUT Model number</b>	M400
<b>Equipment Category</b>	Wireless module for establishing a 2.4 GHz Bluetooth connection between EUT and a mobile phone.
<b>Basic EUT Functionality</b>	M400 unit connects using a Bluetooth connection to a mobile phone and transmit audio to a preselected number that is dialed from the mobile phone.
<b>Input Voltage and Frequency</b>	Battery operated
<b>Connectors available on EUT</b>	None.
<b>Peripherals Required for Test</b>	None.
<b>Release type</b>	Final
<b>Intentional Radiator Frequency</b>	2402 – 2480.0 MHz for Bluetooth protocol.

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT & Test Setup Photographs’.

Client	Endrelia / 2276427 Ontario Inc	 The logo for Global EMC Inc. It features a stylized globe with red and blue continents and a white star in the upper left. The word "GLOBAL" is in blue at the top, and "EMC INC" is in large blue letters below it.
Product	ZPU-M400 / 9756A-M400	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010	

## Appendix B – EUT and Test Setup Photographs

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Figure 1 – Radiated emission setup

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Figure 2 – Power line conducted emissions

Client	Endrelia / 2276427 Ontario Inc
Product	ZPU-M400 / 9756A-M400
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2010



Figure 3 – Conducted power emissions

Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.