

FCC C2PC Test Report

FCC ID : ZQ6-AP6234A

Equipment : Wifi Dual Band + BT combo module

Model No. : AP6234A, AP6234AL

Brand Name : Ampak

Applicant : Ampak Technology Inc

Address : No.1 Jen Al Road, Hsinchu Industrial Park,

Hukou, Hsinchu, Taiwan, 30352

Standard : 47 CFR FCC Part 15.247

Received Date : May 21, 2014

Tested Date : May 21 ~ Jun. 04, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac-MRA



Report No.: FR440102-07AC Report Version: Rev. 01 Page: 1 of 62



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	8
1.5	Test Standards	g
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	1C
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62



Release Record

Report No.	Version	Description	Issued Date
FR440102-07AC	Rev. 01	Initial issue	Jun. 16, 2014

Report No.: FR440102-07AC Page: 3 of 62



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.155MHz 43.68 (Margin -12.06dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 73.00 (Margin -1.00dB) - PK	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11b: 21.54 11g: 22.59 HT20: 22.62 HT40: 21.78	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR440102-07AC Page: 4 of 62



1 General Description

1.1 Information

This report is prepared for FCC class II change.

This report is issued as a duplicate report to original ICC report no. FR440102AC. The modification is adding SAW filter for 2.4G RF part, so only the 2.4G related tests will be re-evaluated. It this test report, all test items has been re-tested and only its data was recorded in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7			
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	MCS 0-7			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Typo	C	Connector				
Ant. No.	Туре	2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850	Connector
1	Dipole	2	3	3	3	3	UFL

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host.
-------------------	-------------------

1.1.4 Accessories

N/A

Report No.: FR440102-07AC Page: 5 of 62



1.1.5 Channel List

Frequenc	y band (MHz)	2400~2483.5		
802.11 b	/ g / n HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

1.1.6 Test Tool and Duty Cycle

Test Tool	Mtool, V2.0.1.1					
	Mode	Duty cycle (%)	Duty factor (dB)			
	11b	100.00%	0.00			
Duty Cycle and Duty Factor	11g	99.31%	0.03			
	HT20	99.26%	0.03			
	HT40	98.52%	0.06			

Report No.: FR440102-07AC Page: 6 of 62




1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	76
11b	2437	86
11b	2462	80
11g	2412	70
11g	2437	80
11g	2462	64
HT20	2412	70
HT20	2437	80
HT20	2462	64
HT40	2422	62
HT40	2437	66
HT40	2452	58

1.2 Local Support Equipment List

	Support Equipment List								
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)			
1	Notebook	DELL	E6430		DoC	USB 1.0m shielded cable w/o core.			

1.3 Test Setup Chart

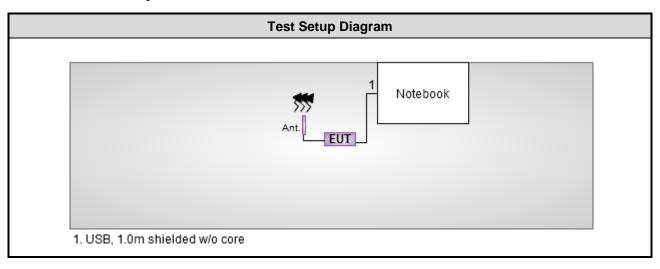

Report No.: FR440102-07AC Page: 7 of 62



1.4 The Equipment List

nduction room 1 / (0											
Manufacturer	Model No		Conduction room 1 / (CO01-WS)								
	Manufacturer Model No. Serial No. Calibration Date Calibration Until										
R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014							
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014							
SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014							
Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015							
NA	50	04	Apr. 18, 2014	Apr. 17, 2015							
3	CHWARZBECK Woken NA	CHWARZBECK Schwarzbeck 8127 Woken CFD200-NL NA 50	CHWARZBECK Schwarzbeck 8127 8127-666 Woken CFD200-NL CFD200-NL-001	CHWARZBECK Schwarzbeck 8127 8127-666 Dec. 04, 2013 Woken CFD200-NL CFD200-NL-001 Apr. 23, 2014 NA 50 04 Apr. 18, 2014							

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber1 / (03C	966 chamber1 / (03CH01-WS)						
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015			
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014			
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014			
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014			
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014			
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014			
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Instrument	Manufacturer	Manufacturer Model No. Seria		Calibration Date	Calibration Until					
Loop Antenna	oop Antenna R&S		100330	Nov. 15, 2012	Nov. 14, 2014					
Note: Calibration Interv	Note: Calibration Interval of instruments listed above is two year.									

Report No.: FR440102-07AC Page: 8 of 62



Test Item	RF Conducted							
Test Site	(TH01-WS)							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015			
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014			
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014			
Note: Calibration Interval of instruments listed above is one year.								

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty						
Parameters	Uncertainty					
Bandwidth	±34.134 Hz					
Conducted power	±0.808 dB					
Frequency error	±34.134 Hz					
Power density	±0.463 dB					
Conducted emission	±2.670 dB					
AC conducted emission	±2.92 dB					
Radiated emission < 1GHz	±3.26 dB					
Radiated emission > 1GHz	±4.94 dB					

Report No.: FR440102-07AC Page: 9 of 62



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 72%	Skys Huang
Radiated Emissions	03CH01-WS	20-22°C / 64-66%	Anderson Hung
RF Conducted	TH01-WS	21°C / 66%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT20	2437	6 Mbps	
Radiated Emissions ≤1GHz	HT20	2437	6 Mbps	
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	
Fundamental Emission Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

NOTE:

Report No.: FR440102-07AC Page: 10 of 62

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

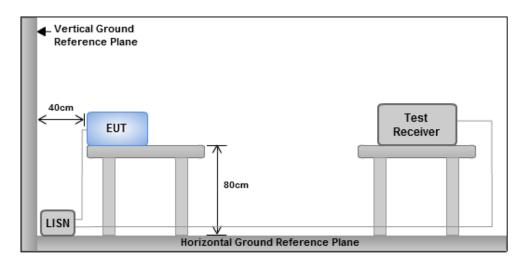


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR440102-07AC Page: 11 of 62




3.1.4 Test Result of Conducted Emissions

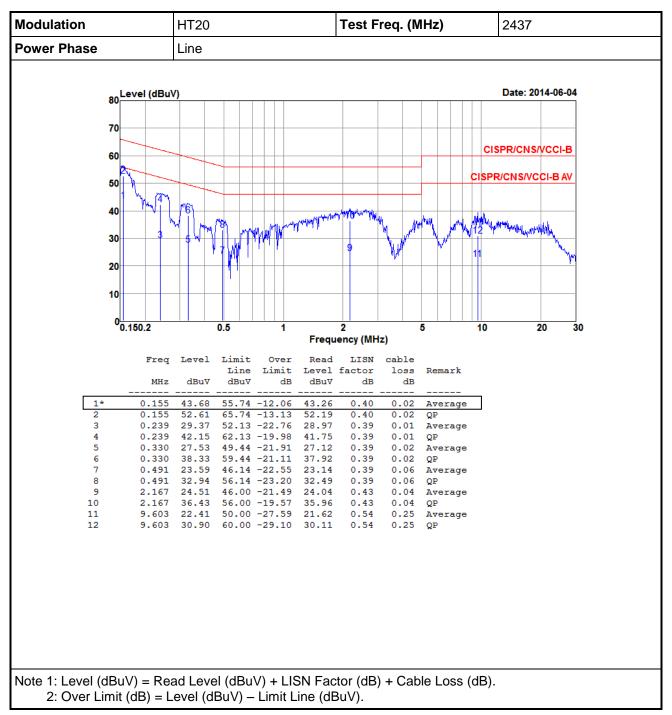

Report No.: FR440102-07AC Page: 12 of 62



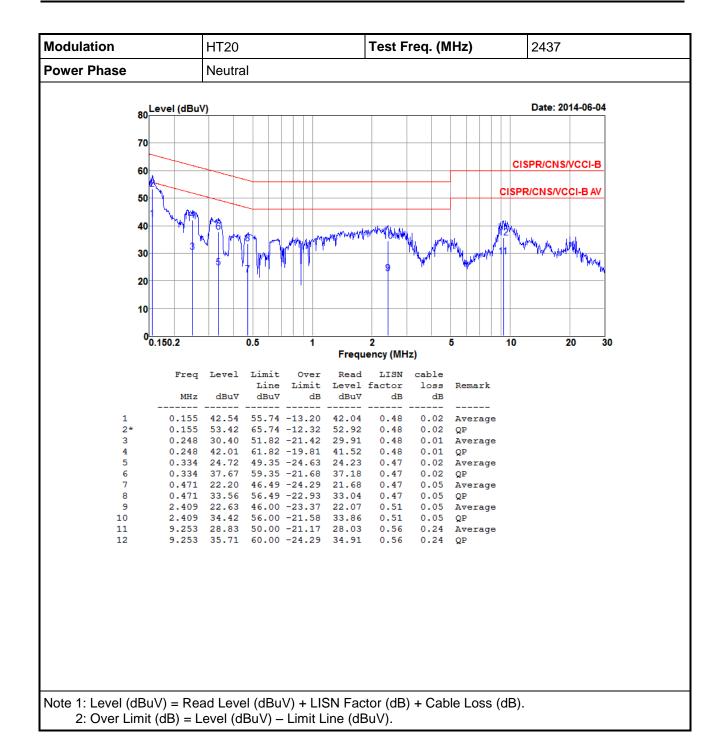

Report No.: FR440102-07AC Page: 13 of 62



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup




Report No.: FR440102-07AC Page: 14 of 62



3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	N	6dB Bandwidth (MHz)					Limit (kU=)
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	1	2412	8.12				500
11b	1	2437	8.58				500
11b	1	2462	7.54				500
11g	1	2412	15.94				500
11g	1	2437	13.45				500
11g	1	2462	15.13				500
HT20	1	2412	15.94				500
HT20	1	2437	15.07				500
HT20	1	2462	16.06				500
HT40	1	2422	35.36				500
HT40	1	2437	33.86				500
HT40	1	2452	35.13				500

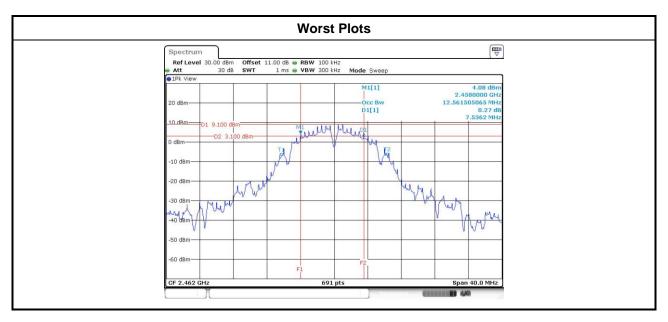

Report No.: FR440102-07AC Page: 15 of 62



Modulation	N	Freq.	99% Occupied Bandwidth (MHz)					
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3		
11b	1	2412	12.12					
11b	1	2437	12.66					
11b	1	2462	12.48					
11g	1	2412	16.57					
11g	1	2437	16.64					
11g	1	2462	16.53					
HT20	1	2412	17.55					
HT20	1	2437	17.58					
HT20	1	2462	17.55					
HT40	1	2422	36.21					
HT40	1	2437	35.95					
HT40	1	2452	36.14					



Report No.: FR440102-07AC Page: 16 of 62



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR440102-07AC Page: 17 of 62



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq.	Peak		d output p 3m)	ower	Total Power	Total Power	Limit
Wiode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	1	2412	18.52				71.121	18.52	30
11b	1	2437	21.54				142.561	21.54	30
11b	1	2462	20.13				103.039	20.13	30
11g	1	2412	20.95				124.451	20.95	30
11g	1	2437	22.59				181.552	22.59	30
11g	1	2462	21.29				134.586	21.29	30
HT20	1	2412	20.98				125.314	20.98	30
HT20	1	2437	22.62				182.810	22.62	30
HT20	1	2462	21.02				126.474	21.02	30
HT40	1	2422	20.71				117.761	20.71	30
HT40	1	2437	21.78				150.661	21.78	30
HT40	1	2452	20.79				119.950	20.79	30

Modulation Mode	N _{TX}	Freq.	Conduc		age) outpu Bm)	it power	Total Power	Total Power	Limit (dBm)
Wiode		(IVIITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(ubili)
11b	1	2412	15.53				35.727	15.53	30
11b	1	2437	18.92				77.983	18.92	30
11b	1	2462	17.18				52.240	17.18	30
11g	1	2412	13.88				24.434	13.88	30
11g	1	2437	17.40				54.954	17.40	30
11g	1	2462	12.68				18.535	12.68	30
HT20	1	2412	13.55				22.646	13.55	30
HT20	1	2437	17.20				52.481	17.20	30
HT20	1	2462	12.69				18.578	12.69	30
HT40	1	2422	12.62				18.281	12.62	30
HT40	1	2437	14.27				26.730	14.27	30
HT40	1	2452	12.09				16.181	12.09	30

Note: Conducted average output power is for reference only.

Report No.: FR440102-07AC Page: 18 of 62



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR440102-07AC Page: 19 of 62



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-5.77	8
11b	1	2437	-3.75	8
11b	1	2462	-4.72	8
11g	1	2412	-10.34	8
11g	1	2437	-7.63	8
11g	1	2462	-15.04	8
HT20	1	2412	-10.82	8
HT20	1	2437	-7.90	8
HT20	1	2462	-11.92	8
HT40	1	2422	-13.65	8
HT40	1	2437	-13.13	8
HT40	1	2452	-14.81	8

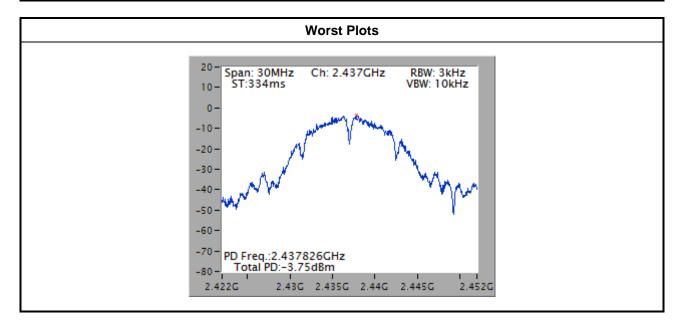

Report No.: FR440102-07AC Page: 20 of 62



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR440102-07AC Page: 21 of 62




3.5.3 Test Setup

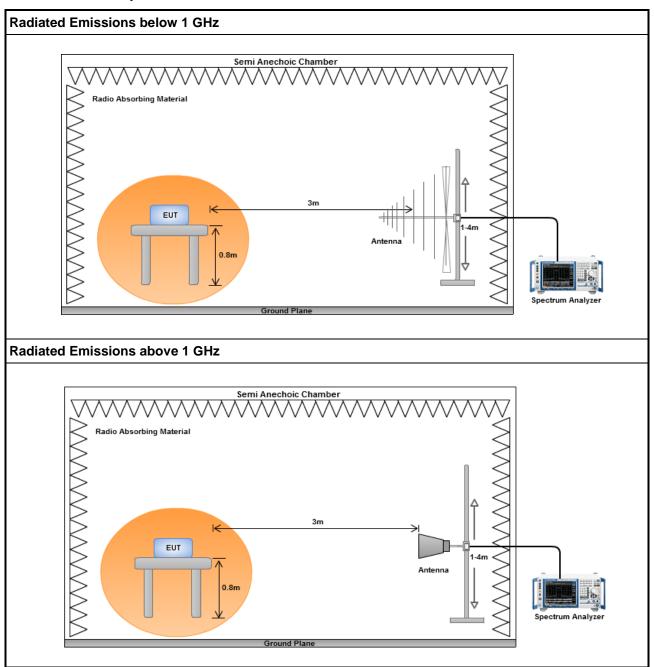

Report No.: FR440102-07AC Page: 22 of 62



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

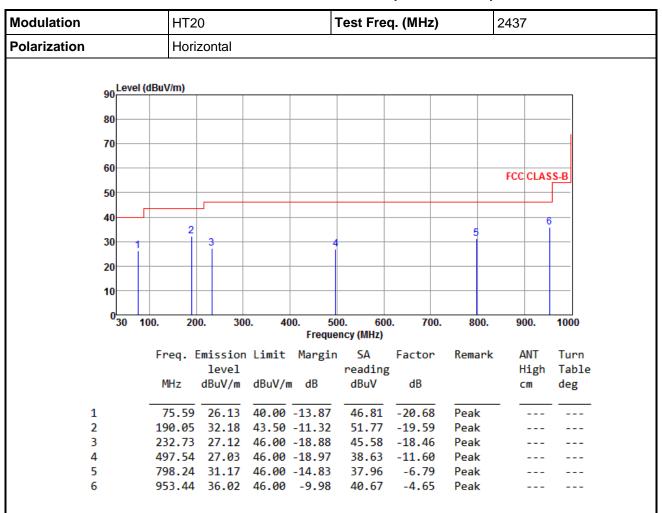

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR440102-07AC Page: 23 of 62



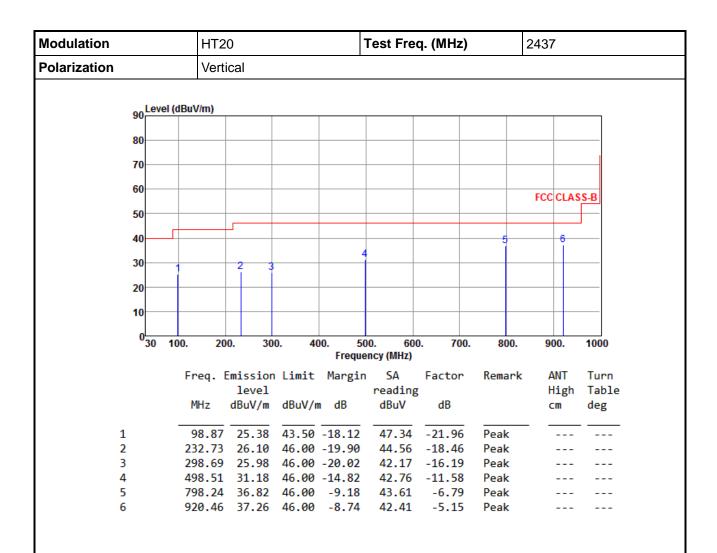

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR440102-07AC Page: 24 of 62



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

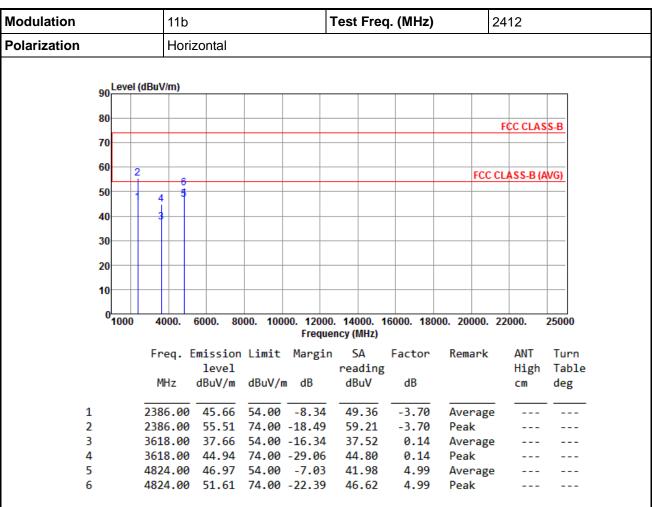


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102-07AC Page: 25 of 62



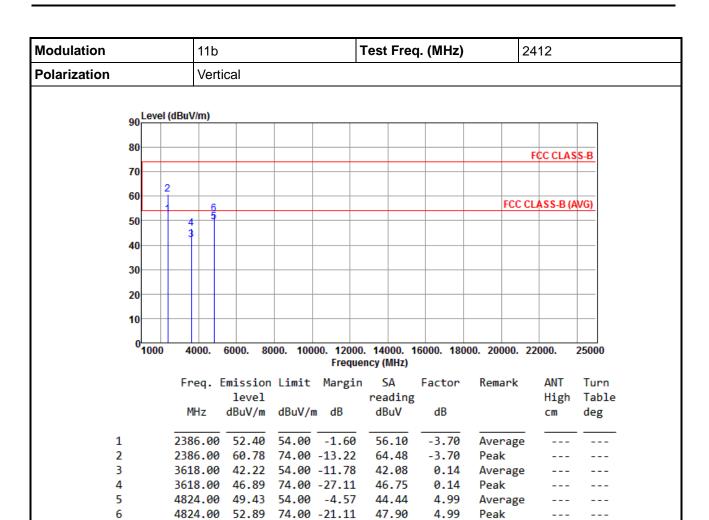


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 26 of 62



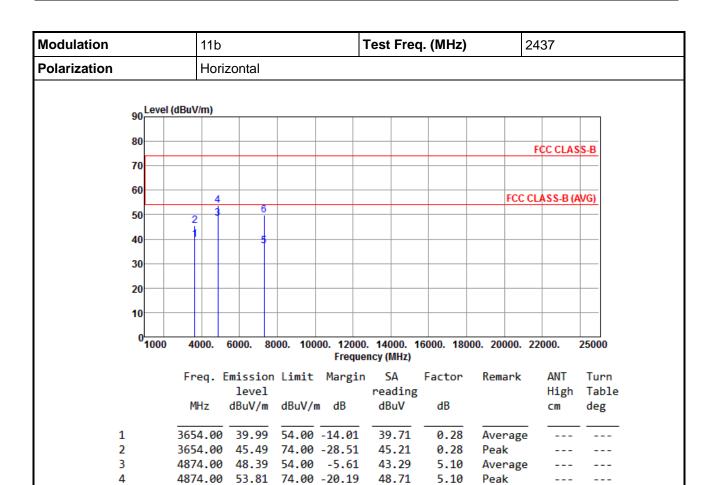

54.00 -16.66

28.01

40.64

Average

Peak

9.33

9.33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

7311.00 37.34

7311.00 49.97 74.00 -24.03

Report No.: FR440102-07AC Page: 27 of 62


Report Version: Rev. 01

5

6



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		

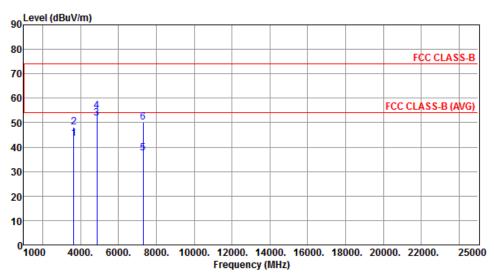


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3654.00	43.54	54.00	-10.46	43.26	0.28	Average		
2	3654.00		74.00		47.84	0.28	Peak		
3	4874.00	51.91	54.00	-2.09	46.81	5.10	Average		
4	4874.00	54.74	74.00	-19.26	49.64	5.10	Peak		
5	7311.00	37.38	54.00	-16.62	28.05	9.33	Average		
6	7311.00	50.02	74.00	-23.98	40.69	9.33	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 28 of 62



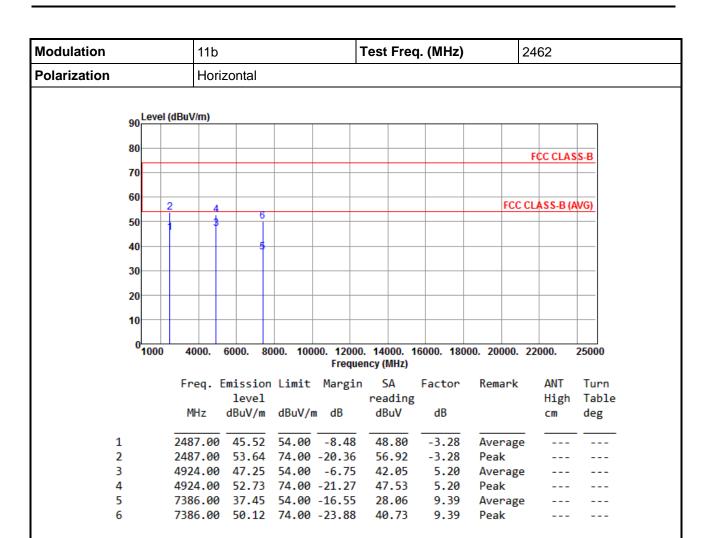


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 29 of 62



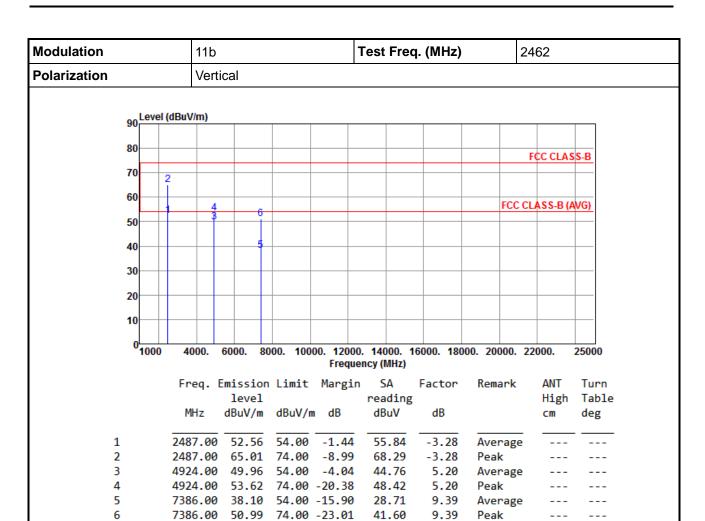


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 30 of 62



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

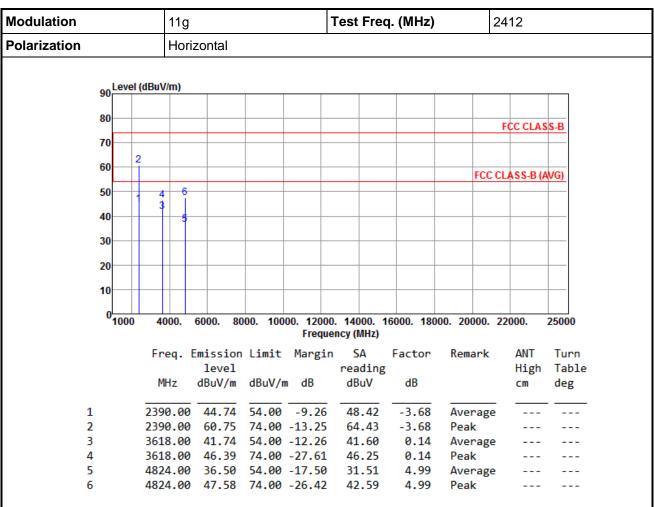


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102-07AC Page: 31 of 62



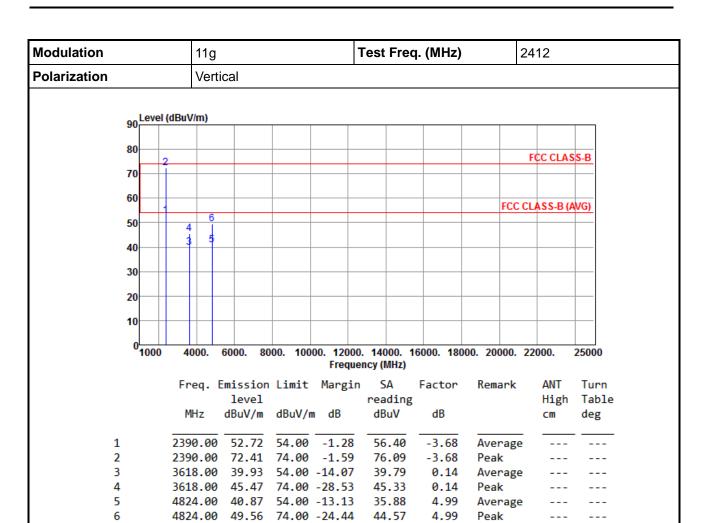


Note 1: Emission Level $(dBuV/m) = SA Reading (dBuV/m) + Factor^* (dB)$

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 32 of 62



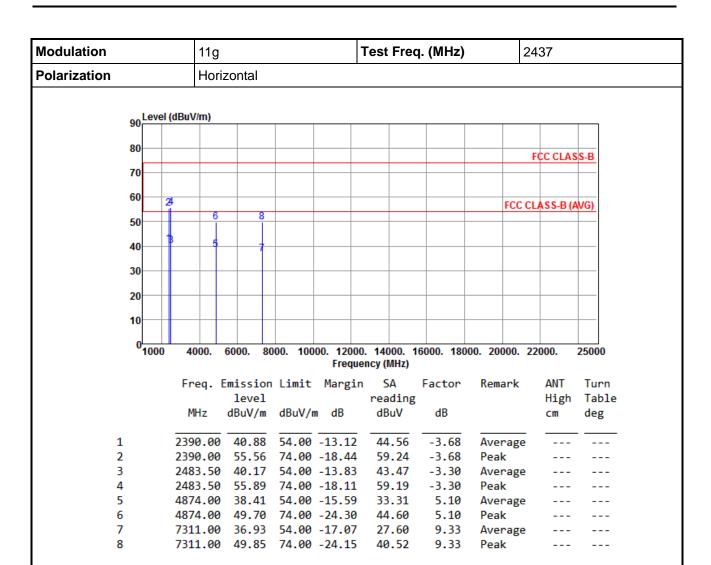


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 33 of 62



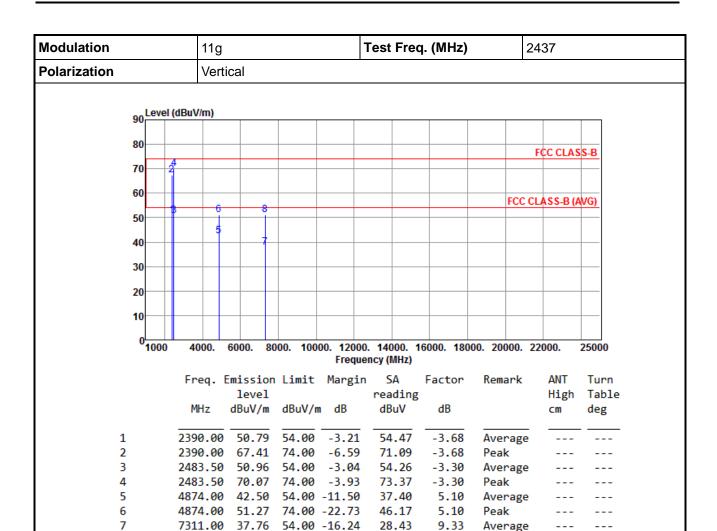

9.33

Peak

41.77

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

7311.00 51.10 74.00 -22.90

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 34 of 62

Report Version: Rev. 01

8



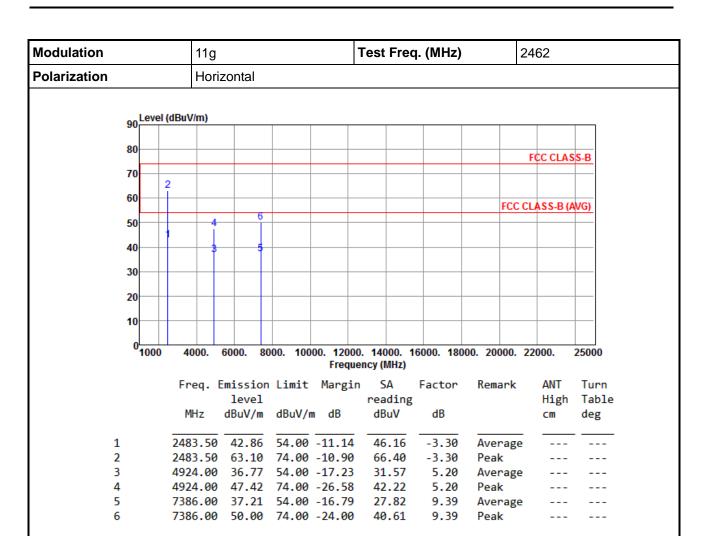


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 35 of 62



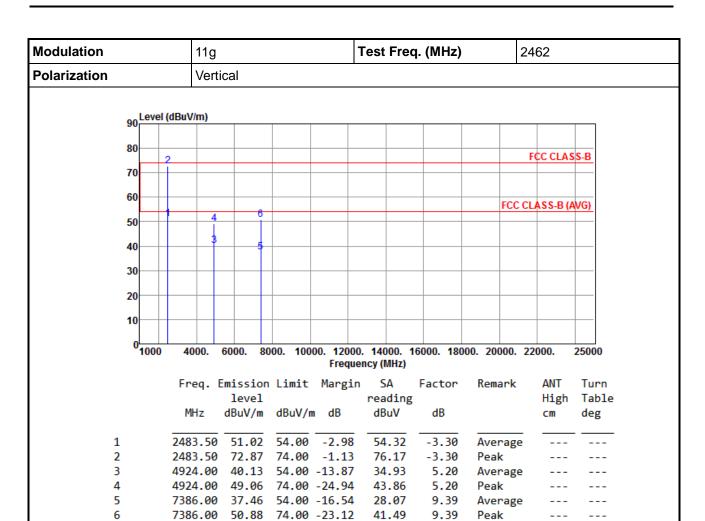

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 36 of 62



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

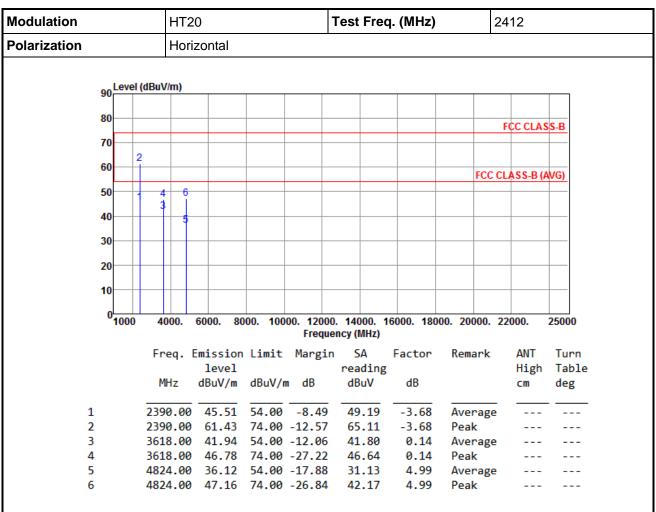


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102-07AC Page: 37 of 62



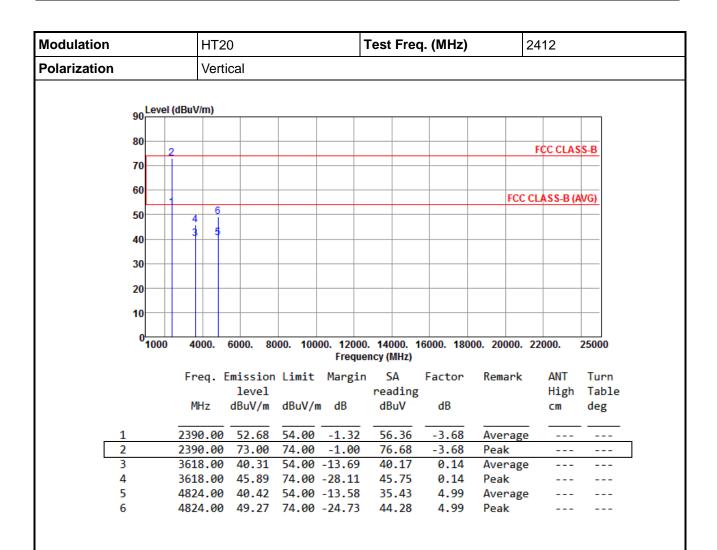


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 38 of 62



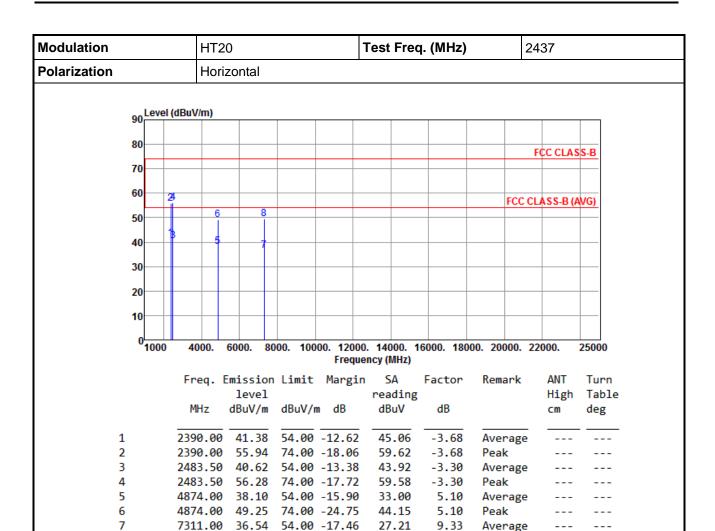

40.15

9.33

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

7311.00 49.48 74.00 -24.52

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR440102-07AC Page: 39 of 62

Report Version: Rev. 01

8



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		
_ Level (dBu)	//m)		

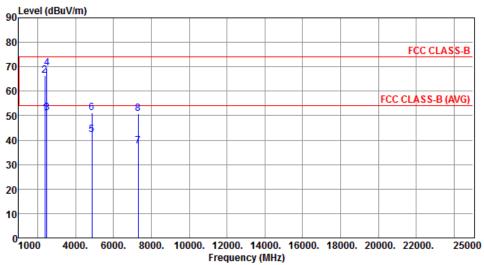


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	50.86	54.00	-3.14	54.54	-3.68	Average		
2	2390.00	66.58	74.00	-7.42	70.26	-3.68	Peak		
3	2483.50	51.25	54.00	-2.75	54.55	-3.30	Average		
4	2483.50	69.44	74.00	-4.56	72.74	-3.30	Peak		
5	4874.00	42.15	54.00	-11.85	37.05	5.10	Average		
6	4874.00	51.02	74.00	-22.98	45.92	5.10	Peak		
7	7311.00	37.43	54.00	-16.57	28.10	9.33	Average		
8	7311.00	50.96	74.00	-23.04	41.63	9.33	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 40 of 62



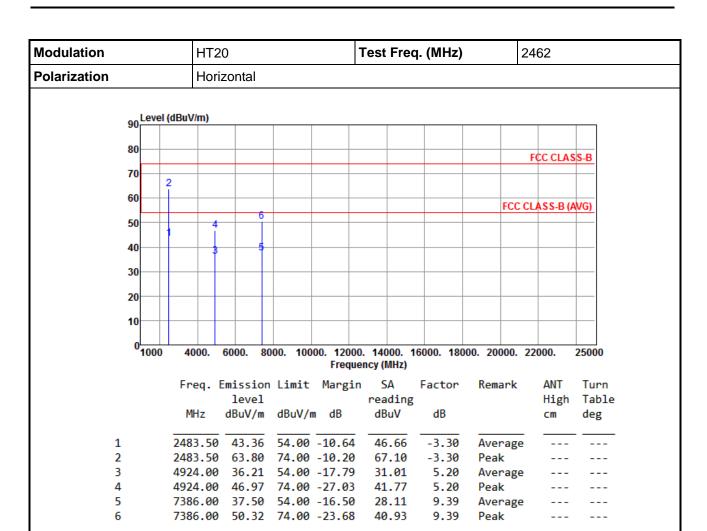


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 41 of 62



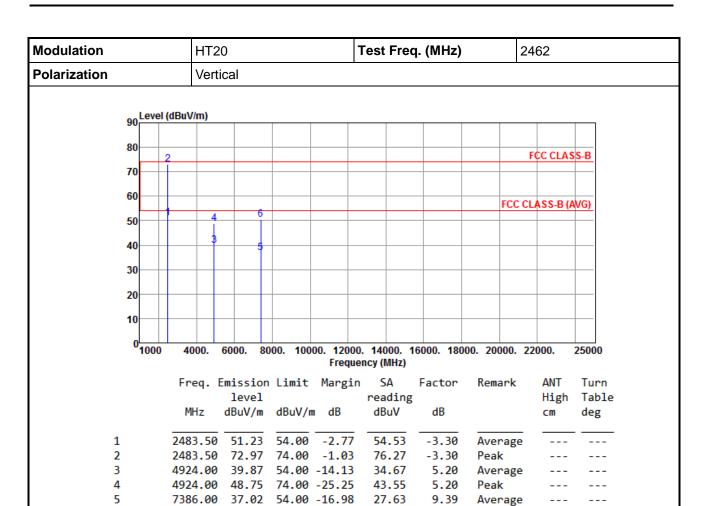

41.03

9.39

Peak

Note 1: Emission Level $(dBuV/m) = SA Reading (dBuV/m) + Factor^* (dB)$

*Factor includes antenna factor, cable loss and amplifier gain

7386.00 50.42 74.00 -23.58

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR440102-07AC Page: 42 of 62

Report Version: Rev. 01

6



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

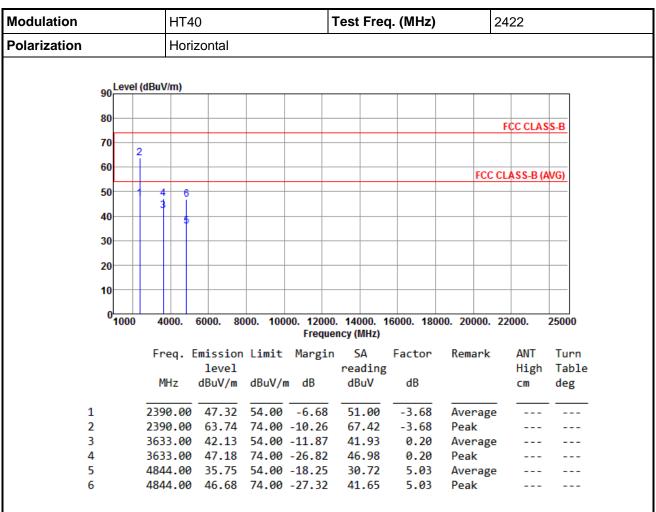

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 43 of 62




dulation	HT40	Test Freq. (MHz)	2422
larization	Vertical		
90 Level (dBu	uV/m)		
90			
80			FCC CLASS-B
70 2			TOO GENGGE
60			FCC CLASS-B (AVG)
50	4 6		FCC CLASS-B (AVG)
40	3 5		
30			
20			
10			
0 1000 4). 14000. 16000. 18000. 20 ency (MHz)	0000. 22000. 2500

	MHZ	aBuV/m	agav/m ag	aBuV	ав		cm	deg
1	2390.00	52.39	54.00 -1.61	56.07	-3.68	Average		
2	2390.00	71.15	74.00 -2.85	74.83	-3.68	Peak		
3	3633.00	40.75	54.00 -13.25	40.55	0.20	Average		
4	3633.00	46.18	74.00 -27.82	45.98	0.20	Peak		
5	4844.00	39.58	54.00 -14.42	34.55	5.03	Average		
6	4844.00	48.33	74.00 -25.67	43.30	5.03	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 44 of 62



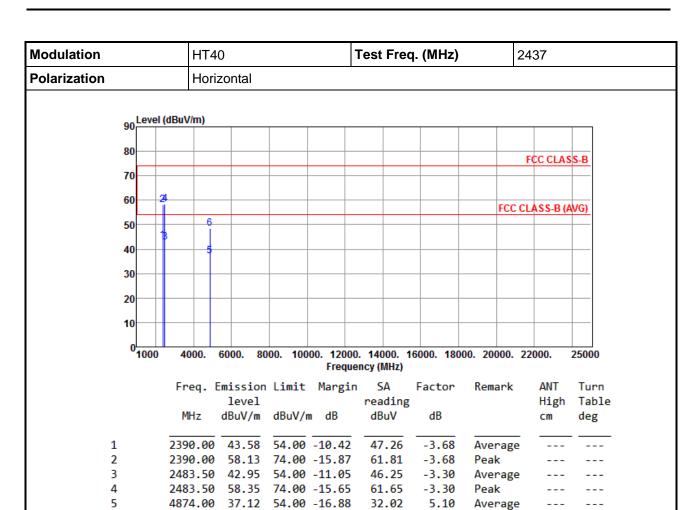

43.48

5.10

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

4874.00 48.58 74.00 -25.42

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR440102-07AC Page: 45 of 62

Report Version: Rev. 01

6



Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		

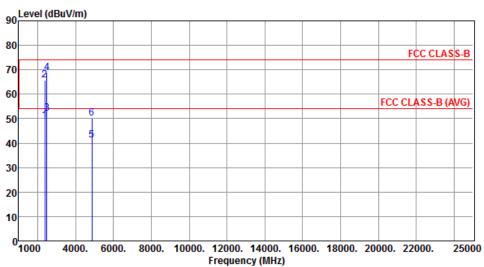

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.23	54.00	-4.77	52.91	-3.68	Average		
2	2390.00	65.64	74.00	-8.36	69.32	-3.68	Peak		
3	2483.50	52.11	54.00	-1.89	55.41	-3.30	Average		
4	2483.50	68.81	74.00	-5.19	72.11	-3.30	Peak		
5	4874.00	41.15	54.00	-12.85	36.05	5.10	Average		
6	4874.00	50.02	74.00	-23.98	44.92	5.10	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 46 of 62



Modulation		HT4	0				Test	Fred	դ. (M Ի	łz)		24	52	
Polarization		Hori	zontal											
90 ^L	evel (d	BuV/m)						I				I		
80-														
00												F	CC CLAS	S-B
70	2													
60														
ļ	$\overline{}$		-	8								FCC CL	ASS-B (A	WG)
50	1	4												
40	$-\!\!+\!\!\!+$			•										
		1												
30														
20	-++								_	_				
40														
10														
0 <mark>.</mark> 1	1000	4000.	6000.	8000.	100	00. 1200 Frequ	0. 14 ency (6000.	1800	0. 200	000. 22	2000.	25000
		Freq. I	missi	on Li	mit	Margi	n (A	Fact	or	Rema	ark	ANT	Tur
			leve					ding					High	Tab
		MHz	dBuV/	m dE	BuV/n	ı dB	dE	BuV	dB				cm	deg
1	3	2483.50	45.4	8 54	1.00	-8.52	48	3.78	-3.	30	Δνει	rage		
2		2483.50			.00			.27	-3.		Peal	_		
3	4	4904.00			.00	-18.85		.99	5.	16	Aver	rage		
4		4904.00						.72		16	Peal	k		
5		7356.00						.48	9.			rage		
6	7	7356.00	50.6	7 74	.00	-23.33	41	.31	9.	36	Peal	k		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 47 of 62

Report Version: Rev. 01



Modulation	HT40	Test Freq. (MHz)	2452			
Polarization	Vertical					
on Level (dBuV/m)						

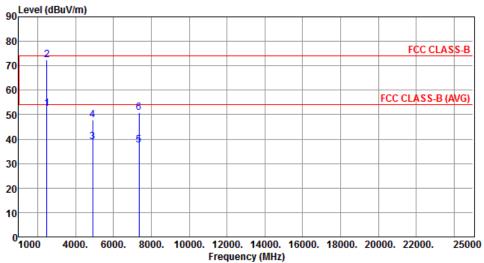

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	52.39	54.00	-1.61	55.69	-3.30	Average		
2	2483.50	72.24	74.00	-1.76	75.54	-3.30	Peak		
3	4904.00	38.75	54.00	-15.25	33.59	5.16	Average		
4	4904.00	47.93	74.00	-26.07	42.77	5.16	Peak		
5	7356.00	37.42	54.00	-16.58	28.06	9.36	Average		
6	7356.00	50.88	74.00	-23.12	41.52	9.36	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102-07AC Page: 48 of 62



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

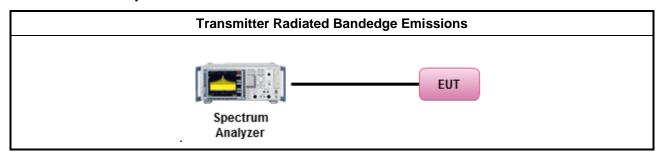


Report No.: FR440102-07AC Page: 49 of 62




3.6.5 Test Result of Emissions in non-restricted frequency bands

802.11b

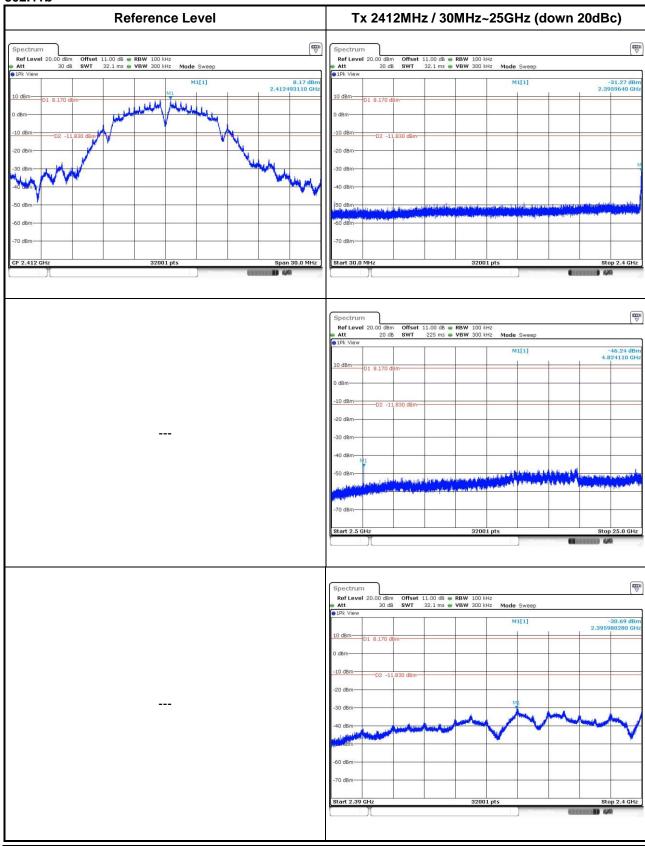


Report No.: FR440102-07AC Report Version: Rev. 01



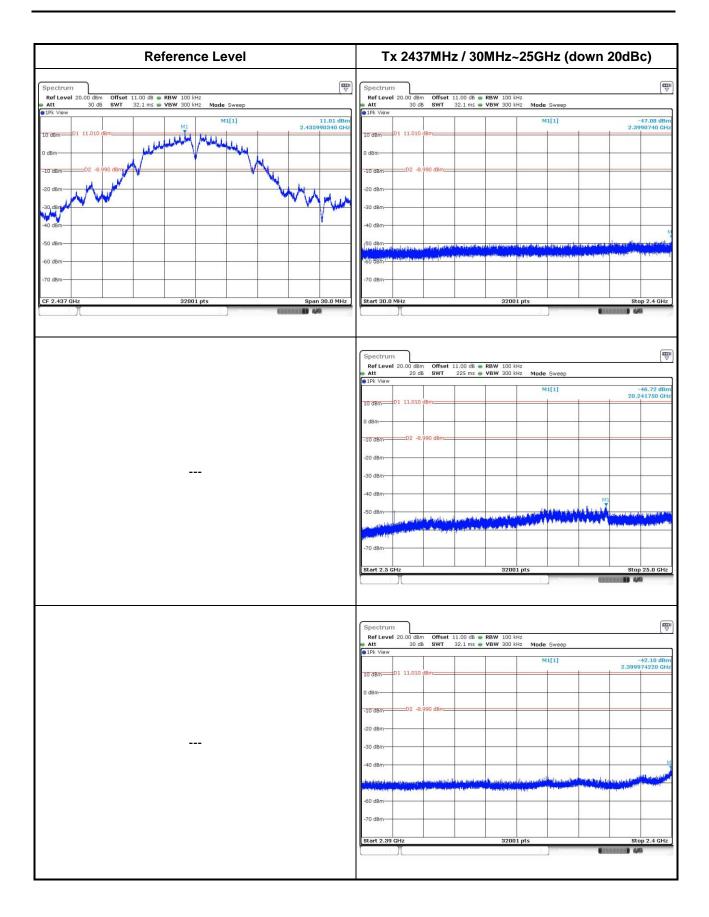


Report No.: FR440102-07AC Page: 51 of 62



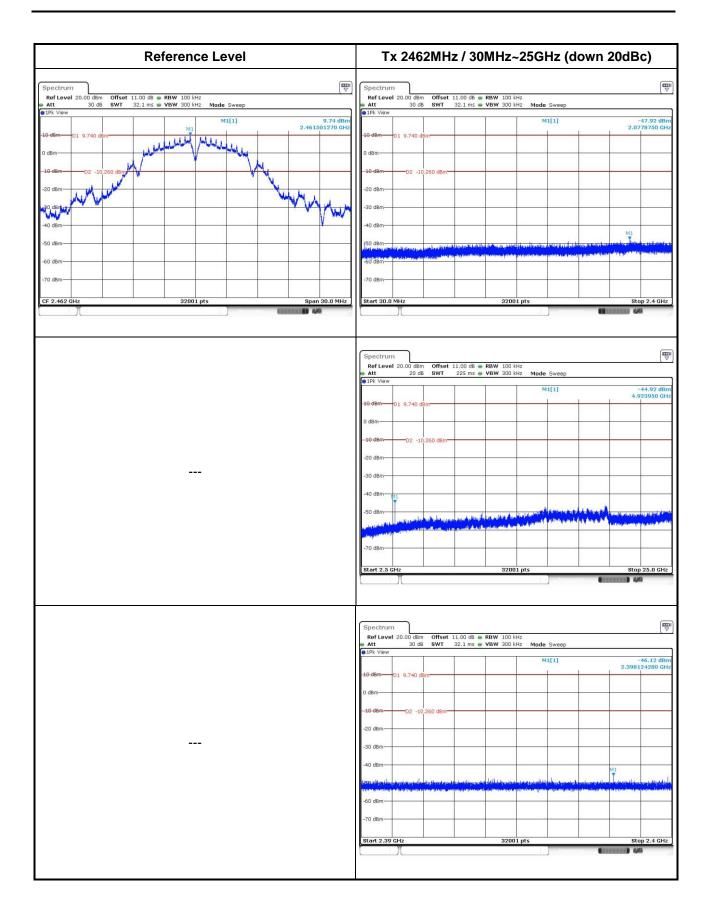


Report No.: FR440102-07AC Page : 52 of 62



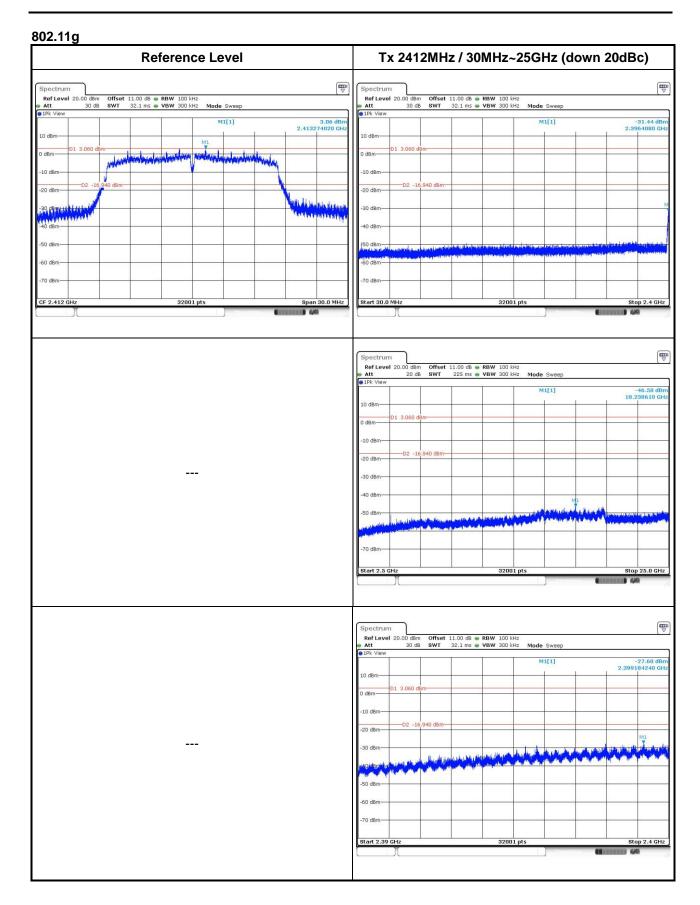


Report No.: FR440102-07AC Page: 53 of 62



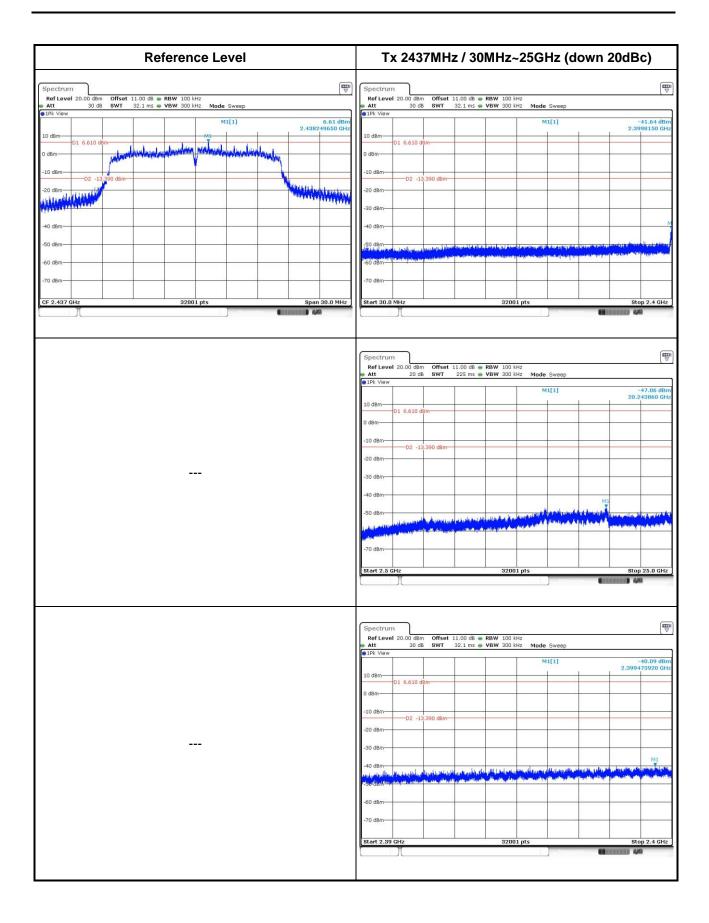

Report No.: FR440102-07AC Page : 54 of 62




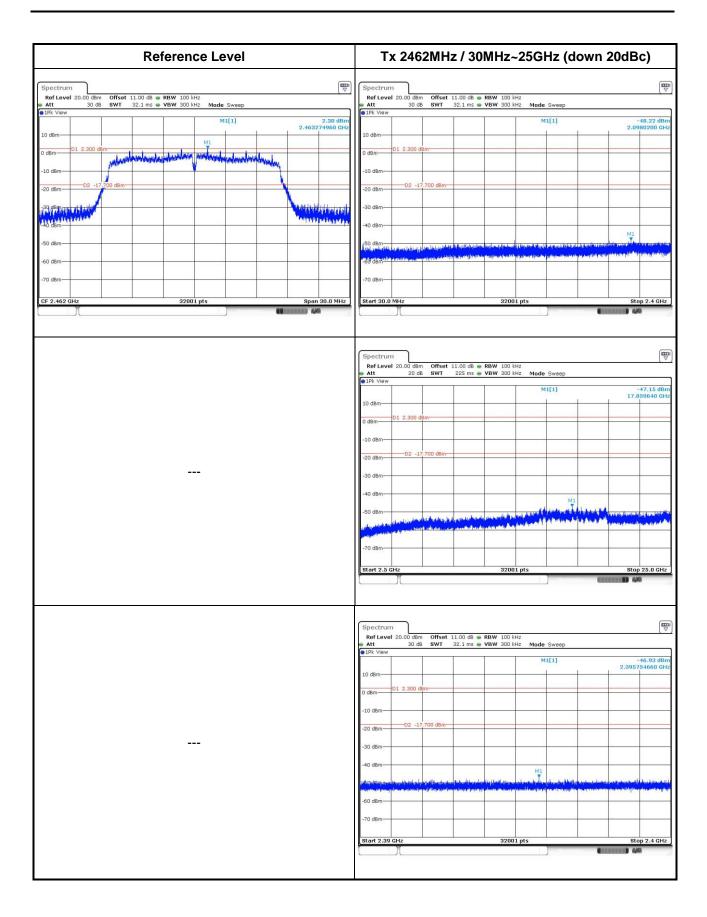

Report No.: FR440102-07AC Page: 55 of 62




802.11n HT20

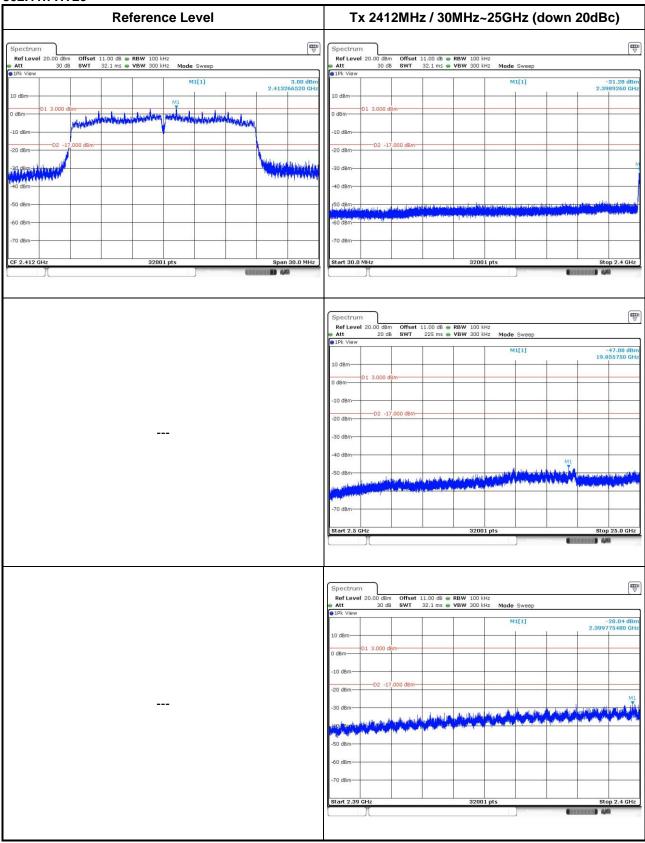


Report No.: FR440102-07AC Page : 56 of 62



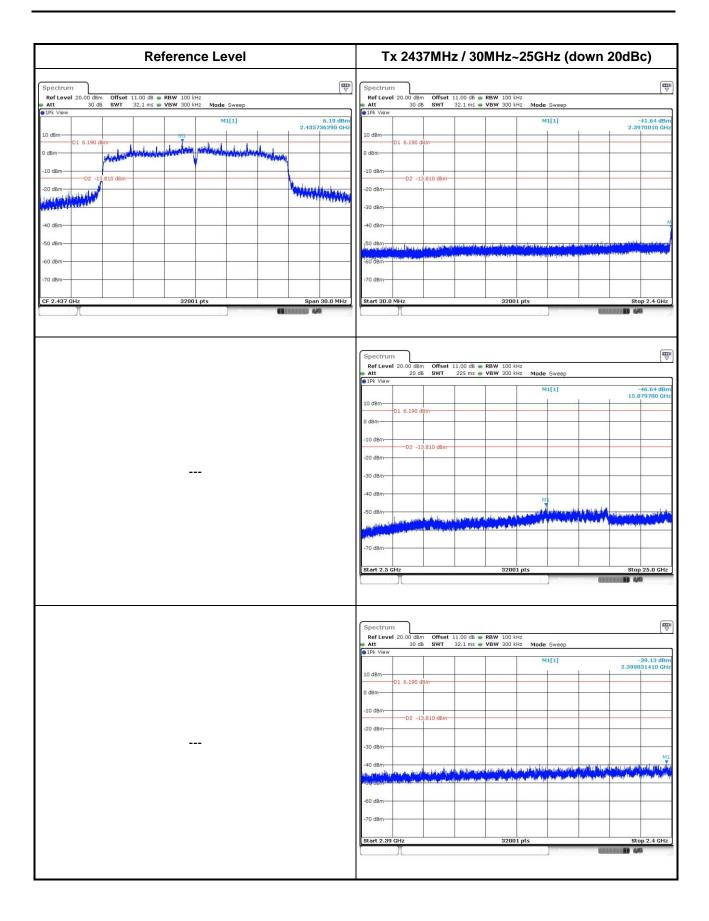

Report No.: FR440102-07AC Page : 57 of 62




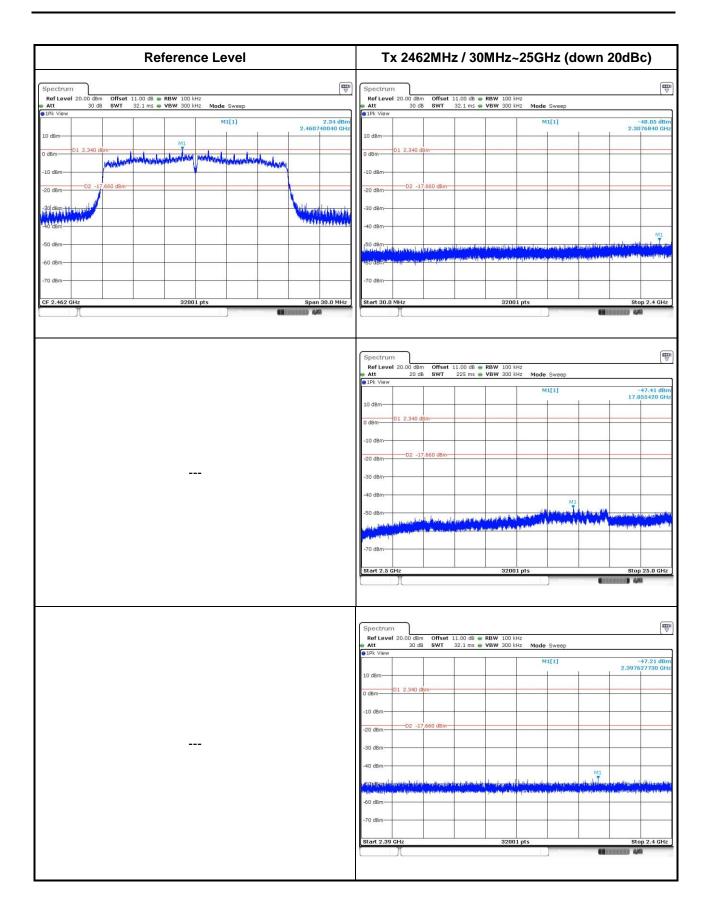

Report No.: FR440102-07AC Page: 58 of 62




802.11n HT40

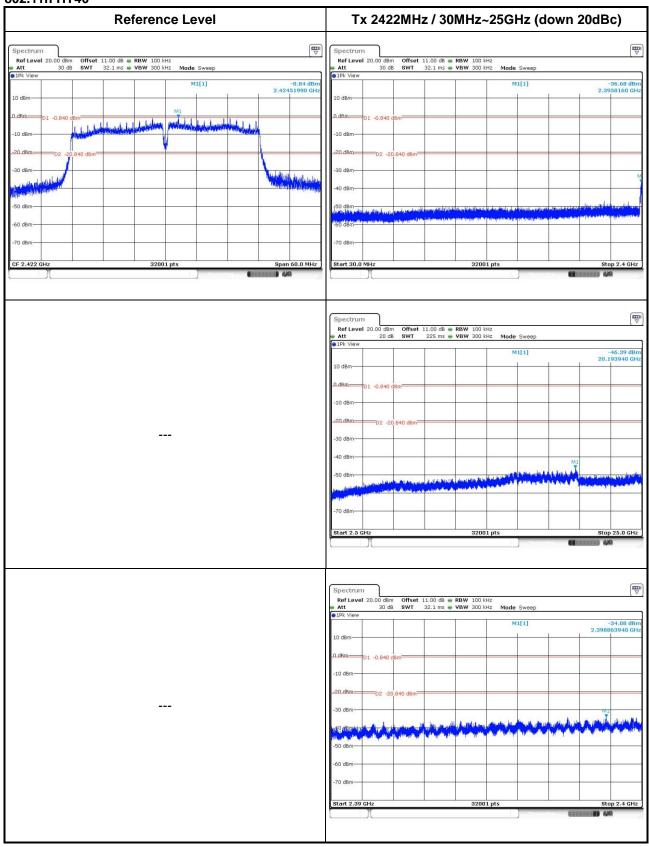


Report No.: FR440102-07AC Page: 59 of 62



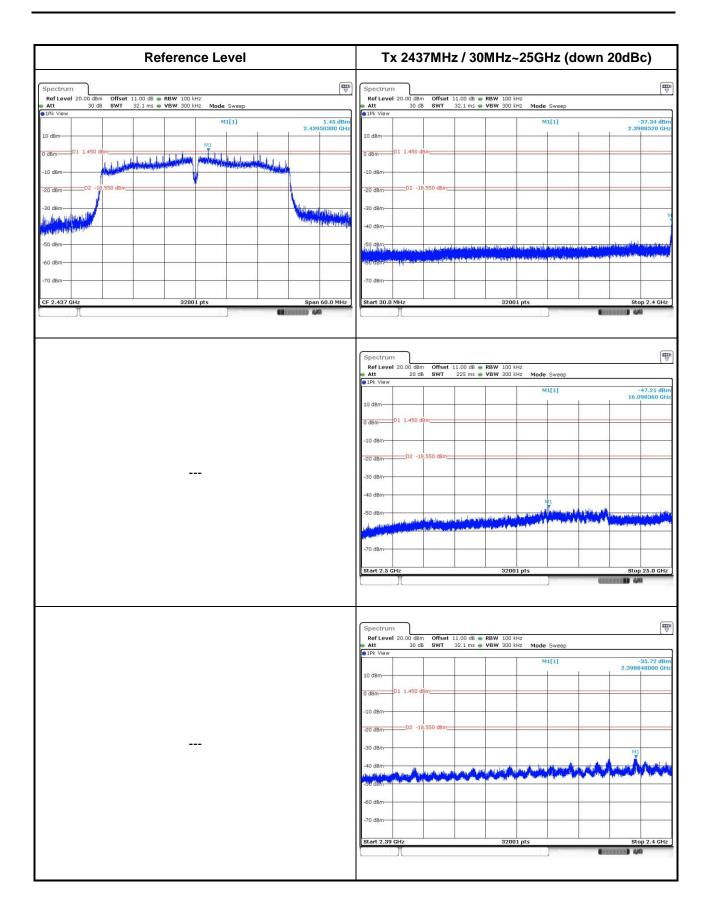

Report No.: FR440102-07AC Page: 60 of 62



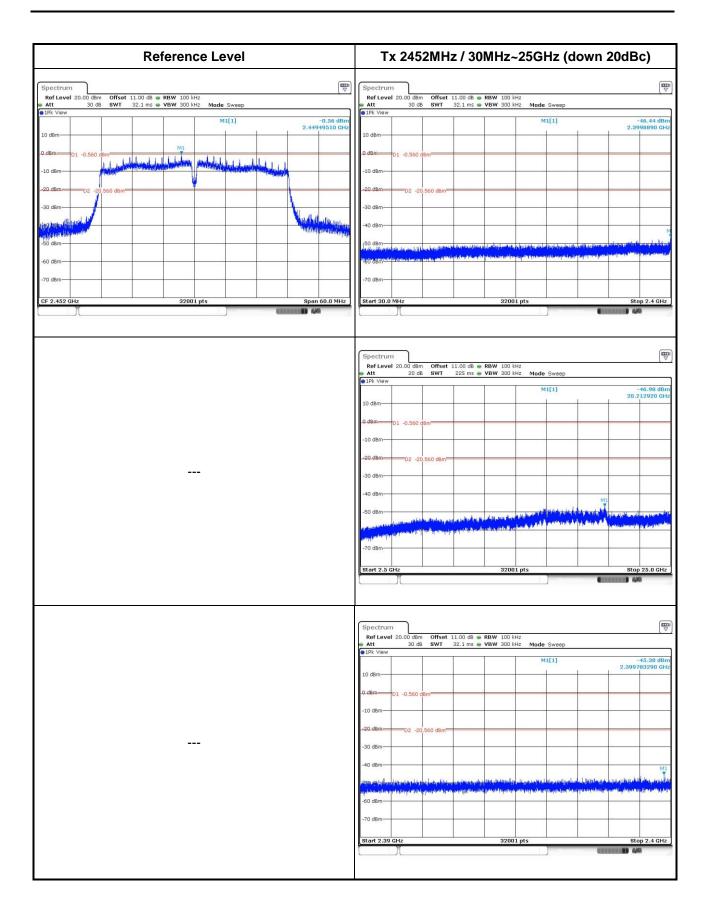

Report No.: FR440102-07AC Page: 61 of 62



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou Kwei Shan

Tel: 886-2-2601-1640 Tel: 886-3-271-8666

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei
City, Taiwan, R.O.C.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan
Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR440102-07AC Page: 62 of 62