



# FCC SAR Test Report

**Equipment** : Wifi Dual Band + BT combo module

**Brand Name** : Ampak

**Model No.** : AP6234A / AP6234AL

**FCC ID** : ZQ6-AP6234A

**Standard** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

**Applicant** : Ampak Technology Inc.  
No.1 Jen Ai Road, Hsinchu  
Industrial Park, Hukou, Hsinchu,  
Taiwan, 30352

The product sample received on Jul.30, 2014 and completely tested on Aug. 22, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Gary Chang / Manager





## Table of Contents

<b>1</b>	<b>STATEMENT OF COMPLIANCE .....</b>	<b>5</b>
1.1	Guidance Standard .....	5
1.2	Testing Location Information .....	5
<b>2</b>	<b>EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
2.1	General Information.....	6
<b>3</b>	<b>RF EXPOSURE LIMITS.....</b>	<b>7</b>
3.1	Uncontrolled Environment.....	7
3.2	Controlled Environment.....	7
<b>4</b>	<b>SPECIFIC ABSORPTION RATE (SAR).....</b>	<b>8</b>
4.1	Introduction.....	8
4.2	SAR Definition .....	8
<b>5</b>	<b>SYSTEM DESCRIPTION AND SETUP .....</b>	<b>9</b>
<b>6</b>	<b>MEASUREMENT PROCEDURES.....</b>	<b>10</b>
6.1	Spatial Peak SAR Evaluation .....	10
6.2	Power Reference Measurement.....	11
6.3	Area Scan.....	11
6.4	Zoom Scan .....	12
6.5	Volume Scan Procedures.....	12
6.6	Power Drift Monitoring.....	12
<b>7</b>	<b>TEST EQUIPMENT LIST .....</b>	<b>13</b>
<b>8</b>	<b>SYSTEM VERIFICATION .....</b>	<b>14</b>
8.1	Tissue Verification .....	14
8.2	System Performance Check Results .....	15
<b>9</b>	<b>RF EXPOSURE POSITIONS .....</b>	<b>16</b>
9.1	SAR Testing for EUT .....	16
<b>10</b>	<b>CONDUCTED RF OUTPUT POWER (UNIT: DBM).....</b>	<b>17</b>
<b>11</b>	<b>SAR TEST RESULTS.....</b>	<b>21</b>
11.1	Body SAR .....	21
11.2	RF energy coupling enhancement .....	23
<b>12</b>	<b>UNCERTAINTY ASSESSMENT.....</b>	<b>25</b>
<b>13</b>	<b>REFERENCES.....</b>	<b>28</b>



**APPENDIX A. Plots of System Performance Check**

**APPENDIX B. Plots of SAR Measurement**

**Appendix C. DASY Calibration Certificate**

**Appendix D. Test setup Photos**



## Revision History



## 1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing as follows.

Exposure Position	Frequency Band	Reported 1g SAR (W/kg)	Equipment Class	Highest Reported 1g SAR (W/kg)
Body	WLAN5.2GHz Band	0.29	NII	0.31
	WLAN5.3GHz Band	0.31		
	WLAN5.6GHz Band	0.28		
	WLAN5.8GHz Band	0.30	DTS	0.36
	WLAN2.4GHz Band	0.36		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

### 1.1 Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802.11abg v01r02

### 1.2 Testing Location Information

Testing Location	
Wen	ADD : No. 13-1, Ln. 19, Wen 33rd St., Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-3180792



## 2 Equipment Under Test (EUT)

### 2.1 General Information

Product Feature & Specification	
Equipment Name	Wifi Dual Band + BT combo module
Brand Name	Ampak
Model Name	AP6234A / AP6234AL <small>Note</small>
FCC ID	ZQ6-AP6234A
Frequency Range	WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5850 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
EUT Stage	Identical Prototype

Note:

The difference between AP6234A and AP6234AL is only 2.4GHz SAW filter as below table.

Brand Name	Model Name	Product Name	Description
Ampak	AP6234A	Wifi Dual Band + BT combo module	Without 2.4G SAW filter
	AP6234AL		With 2.4G SAW filter



## 3 RF Exposure Limits

### 3.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 3.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

#### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
14.02	13.20	13.13

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## 4 Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

## 5 System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

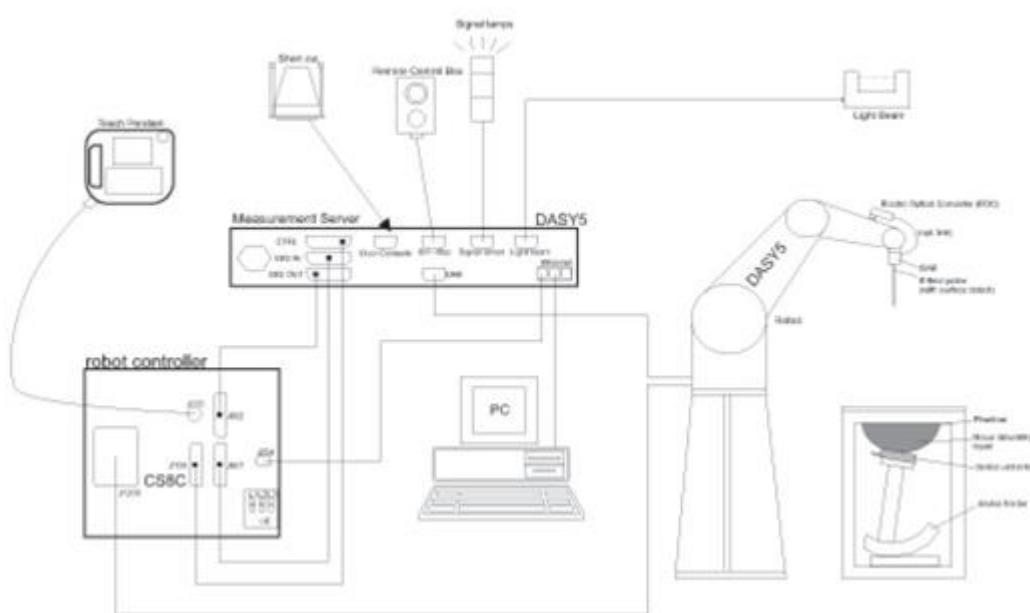



## 6 Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 6.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (g) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (b) Generation of a high-resolution mesh within the measured volume
- (c) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (d) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (e) Calculation of the averaged SAR within masses of 1g and 10g



## 6.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 6.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



## 6.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$  graded grid	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface  $\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 4$ mm  $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

## 6.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 6.6 Power Drift Monitoring

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 7 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Data Acquisition Electronics	DAE4	1424	2014/2/11	2015/2/10
SPEAG	Dosimetric E-Field Probe	EX3DV4	3820	2014/5/15	2015/5/14
SPEAG	2450MHz System Validation Kit	D2450V2	929	2014/2/12	2015/2/11
SPEAG	5000MHz System Validation Kit	D5GHzV2	1171	2014/2/13	2015/2/12
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Mini-Circuits	Power Amplifier	ZHL-42W+	15542	NCR	NCR
Mini-Circuits	Power Amplifier	ZVE-8G+	605601404	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46419201	2014/1/15	2015/1/14
R&S	Spectrum Analyzer	FSP40	100305	2013/10/3	2014/10/2
Agilent	MXG-B RF Vector Signal Generator	N5182B	MY53050081	2014/4/8	2015/4/7
SPEAG	Dielectric Probe Kit	SM DAK 040CA	1146	NCR	NCR
Anritsu	Power Meter	ML2495A	949003	2014/1/28	2015/1/27
Anritsu	Power sensor	MA2411B	917017	2014/1/28	2015/1/27
SPEAG	Flat Phantom ELI5.0	QD OVA 002 AA	1238	NCR	NCR
Wisewind	Thermometer	HTC1	HTC1	2013/12/25	2014/12/24
Wisewind	Thermometer	YF-160A	130504609	2013/12/25	2014/12/24

**General Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
4. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
5. NCR: No calibration request.



## 8 System Verification

### 8.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


#### < Tissue Dielectric Parameter Check Results >

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
2450	22.8	2.005	51.281	1.95	52.7	2.82	-2.69	$\pm 5$	2014/8/22
5200	22.9	5.299	47.706	5.3	49	-0.02	-2.64	$\pm 5$	2014/8/21
5300	22.9	5.428	47.532	5.42	48.9	0.15	-2.80	$\pm 5$	2014/8/21
5600	22.7	5.991	47.13	5.77	48.5	3.83	-2.82	$\pm 5$	2014/8/22
5800	22.9	6.101	46.703	6	48.2	1.68	-3.11	$\pm 5$	2014/8/21

## 8.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/8/22	2450	Body	250	929	3820	1424	14	51.4	56.00	8.949
2014/8/21	5200	Body	100	1171	3820	1424	7.17	74	71.70	-3.108
2014/8/21	5300	Body	100	1171	3820	1424	7.48	75.1	74.80	-0.399
2014/8/22	5600	Body	100	1171	3820	1424	8.43	79.7	84.30	5.772
2014/8/21	5800	Body	100	1171	3820	1424	8.07	74.1	80.70	8.907

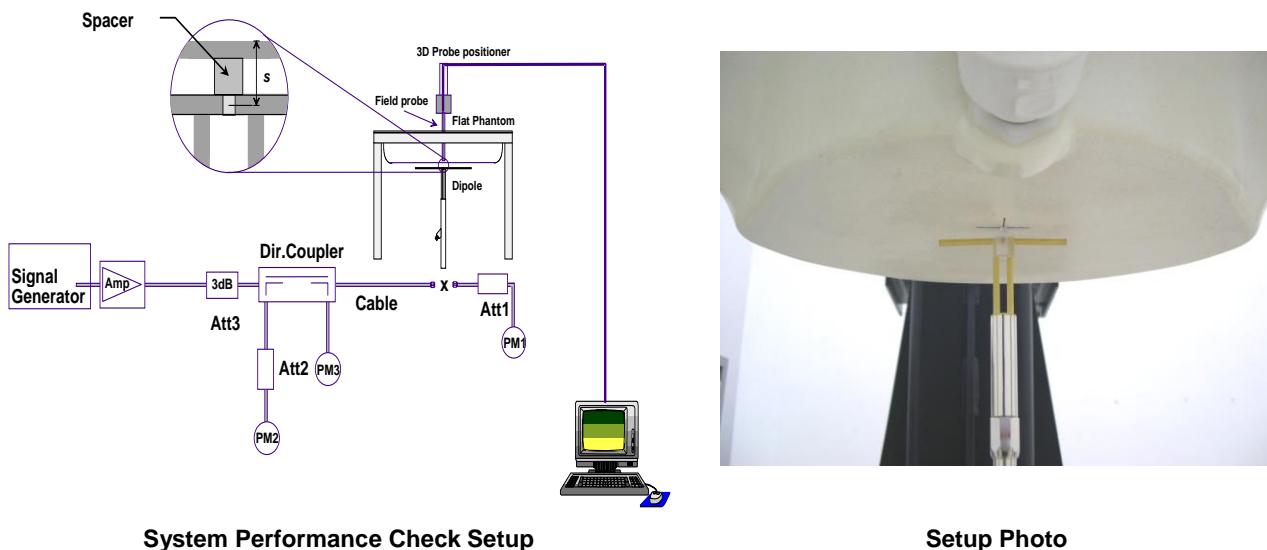

System Performance Check Setup

Setup Photo



## **9 RF Exposure Positions**

### **9.1 SAR Testing for EUT**

Please refer to Appendix D. for the test setup photos.



## 10 Conducted RF Output Power (Unit: dBm)

### <WLAN Conducted Power>

#### General Note:

1. Per FCC KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Per FCC KDB 248227 D01 v01r02, 11g, 11n-HT20 and 11n-HT40 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

### <2.4GHz WLAN Antenna>

Model: AP6234A

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11b	1	2412	1	16.93	17.00
11b	6	2437	1	19.84	20.50
11b	11	2462	1	17.21	17.50
11g	1	2412	6	14.42	14.50
11g	6	2437	6	17.43	17.50
11g	11	2462	6	12.75	13.00
HT20	1	2412	MCS0	14.31	14.50
HT20	6	2437	MCS0	17.26	17.50
HT20	11	2462	MCS0	12.73	13.00
HT40	3	2422	MCS0	13.59	14.00
HT40	6	2437	MCS0	14.33	14.50
HT40	9	2452	MCS0	12.17	12.50

Model: AP6234AL

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11b	1	2412	1	15.53	16.00
11b	6	2437	1	18.92	19.50
11b	11	2462	1	17.18	17.50
11g	1	2412	6	13.88	14.00
11g	6	2437	6	17.40	17.50
11g	11	2462	6	12.68	13.00
HT20	1	2412	MCS0	13.55	14.00
HT20	6	2437	MCS0	17.20	17.50
HT20	11	2462	MCS0	12.69	13.00
HT40	3	2422	MCS0	12.62	13.00
HT40	6	2437	MCS0	14.27	14.50
HT40	9	2452	MCS0	12.09	12.50

**General Note:**

1. Per FCC KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Per FCC KDB 248227 D01 v01r02, 11n/ac-HT20/HT40/VHT20/VHT40 output power is less than 1/4dB higher than 11a mode, thus the SAR can be excluded.
4. For 802.11ac SAR evaluation for each frequency band, 802.11ac VHT80 will be verified at the worst case found in 802.11a SAR testing.
5. Difference between AP6234A and AP6234AL is only 2.4GHz SAW filter. Thus only AP6234A is selected to be the representative model to perform SAR test

**<5.2GHz WLAN Antenna>**

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11a	CH 36	5180	6	15.04	15.50
11a	CH 40	5200	6	15.45	15.50
11a	CH 44	5220	6	15.35	15.50
11a	CH 48	5240	6	15.48	15.50
HT20	CH 36	5180	MCS0	14.91	15.00
HT20	CH 40	5200	MCS0	15.26	15.50
HT20	CH 44	5220	MCS0	15.22	15.50
HT20	CH 48	5240	MCS0	15.37	15.50
HT40	CH 38	5190	MCS0	14.63	15.00
HT40	CH 46	5230	MCS0	16.92	17.00

**<5.3GHz WLAN Antenna>**

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11a	CH 52	5260	6	16.78	17.00
11a	CH 56	5280	6	16.54	17.00
11a	CH 60	5300	6	16.73	17.00
11a	CH 64	5320	6	14.23	14.50
HT20	CH 52	5260	MCS0	16.71	17.00
HT20	CH 56	5280	MCS0	16.42	16.50
HT20	CH 60	5300	MCS0	16.64	17.00
HT20	CH 64	5320	MCS0	14.07	14.50
HT40	CH 54	5270	MCS0	17.09	17.50
HT40	CH 62	5310	MCS0	13.48	13.50

**<5.6GHz WLAN Antenna>**

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11a	CH 100	5500	6	13.81	14.00
11a	CH 104	5520	6	13.92	14.00
11a	CH 108	5540	6	13.55	14.00
11a	CH 112	5560	6	13.53	14.00
11a	CH 116	5580	6	15.22	15.50
11a	CH 132	5660	6	13.32	13.50
11a	CH 136	5680	6	13.58	14.00
11a	CH 140	5700	6	13.09	13.50
HT20	CH 100	5500	MCS0	13.59	14.00
HT20	CH 104	5520	MCS0	13.71	14.00
HT20	CH 108	5540	MCS0	13.42	13.50
HT20	CH 112	5560	MCS0	13.38	13.50
HT20	CH 116	5580	MCS0	15.05	15.50
HT20	CH 132	5660	MCS0	13.18	13.50
HT20	CH 136	5680	MCS0	13.51	14.00
HT20	CH 140	5700	MCS0	13.02	13.50
HT40	CH 102	5510	MCS0	13.55	16.00
HT40	CH 110	5550	MCS0	15.55	16.00
HT40	CH 134	5670	MCS0	15.24	15.50

**<5.8GHz WLAN Antenna>**

Mode	Channel	Frequency (MHz)	Data Rate	Conducted average power (dBm)	Tune up Limit (dBm)
11a	CH 149	5745	6	15.26	15.50
11a	CH 153	5765	6	15.07	15.50
11a	CH 157	5785	6	15.04	15.50
11a	CH 161	5805	6	14.86	15.00
11a	CH 165	5825	6	14.76	15.00
HT20	CH 149	5745	MCS0	15.21	15.50
HT20	CH 153	5765	MCS0	14.98	15.00
HT20	CH 157	5785	MCS0	14.94	15.00
HT20	CH 161	5805	MCS0	14.72	15.00
HT20	CH 165	5825	MCS0	14.63	15.00
HT40	CH 151	5755	MCS0	15.34	15.50
HT40	CH 159	5795	MCS0	15.18	15.50

**<Bluetooth Conducted Power>****General Note:**

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:  
$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR
  - $f(\text{GHz})$  is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Mode	Frequency (MHz)	Conducted average power (dBm)	
		Model: AP6234A	Model: AP6234AL
GFSK	2402	7.73	6.17
GFSK	2441	8.49	7.34
GFSK	2480	<b>8.91</b>	6.75
$\pi/4$ -DQPSK	2402	5.21	3.26
$\pi/4$ -DQPSK	2441	5.71	4.36
$\pi/4$ -DQPSK	2480	5.27	3.33
8DPSK	2402	5.25	3.24
8DPSK	2441	5.83	4.37
8DPSK	2480	5.35	3.32

Mode	Frequency (MHz)	Conducted average power (dBm)	
		Model: AP6234A	Model: AP6234AL
LE-GFSK	2402	5.68	4.02
LE-GFSK	2440	5.87	4.54
LE-GFSK	2480	6.04	3.83

**SAR test exclusion**

Maximum power is 8.91 dBm ( 7.78mW) @ 2480MHz

Per note 1 formula to calculate SAR test exclusion thresholds

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}]$$
$$= 7.78 / 5 * \sqrt{2.480} = 2.45$$

SAR test is not required since calculated value is  $2.45 < 3.0$



## 11 SAR Test Results

### General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$
3. Per KDB 616217 D04v01r01, the additional separation introduced by the contour against a flat phantom is  $< 5 \text{ mm}$  and reported SAR is  $< 1.2 \text{ W/kg}$ , a curved or contoured back surface or edge SAR is not required, more detail information please refer to the setup photo.
4. When the WLAN transmission was verified using a spectrum analyzer.

### 11.1 Body SAR

#### <DTS WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1	2.4 GHz	802.11b	Front Face	2.5	6	2437	19.84	20.5	1.16	-0.11	0.243	0.28
2		802.11b	Rear Face	2.5	6	2437	19.84	20.5	1.16	-0.16	0.312	<b>0.36</b>
3		802.11b	Left Side	2.5	6	2437	19.84	20.5	1.16	-0.16	0.147	0.17
4		802.11b	Right Side	2.5	6	2437	19.84	20.5	1.16	-0.06	0.063	0.07
5		802.11b	Top Side	2.5	6	2437	19.84	20.5	1.16	-0.02	0.021	0.02
6		802.11b	Bottom Side	2.5	6	2437	19.84	20.5	1.16	-0.01	0.032	0.04

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
7	2.4 GHz	802.11b	Front Face	2.5	6	2437	18.92	19.5	1.14	-0.07	0.144	0.16
8		802.11b	Rear Face	2.5	6	2437	18.92	19.5	1.14	-0.01	0.245	<b>0.28</b>
9		802.11b	Left Side	2.5	6	2437	18.92	19.5	1.14	-0.05	0.091	0.10
10		802.11b	Right Side	2.5	6	2437	18.92	19.5	1.14	-0.02	0.060	0.07
11		802.11b	Top Side	2.5	6	2437	18.92	19.5	1.14	-0.07	0.045	0.05
12		802.11b	Bottom Side	2.5	6	2437	18.92	19.5	1.14	-0.06	0.028	0.03

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
34	5.8 GHz	802.11a	Front Face	2.5	149	5745	15.26	15.5	1.06	-0.1	0.165	0.17
35		802.11a	Rear Face	2.5	149	5745	15.26	15.5	1.06	-0.01	0.280	0.30
36		802.11a	Left Side	2.5	149	5745	15.26	15.5	1.06	-0.02	0.281	<b>0.30</b>
37		802.11a	Right Side	2.5	149	5745	15.26	15.5	1.06	-0.07	0.051	0.05
38		802.11a	Top Side	2.5	149	5745	15.26	15.5	1.06	0.07	0.060	0.06
39		802.11a	Bottom Side	2.5	149	5745	15.26	15.5	1.06	-0.06	0.069	0.07
40		802.11n HT40	Left Side	2.5	151	5755	15.34	15.5	1.04	-0.04	0.179	0.19

**<NII WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	5.2 GHz	802.11a	Front Face	2.5	48	5240	15.48	15.5	1.005	-0.03	0.213	0.214
14		802.11a	Rear Face	2.5	48	5240	15.48	15.5	1.005	-0.05	0.190	0.191
15		802.11a	Left Side	2.5	48	5240	15.48	15.5	1.005	0.03	0.223	0.224
16		802.11a	Right Side	2.5	48	5240	15.48	15.5	1.005	-0.07	0.035	0.035
17		802.11a	Top Side	2.5	48	5240	15.48	15.5	1.005	-0.08	0.050	0.050
18		802.11a	Bottom Side	2.5	48	5240	15.48	15.5	1.005	-0.05	0.054	0.054
19		802.11n HT40	Left Side	2.5	46	5230	16.92	17	1.019	-0.19	0.289	<b>0.294</b>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
20	5.3 GHz	802.11a	Front Face	2.5	52	5260	16.78	17	1.05	0.00	0.208	0.22
21		802.11a	Rear Face	2.5	52	5260	16.78	17	1.05	-0.04	0.207	0.22
22		802.11a	Left Side	2.5	52	5260	16.78	17	1.05	-0.05	0.238	0.25
23		802.11a	Right Side	2.5	52	5260	16.78	17	1.05	0.08	0.046	0.05
24		802.11a	Top Side	2.5	52	5260	16.78	17	1.05	-0.08	0.071	0.07
25		802.11a	Bottom Side	2.5	52	5260	16.78	17	1.05	0.07	0.070	0.07
26		802.11n HT40	Left Side	2.5	54	5270	17.09	17.5	1.10	-0.18	0.279	<b>0.31</b>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
27	5.6 GHz	802.11a	Front Face	2.5	116	5580	15.22	15.5	1.07	-0.02	0.246	0.26
28		802.11a	Rear Face	2.5	116	5580	15.22	15.5	1.07	-0.04	0.227	0.24
29		802.11a	Left Side	2.5	116	5580	15.22	15.5	1.07	-0.09	0.263	<b>0.28</b>
30		802.11a	Right Side	2.5	116	5580	15.22	15.5	1.07	-0.07	0.035	0.04
31		802.11a	Top Side	2.5	116	5580	15.22	15.5	1.07	0.01	0.054	0.06
32		802.11a	Bottom Side	2.5	116	5580	15.22	15.5	1.07	-0.05	0.071	0.08
33		802.11a	Left Side	2.5	110	5550	15.55	16	1.11	-0.04	0.199	0.22

**<Simultaneous Transmission SAR>**

Simultaneous Transmission SAR evaluation is not required since WiFi 2.4GHz and WiFi 5GHz ,WiFi and Bluetooth can not transmit simultaneously.



## 11.2 RF energy coupling enhancement

### General Note:

1. Per KDB447498 v05r02, the tip of SAR probe is positioned at a distance of half the probe tip diameter, rounded to the nearest mm, from the phantom surface; the probe tip diameter is 2.5 mm, thus probe tip is positioned at a distance 1.25 mm to the phantom surface.
2. Percent change = [(Measured Peak Reported SAR value – initial Peak Reported SAR) / Initial Peak Reported SAR]\*100%
3. Per KDB447498 v05r02, when there is more than 15% variation in the single-point measurements at each position, more measurements are required to ensure a representative high range value is recorded. The highest of the single-point SAR values, adjusted for tune-up tolerance, should be reported for each position. When the highest measured single-point SAR among all positions is 25% greater than that measured with the device positioned at 5 mm from the phantom, a complete 1-g SAR evaluation is required for that test configuration at the device position producing the highest single-point SAR.

Mode	Position	Antenna Distance (mm)	Average power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
802.11b	Front Face	0	19.84	20.5	1.164	11.385	13.254	-
		5	19.84	20.5	1.164	10.488	12.209	-8%
		10	19.84	20.5	1.164	5.267	6.131	-54%
	Rear Face	0	19.84	20.5	1.164	22.3	25.960	-
		5	19.84	20.5	1.164	9.7	11.292	-57%
	Left Side	0	19.84	20.5	1.164	7.184	8.363	-
		5	19.84	20.5	1.164	5.797	6.748	-19%
		10	19.84	20.5	1.164	2.568	2.989	-64%
	Right Side	0	19.84	20.5	1.164	1.06	1.234	-
		5	19.84	20.5	1.164	0.5649	0.658	-47%
		10	19.84	20.5	1.164	0.3138	0.365	-70%
	Top Side	0	19.84	20.5	1.164	0.607	0.707	-
		5	19.84	20.5	1.164	0.164	0.191	-73%
	Bottom Side	0	19.84	20.5	1.164	0.265	0.308	-
		5	19.84	20.5	1.164	0.092	0.107	-65%

Mode	Position	Antenna Distance (mm)	Average power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
5.2 GHz / 802.11a	Front Face	0	15.48	15.5	1.005	1.61	1.617	-
		5	15.48	15.5	1.005	0.3326	0.334	-79%
	Rear Face	0	15.48	15.5	1.005	1.615	1.622	-
		5	15.48	15.5	1.005	1.064	1.069	-34%
		10	15.48	15.5	1.005	0.4966	0.499	-69%
	Left Side	0	15.48	15.5	1.005	9.61	9.654	-
		5	15.48	15.5	1.005	2.09	2.100	-78%
	Right Side	0	15.48	15.5	1.005	0.173	0.174	-
		5	15.48	15.5	1.005	0.0799	0.080	-54%
	Top Side	0	15.48	15.5	1.005	0.3102	0.312	-
		5	15.48	15.5	1.005	0.1015	0.102	-67%
	Bottom Side	0	15.48	15.5	1.005	0.05928	0.060	-
		5	15.48	15.5	1.005	0.03392	0.034	-43%
		10	15.48	15.5	1.005	0.02501	0.025	-58%



Mode	Position	Antenna Distance (mm)	Average power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
5.3 GHz / 802.11a	Front Face	0	16.78	17	1.052	11.51	12.108	-
		5	16.78	17	1.052	1.77	1.862	-85%
	Rear Face	0	16.78	17	1.052	3.667	3.858	-
		5	16.78	17	1.052	1.596	1.679	-56%
	Left Side	0	16.78	17	1.052	15.92	16.747	-
		5	16.78	17	1.052	2.217	2.332	-86%
	Right Side	0	16.78	17	1.052	0.2278	0.240	-
		5	16.78	17	1.052	0.2015	0.212	-12%
		10	16.78	17	1.052	0.1391	0.146	-39%
	Top Side	15	16.78	17	1.052	0.09917	0.104	-56%
		0	16.78	17	1.052	0.3285	0.346	-
		5	16.78	17	1.052	0.147	0.155	-55%
	Bottom Side	0	16.78	17	1.052	0.8862	0.932	-
		5	16.78	17	1.052	0.3572	0.376	-60%

Mode	Position	Antenna Distance (mm)	Average power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
5.6 GHz / 802.11a	Front Face	0	15.22	15.5	1.067	3.265	3.482	-
		5	15.22	15.5	1.067	0.7303	0.779	-78%
	Rear Face	0	15.22	15.5	1.067	2.575	2.746	-
		5	15.22	15.5	1.067	0.8019	0.855	-69%
	Left Side	0	15.22	15.5	1.067	7.394	7.886	-
		5	15.22	15.5	1.067	1.183	1.262	-84%
	Right Side	0	15.22	15.5	1.067	0.3026	0.323	-
		5	15.22	15.5	1.067	0.206	0.220	-32%
		10	15.22	15.5	1.067	0.1383	0.148	-54%
	Top Side	0	15.22	15.5	1.067	0.1464	0.156	-
		5	15.22	15.5	1.067	0.0616	0.066	-58%
	Bottom Side	0	15.22	15.5	1.067	0.5779	0.616	-
		5	15.22	15.5	1.067	0.1966	0.210	-66%

Mode	Position	Antenna Distance (mm)	Average power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
5.8 GHz / 802.11a	Front Face	0	15.26	15.5	1.057	1.166	1.232	-
		5	15.26	15.5	1.057	0.5255	0.555	-55%
	Rear Face	0	15.26	15.5	1.057	7.05	7.451	-
		5	15.26	15.5	1.057	1.842	1.947	-74%
	Left Side	0	15.26	15.5	1.057	6.219	6.572	-
		5	15.26	15.5	1.057	1.883	1.990	-70%
	Right Side	0	15.26	15.5	1.057	0.4789	0.506	-
		5	15.26	15.5	1.057	0.2739	0.289	-43%
		10	15.26	15.5	1.057	0.166	0.175	-65%
	Top Side	0	15.26	15.5	1.057	0.5081	0.537	-
		5	15.26	15.5	1.057	0.1553	0.164	-69%
	Bottom Side	0	15.26	15.5	1.057	0.9696	1.025	-
		5	15.26	15.5	1.057	0.3297	0.348	-66%



## 12 Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

### Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value ( $\pm\%$ )	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty ( $\pm\%$ ) (1g)
<b>Measurement System</b>					
Probe Calibration	6.0	Normal	1.0	1.0	6.0
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	1.9
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	3.9
Boundary effects	1.0	Rectangular	$\sqrt{3}$	1.0	0.6
Linearity	4.7	Rectangular	$\sqrt{3}$	1.0	2.7
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1.0	0.6
Modulation Response	2.4	Rectangular	$\sqrt{3}$	1.0	1.4
Readout Electronics	0.3	Normal	1.0	1.0	0.3
Response Time	0.8	Rectangular	$\sqrt{3}$	1.0	0.5
Integration Time	2.6	Rectangular	$\sqrt{3}$	1.0	1.5
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1.0	1.7
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1.0	1.7
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1.0	0.2
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1.0	1.7
Max. SAR Eval.	2.0	Rectangular	$\sqrt{3}$	1.0	1.2
<b>Dipole Related</b>					
Device Positioning	2.9	Normal	1.0	1.0	2.9
Device Holder	3.6	Normal	1.0	1.0	3.6
Power Drift	5.0	Rectangular	$\sqrt{3}$	1.0	2.9
Power Scaling	0.0	Rectangular	$\sqrt{3}$	1.0	0.0
<b>Phantom and Tissue parameters</b>					
Phantom Uncertainty	6.1	Rectangular	$\sqrt{3}$	1.0	3.5
SAR correction	1.9	Normal	1.0	1.0	1.9
Liquid Conductivity (measurement)	2.0	Normal	1.0	0.8	1.6
Liquid Permittivity (measurement)	2.1	Normal	1.0	0.3	0.5
Temp. unc. - Conduct	3.4	Rectangular	$\sqrt{3}$	0.8	1.5
Temp. unc. - Permittivity	0.4	Rectangular	$\sqrt{3}$	0.2	0.1
<b>Combined Standard Uncertainty</b>					11.2
<b>Coverage Factor for 95 %</b>					Kp=2
<b>Expanded Uncertainty</b>					22.4

**Uncertainty Budget for frequency range 30 MHz to 3 GHz**



Error Description	Uncertainty Value ( $\pm\%$ )	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty ( $\pm\%$ ) (1g)
<b>Measurement System</b>					
Probe Calibration	6.6	Normal	1.0	1.0	6.6
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	1.9
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	3.9
Boundary effects	2.0	Rectangular	$\sqrt{3}$	1.0	1.2
Linearity	4.7	Rectangular	$\sqrt{3}$	1.0	2.7
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1.0	0.6
Modulation Response	2.4	Rectangular	$\sqrt{3}$	1.0	1.4
Readout Electronics	0.3	Normal	1.0	1.0	0.3
Response Time	0.8	Rectangular	$\sqrt{3}$	1.0	0.5
Integration Time	2.6	Rectangular	$\sqrt{3}$	1.0	1.5
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1.0	1.7
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1.0	1.7
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1.0	0.5
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1.0	3.9
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1.0	2.3
<b>Dipole Related</b>					
Device Positioning	2.9	Normal	1.0	1.0	2.9
Device Holder	3.6	Normal	1.0	1.0	3.6
Power Drift	5.0	Rectangular	$\sqrt{3}$	1.0	2.9
Power Scaling	0.0	Rectangular	$\sqrt{3}$	1.0	0.0
<b>Phantom and Tissue parameters</b>					
Phantom Uncertainty	6.6	Rectangular	$\sqrt{3}$	1.0	3.8
SAR correction	1.9	Normal	1.0	1.0	1.9
Liquid Conductivity (measurement)	2.0	Normal	1.0	0.8	1.6
Liquid Permittivity (measurement)	2.1	Normal	1.0	0.3	0.5
Temp. unc. - Conduct	3.4	Rectangular	$\sqrt{3}$	0.8	1.5
Temp. unc. - Permittivity	0.4	Rectangular	$\sqrt{3}$	0.2	0.1
<b>Combined Standard Uncertainty</b>					
Coverage Factor for 95 %					
Expanded Uncertainty					

**Uncertainty Budget for frequency range 3 GHz to 6 GHz**



## 13 References

- [1] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [2] EN 50566:2013, "Product standard to demonstrate compliance of radio frequency fields from handheld and body-mounted wireless communication devices used by the general public (30 MHz - 6 GHz)" March 2013.
- [3] EN 62311:2008, "Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz)", January 2008
- [4] EN 62209-2:2010, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices. Human models, instrumentation, and procedures. Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", August 2010
- [5] EN 62479:2010 "Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)", December 2010
- [6] SPEAG DASY System Handbook