



**SGS-CSTC Standards  
Technical Services  
(Shanghai) Co., Ltd.**

FCC ID: ZQ8RC305A

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666  
Fax: +86 (0) 21 6191 5655  
ee.shanghai@sgs.com

Report No.: SHEM130200023601  
Page: 1 of 25

## **FCC TEST REPORT**

**Application No. :** SHEM1302000236RF  
**Applicant:** Philips Electronics (Suzhou) Co.,Ltd  
209 ZhuYuan Road, Building B-3rd, 19~21 floor, Suzhou new district, Suzhou  
**FCC ID:** ZQ8RC305A  
**Fundamental Frequency :** 2425MHz-2475MHz  
**Equipment Under Test (EUT):**  
**EUT Name:** Remote Control  
**Brand Name:** Not supplied by the client  
**Model No:** RC3053701/01BR  
**Remark:** Final customer Model No. is DIRECTV RC71  
**Standards:** CFR 47 FCC PART 15 SUBPART C, Section 15.249,  
ANSI C63.10: 2009  
**Date of Receipt:** Jan. 13, 2013  
**Date of Test:** Jan. 15, 2013 to Feb. 25, 2013  
**Date of Issue:** Mar. 12, 2013  
**Test Result :** **PASS \***

\* In the configuration tested, the EUT complied with the standards specified above

Tony Wu

**E&E Section Manager**

**SGS-CSTC (Shanghai) Co., Ltd.**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.


The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## Version

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
00	/	Mar. 01, 2013	/	Original
01	5.2.2, 5.2.4	Mar. 12, 2013	Jim	Update duty cycle from -20dB to -20.35dB.

<b>Authorized for issue by:</b>			
<b>Engineer</b>		Jim Xu  Print Name	  Date(Feb. 25, 2013)
<b>Clerk</b>		Amy Wang  Print Name	  Date(Mar. 12, 2013)
<b>Reviewer</b>		Keny Xu  Print Name	  Date(Mar. 12, 2013)



## 2 Test Summary

Test	Standard Paragraph	Result
Antenna requirement	Section 15.203	PASS
Field Strength of Fundamental	Section 15.249 (a)	PASS
Field Strength of Unwanted Emissions	Section 15.209 & Section 15.249	PASS
20dB Occupied Bandwidth	Section 15.215 (c)	PASS
Band Edge	Section 15.249 (a) & 15.205(c)	PASS
AC Power line conducted emission	15.207	N/A <sup>1)</sup>

Note: N/A = Not Applicable.

Remark<sup>1)</sup>: This test was not performed because the EUT operate on battery power only and can not be plugged into the AC public mains.



### 3 Contents

	Page
<b>1 COVER PAGE</b>	<b>1</b>
<b>VERSION</b>	<b>2</b>
<b>2 TEST SUMMARY</b>	<b>3</b>
<b>3 CONTENTS</b>	<b>4</b>
<b>4 GENERAL INFORMATION</b>	<b>5</b>
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING	5
4.6 TEST LOCATION	5
4.7 MODE OF OPERATION DURING THE TEST / TEST PERIPHERALS USED	6
4.8 DEVIATION FROM STANDARDS	6
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
4.10 TEST FACILITY	6
4.11 TEST EQUIPMENTS LIST	7
4.12 E.U.T. OPERATION	8
<b>5 TEST PROCEDURE &amp; MEASUREMENT DATA</b>	<b>9</b>
5.1 ANTENNA REQUIREMENT	9
5.2 TEST PROCEDURE & MEASUREMENT DATA	10
5.2.1 <i>Test procedure</i>	10
5.2.2 <i>Fundamental emission</i>	12
5.2.3 <i>Radiated emission below 1GHz</i>	13
5.2.4 <i>Radiated emission above 1GHz</i>	15
5.2.5 <i>Band Edge</i>	19
5.2.6 <i>20dB Occupied Bandwidth</i>	23



## 4 General Information

### 4.1 Client Information

Applicant: Philips Electronics (Suzhou) Co.,Ltd  
Address of Applicant: 209 ZhuYuan Road, Building B-3rd, 19~21 floor, Suzhou new district, Suzhou  
Manufacturer: Philips Electronics (Suzhou) Co.,Ltd  
Address of Manufacturer: 209 ZhuYuan Road, Building B-3rd, 19~21 floor, Suzhou new district, Suzhou

### 4.2 General Description of E.U.T.

EUT Name: Remote Control  
Brand Name: Not supplied by the client  
Model No: RC3053701/01BR  
Remark: Final customer Model No. is DIRECTV RC71

### 4.3 Details of E.U.T.

EUT Power Supply: DC 3V (Battery Powered: 1.5V\*2)  
Modulation Type: O-QPSK  
Operation Frequency: The EUT application supports only 3 RF-channels; these channels are the following:  
CH15: 2425 MHz (Low Channel)  
CH20: 2450 MHz (Middle Channel)  
CH25: 2475 MHz (High Channel)  
Hardware Version: Not supplied by client  
Software Version: Not supplied by client

### 4.4 Description of Support Units

Name	Model No.	Remark
NA	NA	NA

### 4.5 Standards Applicable for Testing

CFR 47 FCC PART 15 SUBPART C, Section 15.249,  
ANSI C63.10: 2009

### 4.6 Test Location

All tests were performed at:  
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab  
No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.  
Tel:+86 21 6191 5666 Fax:+86 21 6191 5655  
No tests were sub-contracted.



#### **4.7 Mode of operation during the test / Test peripherals used**

While testing the EUT under RF transmitting mode, the internal modulation was used. Since the EUT is a portable device, so it was set up and tested in three axis (X-Lie Down, Y-Lie on Side and Z-Stand up). We have pre-tested in the three axis, and find the worst case is as below.

<b>EUT orientation (Axis)</b>	<b>Measuring Antenna (Polarization)</b>
X (Lie down)	Vertical
Z (Stand up)	Horizontal

In this report, the test data under worse case is recorded only.

#### **4.8 Deviation from Standards**

None.

#### **4.9 Other Information Requested by the Customer**

None.

#### **4.10 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

Date of expiry: 2014-07-26.

- FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3172 and C-3514 respectively. Date of Registration: 2009-11-30. Date of Expiry: 2012-03-17.



#### 4.11 Test Equipments List

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-6-3	2013-6-1
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-6-3	2013-6-1
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-3-12	2013-3-10
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-6-3	2013-6-1
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-7	2013-10-5
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P	--	20121-10-13	2013-10-11
7	CLAMP METER	FLUKE	316	86080010	2012-04-22	2012304-20
8	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-13	2013-10-11
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2012-6-17	2013-6-16
11	Tunable Notch Filter	Wainwright instruments GmbH	WRCT1800.0/2000.0-0.2/40-5SSK	11	2013-1-24	2014-1-22
12	Tunable Notch Filter	Wainwright instruments GmbH	WRCT800.0/88 0.0-0.2/40-5SSK	9	2013-1-24	2014-1-22
13	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2012-4-8	2013-4-7
14	Low nosie amplifier	TESEQ	LNA6900	70133	2012-7-5	2013-7-4
15	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-04	2013-06-03
16	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2012-05-07	2013-05-06
18	AVG Power Sensor	Rohde & Schwarz	NRP-Z22	1137	2012-05-07	2013-05-06
20	Power meter	Rohde & Schwarz	NRP	101641	2012-05-05	2013-05-04



## **4.12 E.U.T. Operation**

Input voltage:	3VDC (Battery 2*1.5V)
Operating Environment:	
Temperature:	22 - 25 °C
Humidity:	50-60 % RH
Atmospheric Pressure:	1010 mbar
EUT Operation:	<p>The EUT has been tested under operating condition. Test program was used to control the EUT for staying in continuous Transmitting mode is programmed.</p> <p>Channel low (2425MHz), Channel mid(2450MHz), Channel high(2475MHz).</p>



## 5 Test Procedure & Measurement Data

### 5.1 Antenna requirement

Standard Requirement: FCC Part 15C Section 15.203

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Result:

The EUT antenna is internal Antenna. It comply with the standard requirement.



## 5.2 Test Procedure & Measurement Data

### 5.2.1 Test procedure

Test Requirement:	FCC Part15 C Section 15.249(a) & (d)	
Test Method:	FCC Part15 C Section 15.249 & ANSI C63.10	
Test Date:	Jan. 15, 2013 to Feb. 25, 2013	
Measurement Distance:	3m	
Frequency range	30 MHz - 25GHz for transmitting mode. Test instrumentation resolution bandwidth/Video bandwidth 120 kHz/300KHz (30 MHz - 1000 MHz), QP Detector 1 MHz/1MHz (1GHz-25GHz) PK Detector 1MHz/10Hz (1GHz-25GHz) PK Detector	
Operation:	Receive antenna scan height 1 - 4 m, polarization Vertical/ Horizontal, a turntable rotate through 360° in the horizontal plane and it is used to support the test sample at 0.8m above the ground plane, the EUT positional on X,Y,Z three axis.	

#### Requirements:

##### FCC Part 15.249(a)

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m @ 3m)	Field Strength of Harmonics (dB $\mu$ V/m @ 3m)
902 to 928	94.0	54.0
<b>2400 to 2483.5</b>	<b>94.0</b>	<b>54.0</b>
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

##### FCC Part 15.249(d)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

#### Remark:

The fundamental frequency of the EUT is 2425MHz , 2450MHz and 2475MHz.

The limit for average field strength dB $\mu$ V/m for the fundamental frequency = 94.0 dB $\mu$ V/m.

The limit for peak field strength dB $\mu$ V/m for the fundamental frequency = 114.0 dB $\mu$ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB $\mu$ V/m for the harmonics = 54.0 dB $\mu$ V/m.



The limit for peak field strength dB $\mu$ V/m for the harmonics = 74.0 dB $\mu$ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB $\mu$ V/m in 15.209. Here the limit for the other emission is 54.0 dB $\mu$ V/m.

**Test Procedure:** The procedure used was ANSI Standard C63.10:2009. The measurement receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was turned to produce the

maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

### Test Configuration:

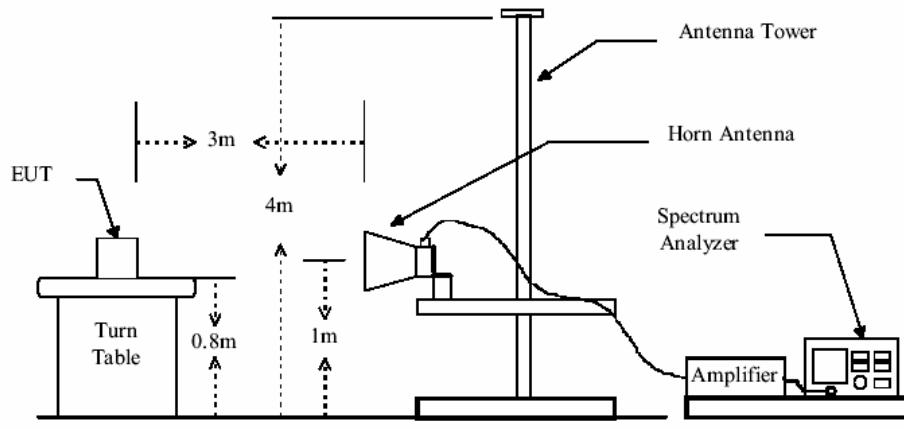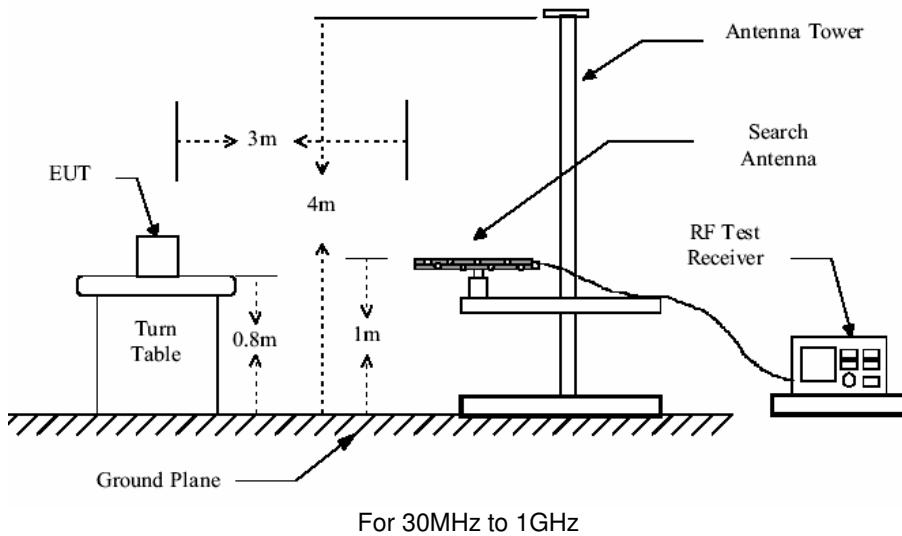

The field strength is calculated by adding the Antenna Factor, Cable Loss & preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level (Result) = Receiver Reading + Corrected Factor

Corrected Factor = Antenna Factor + Cable Loss - Preamplifier Factor

Margin = Result - Limit



## 5.2.2 Fundamental emission

Peak Value:

Frequency (MHz)	Corrected Factor (dB/m)	Read Level (dB $\mu$ V)	PK Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Polarization (H/V)
2425	-6.50	98.74	92.24	114	-21.76	V
2425	-6.50	101.95	95.45	114	-18.55	H
2450	-6.46	102.66	96.20	114	-17.80	V
2450	-6.46	100.39	93.93	114	-20.07	H
2475	-6.42	99.99	93.57	114	-20.43	V
2475	-6.42	103.05	96.63	114	-17.37	H


Average Value:

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Polarization (H/V)
2425	-20.35	92.24	71.89	94	-22.11	V
2425	-20.35	95.45	75.10	94	-18.90	H
2450	-20.35	96.20	75.85	94	-18.15	V
2450	-20.35	93.93	73.58	94	-20.42	H
2475	-20.35	93.57	73.22	94	-20.78	V
2475	-20.35	96.63	76.28	94	-17.72	H

Remark: AV Value = PK Value + Duty Cycle Correction Factor (-20.35dB)

**5.2.3 Radiated emission below 1GHz**


Vertical: Quasi-Peak Measurement

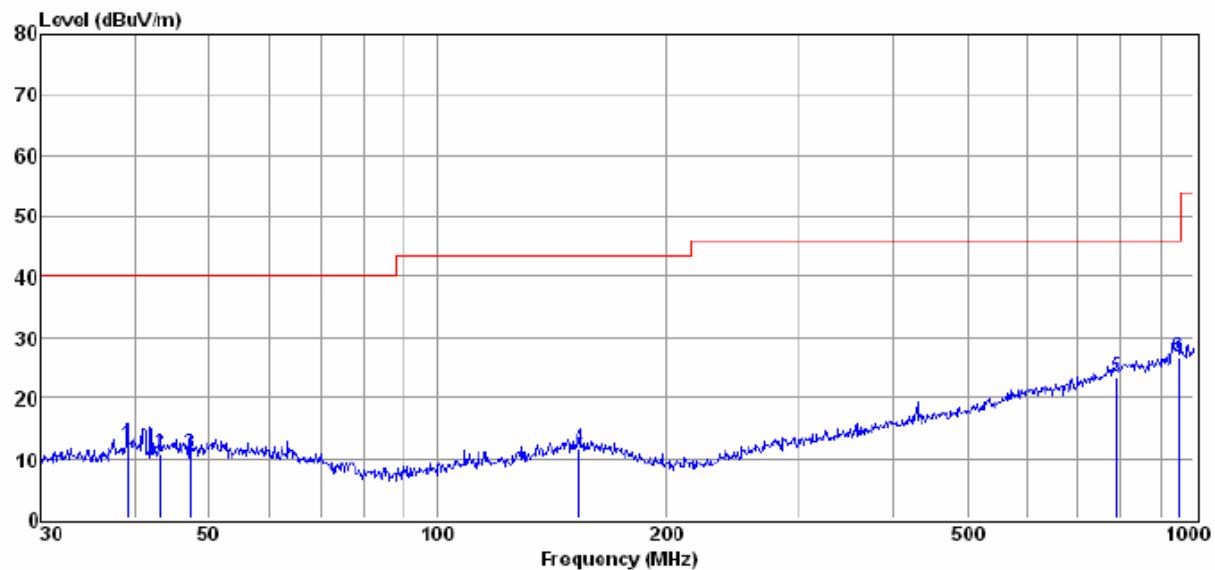

Item (Mark)	Freq. (MHz)	Read Level (dB $\mu$ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB $\mu$ V/m )	Limit Line (dB $\mu$ V/m )	Over Limit (dB)	Detector	Polarization
1	38.89	23.85	13.10	24.70	0.54	12.79	40.00	-27.21	QP	VERTICAL
2	43.05	21.61	13.18	24.70	0.58	10.67	40.00	-29.33	QP	VERTICAL
3	47.16	21.73	12.97	24.70	0.62	10.62	40.00	-29.38	QP	VERTICAL
4	154.28	22.26	12.66	24.70	1.29	11.51	43.50	-31.99	QP	VERTICAL
5	787.85	21.76	22.26	24.00	3.42	23.44	46.00	-22.56	QP	VERTICAL
6	952.09	22.61	23.92	23.79	3.80	26.54	46.00	-19.46	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor  
2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

## Horizontal: Quasi-Peak Measurement

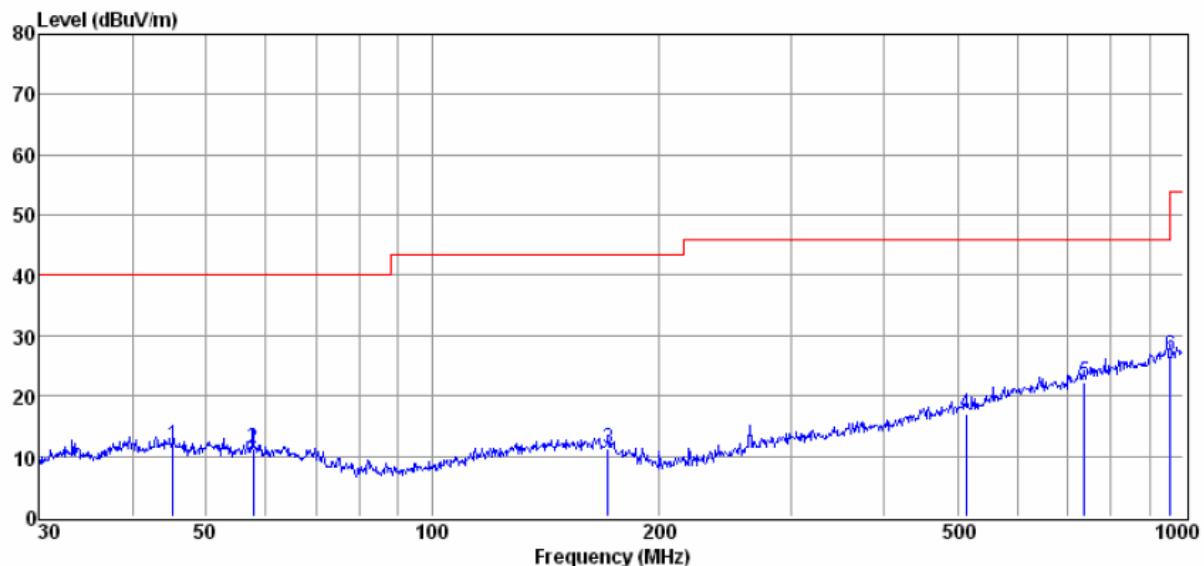

Item (Mark)	Freq. (MHz)	Read Level (dB $\mu$ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB $\mu$ V/m )	Limit Line (dB $\mu$ V/m )	Over Limit (dB)	Detector	Polarization
1	45.22	22.70	13.09	24.70	0.60	11.69	40.00	-28.31	QP	HORIZONTAL
2	57.80	23.03	12.33	24.70	0.71	11.37	40.00	-28.63	QP	HORIZONTAL
3	171.39	22.38	12.13	24.60	1.37	11.28	43.50	-32.22	QP	HORIZONTAL
4	513.63	21.78	16.83	24.30	2.66	16.97	46.00	-29.03	QP	HORIZONTAL
5	737.07	21.78	21.29	24.05	3.28	22.30	46.00	-23.70	QP	HORIZONTAL
6	958.79	22.63	23.97	23.76	3.82	26.66	46.00	-19.34	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

**5.2.4 Radiated emission above 1GHz****Operation Mode: TX Low CH (2425MHz)**

Vertical: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4850.000	56.57	peak	0.01	56.58	74.00	-17.42
2	7275.000	62.67	peak	6.59	69.26	74.00	-4.74
3	7627.000	40.35	peak	7.73	48.08	74.00	-25.92
4	9354.250	38.10	peak	11.34	49.44	74.00	-24.56
5	9700.000	39.64	peak	11.61	51.25	74.00	-22.75
6	12125.000	43.34	peak	8.52	51.86	74.00	-22.14

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4850	-20.35	56.58	36.23	54	-17.77
7275	-20.35	69.26	48.91	54	-5.09

Horizontal: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4850.000	62.51	peak	0.01	62.52	74.00	-11.48
2	7275.000	61.44	peak	6.59	68.03	74.00	-5.97
3	9554.000	37.56	peak	11.83	49.39	74.00	-24.61
4	9700.000	37.53	peak	11.61	49.14	74.00	-24.86
5	11175.500	38.66	peak	9.70	48.36	74.00	-25.64
6	12125.000	42.22	peak	8.52	50.74	74.00	-23.26

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4850	-20.35	62.52	42.17	54	-11.83
7275	-20.35	68.03	47.68	54	-6.32

Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.

Remark 3: AV Value = PK Value + Duty Cycle Correction Factor (-20.35dB)

Remark 4: No other radiation has been found.



**Operation Mode: TX Mid CH (2450MHz)**

Vertical: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4900.000	55.96	peak	0.21	56.17	74.00	-17.83
2	7350.000	60.74	peak	6.97	67.71	74.00	-6.29
3	9377.750	37.43	peak	11.43	48.86	74.00	-25.14
4	9800.000	38.63	peak	11.47	50.10	74.00	-23.90
5	11152.000	38.73	peak	9.73	48.46	74.00	-25.54
6	12256.500	42.02	peak	8.18	50.20	74.00	-23.80

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4900	-20.35	56.17	35.82	54	-18.18
7350	-20.35	67.71	47.36	54	-6.64

Horizontal: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4900.000	60.25	peak	0.21	60.46	74.00	-13.54
2	7350.000	59.77	peak	6.97	66.74	74.00	-7.26
3	7427.250	40.67	peak	7.36	48.03	74.00	-25.97
4	9577.500	37.38	peak	11.79	49.17	74.00	-24.83
5	11892.250	40.05	peak	8.93	48.98	74.00	-25.02
6	12256.500	40.55	peak	8.18	48.73	74.00	-25.27

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4900	-20.35	60.46	40.11	54	-13.89
7350	-20.35	66.74	46.39	54	-7.61

Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.

Remark 3: AV Value = PK Value + Duty Cycle Correction Factor (-20.35dB)

Remark 4: No other radiation has been found.



**Operation Mode: TX High CH (2475MHz)**

Vertical: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4950.000	59.88	peak	0.41	60.29	74.00	-13.71
2	7425.000	57.54	peak	7.35	64.89	74.00	-9.11
3	9900.000	37.71	peak	11.32	49.03	74.00	-24.97
4	10071.000	38.39	peak	11.09	49.48	74.00	-24.52
5	11434.000	39.33	peak	9.28	48.61	74.00	-25.39
6	12375.000	43.71	peak	7.86	51.57	74.00	-22.43

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4950	-20.35	60.29	39.94	54	-14.06
7425	-20.35	64.89	44.54	54	-9.46

Horizontal: PK Value

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	4950.000	63.18	peak	0.41	63.59	74.00	-10.41
2	7425.000	55.54	peak	7.35	62.89	74.00	-11.11
3	9636.250	37.22	peak	11.71	48.93	74.00	-25.07
4	9900.000	37.45	peak	11.32	48.77	74.00	-25.23
5	11434.000	40.29	peak	9.28	49.57	74.00	-24.43
6	12375.000	43.45	peak	7.86	51.31	74.00	-22.69

Vertical: AV Value

Frequency (MHz)	Duty Cycle Correction Factor (dB)	PK Value (dB $\mu$ V)	AV Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4950	-20.35	63.59	43.24	54	-10.76
7425	-20.35	62.89	42.54	54	-11.46

Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.


Remark 3: AV Value = PK Value + Duty Cycle Correction Factor (-20.35dB)

Remark 4: No other radiation has been found.


**Duty Cycle Measurement Result:**

Test Requirement: ANSI C63.10 Section 6.5.4.2

Ton=960us, Tp=100ms

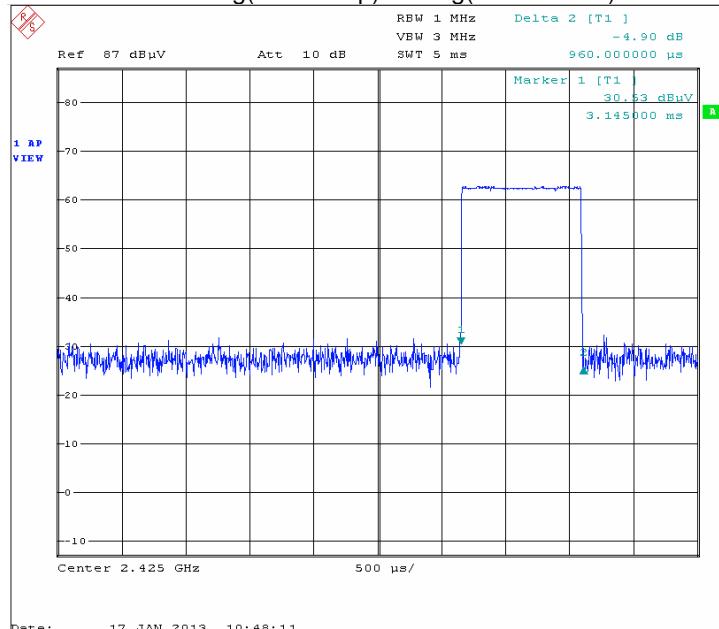Duty Cycle Correction Factor =  $20 \times \log(10 \times \text{Ton}/\text{Tp}) = 20 \times \log(10 \times 0.96/100) = -20.35 \text{ dB}$ 


Ton = 960us = 0.96ms

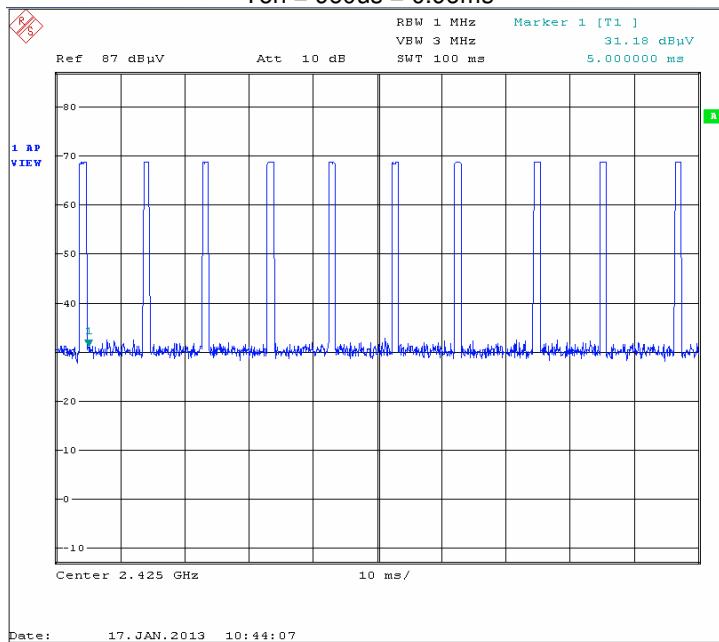

Tp=100ms

### 5.2.5 Band Edge

Low channel (2425MHz), Horizontal:

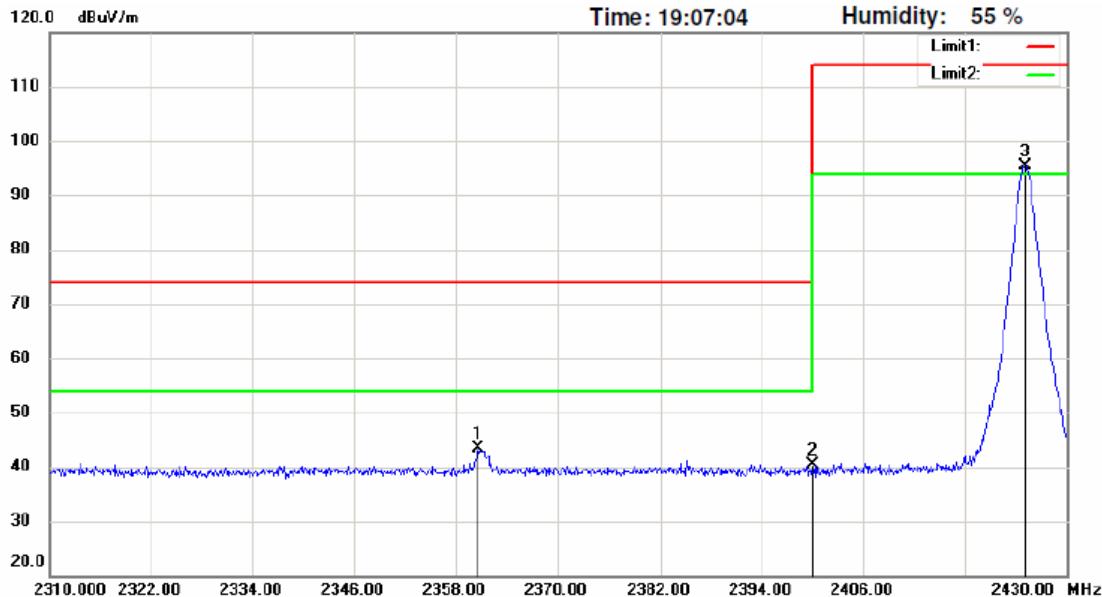

Peak & AV Detector:

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2360.640	49.99	peak	-6.60	43.39	74.00	-30.61
2	2400.000	46.84	peak	-6.54	40.30	74.00	-33.70
3	2425.000	101.95	peak	-6.50	95.45	114.00	-18.55


Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.

Low channel (2425MHz), Vertical:

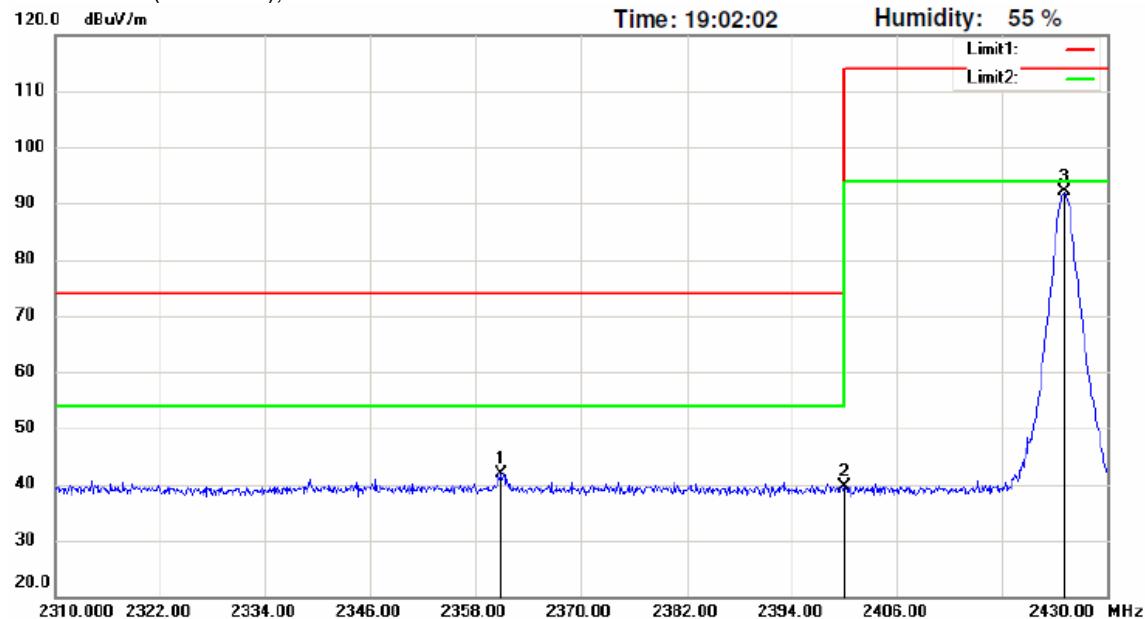

Peak &amp; AV Detector:

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2361.000	48.43	peak	-6.59	41.84	74.00	-32.16
2	2400.000	46.26	peak	-6.54	39.72	74.00	-34.28
3	2425.080	98.74	peak	-6.50	92.24	114.00	-21.76


Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.

High channel (2475MHz), Horizontal:

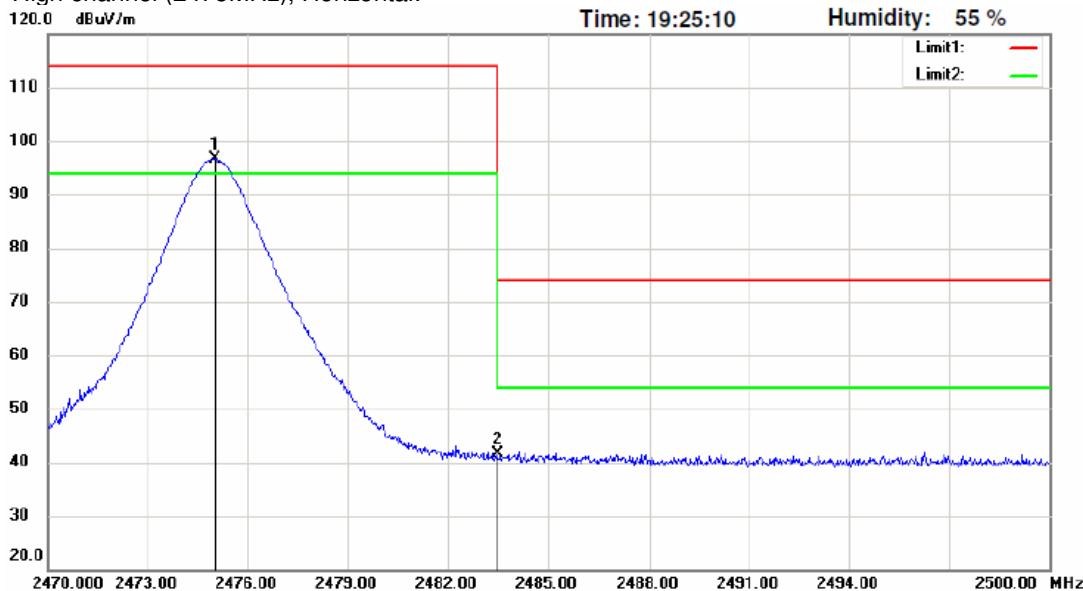

Peak &amp; AV Detector:

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2475.000	103.05	peak	-6.42	96.63	114.00	-17.37
2	2483.500	47.94	peak	-6.41	41.53	74.00	-32.47


Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.

High channel (2475MHz), Vertical:

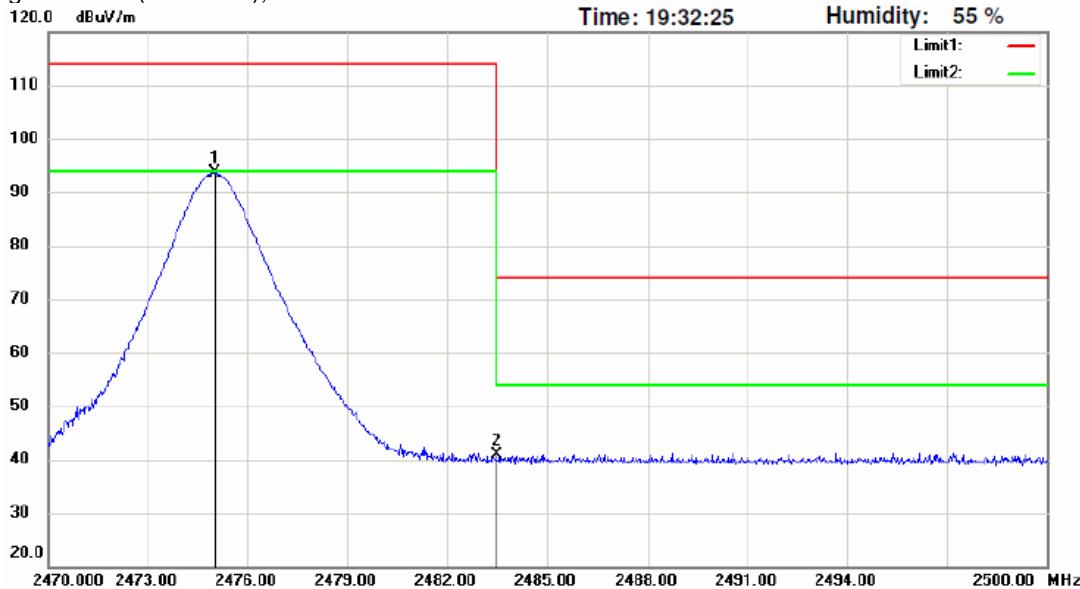

Peak &amp; AV Detector:

Mk.	Frequency (MHz)	Reading (dB <sub>uV/m</sub> )	Detector	Corrected factor(dB)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)
1	2475.000	99.99	peak	-6.42	93.57	114.00	-20.43
2	2483.500	47.18	peak	-6.41	40.77	74.00	-33.23

Remark 1: Corrected factor = Antenna Factor + Cable Loss - Preamplifier Factor

Result = Reading + Corrected factor

Margin = Result - Limit

Remark 2: If the PK measured value complies with the AV limits, it is unnecessary to perform an AV measurement.



### **5.2.6 20dB Occupied Bandwidth**

Test Requirement: FCC Part 15 Section 15.249/15.215(c)  
Test Method: ANSI C63.10  
Operation within the band 2400-2483.5MHz  
Test Date: Jan. 16. 2013  
Requirements: 15.249 (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.  
Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken. Set RBW=100kHz, VBW=300kHz, sweep time = Auto.


Occupied Bandwidth:

Test result:

<b>Test Channel</b>	<b>20 dB bandwidth</b>
Low channel (2425MHz)	297kHz
Middle channel (2450MHz)	305kHz
High channel (2475MHz)	304kHz


## Test Plot:

## Low Channel(2425MHz):

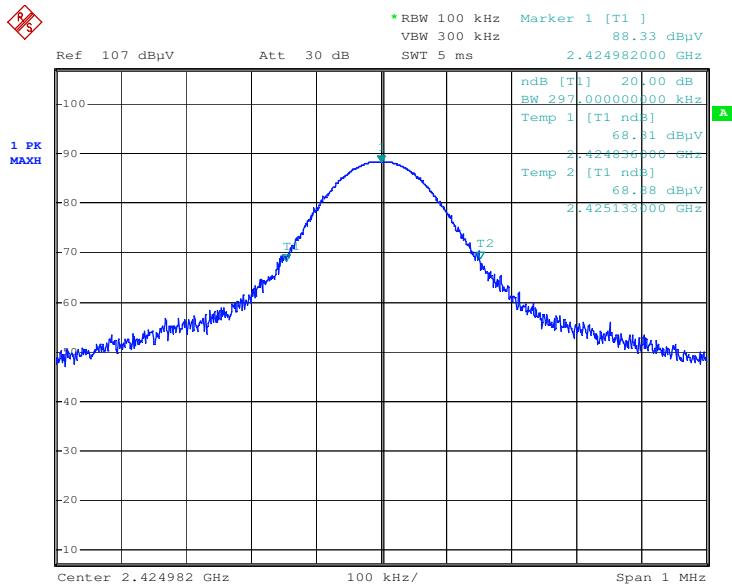


Date: 16.JAN.2013 12:57:44

## Middle Channel(2450MHz):

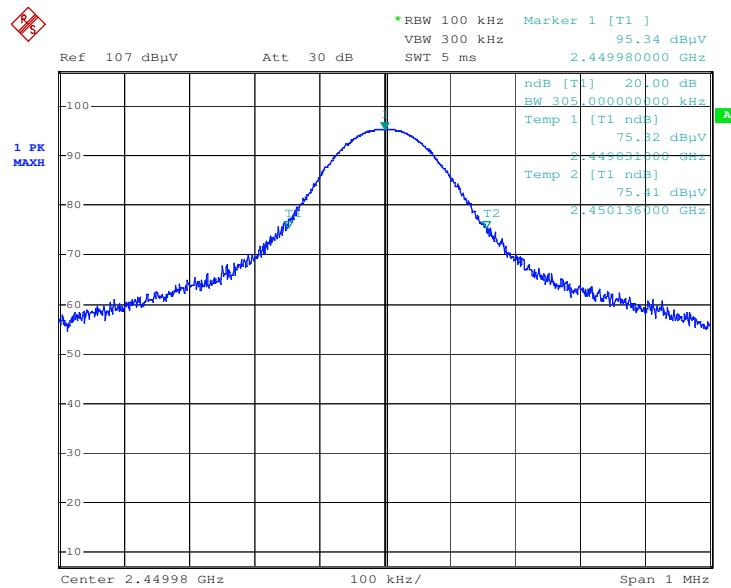

Date: 16.JAN.2013 12:49:35

High Channel(2475MHz):

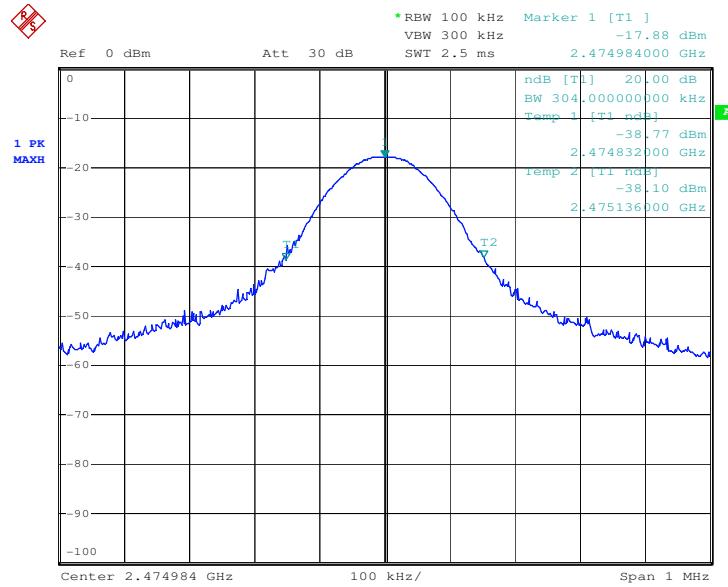

Date: 16.JAN.2013 13:31:01

***End of the Report***