FCC RF Test Report

APPLICANT : Nest Labs Inc.

EQUIPMENT : Nest Hello

MODEL NAME : A0077

FCC ID : ZQANC51

STANDARD : FCC Part 15 Subpart C §15.247

CLASSIFICATION : (DTS) Digital Transmission System

The product was completed on Oct. 26, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 1 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

1190

Report No.: FR733120-01B

TABLE OF CONTENTS

SUI	MMAR	Y OF TEST RESULT	4
1	GENE	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Product Feature of Equipment Under Test	5
	1.3	Modification of EUT	5
	1.4	Testing Location	6
	1.5	Applicable Standards	6
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Carrier Frequency Channel	7
	2.2	Descriptions of Test Mode	8
	2.3	Test Mode	8
	2.4	Connection Diagram of Test System	9
	2.5	Support Unit used in test configuration and system	10
	2.6	EUT Operation Test Setup	10
	2.7	Measurement Results Explanation Example	
3	TEST	RESULT	11
	3.1	6dB and 99% Bandwidth Measurement	11
	3.2	Peak Output Power Measurement	16
	3.3	Power Spectral Density Measurement	17
	3.4	Conducted Band Edges and Spurious Emission Measurement	22
	3.5	Radiated Band Edges and Spurious Emission Measurement	27
	3.6	AC Conducted Emission Measurement	31
	3.7	Antenna Requirements	35
4	LIST	OF MEASURING EQUIPMENT	36
5		ERTAINTY OF EVALUATION	37
AP	PENDI	IX A. CONDUCTED TEST RESULTS IX B. CONDUCTED SPURIOUS EMISSION	
		IX C. CONDUCTED SPURIOUS EMISSION PLOTS	
		IX D. CABINET RADIATION DATA IX E. CABINET RADIATION PLOTS	
		IX F. DUTY CYCLE PLOTS	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Report No. : FR733120-01B

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR733120-01B	Rev. 01	Initial issue of report	Nov. 01, 2017
FR733120-01B	Rev. 02	Revising antenna gain information in appendix a.	Nov. 09, 2017

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 3 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass
3.1	-	99% Bandwidth	-	Pass
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass
3.4 15.247(d)		Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass
3.5 15.247(d)		Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 4 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

1 General Description

1.1 Applicant

Nest Labs Inc.

3400 Hillview Ave.Palo Alto, CA 94304 USA

1.2 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac and Zigbee

Product Specification subjective to this standard				
	WLAN: IFA Antenna			
Antenna Type	Bluetooth: IFA Antenna			
	Zigbee: IFA Antenna			

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 5 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,		
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.		
rest Site Location	TEL: +886-3-327-3456		
	FAX: +886-3-328-4978		
Took Site No	Sporton	Site No.	
Test Site No.	TH05-HY	CO05-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.			
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,			
Took Cita Lagation	Taoyuan City, Taiwan (R.O.C.)			
Test Site Location	TEL: +886-3-327-0868			
	FAX: +886-3-327-0855			
Toot Site No	Sporton	Site No.		
Test Site No.	03CH11-HY	03CH15-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 6 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
2400-2483.5 MHz	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 7 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FR15CBT4.0 Version 1.3

Report No. : FR733120-01B

2.2 Descriptions of Test Mode

The RF output power was recorded in the following table:

		Bluetooth – LE RF Output Power
Channel	Frequency	Data Rate / Modulation
Chamile	rrequency	GFSK
		1Mbps
Ch00	2402MHz	8.67 dBm
Ch19	2440MHz	9.34 dBm
Ch39	2480MHz	9.11 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

	Summary table of Test Cases						
Test Item	Data Rate / Modulation						
rest item	Bluetooth – LE / GFSK						
Conducted	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps						
TCs	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps						
ICS	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps						
Radiated	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps						
TCs	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps						
108	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps						
AC	Mode 1 :WI AN On a PLE On a Zighee On a Sensor On a LED On a IR LED On a						
Conducted	Mode 1:WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On +						
Emission	Speaker On + Cemera + AC to AC transformer						


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 8 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No.: FR733120-01B

2.4 Connection Diagram of Test System

<Bluetooth - LE Tx Mode>

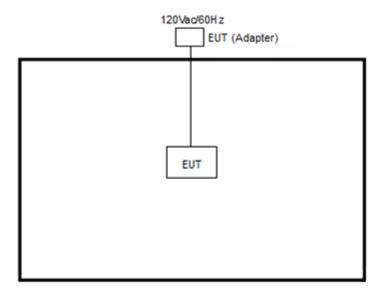

<AC Conducted Emission Mode>

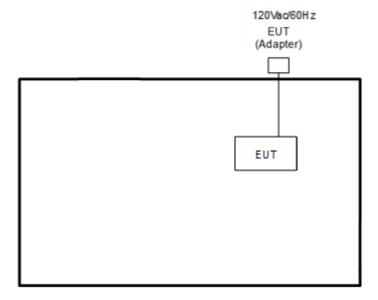

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 9 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FR15CBT4.0 Version 1.3

Report No.: FR733120-01B

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook-40	Lenovo	IdeaPad(80O7)	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "tera term" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).
=
$$4.2 + 10 = 14.2$$
 (dB)

Report No.: FR733120-01B

Report Version : Rev. 02

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
- 6. Measure and record the results in the test report.

3.1.4 Test Setup



SPORTON INTERNATIONAL INC.


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 11 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

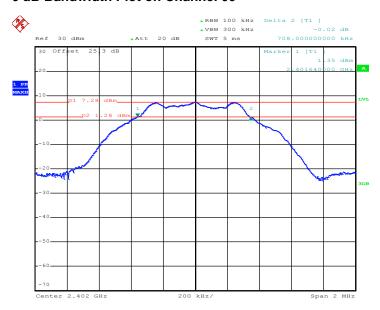


Date: 14.JUL.2017 00:48:53

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 12 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No. : FR733120-01B

6 dB Bandwidth Plot on Channel 19

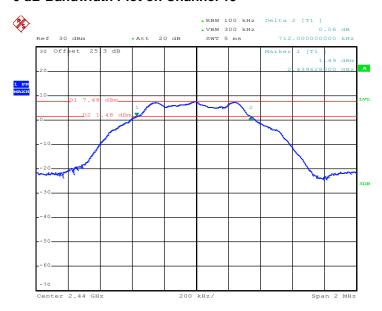

Date: 14.JUL.2017 00:51:26

6 dB Bandwidth Plot on Channel 39

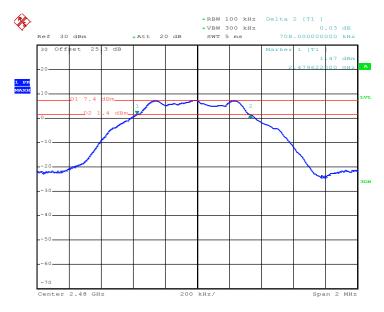

Date: 14.JUL.2017 00:54:13

SPORTON INTERNATIONAL INC.


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 13 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.

99% Bandwidth Plot on Channel 00

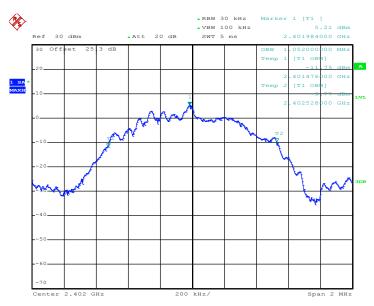


Date: 14.JUL.2017 00:50:26

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 14 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No. : FR733120-01B

99% Occupied Bandwidth Plot on Channel 19

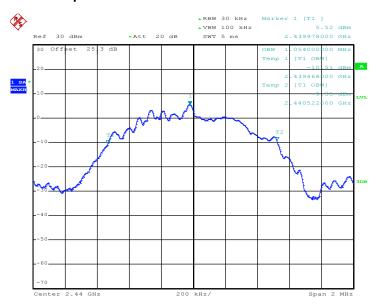

Date: 14.JUL.2017 00:53:04

99% Occupied Bandwidth Plot on Channel 39

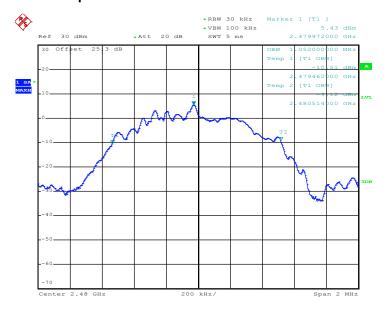

Date: 14.JUL.2017 00:55:59

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 15 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.2 Peak Output Power Measurement

Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 **Measuring Instruments**

The section 4.0 of List of Measuring Equipment of this test report is used for test.

Test Procedures 3.2.3

- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously. 3.
- Measure the conducted output power and record the results in the test report. 4.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

Page Number : 16 of 37 Report Issued Date: Nov. 09, 2017 Report Version : Rev. 02

Report No.: FR733120-01B

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

- The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 17 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

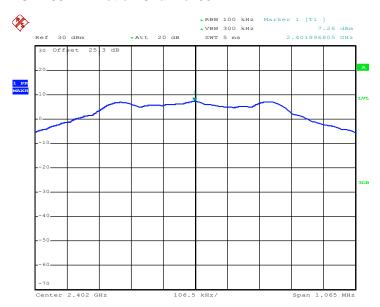


Date: 14.JUL.2017 00:49:35

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 18 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No. : FR733120-01B

PSD 100kHz Plot on Channel 19

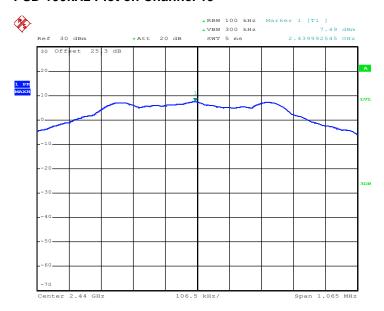

Date: 14.JUL.2017 00:52:02

PSD 100kHz Plot on Channel 39

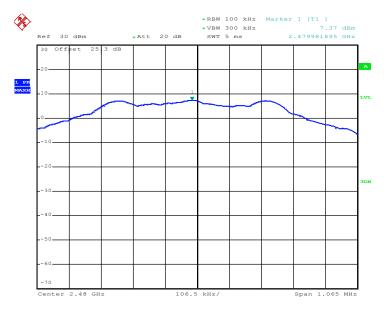

Date: 14.JUL.2017 00:54:47


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 19 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

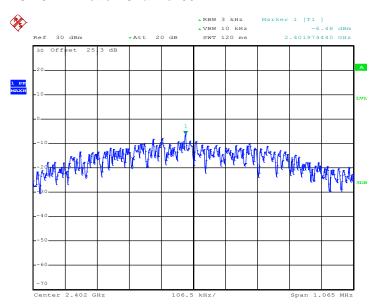


Date: 14.JUL.2017 00:49:12

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 20 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No.: FR733120-01B

PSD 3kHz Plot on Channel 19

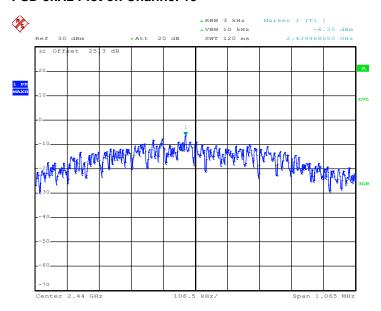

Date: 14.JUL.2017 00:51:48

PSD 3kHz Plot on Channel 39

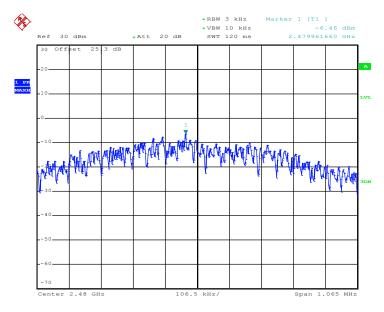

Date: 14.JUL.2017 00:54:29

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 21 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup




SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 22 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

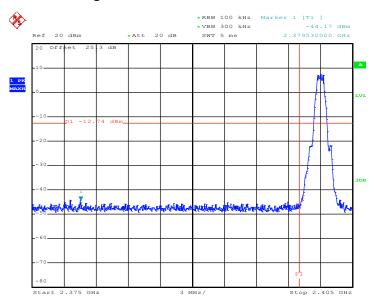

Date: 14.JUL.2017 00:49:52

High Band Edge Plot on Channel 39

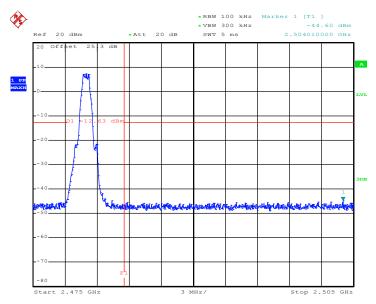

Date: 14.JUL.2017 00:55:09


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 23 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B


3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

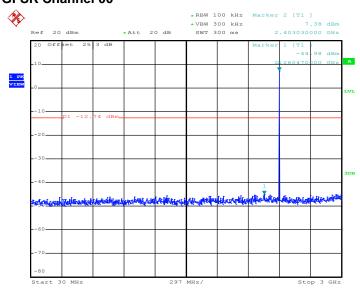

Date: 14.JUL.2017 00:50:03

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

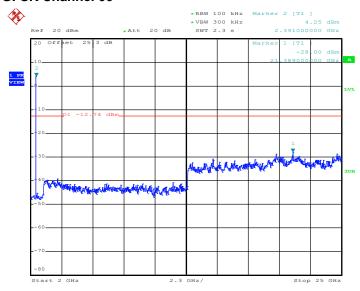


Date: 14.JUL.2017 00:50:12

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 24 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No.: FR733120-01B

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

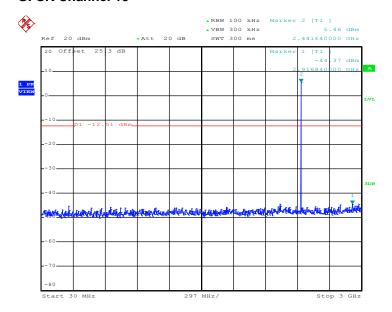

Date: 14.JUL.2017 00:52:16

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

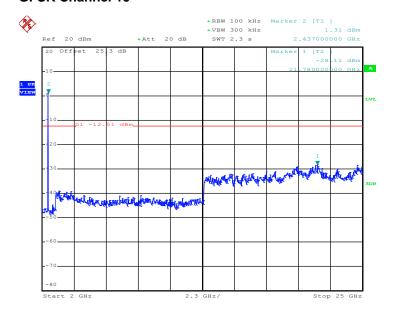


Date: 14.JUL.2017 00:52:25

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 25 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02


Report No. : FR733120-01B

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

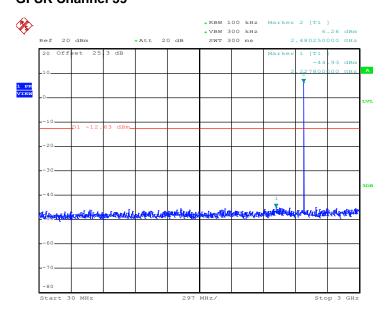

Date: 14.JUL.2017 00:55:21

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

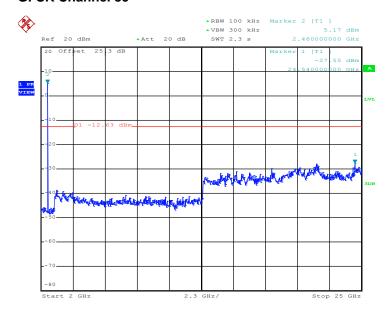

Date: 14.JUL.2017 00:55:30

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 26 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 27 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.5.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.

Report No.: FR733120-01B


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for 3. frequency above 1GHz respectively above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
- For conducted spurious emission measurement in the restricted band, the RF output of EUT 6. was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than 8. average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 9. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

SPORTON INTERNATIONAL INC. Page Number : 28 of 37 TEL: 886-3-327-3456 Report Issued Date: Nov. 09, 2017 : Rev. 02 FAX: 886-3-328-4978 Report Version


FCC ID: ZQANC51 Report Template No.: BU5-FR15CBT4.0 Version 1.3

3.5.4 Test Setup


For Conducted Measurement:



For radiated emissions below 30MHz

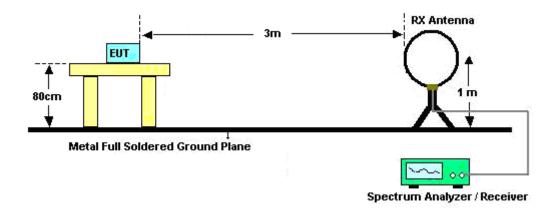

For radiated emissions from 30MHz to 1GHz

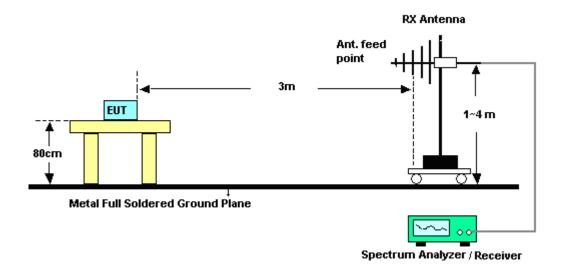


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 29 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

For radiated emissions above 1GHz

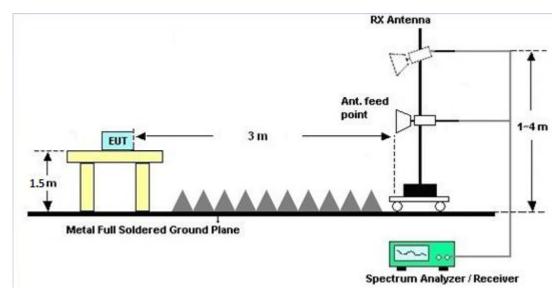

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

Please refer to Appendix B and C.

3.5.7 Test Result of Conducted Spurious Emission in the Restricted Band

Please refer to Appendix B and C.

3.5.8 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix D and E.

3.5.9 Duty Cycle

Please refer to Appendix F.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 30 of 37 Report Issued Date : Nov. 09, 2017

: Rev. 02

Report No.: FR733120-01B

Report Template No.: BU5-FR15CBT4.0 Version 1.3

Report Version

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Eroquency of emission (MUz)	Conducted limit (dBµV)		
Frequency of emission (MHz)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*}Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


3.6.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 31 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.6.4 Test Setup

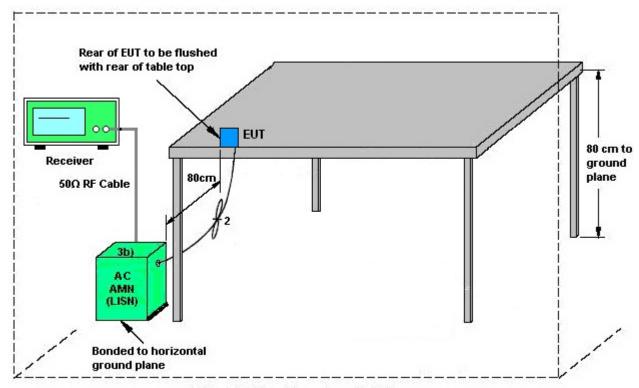

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 32 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~25 ℃			
Test Engineer :	Kai-Chun Chu	Relative Humidity :	52~55%			
Test Voltage :	120Vac / 60Hz	Phase :	Line			
F T	WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On + Speaker					
Function Type :	On + Cemera + AC to AC transformer					

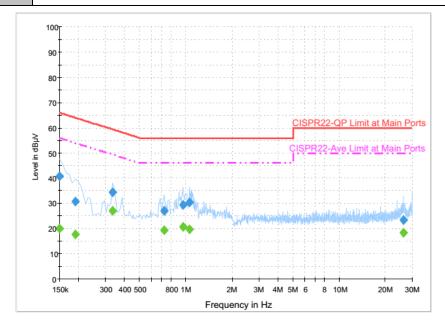

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr.	Margin (dB)	Limit (dBµV)
(1411 12)	(ubµv)			(ub)	(ub)	(αυμν)
0.150000	40.9	Off	L1	19.6	25.1	66.0
0.190000	30.7	Off	L1	19.6	33.3	64.0
0.334000	34.5	Off	L1	19.6	24.9	59.4
0.726000	27.1	Off	L1	19.6	28.9	56.0
0.958000	29.6	Off	L1	19.6	26.4	56.0
1.062000	30.3	Off	L1	19.6	25.7	56.0
26.342000	23.3	Off	L1	20.9	36.7	60.0

Final Result : Average


Frequency	Average	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	i iitei	Lilie	(dB)	(dB)	(dBµV)
0.150000	20.2	Off	L1	19.6	35.8	56.0
0.190000	17.6	Off	L1	19.6	36.4	54.0
0.334000	27.2	Off	L1	19.6	22.2	49.4
0.726000	19.3	Off	L1	19.6	26.7	46.0
0.958000	20.8	Off	L1	19.6	25.2	46.0
1.062000	19.8	Off	L1	19.6	26.2	46.0
26.342000	18.4	Off	L1	20.9	31.6	50.0

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 33 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B



Test Mode :	Mode 1	Temperature :	22~25 ℃			
Test Engineer :	Kai-Chun Chu	Relative Humidity :	52~55%			
Test Voltage :	120Vac / 60Hz	Phase :	Neutral			
Function Type:	WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On + Speaker					
	On + Camara + AC to AC transformer					

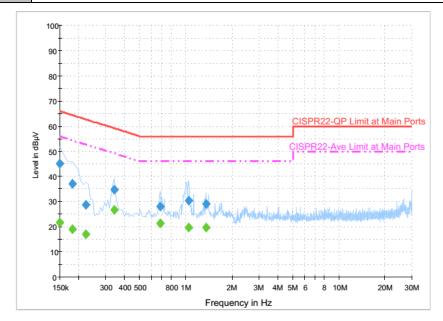

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	45.3	Off	N	19.5	20.7	66.0
0.182000	37.0	Off	N	19.5	27.4	64.4
0.222000	28.6	Off	N	19.5	34.1	62.7
0.342000	34.8	Off	N	19.5	24.4	59.2
0.678000	28.0	Off	N	19.5	28.0	56.0
1.046000	30.3	Off	N	19.6	25.7	56.0
1.350000	29.2	Off	N	19.6	26.8	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
(1011 12)	(αΒμν)			(GD)	(GD)	(GDpt)
0.150000	21.7	Off	N	19.5	34.3	56.0
0.182000	18.9	Off	N	19.5	35.5	54.4
0.222000	17.0	Off	N	19.5	35.7	52.7
0.342000	26.6	Off	N	19.5	22.6	49.2
0.678000	21.4	Off	N	19.5	24.6	46.0
1.046000	19.9	Off	N	19.6	26.1	46.0
1.350000	19.8	Off	N	19.6	26.2	46.0

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 34 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 35 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No.: FR733120-01B

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	NA	Dec. 26, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 26, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 25, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Nov. 24, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 22, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jul. 22, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jul. 22, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 12, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 12, 2017	Jul. 01, 2017 ~ Jul. 25, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 15, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 07, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 07, 2017	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jun. 23, 2017	Jul. 01, 2017 ~ Jul. 25, 2017	Jun. 22, 2018	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA1840-35- HG	1887435	18GHz~40GHz	Oct. 13, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 12, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jul. 01, 2017 ~ Jul. 25, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 01, 2017 ~ Jul. 25, 2017	N/A	Radiation (03CH11-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Jan. 04, 2017	Jul. 05, 2017	Jan. 03, 2018	CSE (03CH15-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 23, 2016	Jul. 05, 2017	Dec. 22, 2017	CSE (03CH15-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZQANC51 Page Number : 36 of 37
Report Issued Date : Nov. 09, 2017
Report Version : Rev. 02

Report No. : FR733120-01B

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	0.70
of 95% (U = 2Uc(y))	2.70

Report No.: FR733120-01B

<03CH11-HY >

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5.20
of 95% (U = 2Uc(y))	5.20

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	5.50
of 95% (U = 2Uc(y))	5.50

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	5.20
of 95% (U = 2Uc(y))	5.20

<03CH15-HY >

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	5.14
of 95% (U = 2Uc(y))	5.14

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	5.48
of $95\% (U = 2Uc(y))$	5.40

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	5.12
of 95% (U = 2Uc(y))	5.12

 SPORTON INTERNATIONAL INC.
 Page Number
 : 37 of 37

 TEL: 886-3-327-3456
 Report Issued Date
 : Nov. 09, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

FCC ID : ZQANC51 Report Template No.: BU5-FR15CBT4.0 Version 1.3

Report Number : FR733120-01B

Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Aking Chang	Temperature:	21~25	°C
Test Date:	2017/06/30~2017/10/26	Relative Humidity:	51~54	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.052	0.708	0.50	Pass
BLE	1Mbps	1	19	2440	1.054	0.712	0.50	Pass
BLE	1Mbps	1	39	2480	1.052	0.708	0.50	Pass

TEST RESULTS DATA Peak Power Table

Mod.	Data Rate	N⊤×	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.67	30.00	0.82	9.49	36.00	Pass
BLE	1Mbps	1	19	2440	9.34	30.00	0.82	10.16	36.00	Pass
BLE	1Mbps	1	39	2480	9.11	30.00	0.82	9.93	36.00	Pass

TEST RESULTS DATA Average Power Table (Reporting Only)

	Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
ĺ	BLE	1Mbps	1	0	2402	2.09	8.51
ĺ	BLE	1Mbps	1	19	2440	2.09	9.17
	BLE	1Mbps	1	39	2480	2.09	8.88

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.26	-6.48	0.82	8.00	Pass
BLE	1Mbps	1	19	2440	7.49	-6.25	0.82	8.00	Pass
BLE	1Mbps	1	39	2480	7.37	-6.46	0.82	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix B. Conducted Spurious Emission

Test Engineer :	Rover Lee	Temperature :	22~24°C
rest Engineer.		Relative Humidity :	51~55%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ Conducted)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
		2330.16	-38.54	-17.34	-21.2	-43.36	2	2.82	0	0	Р
BLE		2329.74	-51.58	-10.38	-41.2	-56.4	2	2.82	0	0	Α
CH 00 2402MHz	*	2402	9.85	-	-	4.99	2	2.86	0	0	Р
2402181712	*	2402	8.5	-	-	3.64	2	2.86	0	0	Α
		2322.32	-38.82	-17.62	-21.2	-43.63	2	2.81	0	0	Р
		2318.68	-51.46	-10.26	-41.2	-56.27	2	2.81	0	0	Α
BLE	*	2440	9.88	-	-	4.97	2	2.91	0	0	Р
CH 19 2440MHz	*	2440	8.02	-	-	3.11	2	2.91	0	0	Α
2440141712		2486.63	-38.27	-17.07	-21.2	-43.22	2	2.95	0	0	Р
		2490.83	-51.43	-10.23	-41.2	-56.38	2	2.95	0	0	Α
51.5	*	2480	10.77	•	-	5.84	2	2.93	0	0	Р
BLE CH 39	*	2480	9.41	-	-	4.48	2	2.93	0	0	Α
2480MHz		2485.79	-38.67	-17.47	-21.2	-43.62	2	2.95	0	0	Р
2400WII 12		2483.5	-51.16	-9.96	-41.2	-56.11	2	2.95	0	0	Α
Remark		o other spurious		Peak and	l Average	limit line.					

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ Conducted)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
BLE											
CH 00		4804	-55.15	-33.95	-21.2	-62.03	2	4.88	0	0	Р
2402MHz											
BLE		4880	-55.44	-34.24	-21.2	-62.33	2	4.89	0	0	Р
CH 19											
2440MHz		7320	-60.01	-38.81	-21.2	-68.36	2	6.35	0	0	Р
BLE		4960	-47.05	-25.85	-21.2	-53.94	2	4.89	0	0	Р
CH 39											
2480MHz		7440	-57.11	-35.91	-21.2	-65.53	2	6.42	0	0	Р
Remark		other spurious		: Peak an	d Average	limit line.					

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Aux	Aux2	Peak
				Limit	Line	Level	Factor	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
		41.07	-72.14	-16.94	-55.2	-79.17	2	0.33	0	4.7	Р
		106.41	-76.64	-24.94	-51.7	-83.98	2	0.64	0	4.7	Р
BLE		176.34	-77.98	-26.28	-51.7	-85.6	2	0.92	0	4.7	Р
LF		551.3	-78.19	-28.99	-49.2	-86.39	2	1.5	0	4.7	Р
		826.4	-59.46	-10.26	-49.2	-67.95	2	1.79	0	4.7	Р
		949.6	-76.58	-27.38	-49.2	-85.27	2	1.99	0	4.7	Р
Remark		o other spurious		imit line.							

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	МІМО	Groun ding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
1		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
802.11b		2386.545	-39.03	-17.83	-21.2	-44.06	2	3.03	0	0	Р
CH 01											
2412MHz		2386.125	-48.1	-6.9	-41.2	-53.13	2	3.03	0	0	Α

- 1. Level(dBm)
- = Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)
- 2. Over Limit(dB)
- = Level(dBm) Limit Line(dBm)

For Peak Limit @ 2386.545MHz:

- 1. Level(dBm)
- = Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)
- = 2(dB) + 3.03(dB) 44.06(dBm)
- = -39.03(dBm)
- 2. Over Limit(dB)
- = Level(dBm) Limit Line(dBm)
- = -39.03(dBm) + 21.2(dBm)
- = -17.83(dB)

For Average Limit @ 2386.125MHz:

- 1. Level(dBm)
- = Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)
- = 2(dBi) + 3.03(dB) 53.13(dBm)
- = -48.1(dBm)
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -6.9(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978



Appendix C. Conducted Spurious Emission Plots

Toot Engineer		Temperature :	22~24°C
Test Engineer :	Rover Lee	Relative Humidity :	51~55%

Report No. :FR733120-01B

Note symbol


-L	Low channel location
-R	High channel location


SPORTON INTERNATIONAL INC. Page Number : C1 of C9




2.4GHz 2400~2483.5MHz


BLE (Band Edge @ Conducted)

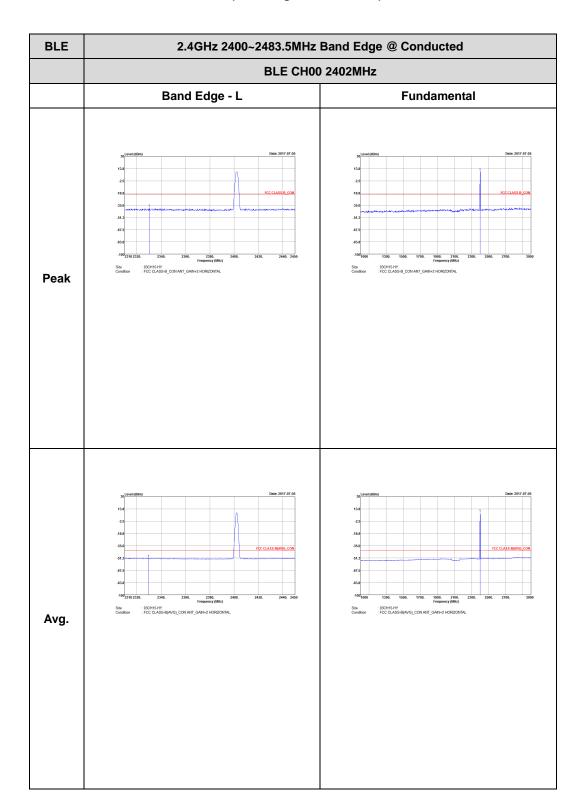

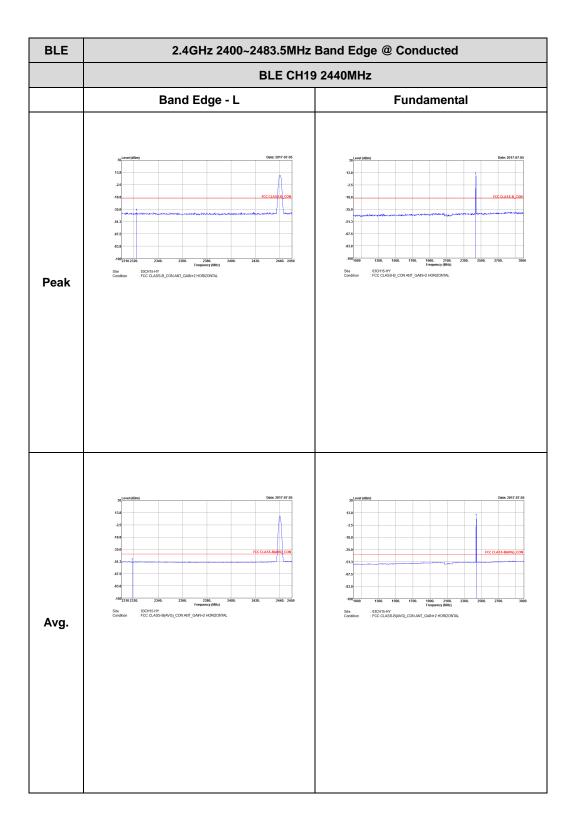

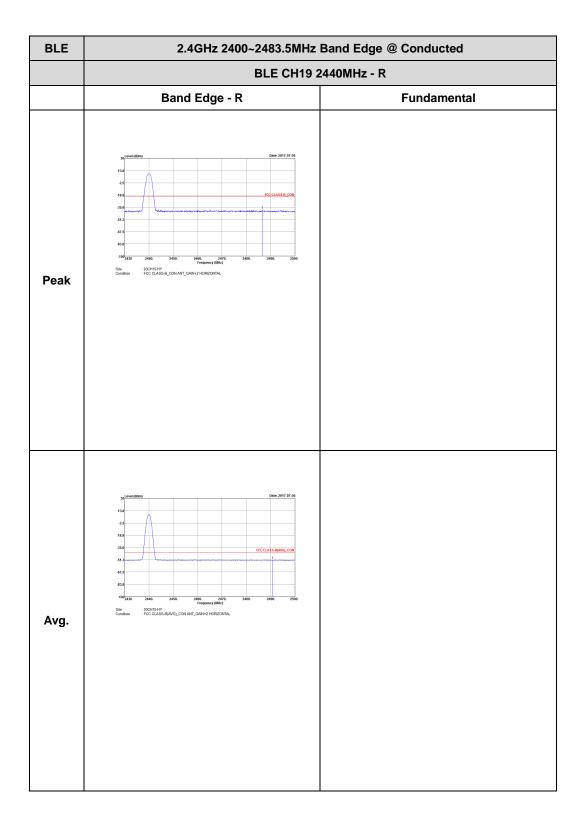





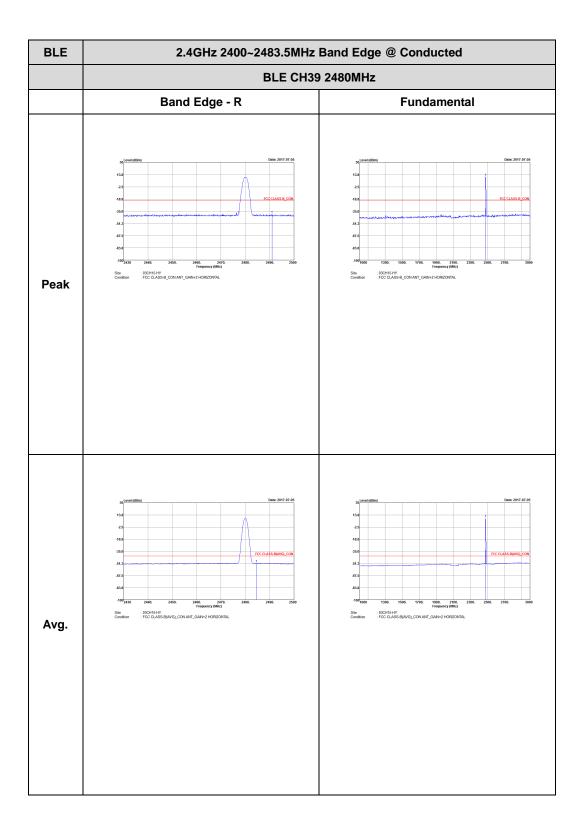


2.4GHz 2400~2483.5MHz

BLE (Harmonic @ Conducted)

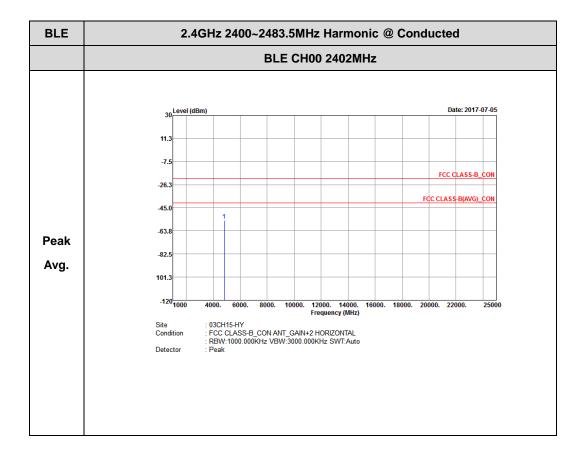


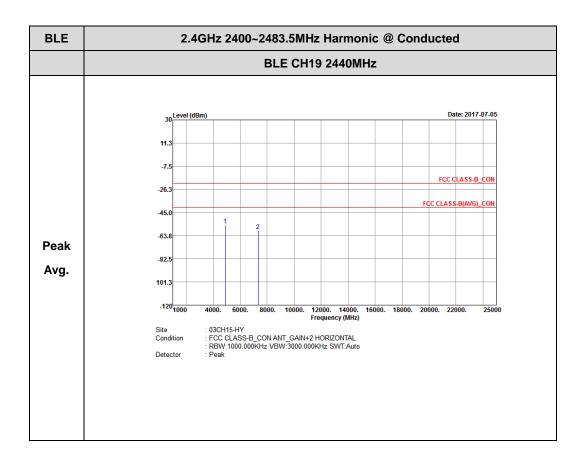

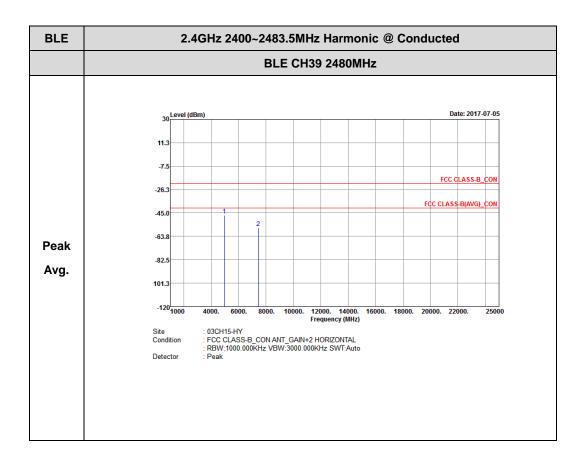



Emission below 1GHz 2.4GHz BLE (LF)

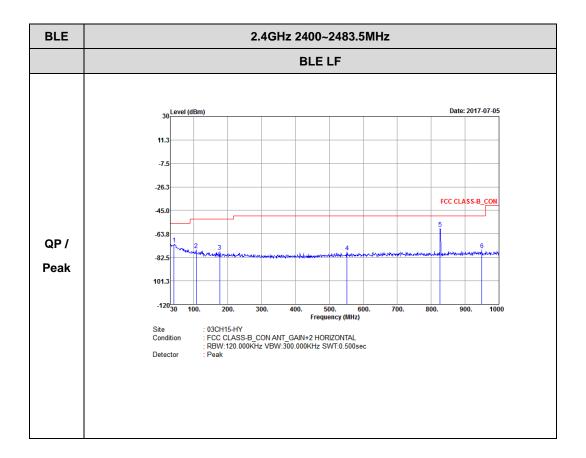

Page Number

: C9 of C9

Appendix D. Cabinet Radiation Data

Test Engineer :		Temperature :	20~24°C
rest Engineer .	J.C. Liang, Jacky Hung, and Ken Wu	Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2312.835	54.91	-19.09	74	45.85	26.59	6.15	33.61	112	48	Р	Н
		2372.16	42.08	-11.92	54	32.65	26.81	6.29	33.6	112	48	Α	Н
DI E	*	2402	78.5	-	-	68.93	26.87	6.36	33.59	112	48	Р	Н
BLE	*	2402	77.12	-	-	67.55	26.87	6.36	33.59	112	48	Α	Н
CH 00 2402MHz		2384.34	54.54	-19.46	74	45.04	26.81	6.36	33.6	346	64	Р	V
2402WII 12		2378.145	41.9	-12.1	54	32.47	26.81	6.29	33.6	346	64	Α	V
	*	2402	79.7	-	-	70.13	26.87	6.36	33.59	346	64	Р	V
	*	2402	78.11	-	-	68.54	26.87	6.36	33.59	346	64	Α	V
		2342.2	54.6	-19.4	74	45.35	26.7	6.22	33.6	110	53	Р	Н
		2384.62	41.91	-12.09	54	32.41	26.81	6.36	33.6	110	53	Α	Н
	*	2440	79.59	-	-	69.84	27.03	6.38	33.59	110	53	Р	Н
	*	2440	77.65	-	-	67.9	27.03	6.38	33.59	110	53	Α	Н
		2497.62	54.39	-19.61	74	44.44	27.2	6.39	33.57	110	53	Р	Н
BLE		2484.25	42.21	-11.79	54	32.33	27.14	6.39	33.58	110	53	Α	Н
CH 19		2321.48	54.36	-19.64	74	45.24	26.65	6.15	33.61	372	63	Р	V
2440MHz		2371.04	41.92	-12.08	54	32.49	26.81	6.29	33.6	372	63	Α	V
	*	2440	79.18	-	-	69.43	27.03	6.38	33.59	372	63	Р	V
	*	2440	77.84	-	-	68.09	27.03	6.38	33.59	372	63	Α	V
		2489.5	55.17	-18.83	74	45.23	27.2	6.39	33.58	372	63	Р	V
		2490.9	42.13	-11.87	54	32.19	27.2	6.39	33.58	372	63	Α	V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: D1 of D6



SPORTON LAB. FCC RF Test Report

	*	2480	78.79	-	-	68.92	27.14	6.38	33.58	106	53	Р	Н
	*	2480	77	-	-	67.13	27.14	6.38	33.58	106	53	Α	Н
		2495.92	55.33	-18.67	74	45.38	27.2	6.39	33.57	106	53	Р	Н
BLE		2492.2	42.19	-11.81	54	32.24	27.2	6.39	33.57	106	53	Α	Н
CH 39	*	2480	76.42	-	-	66.55	27.14	6.38	33.58	358	69	Р	٧
2480MHz	*	2480	74.93	-	-	65.06	27.14	6.38	33.58	358	69	Α	V
		2490.32	55.09	-18.91	74	45.15	27.2	6.39	33.58	358	69	Р	7
		2499.2	42.58	-11.42	54	32.63	27.2	6.39	33.57	358	69	Α	/
Remark		o other spurious		Peak and	Average lir	mit line.							

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBm)	Limit (dB)	Line (dBm)	Level (dBm)	Factor (dBi)	Loss (dB)	Factor (dB)	Pos (cm)		Avg. (P/A)	
BLE		4804	38.01	-35.99	74	59.4	31.6	9.6	63.02	100	0	Р	Н
CH 00 2402MHz		4804	38.61	-35.39	74	60	31.6	9.6	63.02	100	0	Р	V
		4880	38.96	-35.04	74	60.13	31.71	9.56	62.87	100	0	Р	Н
BLE		7320	44.3	-29.7	74	57.72	37.51	11.31	62.7	100	0	Р	Н
CH 19 2440MHz		4880	37.49	-36.51	74	58.66	31.71	9.56	62.87	100	0	Р	V
244UWITI2		7320	43.33	-30.67	74	56.75	37.51	11.31	62.7	100	0	Р	V
		4960	38.55	-35.45	74	59.42	31.84	9.53	62.68	100	0	Р	Н
BLE		7440	43.63	-30.37	74	56.62	38.06	11.34	62.77	100	0	Р	Н
CH 39		4960	38.88	-35.12	74	59.75	31.84	9.53	62.68	100	0	Р	V
2480MHz		7440	45.23	-28.77	74	58.22	38.06	11.34	62.77	100	0	Р	V

Remark

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		31.89	21.9	-18.1	40	30.22	23.33	0.82	32.49	-	-	Р	Н
		220.08	24.06	-21.94	46	39.46	15.21	1.72	32.39	-	-	Р	Н
		259.5	29.35	-16.65	46	39.76	19.8	2.09	32.38	-	-	Р	Н
		699.7	35.43	-10.57	46	37.76	26.66	3.35	32.47	-	-	Р	Н
0.4011-		740.3	40.57	-5.43	46	41.36	28.03	3.4	32.35	100	0	Р	Н
2.4GHz BLE		820.1	39.65	-6.35	46	39.69	28.35	3.53	32.08	-	-	Р	Н
LF		31.08	29.97	-10.03	40	37.78	23.84	0.82	32.49	-	-	Р	V
		73.74	27.7	-12.3	40	46.51	12.44	1.22	32.49	-	-	Р	V
		104.25	27.91	-15.59	43.5	42.49	16.49	1.39	32.48	-	-	Р	V
		699.7	35.93	-10.07	46	38.26	26.66	3.35	32.47	-	-	Р	V
		740.3	39.82	-6.18	46	40.61	28.03	3.4	32.35	100	0	Р	V
		780.2	37.23	-8.77	46	37.49	28.34	3.49	32.24	-	-	Р	V
Remark		other spurious		imit line.									

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Note symbol

Report No. :FR733120-01B

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not
	exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

SPORTON INTERNATIONAL INC. Page Number : D5 of D6

A calculation example for radiated spurious emission is shown as below:

Report No.: FR733120-01B

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

1. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $=43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

SPORTON INTERNATIONAL INC. Page Number : D6 of D6

Appendix E. Cabinet Radiation Plots

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C	
rest Engineer.		Relative Humidity :	50~54%	

Report No. :FR733120-01B

Note symbol

-L	Low channel location
-R	High channel location


SPORTON INTERNATIONAL INC. Page Number: E1 of E13







2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

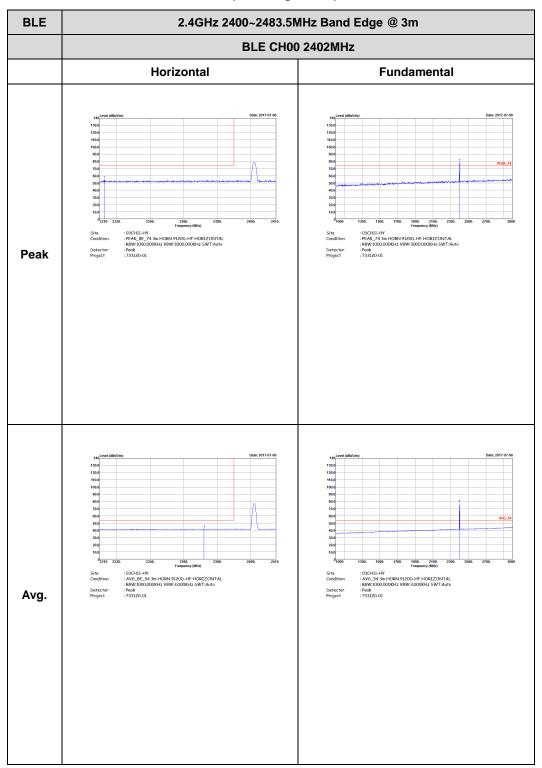




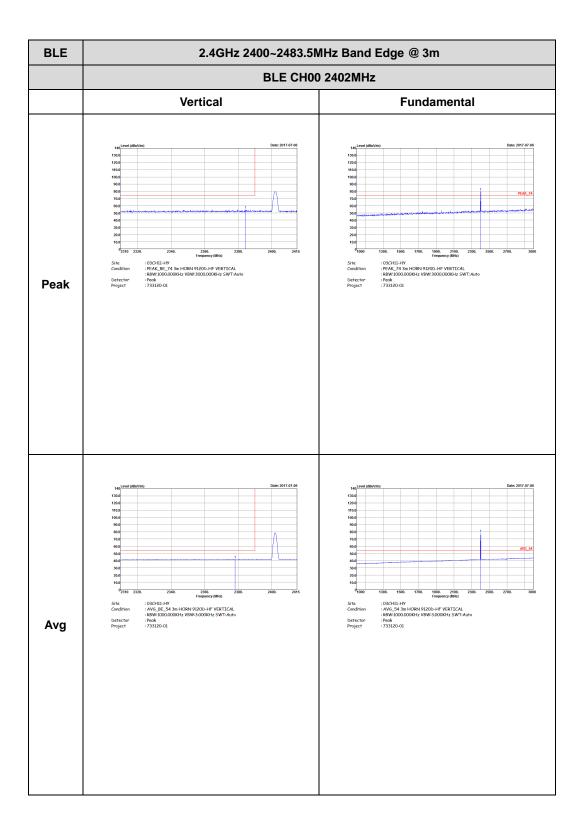


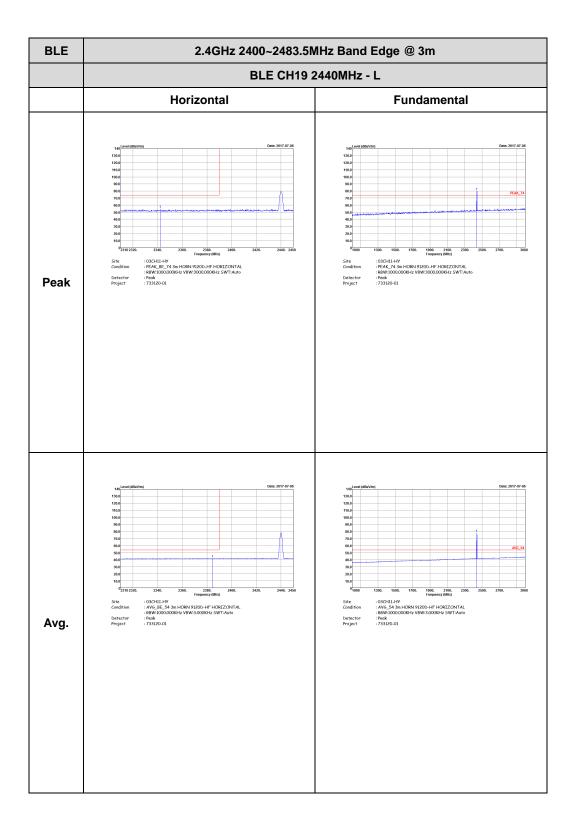


Report No. :FR733120-01B

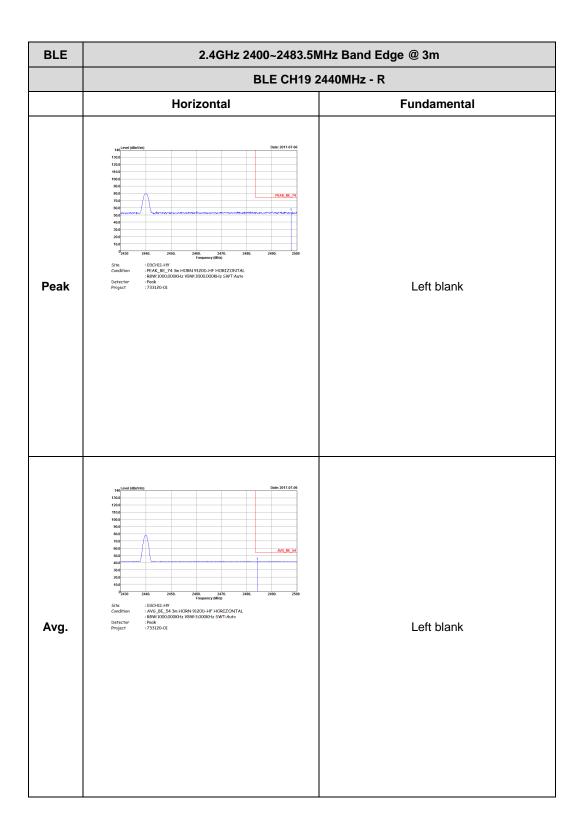




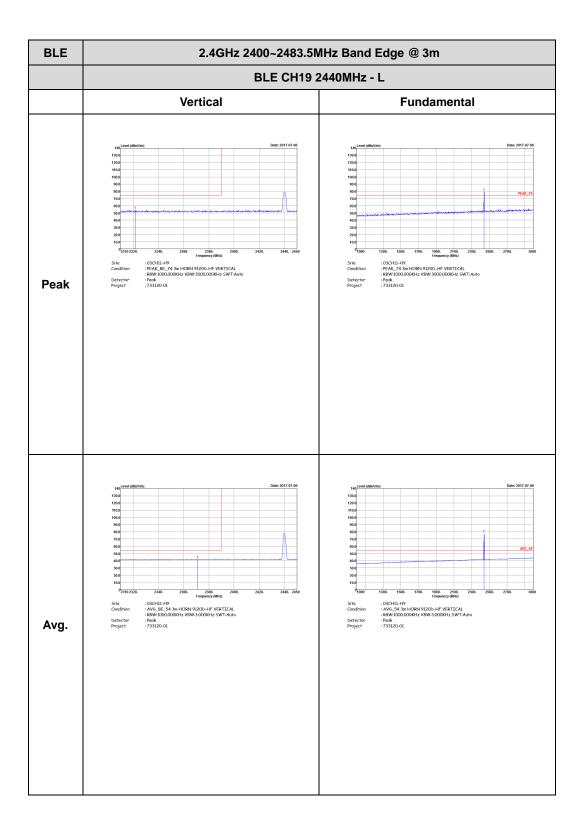


Report No. :FR733120-01B

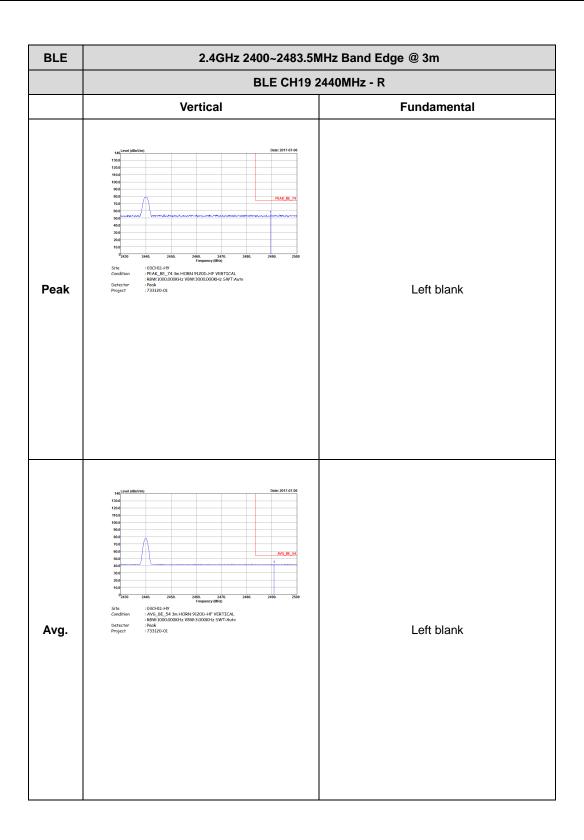



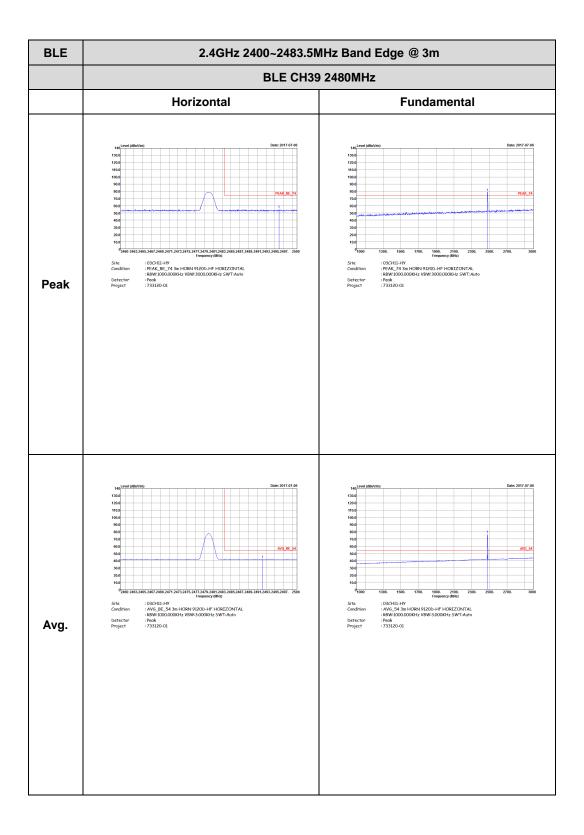




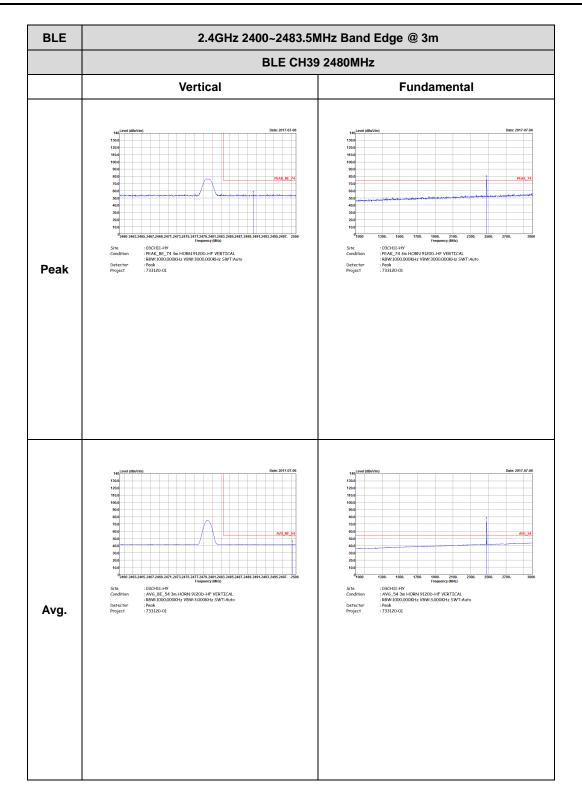



Report No. :FR733120-01B

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

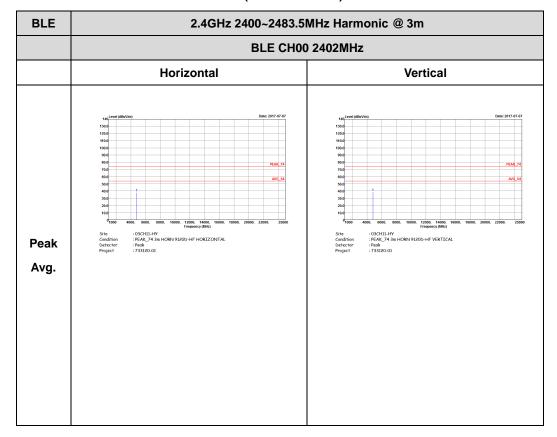


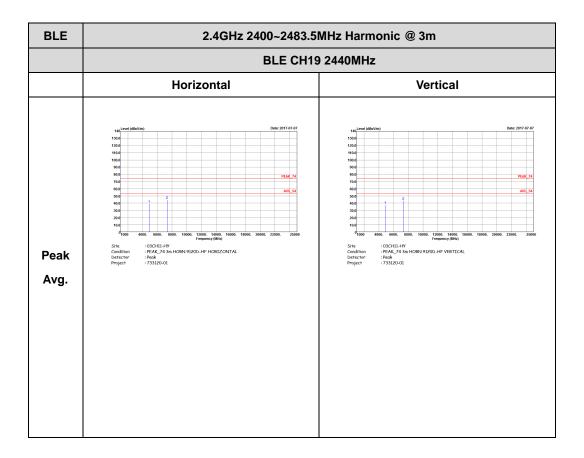

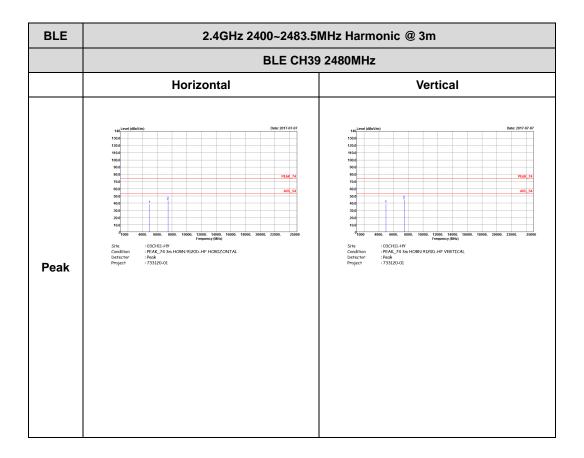

Report No. :FR733120-01B

Emission below 1GHz 2.4GHz BLE (LF)

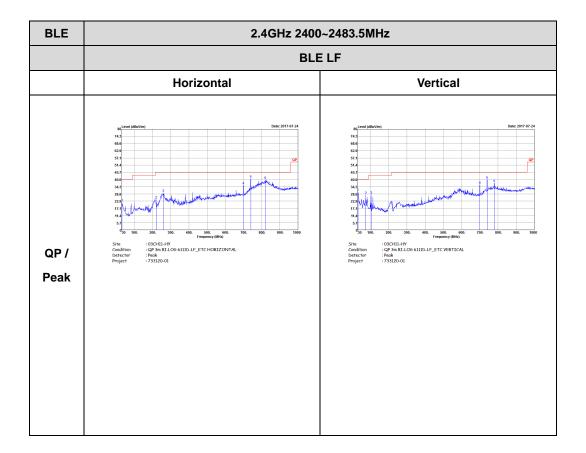




Appendix F. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE	61.78	388	2.58	3kHz

Bluetooth - LE

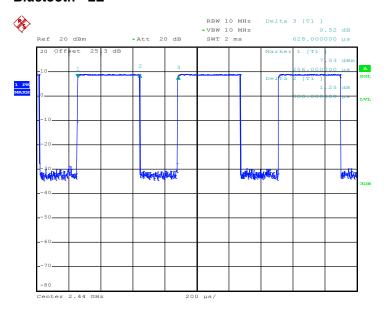

Date: 30.JUN.2017 22:32:56

TEL: 886-3-327-3456 FAX: 886-3-328-4978