

## FCC TEST REPORT

### 47 CFR FCC Part 15 Subpart B

**FCC ID**.....: A1301096020-4

**Report Reference No.**.....: ZRD-D7

Compiled by

( position+printed name+signature) ..: File administrators Tony Li

Supervised by

( position+printed name+signature) ..: Technique principal Robin Fang

Approved by

( position+printed name+signature) ..: Manager James Wu

Date of issue.....: May 7, 2013

**Representative Laboratory Name** ..: Shenzhen CTL Electron Technology Co., Ltd.

Address.....: Room 405, The 3# of 4th Building, Zhuguang No.2 Industrial District, Xili Town, Nanshan, Shenzhen, China

**Testing Laboratory Name** ..: DTT Services Co.,Ltd

Address.....: 1F,2 Block,Jiaquan Building,Guanlan High-tech Park,Bao'an District, Shenzhen,Guangdong,China. 518110

**Applicant's name**.....: **Shenzhen livall Netwotk Technology Co ltd**

Address.....: 9/F, Jiuzhou Electric Building, Southern No.12 rd Technology Park, Shenzhen

#### **Test specification:**

Standard .....: **47 CFR FCC Part 15 Subpart B - Unintentional Radiators**  
**ANSI C63.4: 2009**

TRF Originator .....: Shenzhen CTL Electron Technology Co., Ltd.

Master TRF .....: Dated 2012-06

#### **Shenzhen CTL Electron Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electron Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electron Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: TELPAD

Trade Mark .....: Livall

Manufacturer .....: Shenzhen livall Netwotk Technology Co ltd

Model/Type reference.....: D7

Listed Models .....: /

Result.....: **Positive**

*Tony Li*  
*Robin Fang*  
*James Wu*

## TEST REPORT

<b>Test Report No. :</b>	<b>A1301096020-4</b>	<b>May 7, 2013</b>
		<b>Date of issue</b>

Equipment under Test : TELPAD

Model /Type : D7

Listed Models : /

**Applicant** : **Shenzhen livall Netwotk Technology Co ltd**

Address : 9/F, Jiuzhou Electric Building, Southern No.12 rd  
Technology Park, Shenzhen

**Manufacturer** : **Shenzhen livall Netwotk Technology Co ltd**

Address : 9/F, Jiuzhou Electric Building, Southern No.12 rd  
Technology Park, Shenzhen

<b>Test Result</b> according to the standards on page 4:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<u>1.</u>	<u>TEST STANDARDS .....</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY .....</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	Related Submittal(s) / Grant (s)	5
2.6.	Modifications	5
2.7.	Configuration of Tested System	6
2.8.	NOTE	6
<u>3.</u>	<u>TEST ENVIRONMENT.....</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>9</u>
4.1.	Conducted Emissions Test	9
4.2.	Radiated Emission Test	12
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT .....</u>	<u>17</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u>	<u>19</u>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[\*\*47 CFR FCC Part 15 Subpart B - Unintentional Radiators\*\*](#)

[\*\*ANSI C63.4: 2009\*\*](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Jan 21,2013
Testing commenced on	:	Jan 21,2013
Testing concluded on	:	Jan 30, 2013

### 2.2. Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

Internal Battery DC 3.70 V

### 2.3. Short description of the Equipment under Test (EUT)

2.4GHz (TELPAD)

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

### 2.4. EUT operation mode

The EUT has been tested under typical operating condition.

### 2.5. Related Submittal(s) / Grant (s)


This submittal(s) (test report) is intended for **FCC ID:ZRD-D7** filing to comply with the FCC Part 15, Subpart B Rules.

### 2.6. Modifications

No modifications were implemented to meet testing criteria.

## 2.7. Configuration of Tested System

### Configuration of Tested System

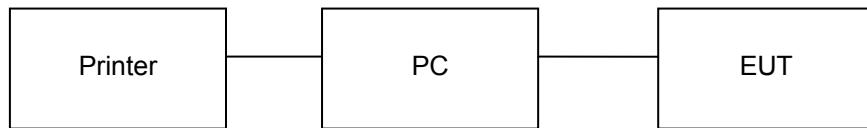

### Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.	Notes
1	PC	DELL	PP26L	CNG8390Q6X	DOC
2	Printer	HP	Laserjet 6L C3990	Laserjet 6L C3990A	DOC
3	Mouse	DELL	OPTICAL MOUSE	/	DOC

Printer USB Cable	Shield :	Shielded
	Detachable :	Detachable
	Length (m) :	1.8m
EUT USB Cable	Shield :	Shielded
	Detachable :	Detachable
	Length (m) :	0.5m
Earphone Line	Shield :	Shielded
	Detachable :	Detachable
	Length (m) :	1.2m
Charger Cable	Shield :	Unshielded
	Detachable :	Detachable
	Length (m) :	1.5m
HDMI Connector	Shield :	Shielded
	Detachable :	Detachable

## 2.8. NOTE

1. The EUT including WLAN,Bluetooth function,The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN Radio	FCC Part 15 Subpart C (Section15.247)	A1301096020-1
Bluetooth	FCC Part 15 Subpart C (Section15.247)	A1301096020-2
SAR	OET 65	A1301096020-3
USB Port	FCC Part 15 Subpart B	A1301096020-4

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

DTT Services Co.,Ltd  
1F,2 Block,Jiaquan Building,Guanlan High-tech Park,Bao'an District, Shenzhen,Guangdong,China.  
518110

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **IC Registration No.: 9783A**

The 3m alternate test site of DTT Services Co.,Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

##### **FCC-Registration No.: 214666**

DTT Services Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### **3.4. Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the DTT Services Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for DTT Services Co.,Ltd is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.5. Equipments Used during the Test

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2012/4/23
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2012/4/23
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2012/4/23
4	EMI TEST SOFTWARE	Audix	Z3	N/A	----


Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2012/4/23
2	EMI TEST OFTWARE	Audix	Z3	N/A	----
3	RF TEST PANEL	Rohde & Schwarz	TS / RSP	335015/ 0017	2012/4/23
4	TURNTABLE	ETS	2088	2149	2012/4/23
5	ANTENNA MAST	ETS	2075	2346	2012/4/23
6	EMI TEST OFTWARE	Rohde & Schwarz	ESK1	N/A	2012/4/23
7	HORN ANTENNA	Rohde & Schwarz	HF906	100039	2012/4/23
8	Amplifier	Sonoma	310N	E009-13	2012/4/23
9	JS amplifier	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2012/4/23

The calibration interval was one year.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

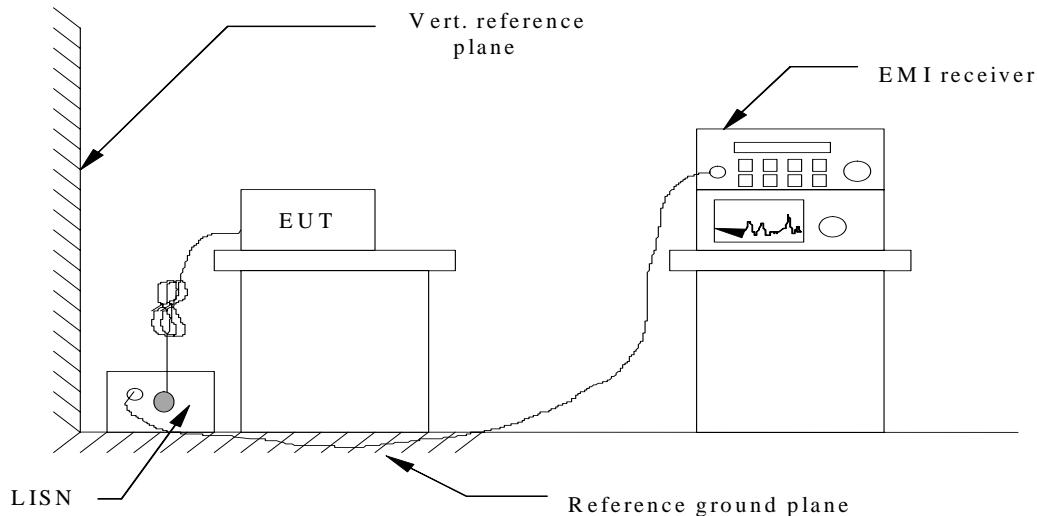

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.


#### CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

**TEST RESULTS****For Neutral**

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
 Short Description: 150K-30M Voltage

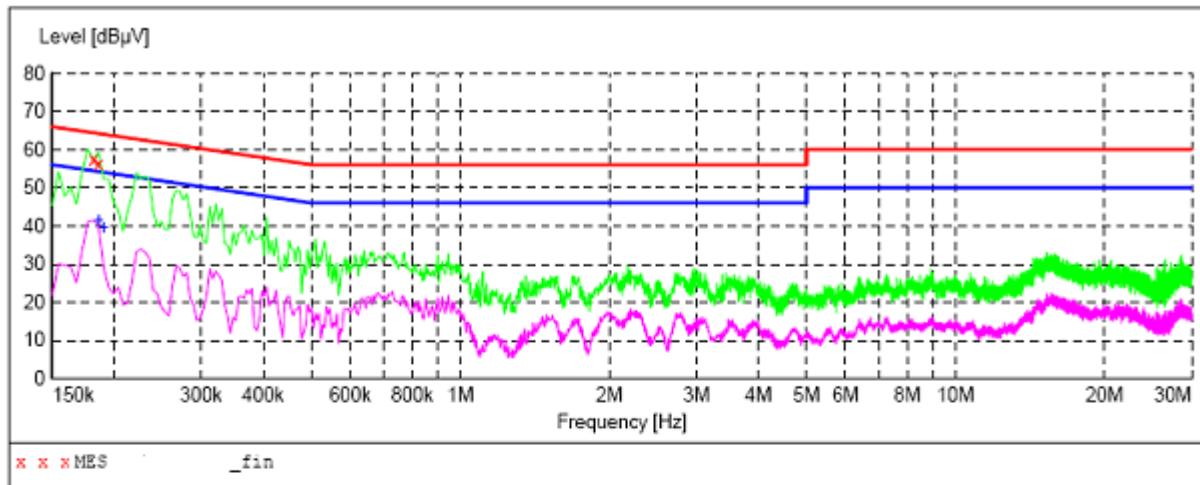**MEASUREMENT RESULT:**


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.181500	57.60	11.0	64	6.8	QP	N	GND
0.186000	56.50	11.0	64	7.7	QP	N	GND

**MEASUREMENT RESULT:**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.186000	41.60	11.0	54	12.6	AV	N	GND
0.190500	39.40	10.9	54	14.6	AV	N	GND

**For Line**

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
 Short Description: 150K-30M Voltage

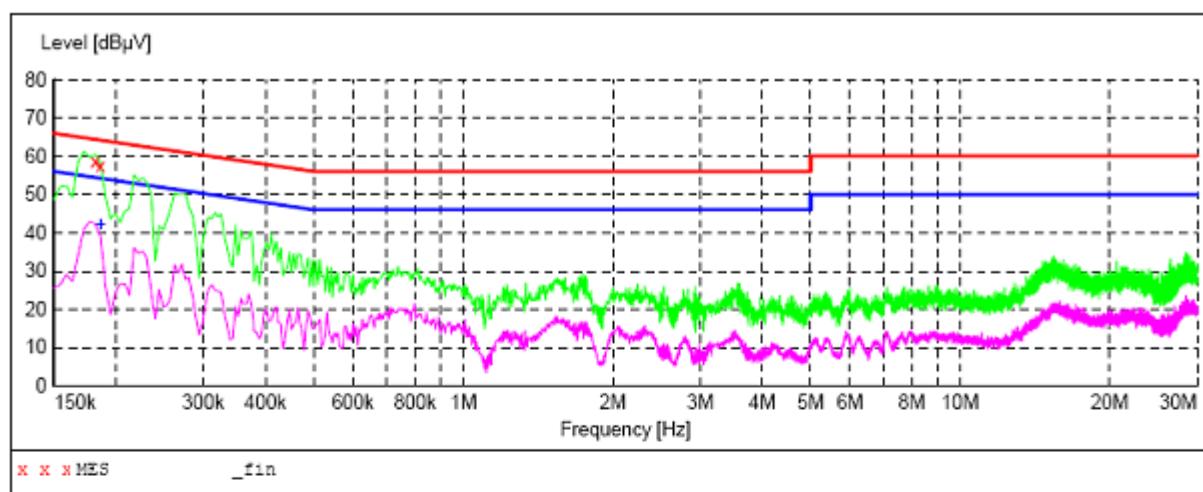**MEASUREMENT RESULT:**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.181500	58.70	11.0	64	5.7	QP	L1	GND
0.186000	57.50	11.0	64	6.7	QP	L1	GND


**MEASUREMENT RESULT:**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.186000	42.30	11.0	54	11.9	AV	L1	GND


## 4.2. Radiated Emission Test

### TEST CONFIGURATION

- a) Radiated Emission Test Set-Up, Frequency below 1000MHz

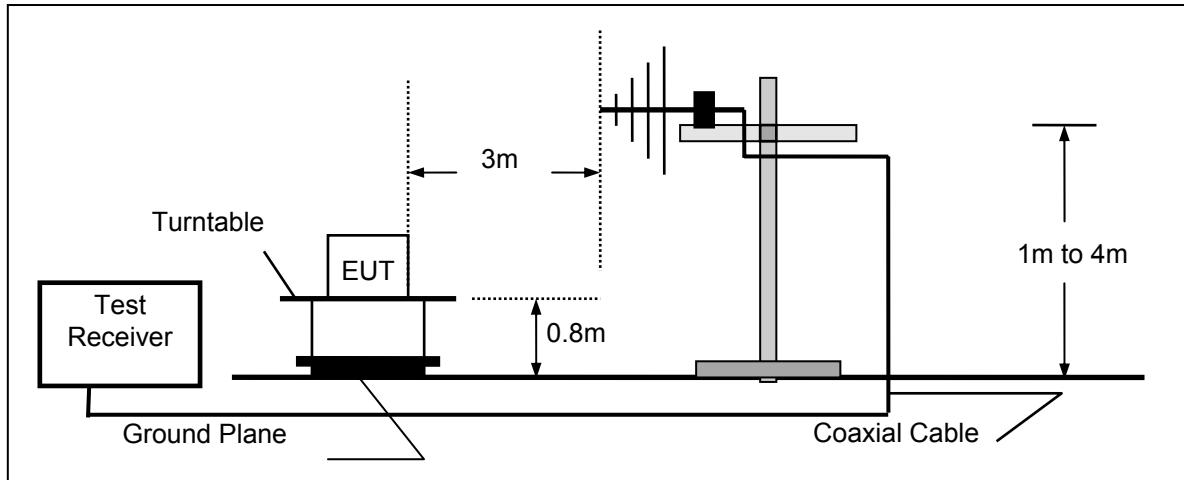

- b) Radiated Emission Test Set-Up, Frequency above 1000MHz

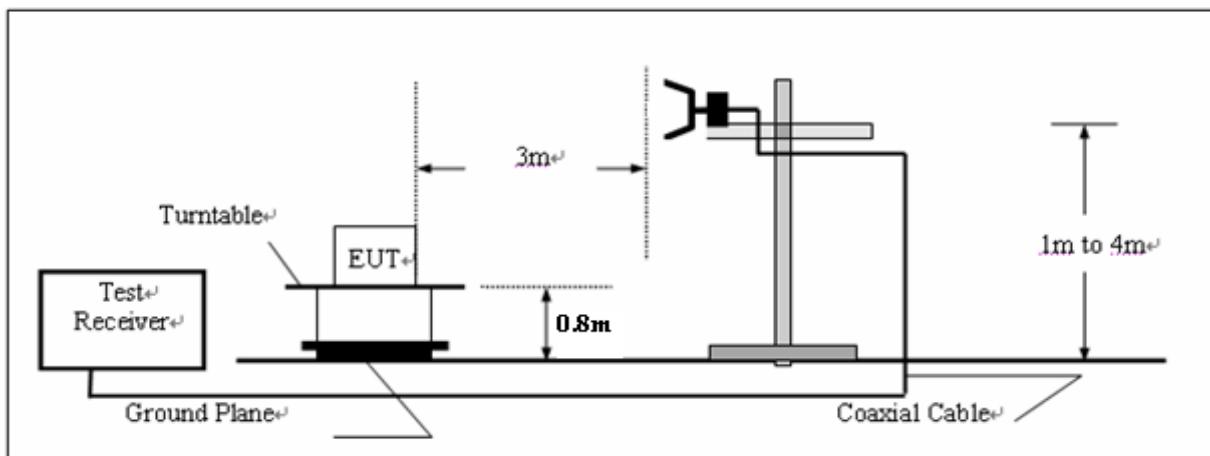

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The Highest frequency generated or used in the device or on which the device operates or tunes was 1.5GHz, so radiated emissions test frequency from 30MHz to 7.5GHz.

## FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CL - AG}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

## RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

## TEST CONDITION

**TEST RESULTS*****SWEEP TABLE: "test (30M-1G)"***


Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

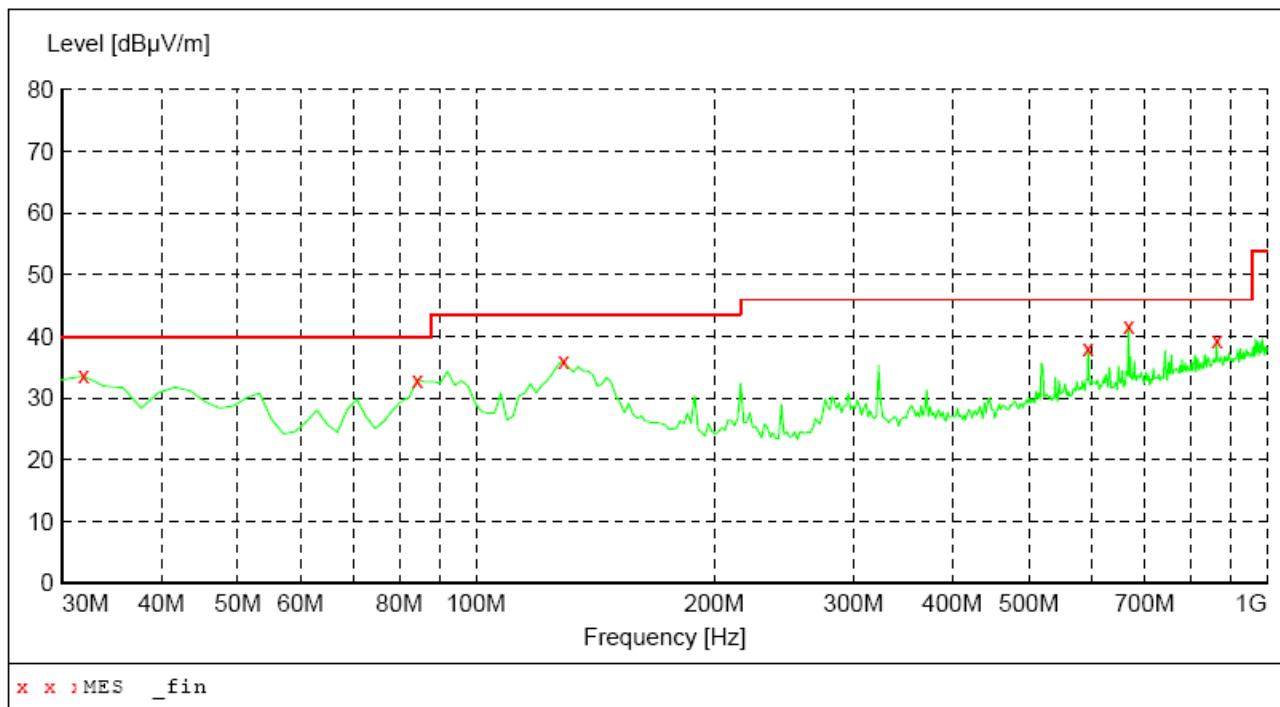***MEASUREMENT RESULT:***

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	33.60	14.4	40.0	6.4	QP	100.0	15.00	VERTICAL
84.320000	33.00	14.1	40.0	7.0	QP	100.0	124.00	VERTICAL
128.940000	36.00	13.9	43.5	7.5	QP	100.0	60.00	VERTICAL
594.540000	38.20	26.3	46.0	7.8	QP	100.0	238.00	VERTICAL
668.260000	41.80	27.2	46.0	4.2	QP	100.0	325.00	VERTICAL
864.200000	39.30	30.6	46.0	6.7	QP	100.0	75.00	VERTICAL

***SWEEP TABLE: "test (30M-1G)"***


Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

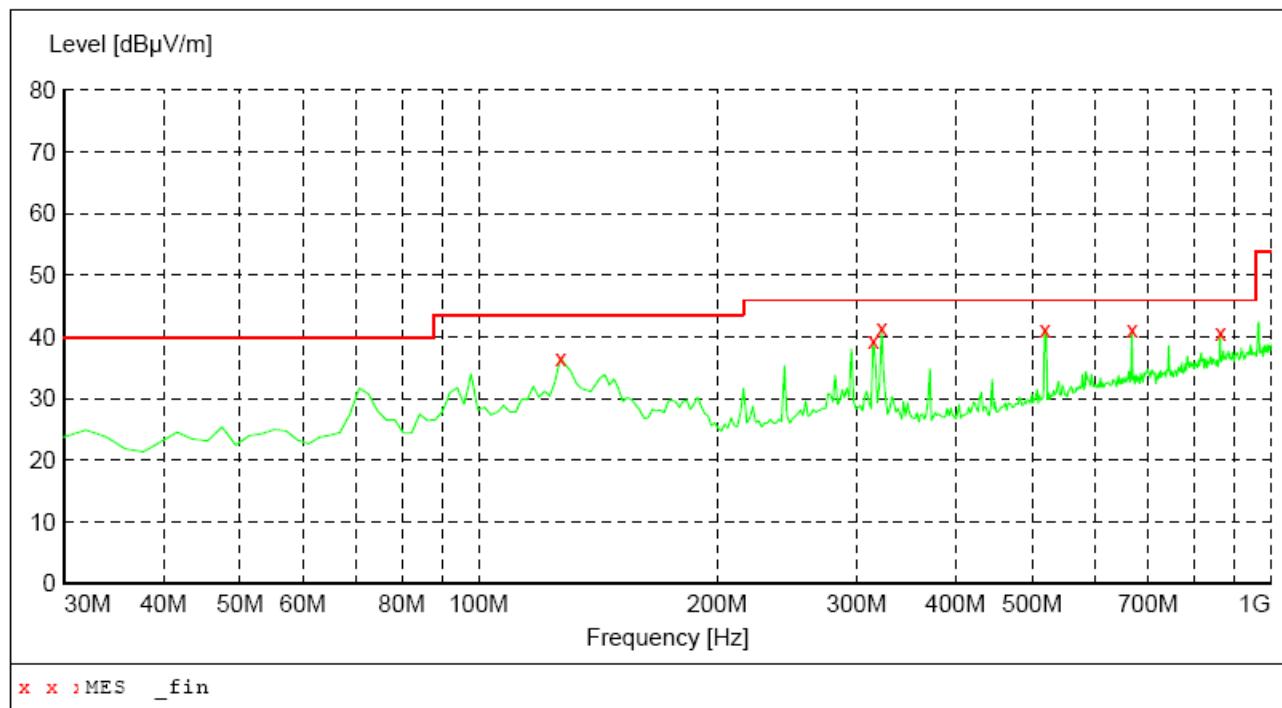***MEASUREMENT RESULT:***


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
127.000000	36.60	14.1	43.5	6.9	QP	300.0	25.00	HORIZONTAL
315.180000	39.40	19.1	46.0	6.6	QP	100.0	30.00	HORIZONTAL
322.940000	41.50	19.3	46.0	4.5	QP	100.0	125.00	HORIZONTAL
518.880000	41.30	24.4	46.0	4.7	QP	100.0	350.00	HORIZONTAL
668.260000	41.20	27.2	46.0	4.8	QP	100.0	272.00	HORIZONTAL
864.200000	40.80	30.6	46.0	5.2	QP	100.0	105.00	HORIZONTAL

Remark:1.Emission Level=Antenna Factor+Cable Loss+Reading.

2.The Emission levels that are 20dB below the official limit are not reported.

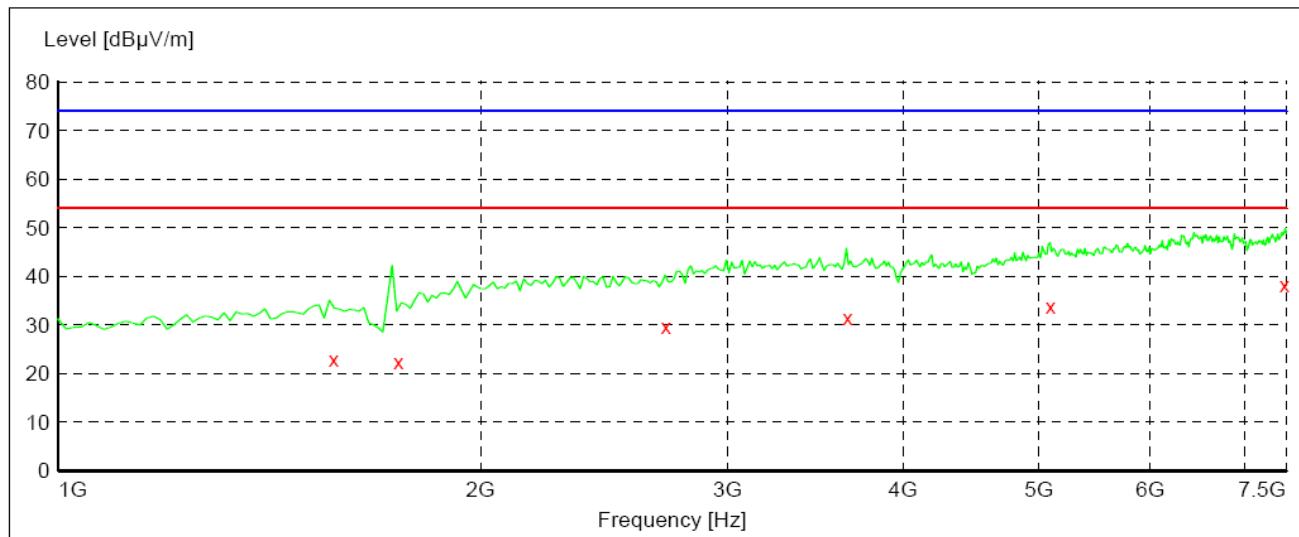

Frequency (MHz)	Level (dB $\mu$ V/m)	Bandwidth (KHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Position	Verdict
1572.500000	22.90	1000	100	54.00	31.10	Vertical	Pass
1748.000000	22.30	1000	100	54.00	31.70	Vertical	Pass
2711.000000	29.60	1000	100	54.00	24.40	Vertical	Pass
3652.500000	31.50	1000	150	54.00	22.50	Vertical	Pass
5096.000000	33.80	1000	110	54.00	20.20	Vertical	Pass
7481.000000	38.30	1000	150	54.00	15.70	Vertical	Pass

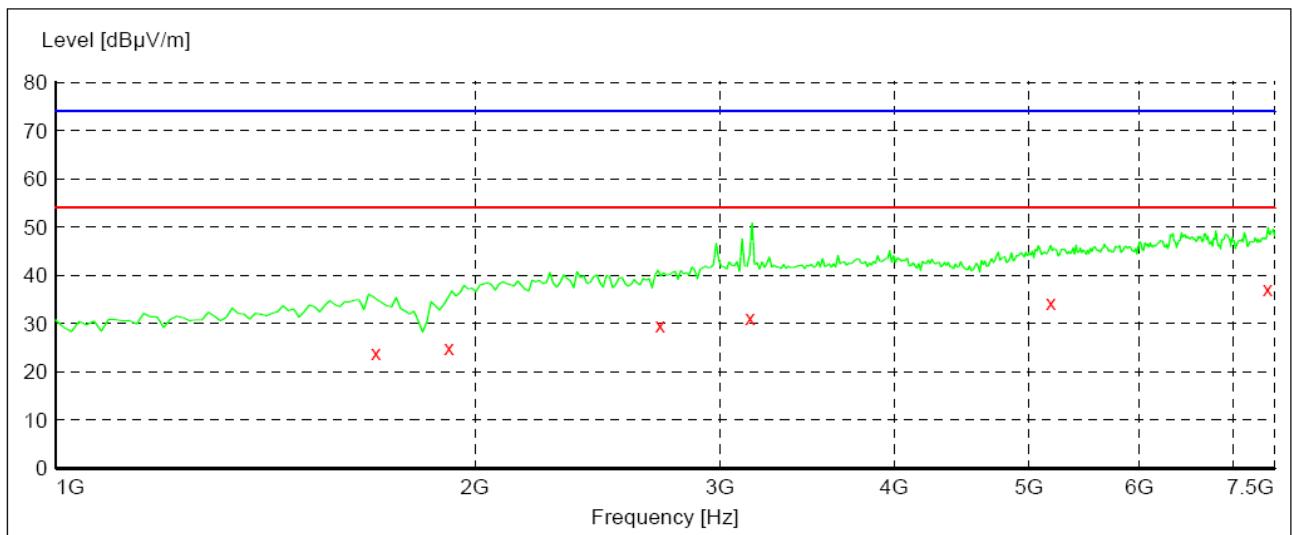

Frequency (MHz)	Level (dB $\mu$ V/m)	Bandwidth (KHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Position	Verdict
1698.000000	24.00	1000	150	54.00	30.00	Horizontal	Pass
1916.500000	24.90	1000	147	54.00	29.10	Horizontal	Pass
2716.000000	29.60	1000	100	54.00	24.40	Horizontal	Pass
3153.000000	31.20	1000	100	54.00	22.80	Horizontal	Pass
5183.500000	34.40	1000	120	54.00	19.60	Horizontal	Pass
7419.500000	37.30	1000	100	54.00	16.70	Horizontal	Pass

Remark:1.Emission Level=Antenna Factor+Cable Loss+Reading.

2.The Emission levels that are 20dB below the official limit are not reported.

## 5. Test Setup Photos of the EUT





## **6. External and Internal Photos of the EUT**


### **External Photos**












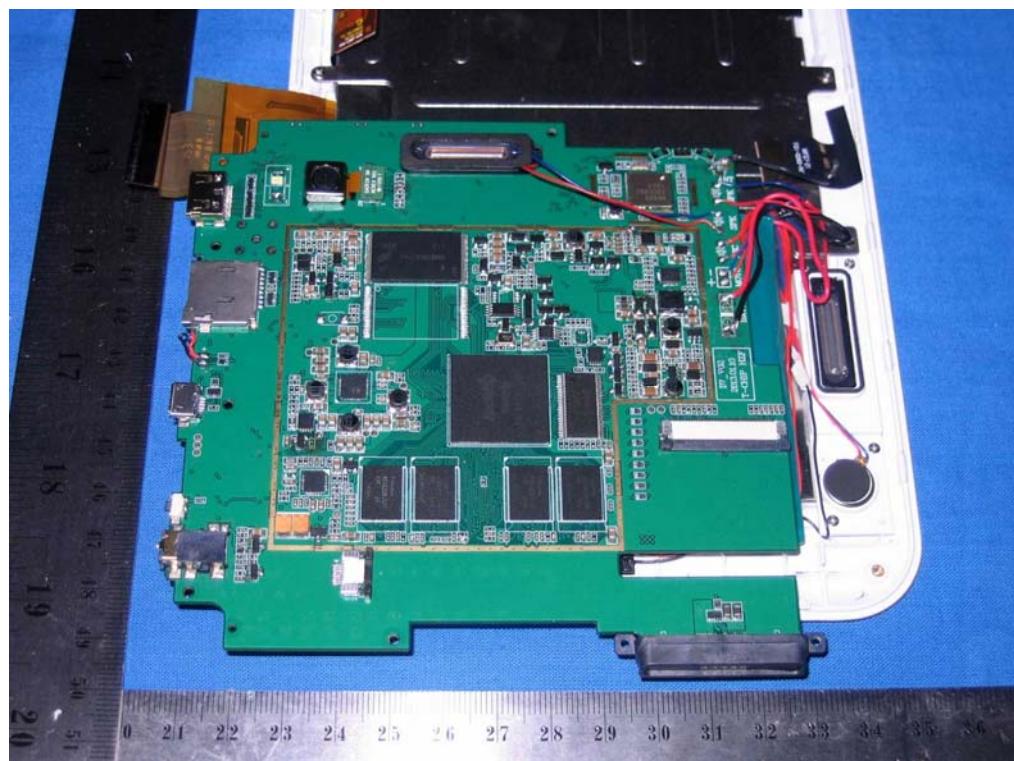

Internal Photos

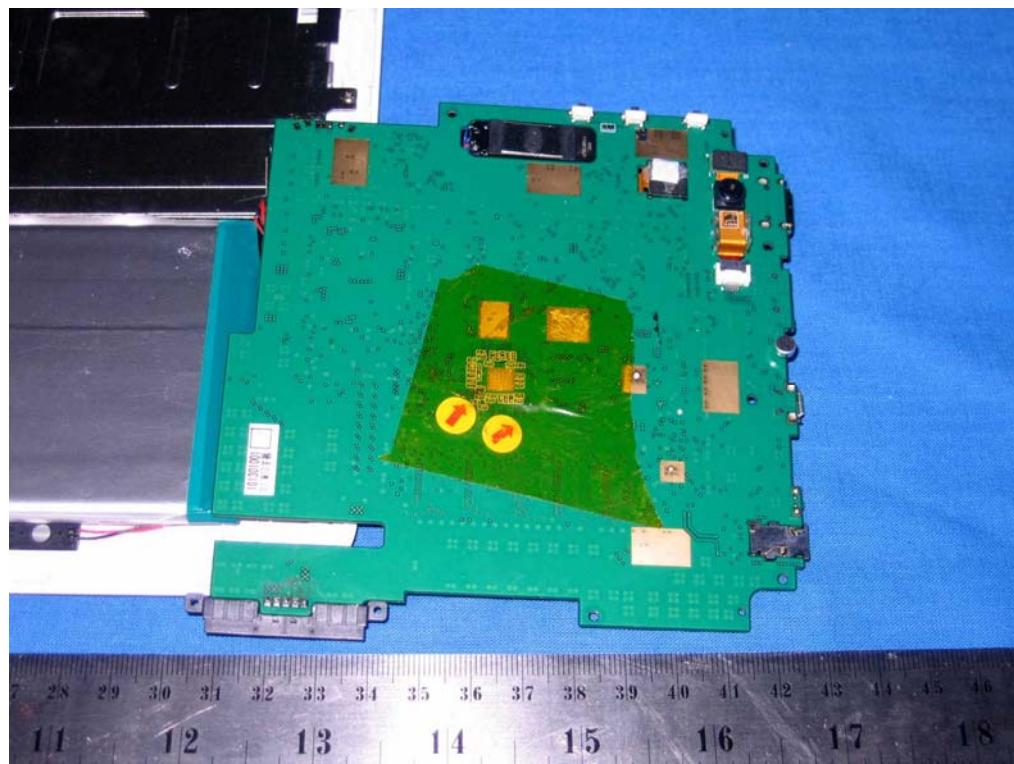

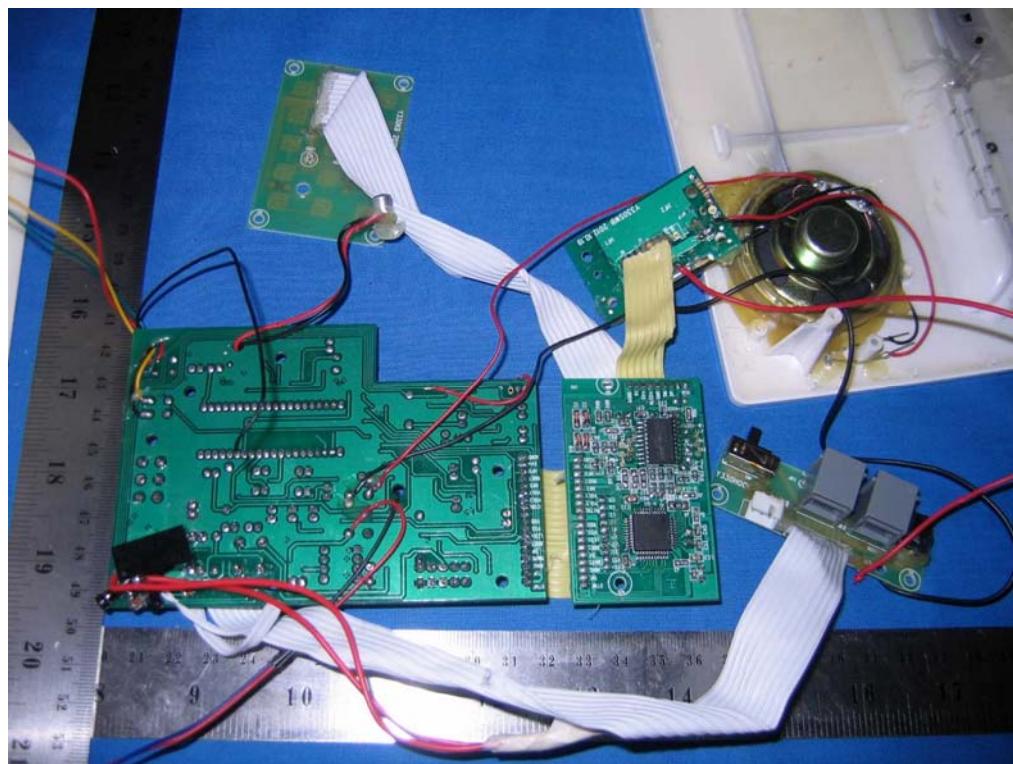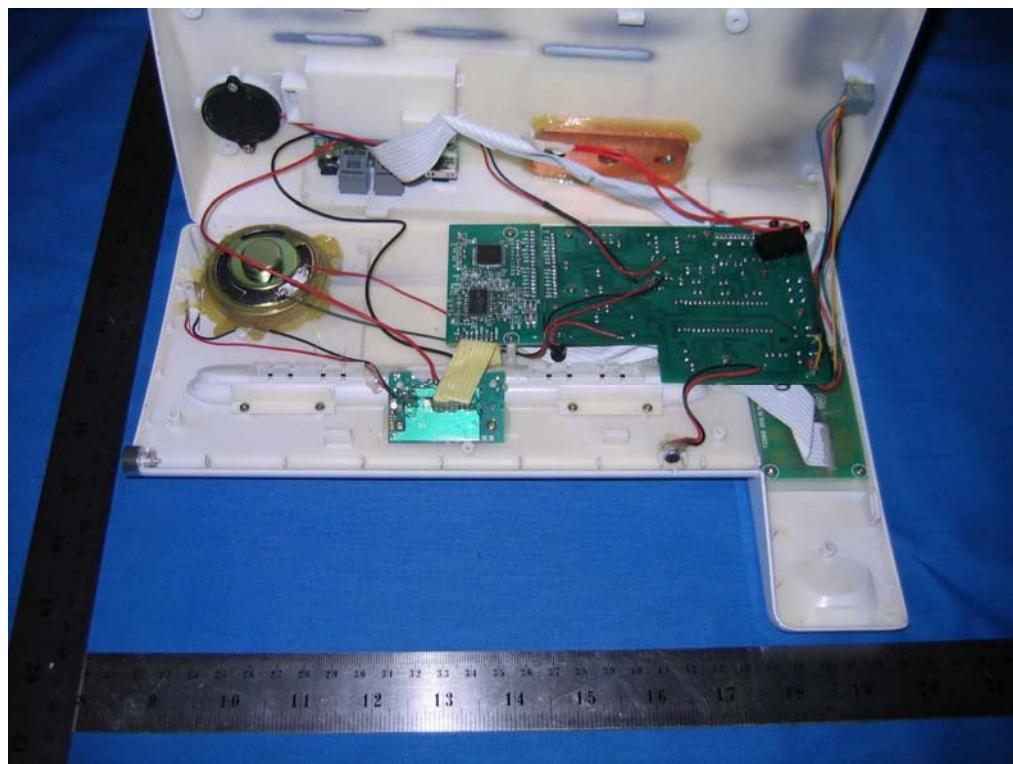

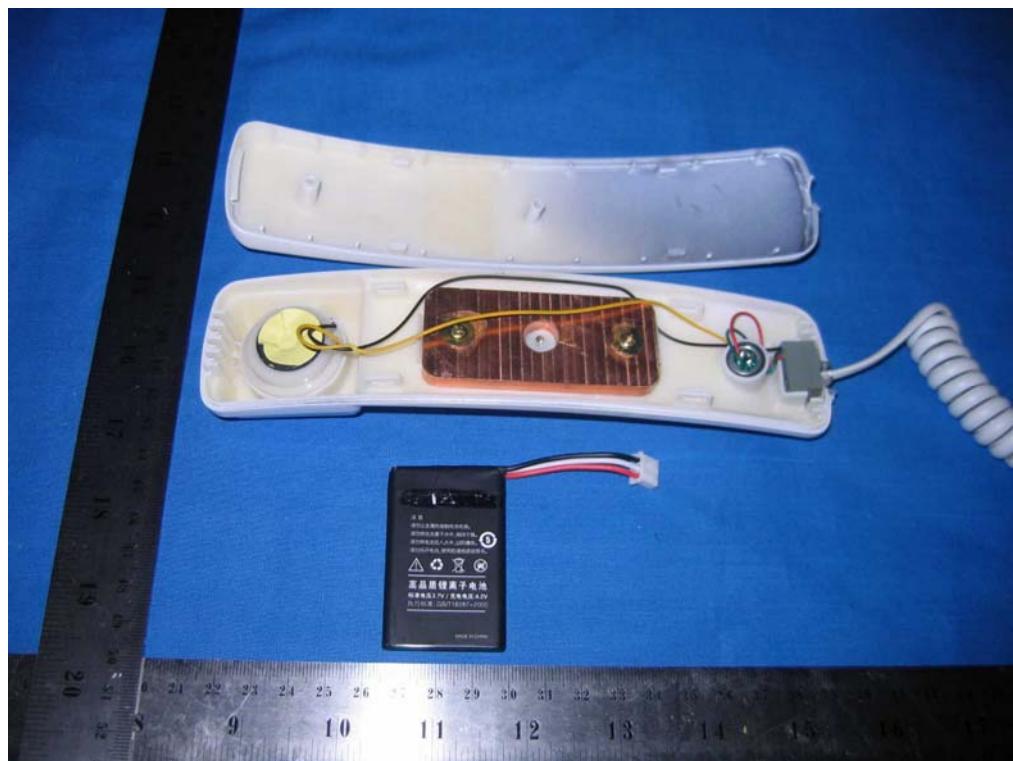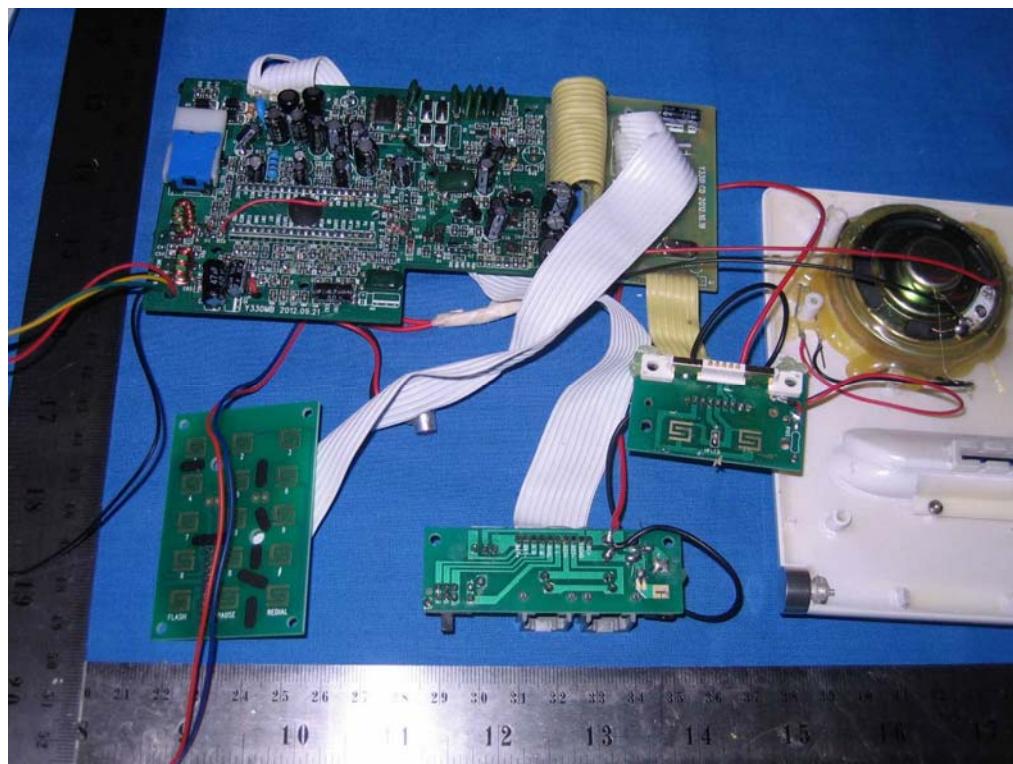

.....End of Report.....