

# RF TEST REPORT

Test item : Bluetooth keyboard  
Model No. : AA-SK2NWBB  
Order No. : 1107-01011  
Date of receipt : 2011-07-21  
Test duration : 2011-07-20 ~ 2011-07-29  
Date of issue : 2011-08-03  
Use of report : FCC & IC Original Grant

Applicant : OKI Electric Technology(Kunshan) Co., Ltd  
Park Bao Jia Road, Kunshan Hi-Tech Industrial, Kunshan City, Jiangsu  
PRC. 215316 China

Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15.247 Subpart C  
RSS-210, RSS-Gen  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and  
the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full,  
without the written approval of Digital EMC Co., Ltd.

Tested by:



Engineer  
S.K.Ryu

Witnessed by:

N/A

Reviewed by:

  
Manager  
W.J. Lee

## **CONTENTS**

<b>1. Equipment information.....</b>	<b>3</b>
1.1 Equipment description .....	3
1.2 Ancillary equipment .....	3
<b>2. Information about test items.....</b>	<b>4</b>
2.1 Test mode & EUT Position.....	4
2.2 Auxiliary equipment .....	4
2.3 Tested frequency .....	4
2.4 Tested environment.....	4
2.5 EMI Suppression Device(s)/Modifications .....	4
<b>3. Test Report .....</b>	<b>5</b>
3.1 Summary of tests .....	5
3.2 Transmitter requirements .....	6
3.2.1 Carrier Frequency Separation.....	6
3.2.2 Number of Hopping Frequencies .....	8
3.2.3 20 dB Bandwidth & Occupied Bandwidth(99%) .....	11
3.2.4 Time of Occupancy (Dwell Time) .....	14
3.2.5 Peak Output Power.....	16
3.2.6 Conducted Spurious Emissions .....	19
3.2.7 Radiated Spurious Emissions .....	31
3.2.8 AC Line Conducted Emissions.....	33
3.2.9 Antenna Requirements .....	34
3.3 Receiver requirements .....	35
3.3.1 AC Conducted Emissions (Receiver Mode) .....	35
3.3.2 Out of Band Emissions – Radiated (Receiver Mode).....	36
<b>APPENDIX I.....</b>	<b>38</b>

## 1. Equipment information

### 1.1 Equipment description

FCC Equipment Class	Part 15 Spread Spectrum Transmitter(DSS)
FCC ID	ZRN-AASK2NWBB
IC ID	9797A-AASK2NWBB
Equipment type	Bluetooth keyboard
Equipment model name	AA-SK2NWBB
Equipment add model name	AA-SK2NWBB/US, AA-SK2NWBB/CA
Equipment serial no.	Identical prototype
Frequency band	2402 ~ 2480 MHz
Spread Spectrum	Frequency Hopping
Modulation type	GFSK
Transmission rate	1Mbps
Channel Spacing	1.0 MHz
Power	Mercury & Cadmium Battery: DC 3.0 V
Antenna type	Internal Type: Chip Antenna (Max. Peak Gain:3.5 dBi)

### 1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

## 2. Information about test items

### 2.1 Test mode & EUT Position

This device was tested in maximum duty mode at maximum power of hopping enable / disable mode.

Test Case 1	-
Test Case 2	-
Test Case 3	-

EUT position: refer to Test photo file.

### 2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

### 2.3 Tested frequency

- Hopping Function: Enable

	TX Frequency (MHz)	RX Frequency (MHz)
Hopping Band	2402 ~ 2480	2402 ~ 2480

- Hopping Function: Disable

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2402	2402
Middle Channel	2441	2441
Highest Channel	2480	2480

### 2.4 Tested environment

Temperature	: 20 ~ 25 °C
Relative humidity content	: 40 ~ 46 % R.H.
Details of power supply	: DC 3.0 V

### 2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing  
 → None

### 3. Test Report

#### 3.1 Summary of tests

FCC Part RSS-210 & GEN	Parameter	Limit (Using in 2400 ~ 2483.5MHz)	Test Condition	Status (note 1)
<b>I. Transmit mode (Tx)</b>				
15.247(a) RSS-210(A8.1)	Carrier Frequency Separation	>= 20dB BW or >= Two-Thirds of the 20dB BW	Conducted	C
	Number of Hopping Frequencies	>= 15 hops		C
	20 dB Bandwidth	None		C
	Dwell Time	=< 0.4 seconds		C
15.247(b) RSS-210(A8.4)	Transmitter Output Power	=< 1Watt , if CHs >= 75 Others =<0.125W		C
15.247(d) RSS-210(A8.5)	Band-edge /Conducted	The radiated emission to any 100 kHz of outband shall be at least 20dB below the highest inband spectral density.		C
	Conducted Spurious Emissions			C
15.205,15.209 RSS-210(A8.5)	Radiated Emissions	FCC 15.209	Radiated	C Note 2
15.207 RSS-Gen(7.2.4)	AC Conducted Emissions	FCC 15.207	AC Line Conducted	NA Note 3
RSS Gen Issue 3	Occupied Bandwidth (99%)	RSS-Gen(4.6.1)	Conducted	C
15.203 RSS-Gen(7.1.2)	Antenna Requirements	FCC 15.203	-	C
<b>II. Receive mode (Rx)</b>				
RSS-Gen(7.2.4)	AC Conducted Emissions	RSS-Gen(7.2.4 Table 4)	Line Conducted	NA Note 3
RSS-Gen(6)	Receiver Spurious Emissions	RSS-Gen(6 Table 2)	Radiated	C Note 2

Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable  
 Note 2: This test item was performed in each axis. And the worst case data were reported.  
 These test items were performed at OATS of KOSTEC Co., Ltd.(IC assigned code: 8305A)  
 Note 3: This test is not applicable. Because the power of this device is supplied from batteries.

The sample was tested according to the following specification:

ANSI C-63.4-2003, DA00-705, RSS-Gen Issue 3

## 3.2 Transmitter requirements

### 3.2.1 Carrier Frequency Separation

#### - Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = wide enough to capture the peaks of two adjacent channels

RBW = 1% of the span

Sweep = auto

VBW =  $\geq$  RBW

Detector function = peak

Trace = max hold

#### - Measurement Data: Comply

Hopping Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	2439.990	2440.995	1.005

Note 1: See next pages for actual measured spectrum plots.


#### - Minimum Standard:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

## Carrier Frequency Separation

Hopping mode: Enable

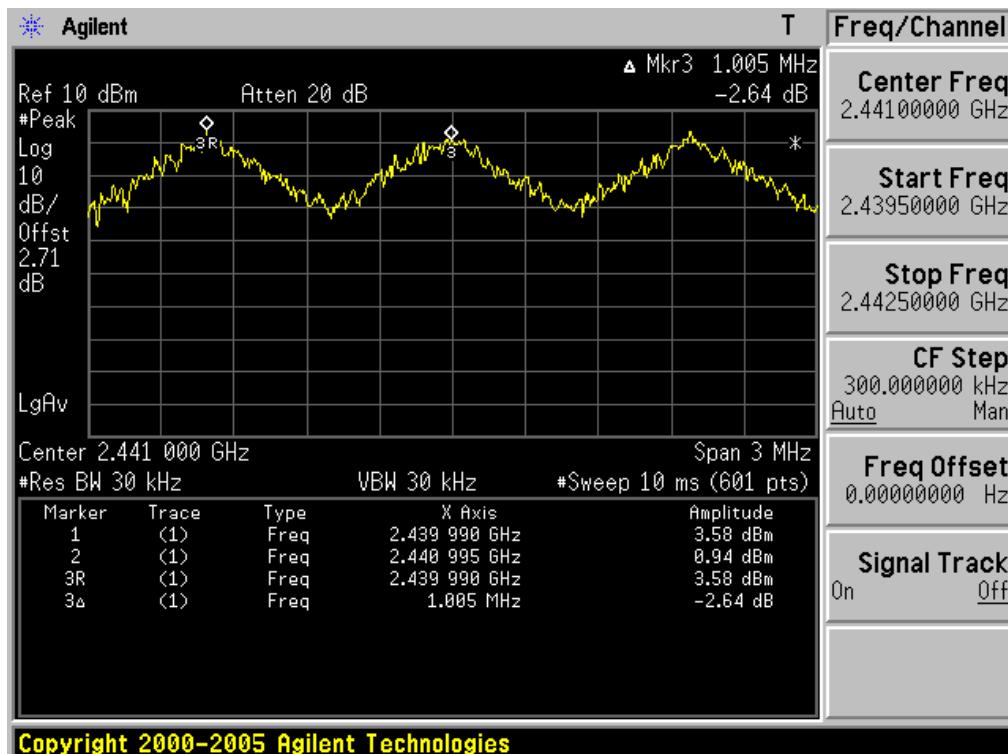

### 3.2.2 Number of Hopping Frequencies

#### - Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Span = 25MHz      Plot 1: Start Frequency = 2389.5MHz, Stop Frequency = 2414.5 MHz  
                         Plot 2: Start Frequency = 2414.5MHz, Stop Frequency = 2439.5 MHz  
                         Plot 3: Start Frequency = 2439.5MHz, Stop Frequency = 2464.5 MHz  
                         Plot 4: Start Frequency = 2464.5MHz, Stop Frequency = 2489.5 MHz

RBW = 1% of the span or more      Sweep = auto

VBW =  $\geq$  RBW      Detector function = peak

Trace = max hold

#### - Measurement Data: Comply

Hopping mode	Test Result (Total Hops)
Enable	79


Note 1: See next pages for actual measured spectrum plots.

#### - Minimum Standard:


At least 15 hopes

**Number of Hopping Frequencies 1**

Hopping mode: Enable

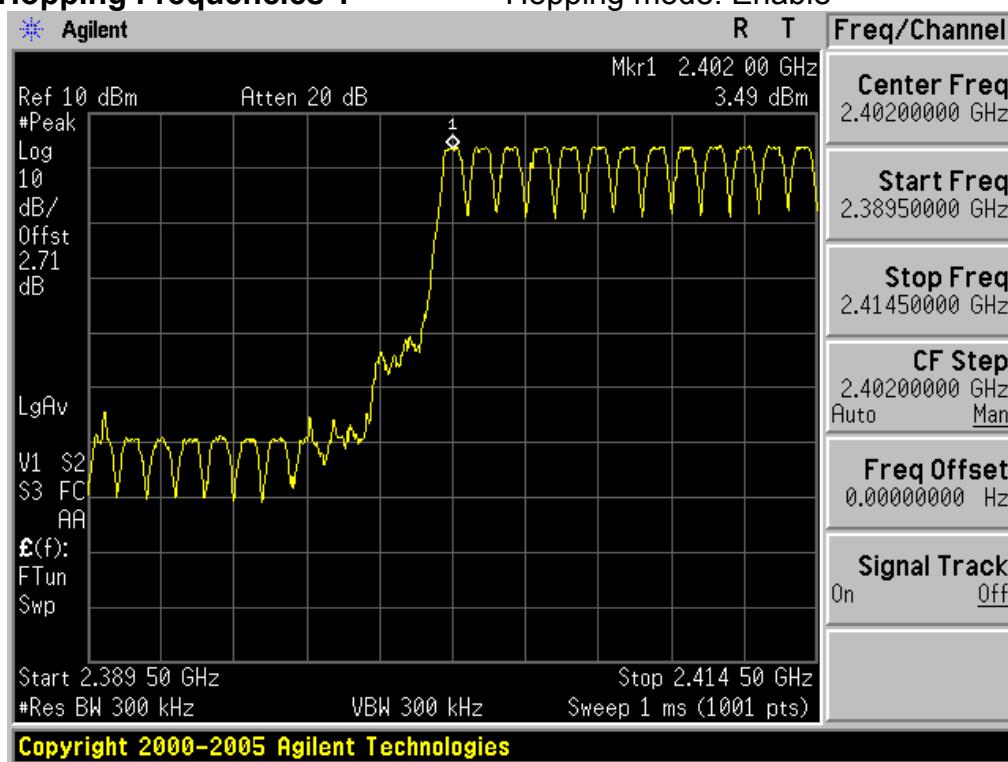
**Number of Hopping Frequencies 2**

Hopping mode: Enable

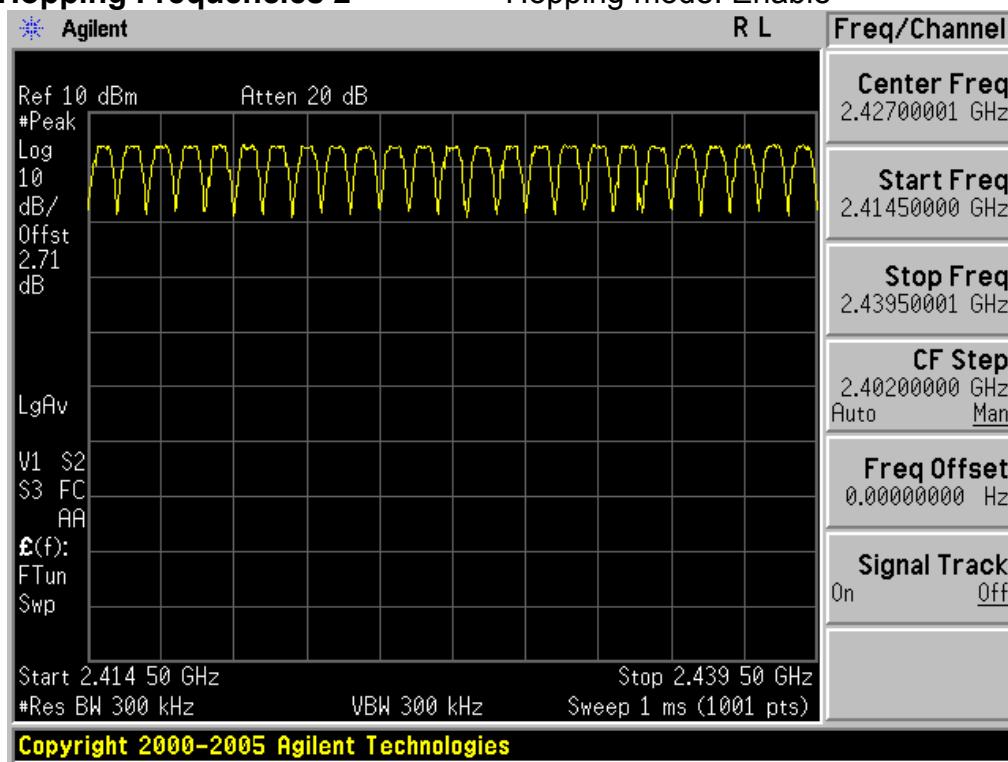


**Number of Hopping Frequencies 3**

Hopping mode: Enable

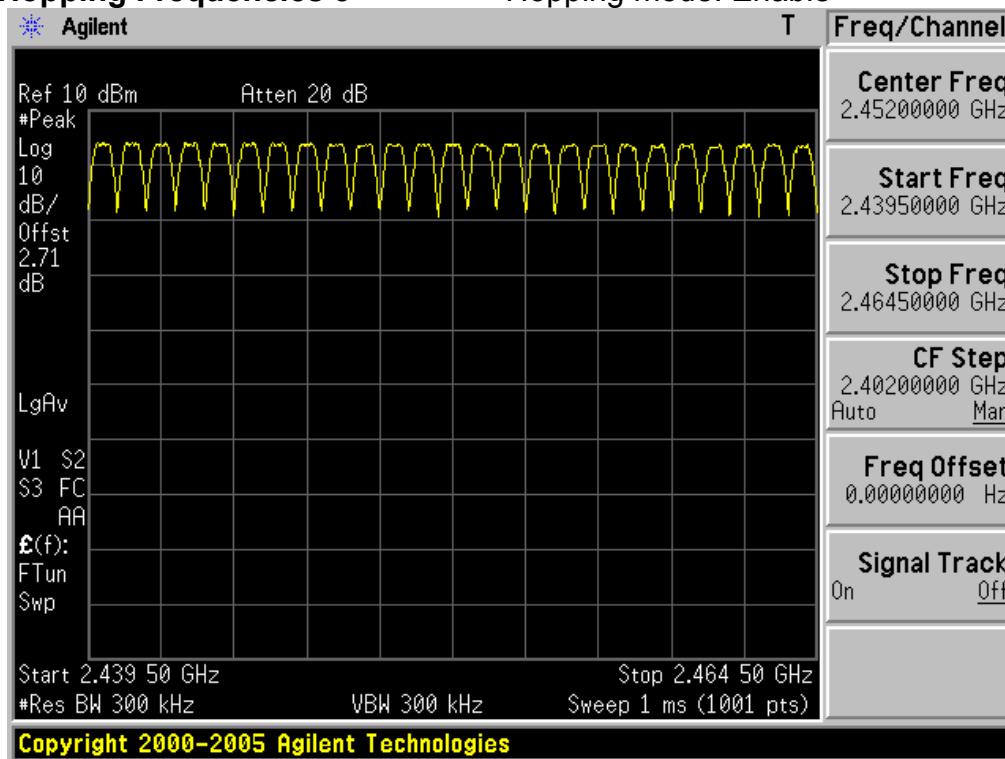**Number of Hopping Frequencies 4**

Hopping mode: Enable

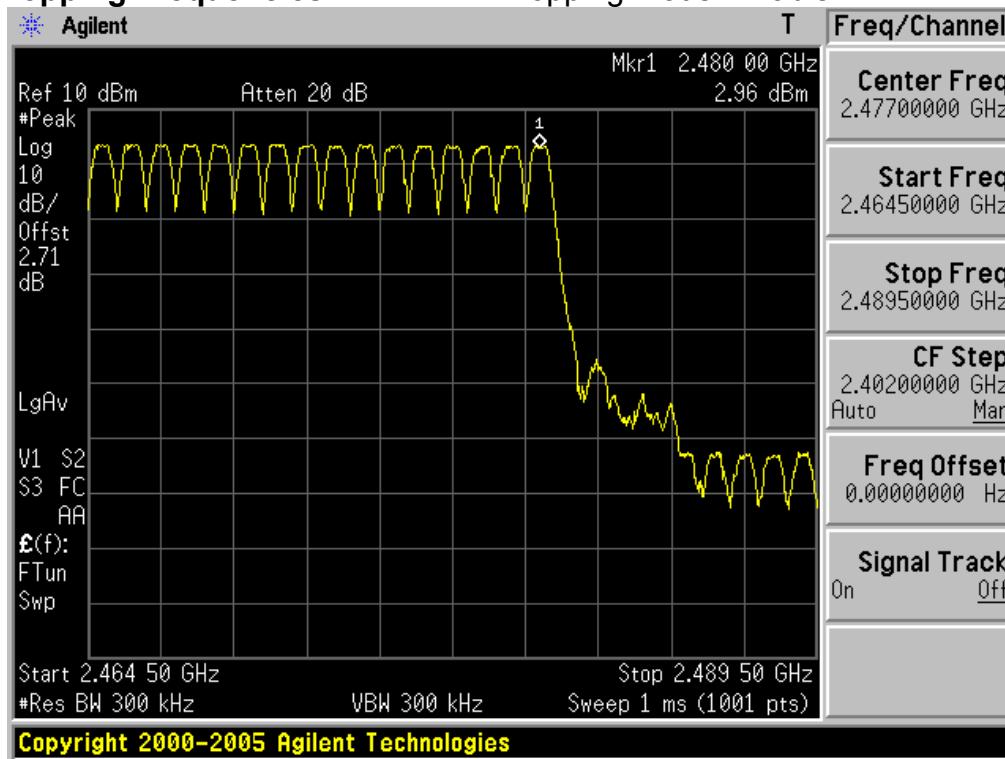

### 3.2.3 20 dB Bandwidth & Occupied Bandwidth(99%)

#### - Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = approximately 2 or 3 times of the 20 dB bandwidth

RBW = 1% of the 20dB bandwidth or more

Sweep = auto

VBW =  $\geq$  RBW

Detector function = peak

Trace = max hold

#### - Measurement Data: **Comply**

Hopping mode	Tested Channel	Test Results(MHz)	
		20dB Bandwidth	Occupied Bandwidth(99%)
Disable	Lowest	0.934	0.882
	Middle	0.931	0.877
	Highest	0.929	0.878


Note 1: See next pages for actual measured spectrum plots.

#### - Minimum Standard:

None
------


## 20dB Bandwidth


## Lowest Channel

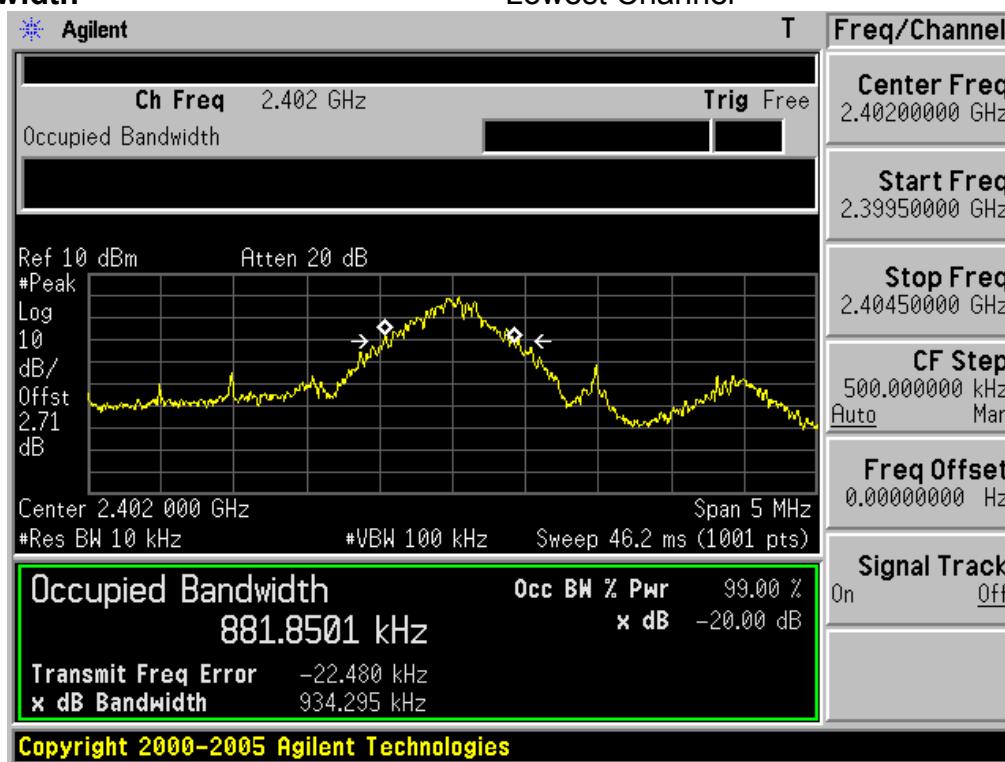

## 20dB Bandwidth

## Middle Channel

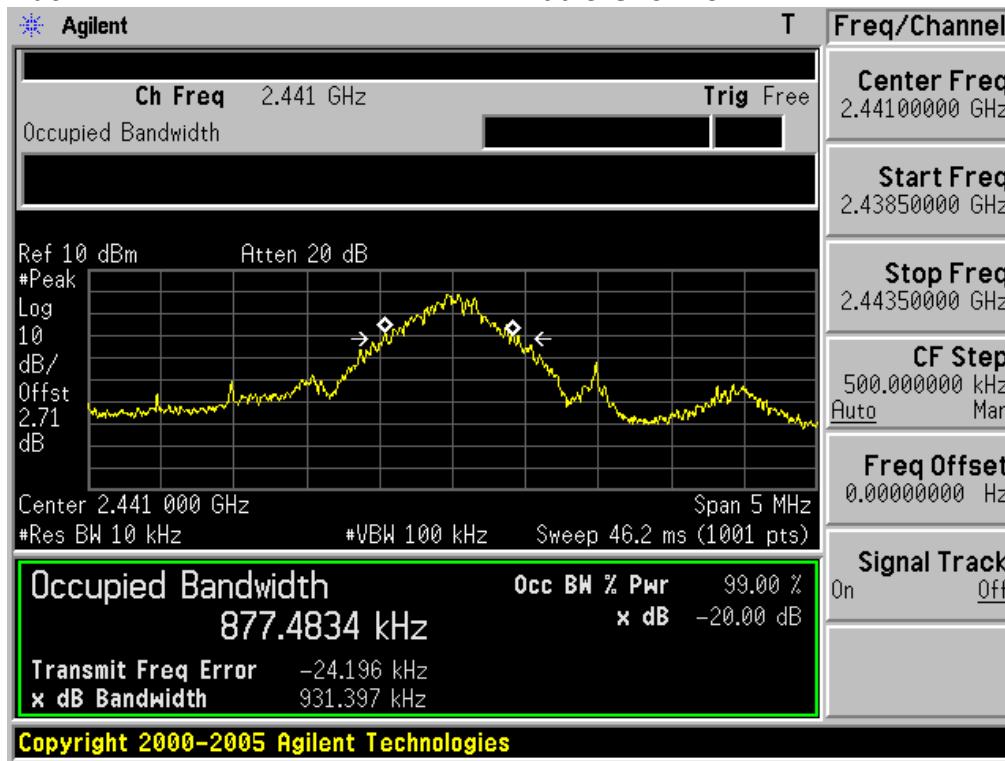

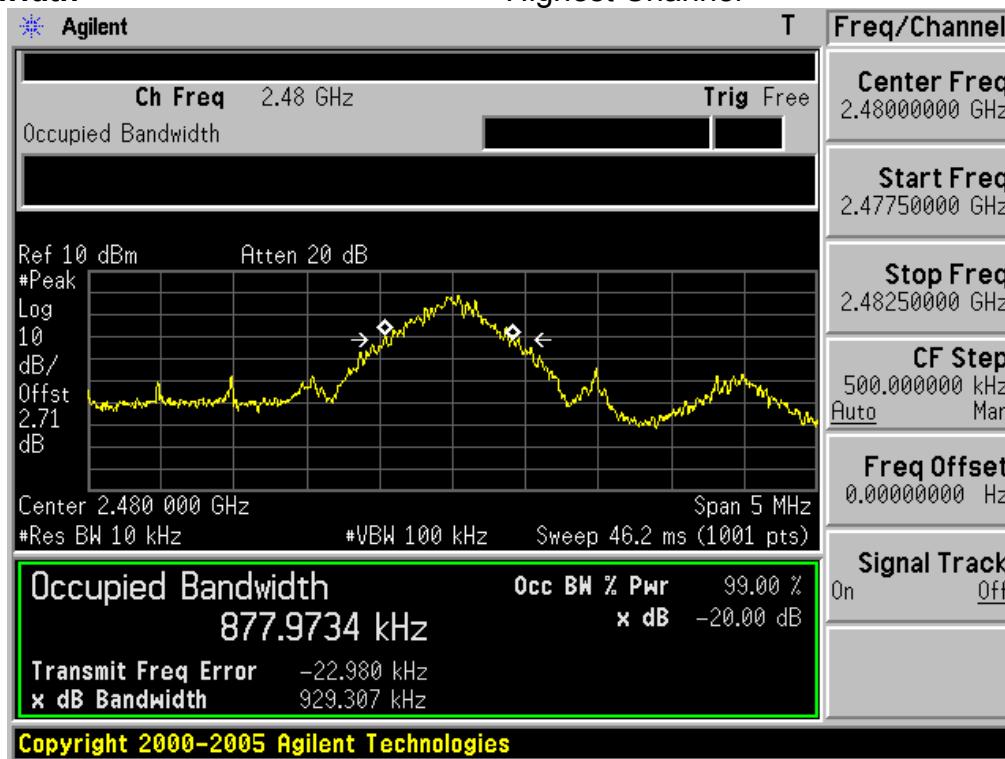**20dB Bandwidth****Highest Channel**

### 3.2.4 Time of Occupancy (Dwell Time)

#### - Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW =  $\geq$  RBW

Trace = max hold

Detector function = peak

#### - Measurement Data: **Comply**

Hopping mode	Packet Type	Burst On Time (ms)	Period (ms)	Number of hopping Channels	Test Result (s)
Enable	DH 5	3.05	3.75	79	0.325

Note 1: Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

DWELL TIME=(0.4 x Number of hopping Channels) x Burst On time / (period x Number of hopping Channels)


Note 2: See next pages for actual measured spectrum plots.

#### - Minimum Standard:

No greater than 0.4 seconds
-----------------------------

## Time of Occupancy

Hopping mode: Enable

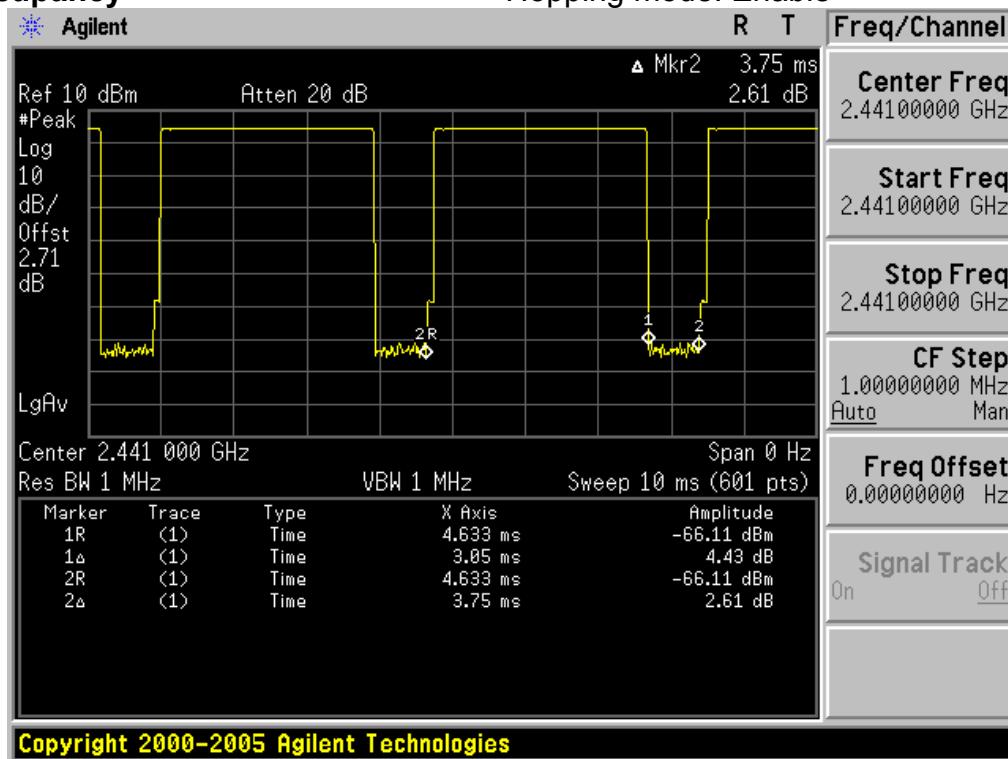

### 3.2.5 Peak Output Power

#### - Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = approximately 5 times of the 20 dB bandwidth

RBW = greater than the 20dB bandwidth of the emission being measured

VBW =  $\geq$  RBW

Detector function = peak

Trace = max hold

Sweep = auto

#### - Measurement Data: Comply

Hopping mode	Tested Channel	Test Results	
		dBm	mW
Disable	Lowest	4.51	2.825
	Middle	4.23	2.649
	Highest	3.67	2.328


Note 1: See next pages for actual measured spectrum plots.

#### - Minimum Standard:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: **1 Watt**. For all other frequency hopping systems in the 2400-2483.5 MHz band: **0.125 Watts**


## Peak Output Power

## Lowest Channel

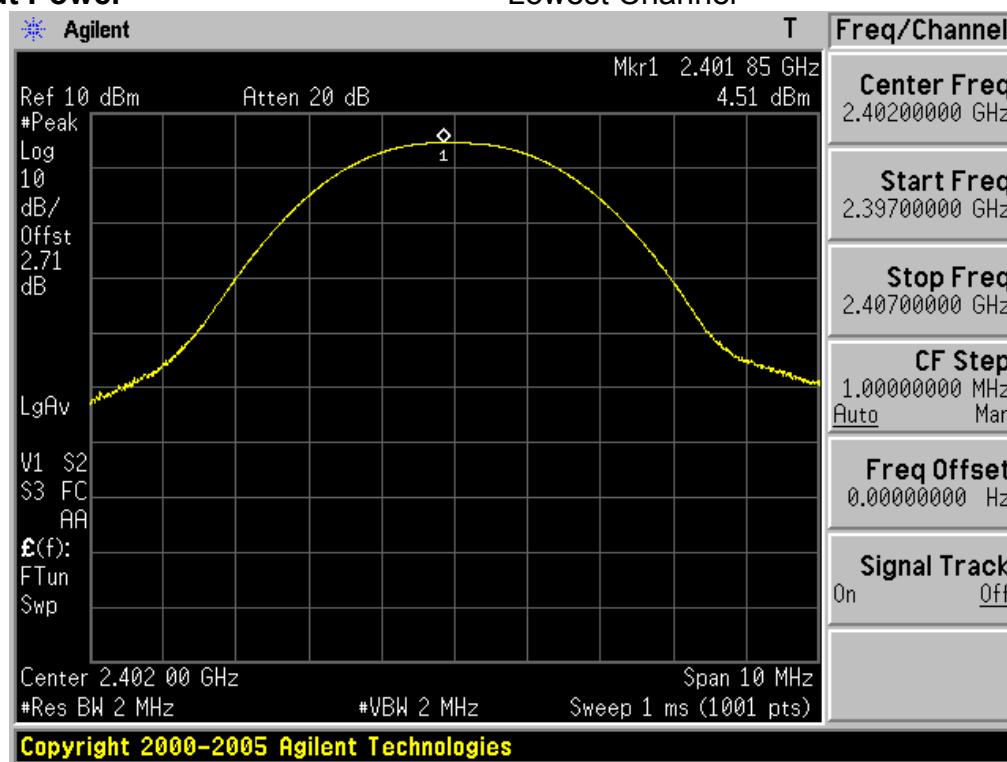


## Peak Output Power

## Middle Channel

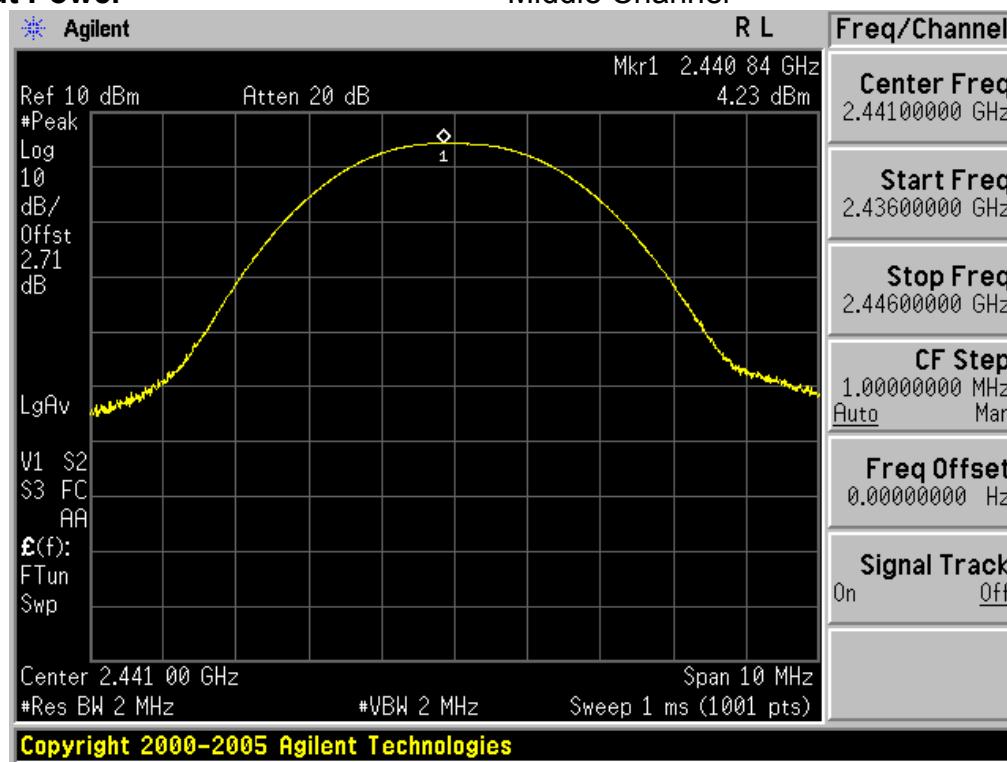

## Peak Output Power

## Highest Channel

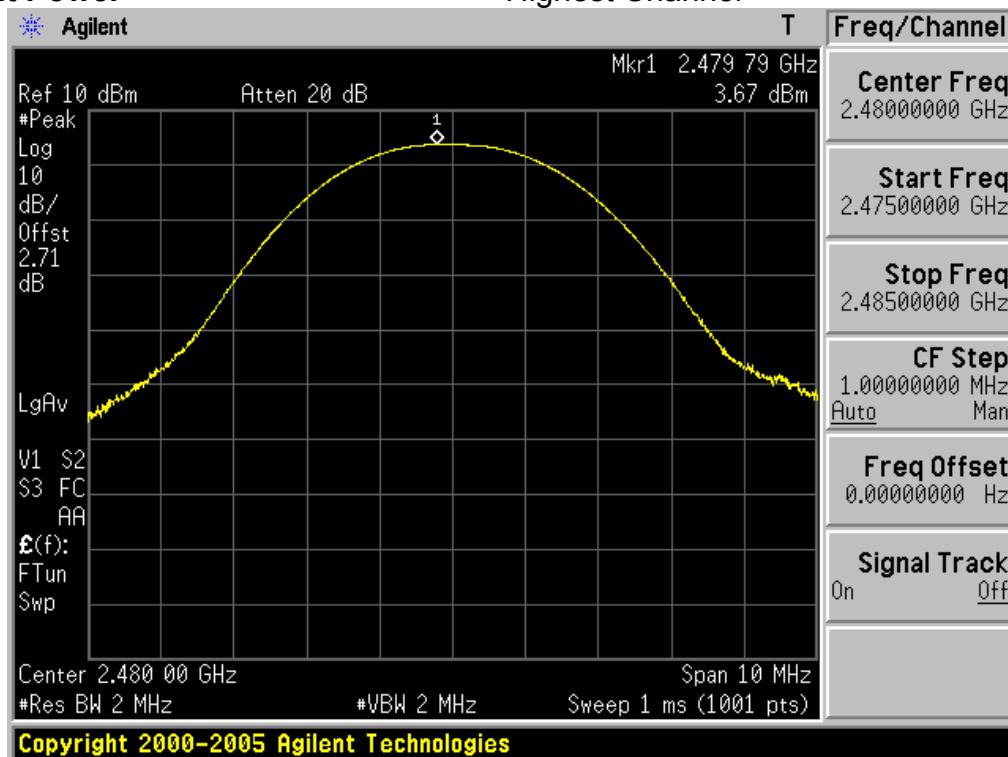

### 3.2.6 Conducted Spurious Emissions

#### - Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

For Band-edge testing the spectrum analyzer is set to:

Tested frequency = the highest and the lowest Frequencies

Center frequency = 2400MHz, 2483.5MHz

Span = 10MHz

Detector function = peak

RBW = 1% of the span

VBW =  $\geq$  RBW

Trace = max hold

Sweep = auto

For spurious testing the spectrum analyzer is set to:

Tested frequency = the highest, middle and the lowest Frequencies

RBW = 100 kHz

VBW =  $\geq$  RBW

Detector function = peak

Sweep = auto

Trace = max hold

#### - Measurement Data: **Comply**

Note 1: See next pages for actual measured spectrum plots.

#### - Minimum Standard:


Minimum Standard:	> 20 dBc
-------------------	----------

**Low Band-edge**

Hopping mode: Disable

**Low Band-edge**

Hopping mode: Enable

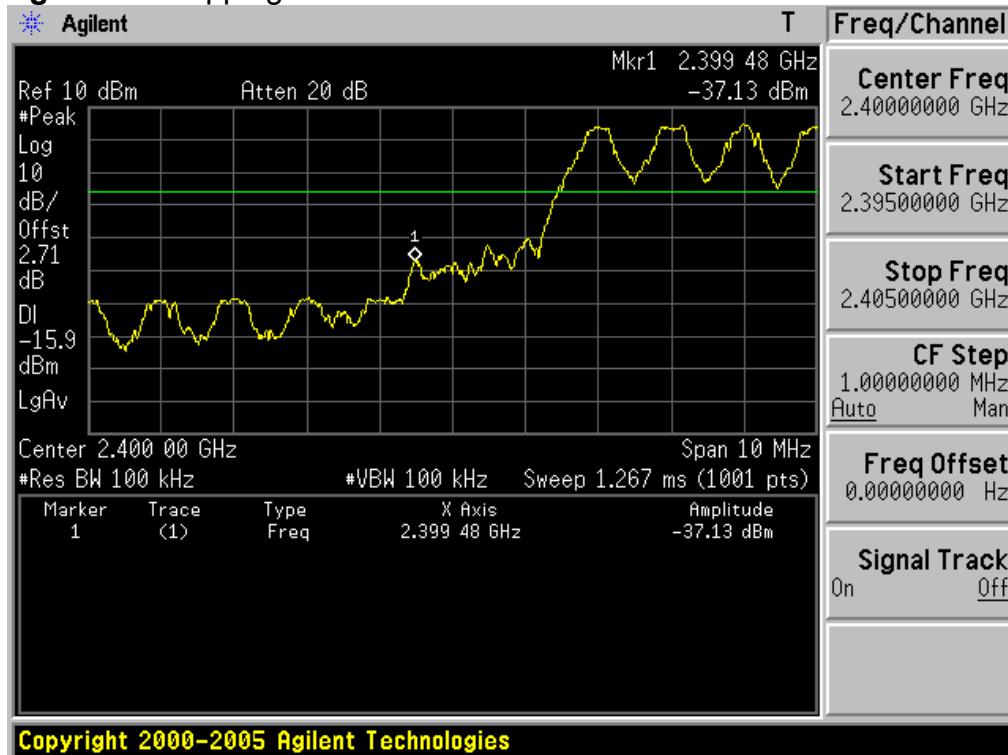




**High Band-edge**

Hopping mode: Disable

**High Band-edge**


Hopping mode: Enable

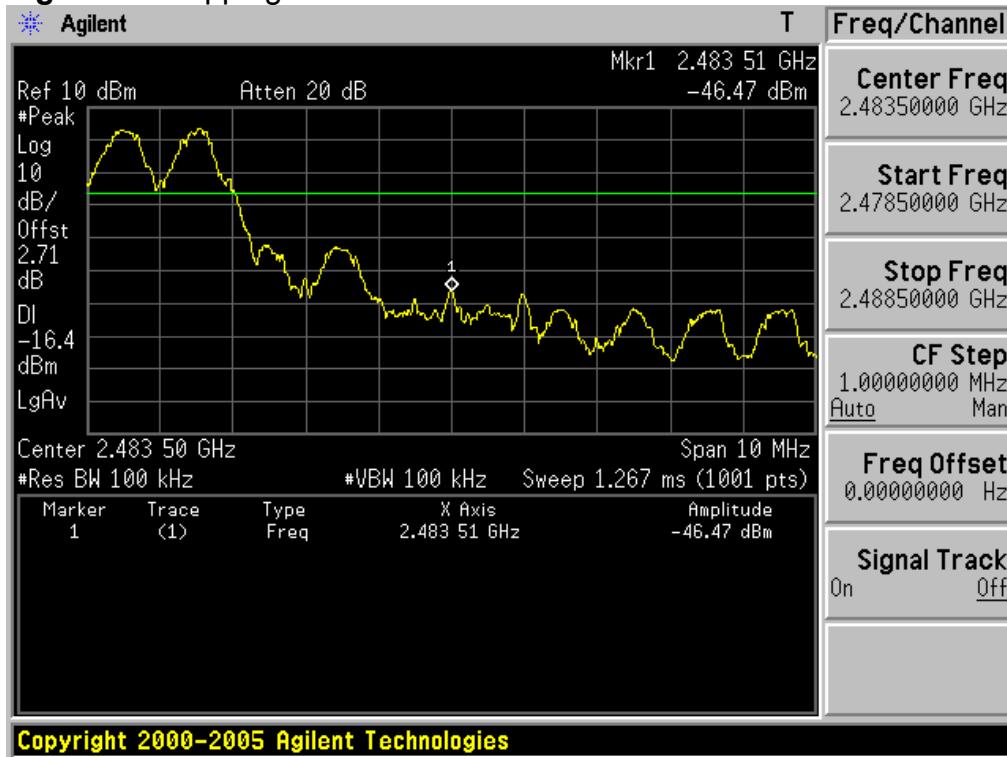

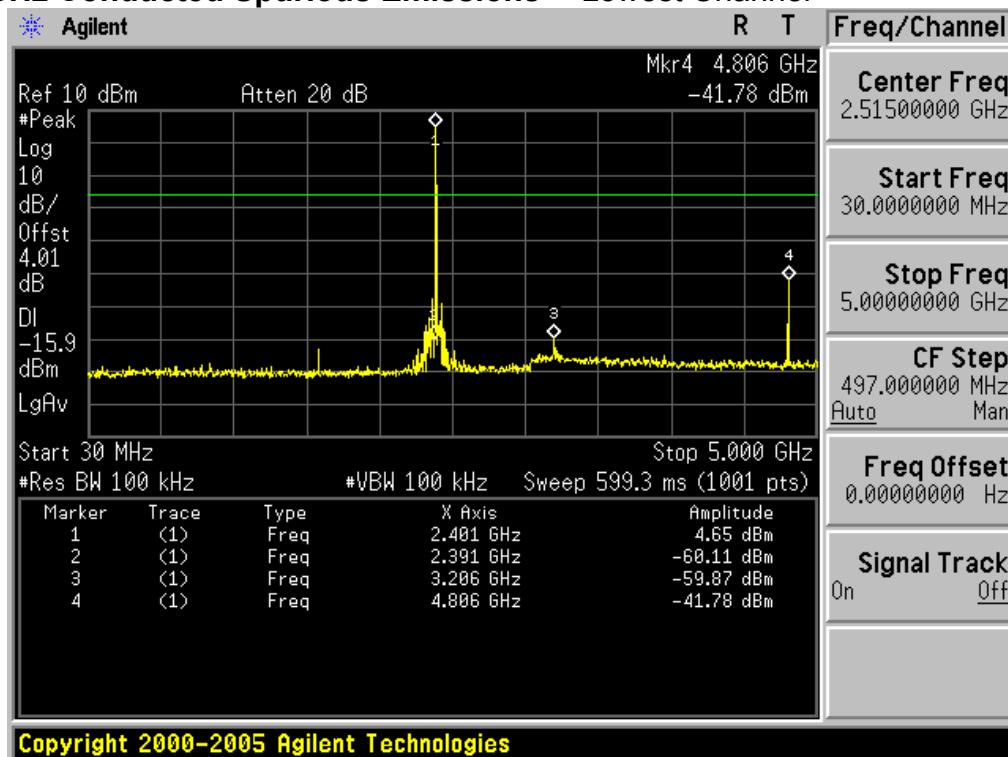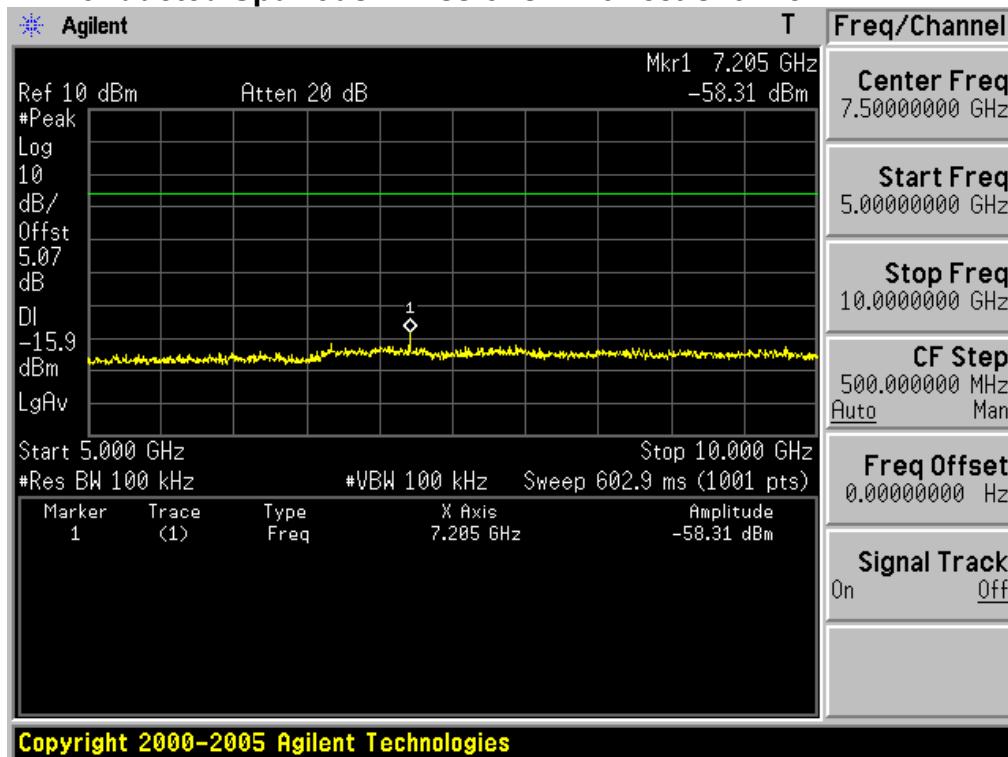**30MHz ~ 5GHz Conducted Spurious Emissions Lowest Channel****5GHz ~ 10GHz Conducted Spurious Emissions Lowest Channel**


## 10GHz ~ 15GHz Conducted Spurious Emissions


## Lowest Channel


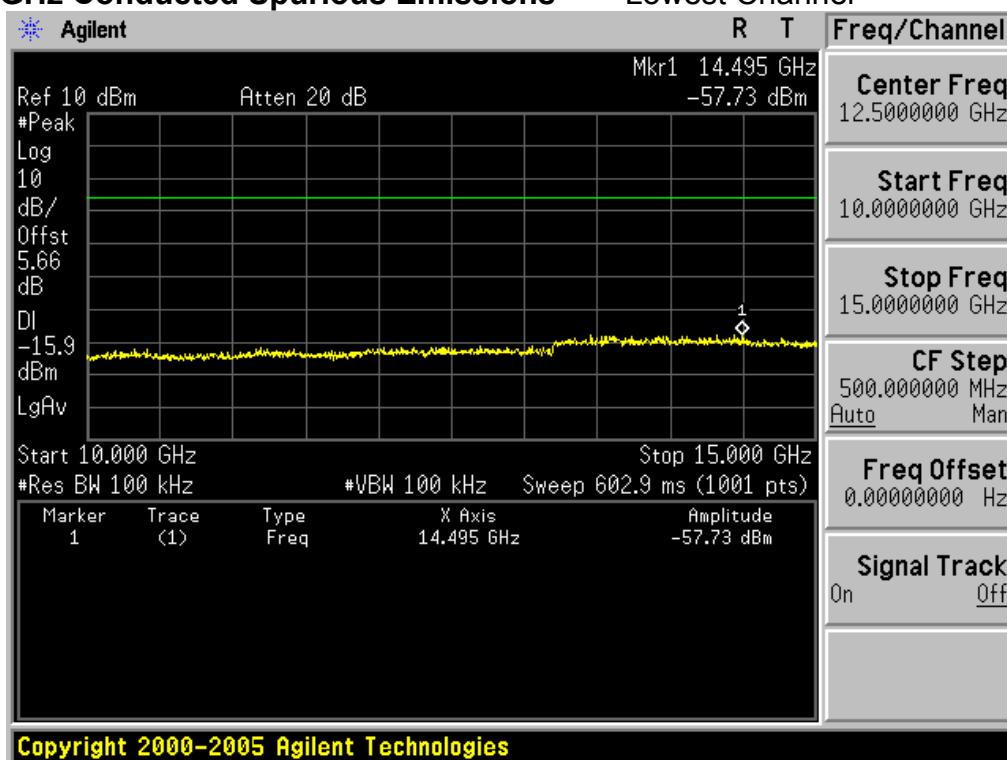


## 15GHz ~ 20GHz Conducted Spurious Emissions


## Lowest Channel

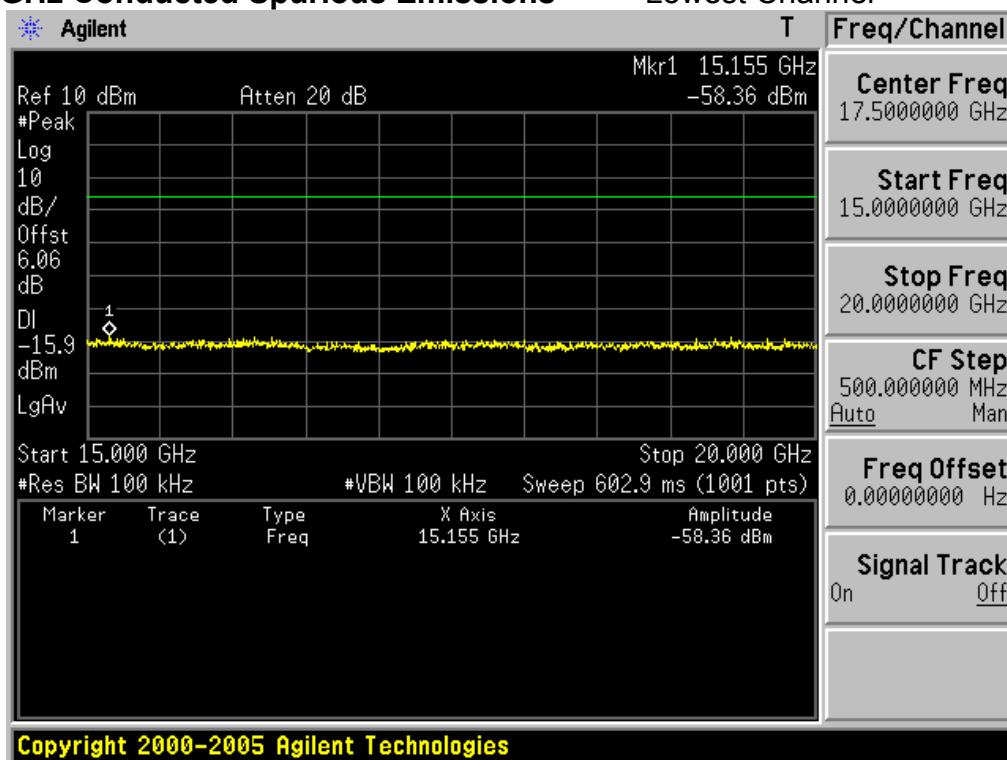

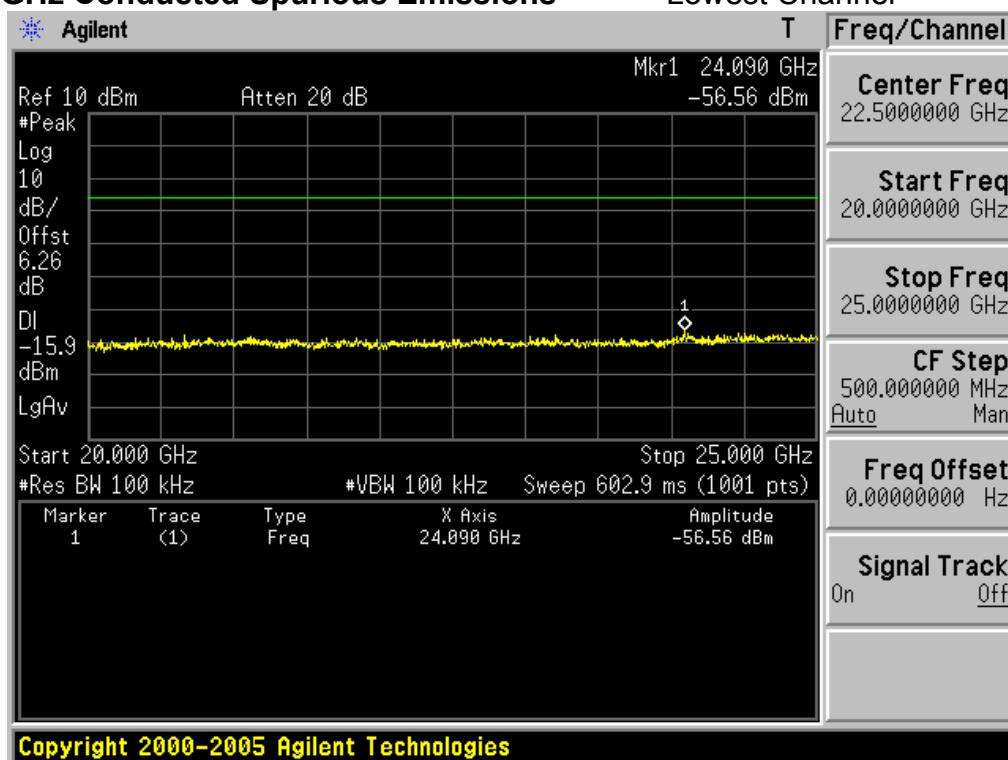
**20GHz ~ 25GHz Conducted Spurious Emissions****Lowest Channel**

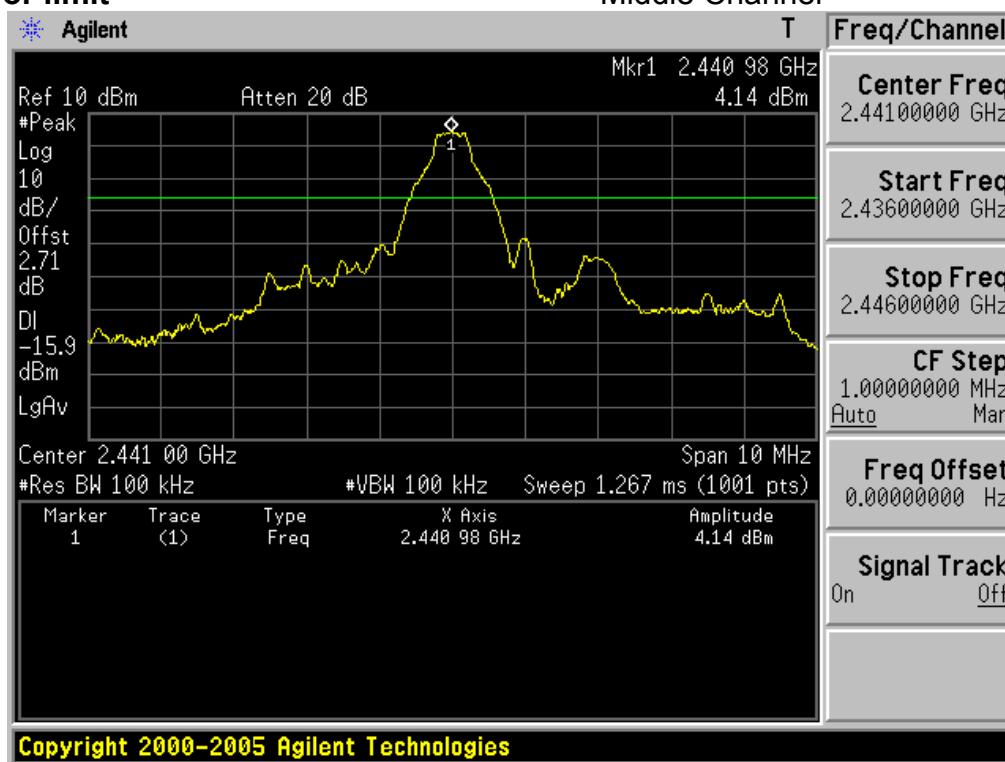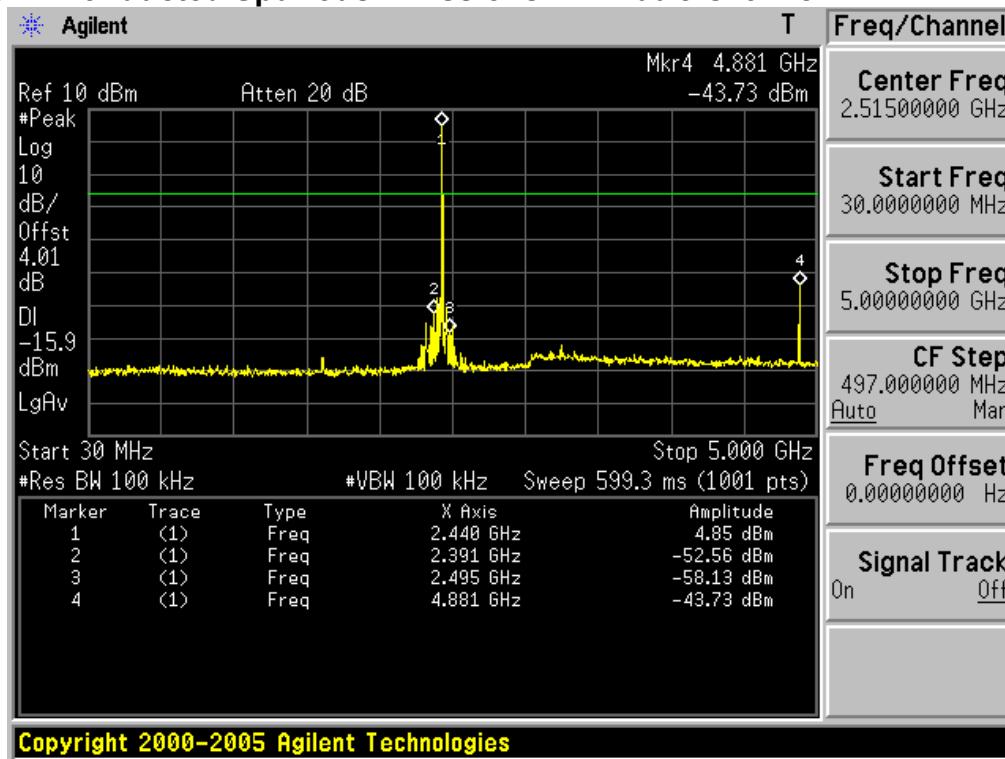**Reference for limit****30MHz ~ 5GHz Conducted Spurious Emissions**

## 5GHz ~ 10GHz Conducted Spurious Emissions Middle Channel

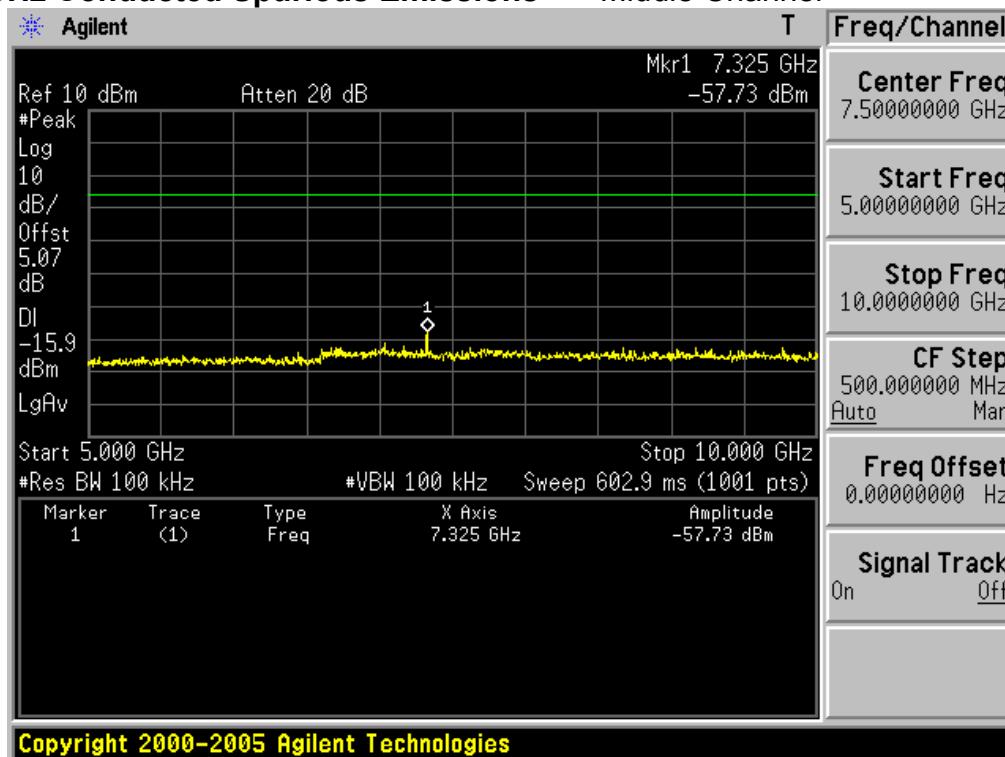


## 10GHz ~ 15GHz Conducted Spurious Emissions Middle Channel

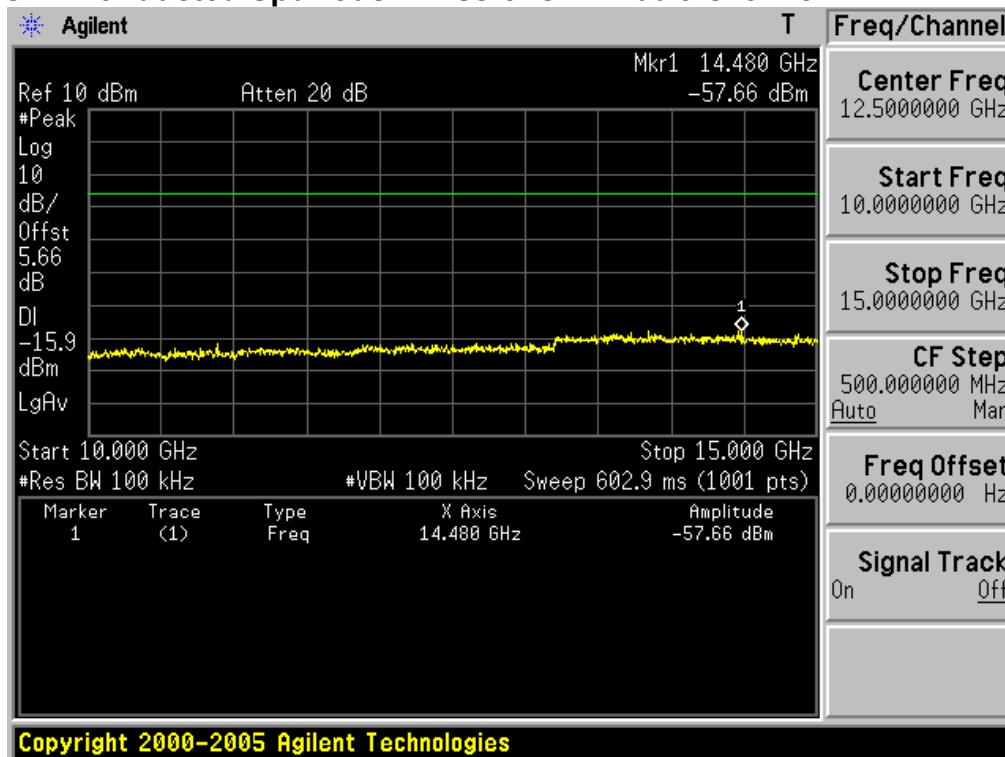


## 15GHz ~ 20GHz Conducted Spurious Emissions



## Middle Channel

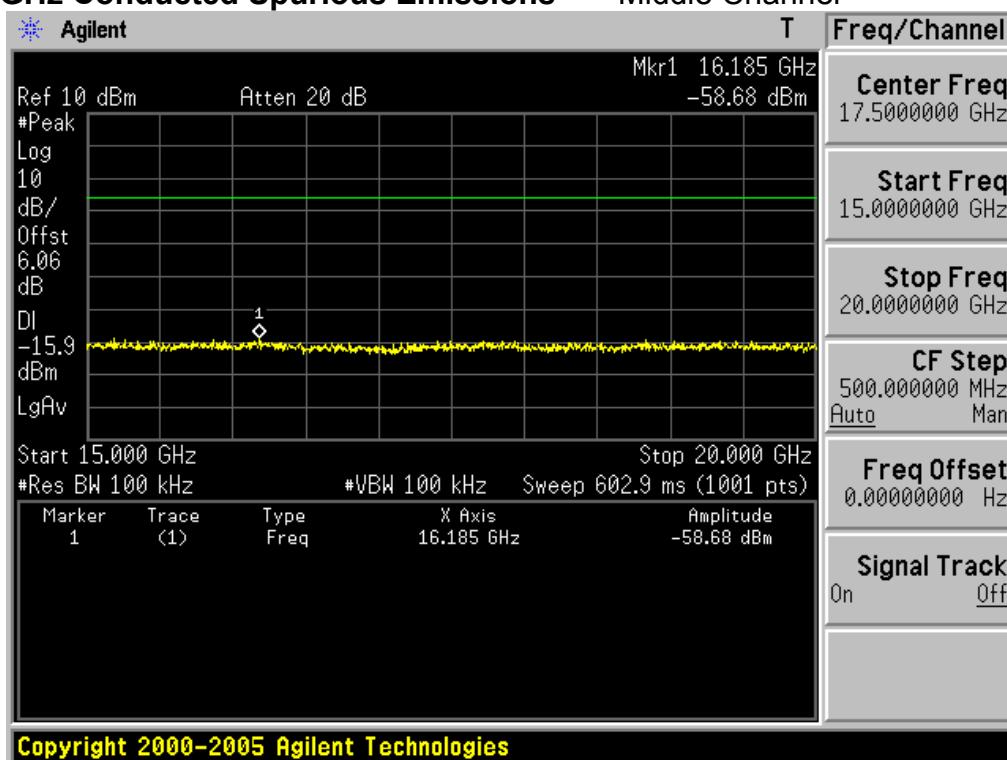


## 20GHz ~ 25GHz Conducted Spurious Emissions

## Middle Channel

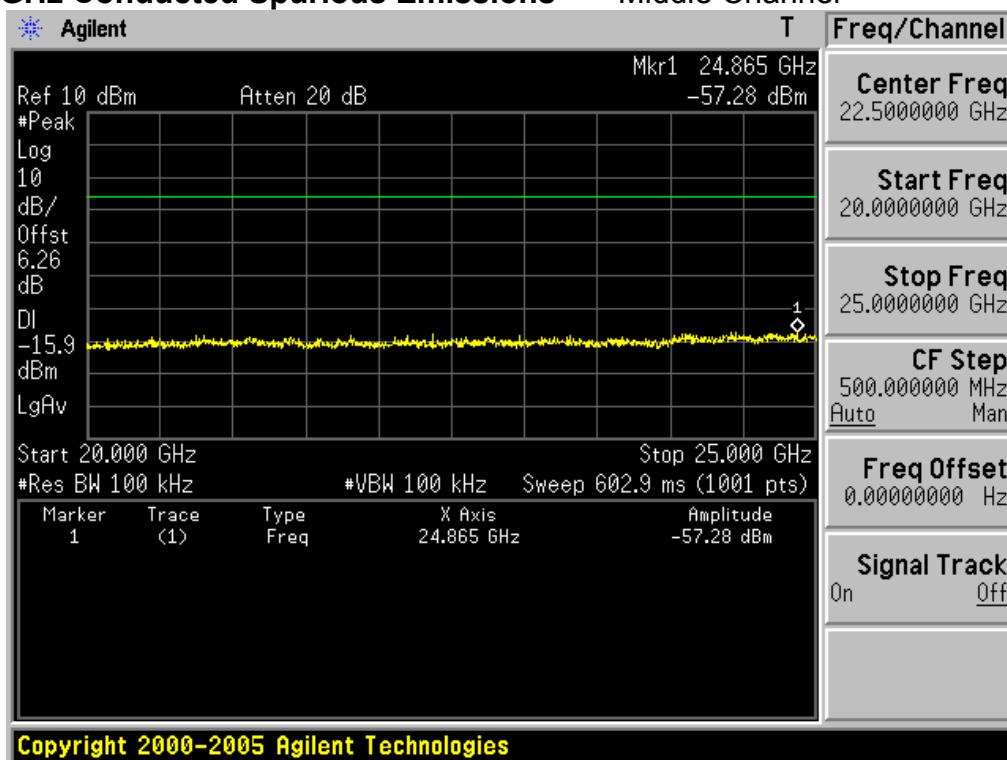


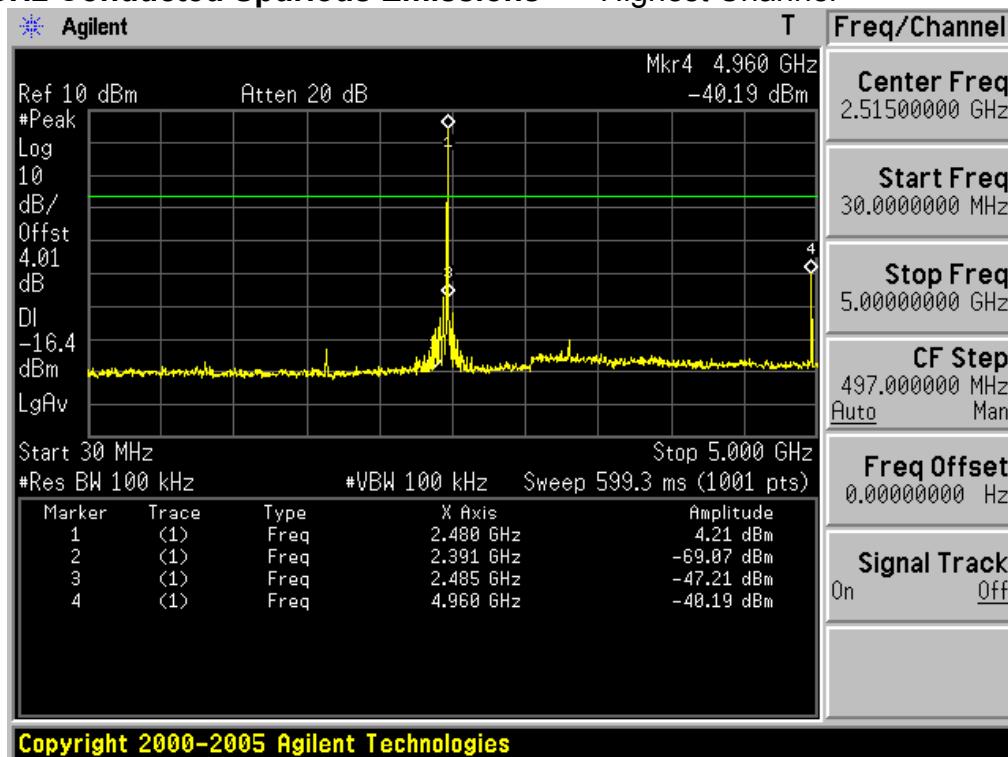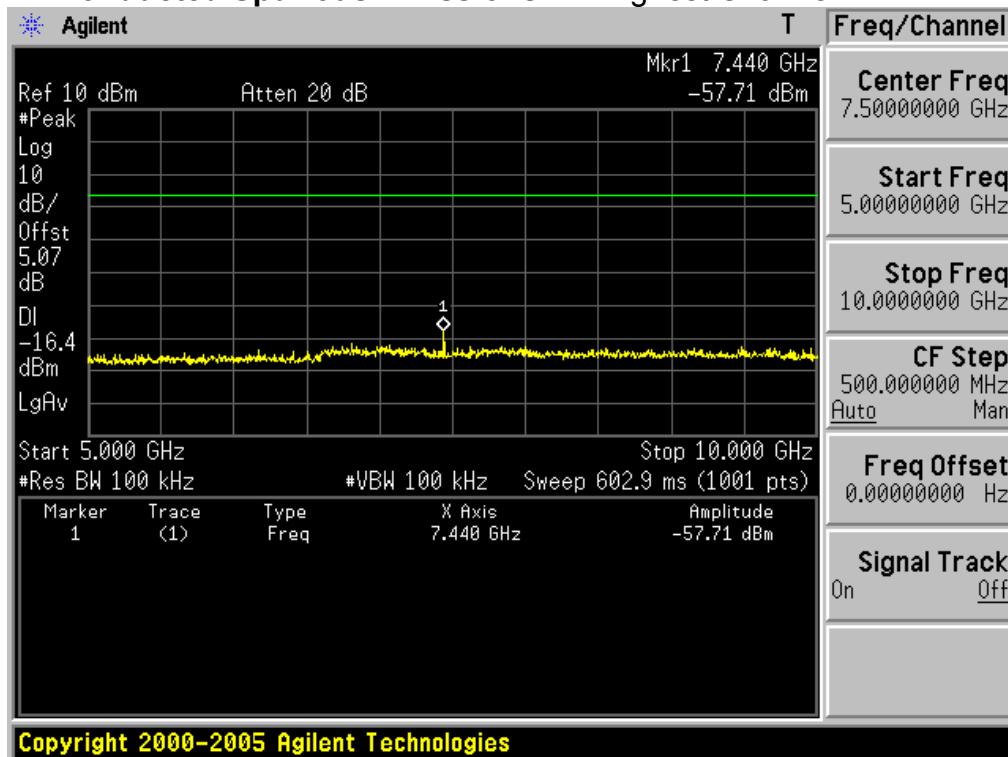
**30MHz ~ 5GHz Conducted Spurious Emissions      Highest Channel****5GHz ~ 10GHz Conducted Spurious Emissions      Highest Channel**

## 10GHz ~ 15GHz Conducted Spurious Emissions Highest Channel

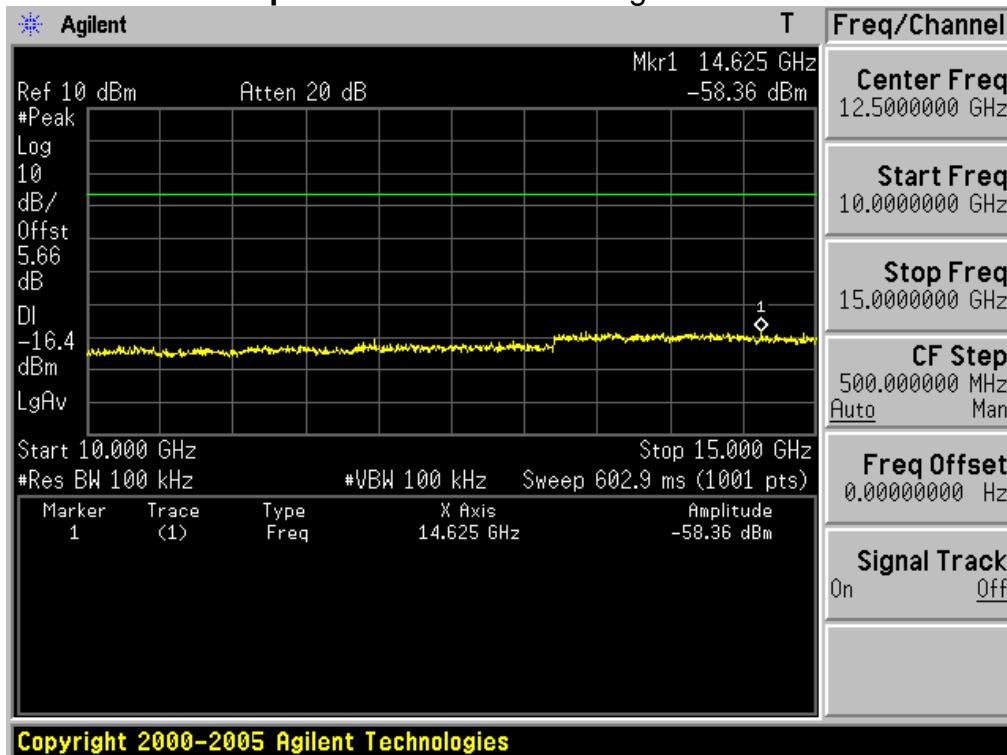

## 15GHz ~ 20GHz Conducted Spurious Emissions Highest Channel

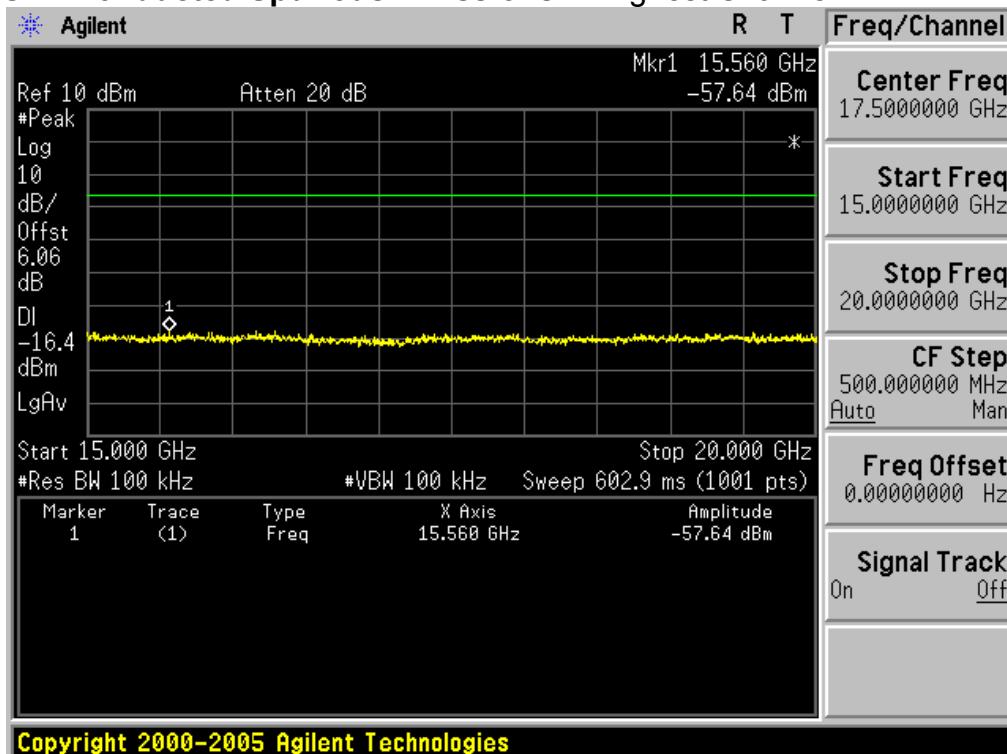

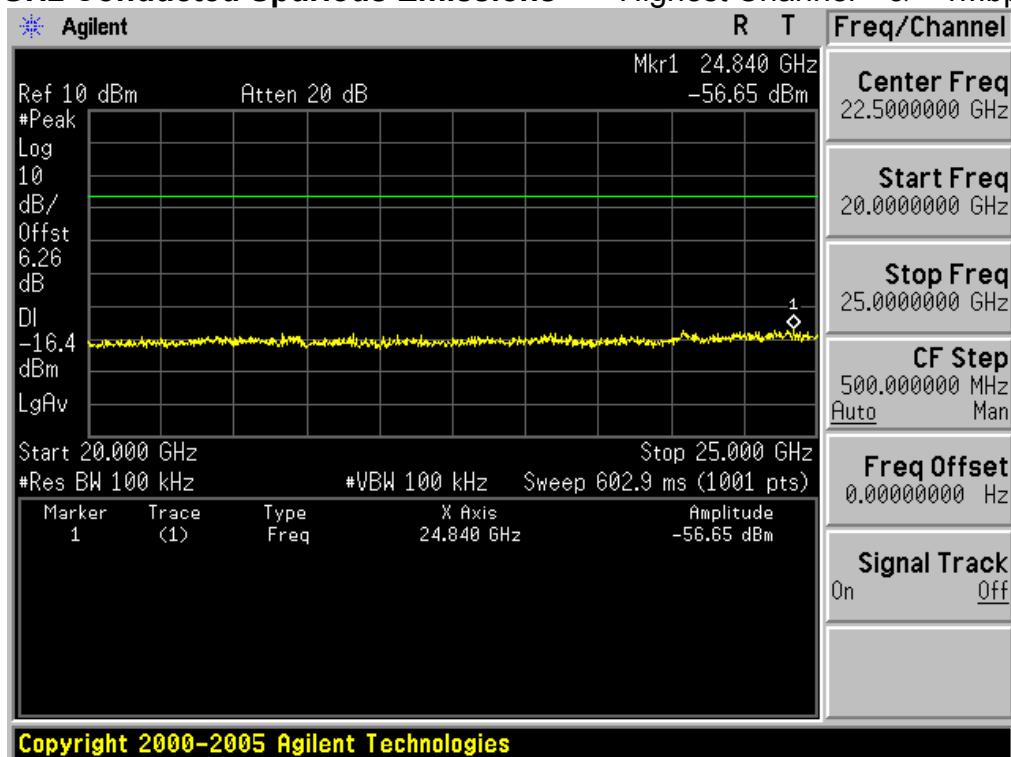**20GHz ~ 25GHz Conducted Spurious Emissions      Highest Channel & 1Mbps**

### 3.2.7 Radiated Spurious Emissions

#### - Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Tested frequency = Low, Middle, High Frequencies

Frequency Range = 30 MHz ~ 10th harmonic.

RBW and VBW = 1. Frequency range: 30MHz ~ 1GHz  
RBW = 120KHz / VBW =  $\geq$  RBW

2. Frequency range: 1GHz ~ 10<sup>th</sup> harmonics

Peak mode: RBW = 1MHz / VBW =  $\geq$  RBW

Average mode: RBW = 1MHz / VBW = 10Hz

Detector function = Peak

Sweep = auto

Trace = max hold

#### - Measurement Data: **Comply**

Note 1: See next pages for actual measured spectrum plots and data.

Note 2: These test items were performed at OATS of KOSTEC Co., Ltd.(IC assigned code: 8305A)

#### - Minimum Standard:

##### • FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

##### • FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		

• FCC Part 15.205(b): The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 30MHz ~ 25GHz Radiated Spurious Emissions

### ▪ Lowest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
319.967	H	Z axis	QP	34.10	-7.00	27.10	46.00	18.90
2369.920	H	Z axis	PK	53.49	-11.07	42.42	74.00	31.58
2370.000	H	Z axis	AV	45.03	-11.07	33.96	54.00	20.04
4804.078	H	Z axis	PK	63.18	-1.47	61.71	74.00	12.29
4803.895	H	Z axis	AV	54.01	-1.47	52.54	54.00	1.46

### ▪ Middle Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
319.967	H	Z axis	QP	33.70	-7.00	26.70	46.00	19.30
4881.892	H	Z axis	PK	60.61	-0.93	59.68	74.00	14.32
4881.904	H	Z axis	AV	53.00	-0.93	52.07	54.00	1.93

### ▪ Highest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
320.015	H	Z axis	QP	33.80	-7.00	26.80	46.00	19.20
2483.530	V	Y axis	PK	64.33	-10.26	54.07	74.00	19.93
2483.500	V	Y axis	AV	45.84	-10.26	35.58	54.00	18.42
4960.141	H	Z axis	PK	57.27	-0.40	56.87	74.00	17.13
4959.862	H	Z axis	AV	49.38	-0.40	48.98	54.00	5.02

#### Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions on above table.
2. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

### 3.2.8 AC Line Conducted Emissions

#### - Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak and average detector mode with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### - Measurement Data: **NA**

#### - Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

### 3.2.9 Antenna Requirements

#### - Procedure:

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

#### - Conclusion: **Comply**

The antenna is permanently attached by soldering. (Refer to Internal Photo file.)

#### - Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

### 3.3 Receiver requirements

#### 3.3.1 AC Conducted Emissions (Receiver Mode)

##### - Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its receiving function. Emissions closest to the limit are measured in the quasi-peak mode (QP) and average mode (AV) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

##### - Measurement Data: **NA**

##### - Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

### 3.3.2 Out of Band Emissions – Radiated (Receiver Mode)

#### - Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

#### The spectrum analyzer is set to:

Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )

Trace = max hold

Sweep = auto

VBW = 10Hz (Average), VBW ≥ RBW (Peak)

Detector function = peak

#### - Measurement Data: **Comply** (Refer to the Next page)

Note 1: See next pages for actual measured spectrum plots and data.

Note 2: This test item was performed in each axis. and the worst case data were reported.

Note 3: These test items were performed at OATS of KOSTEC Co., Ltd.(IC assigned code: 8305A)

#### - Minimum Standard: FCC Part 15.109(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

## 30MHz ~ 25GHz Radiated Spurious Emissions

### ▪ Lowest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
319.872	H	Z axis	QP	32.26	-7.00	25.26	46.00	20.74
5439.112	H	X axis	PK	42.10	6.10	48.20	74.00	25.80
5439.112	H	X axis	AV	28.00	6.10	34.10	54.00	19.90

### ▪ Middle Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
319.883	H	Z axis	QP	31.64	-7.00	24.64	46.00	21.36
5639.429	V	X axis	PK	42.30	6.10	48.40	74.00	25.60
5639.429	V	X axis	AV	27.80	6.10	33.90	54.00	20.10

### ▪ Highest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
320.078	H	Z axis	QP	32.57	-7.00	25.57	46.00	20.43
5735.582	V	X axis	PK	42.10	5.80	47.90	74.00	26.10
5735.582	V	X axis	AV	27.10	5.80	32.90	54.00	21.10

#### Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions on above table.
2. Sample Calculation.  

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

# **APPENDIX I**

## **TEST EQUIPMENT FOR TESTS**

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input checked="" type="checkbox"/>	Spectrum Analyzer	Agilent	E4440A	10/09/30	11/09/30	MY45304199
<input type="checkbox"/>	Spectrum Analyzer	Rohde Schwarz	FSQ26	11/01/11	12/01/11	200445
<input type="checkbox"/>	Spectrum analyzer	Agilent	E4404B	11/03/08	12/03/08	US41061134
<input type="checkbox"/>	Spectrum Analyzer(RE)	H.P	8563E	10/10/04	11/10/04	3551A04634
<input type="checkbox"/>	MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	11/01/07	12/01/07	MY49100833
<input type="checkbox"/>	Power Meter	H.P	EPM-442A	11/07/01	12/07/01	GB37170413
<input type="checkbox"/>	Power Sensor	H.P	8481A	11/07/01	12/07/01	3318A96332
<input type="checkbox"/>	Wideband Power Sensor	Rohde Schwarz	NRP-Z81	11/06/04/	12/06/04	1137.9009.02-101001
<input type="checkbox"/>	Power Divider	Agilent	11636B	10/10/05	11/10/05	56471
<input type="checkbox"/>	4-Way Power Divider	ET Industries	D-0526-4	10/12/24	11/12/24	210195001
<input type="checkbox"/>	Power Splitter	Anritsu	K241B	10/10/05	11/10/05	020611
<input type="checkbox"/>	Power Splitter	Anritsu	K241B	11/07/01	12/07/01	017060
<input type="checkbox"/>	Power Splitters & Dividers	Aeroflex/Weinschel	1594	11/02/21	12/02/21	1177
<input type="checkbox"/>	Frequency Counter	H.P	5342A	11/07/01	12/07/01	2119A04450
<input type="checkbox"/>	TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	10/10/04	11/10/04	30604493/021031
<input checked="" type="checkbox"/>	Digital Multimeter	H.P	34401A	11/03/07	12/03/07	3146A13475, US36122178
<input type="checkbox"/>	Multifunction Synthesizer	HP	8904A	10/10/11	11/10/11	3633A08404
<input checked="" type="checkbox"/>	Signal Generator	Rohde Schwarz	SMR20	11/03/08	12/03/08	101251
<input checked="" type="checkbox"/>	Signal Generator	H.P	ESG-3000A	11/07/01	12/07/01	US37230529
<input type="checkbox"/>	Vector Signal Generator	Rohde Schwarz	SMJ100A	11/01/11	12/01/11	100148
<input type="checkbox"/>	Vector Signal Generator	Rohde Schwarz	SMBV100A	11/01/11	12/01/11	255571
<input type="checkbox"/>	Audio Analyzer	H.P	8903B	11/07/02	12/07/02	3011A09448
<input type="checkbox"/>	Modulation Analyzer	H.P	8901B	11/07/01	12/07/01	3028A03029
<input type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	11/03/07	12/03/07	GB43461134
<input type="checkbox"/>	Universal Radio communication Tester	Rohde Schwarz	CMU200	11/03/07	12/03/07	106760
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000B	11/07/01	12/07/01	3000B640046
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-3
<input checked="" type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-2
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-4
<input type="checkbox"/>	AC Power supply	DAEKWANG	5KVA	11/03/08	12/03/08	20060321-1
<input checked="" type="checkbox"/>	DC Power Supply	HP	6622A	11/03/07	12/03/07	3448A03760
<input type="checkbox"/>	DC Power Supply	HP	6633A	11/03/07	12/03/07	3524A06634
<input type="checkbox"/>	DC Power Supply	Protek	PWS-3010D	10/10/04	11/10/04	4072702
<input type="checkbox"/>	DC Power Supply	SM techno	SDP30-5D	11/05/20	12/05/20	305DKA013
<input type="checkbox"/>	BAND Reject Filter	Microwave Circuits	N0308372	10/10/05	11/10/05	3125-01DC0352
<input type="checkbox"/>	BAND Reject Filter	Wainwright	WRCG1750	10/10/05	11/10/05	2
<input type="checkbox"/>	High-Pass Filter	ANRITSU	MP526D	10/10/04	11/10/04	M27756
<input type="checkbox"/>	High-pass filter	Wainwright	WHNX2.1	N/A	N/A	1
<input checked="" type="checkbox"/>	High-pass filter	Wainwright	WHNX3.0	N/A	N/A	9
<input type="checkbox"/>	High-pass filter	Wainwright	WHNX5.0	N/A	N/A	8

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input type="checkbox"/>	High-Pass Filter	Wainwright	WHKX8.5	N/A	N/A	1
<input type="checkbox"/>	High-Pass Filter	Wainwright	D82346	N/A	N/A	9
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT1900.0/ 2200.0-5/40-10SSK	N/A	N/A	30
<input type="checkbox"/>	HORN ANT	ETS	3115	10/10/04	11/10/04	21097
<input checked="" type="checkbox"/>	HORN ANT	ETS	3115	11/03/22	12/03/22	6419
<input type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
<input type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
<input type="checkbox"/>	HORN ANT	SCHWARZBECK	BBHA9120A	10/04/13	12/04/13	322
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2116
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2117
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2261
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2262
<input type="checkbox"/>	LOOP Antenna	ETS	6502	10/11/29	11/11/29	3471
<input type="checkbox"/>	Coaxial Fixed Attenuators	Agilent	8491B	11/07/02	12/07/02	MY39260700
<input type="checkbox"/>	Attenuator (3dB)	WEINSCHEL	56-3	10/10/05	11/10/05	Y2342
<input type="checkbox"/>	Attenuator (3dB)	WEINSCHEL	56-3	10/10/05	11/10/05	Y2370
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHEL	23-10-34	10/10/01	11/10/01	BP4386
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHEL	23-10-34	11/01/11	12/01/11	BP4387
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHEL	86-10-11	10/10/05	11/10/05	446
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHEL	86-10-11	10/10/05	11/10/05	408
<input type="checkbox"/>	Attenuator (20dB)	WEINSCHEL	86-20-11	10/10/05	11/10/05	432
<input type="checkbox"/>	Attenuator (30dB)	JFW	50FH-030-300	11/03/07	12/03/07	060320-1
<input type="checkbox"/>	Attenuator (40dB)	WEINSCHEL	57-40-33	10/10/01	11/10/01	NN837
<input type="checkbox"/>	Termination	H.P	HP-909D	11/07/02	12/07/02	02750
<input type="checkbox"/>	Termination	H.P	HP-909D	11/07/02	12/07/02	02702
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/01	12/07/01	788
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/01	12/07/01	790
<input type="checkbox"/>	Amplifier (30dB)	Agilent	8449B	11/03/07	12/03/07	3008A01590
<input type="checkbox"/>	Amplifier (30dB)	H.P	8449B	11/03/07	12/03/07	3008A00370
<input type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	10/10/04	11/10/04	1020
<input type="checkbox"/>	RF Power Amplifier	OPHIRRF	5069F	11/07/01	12/07/01	1006
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	R&S	ESU	11/01/20	12/01/20	100014
<input type="checkbox"/>	BILOG ANTENNA	SCHAFFNER	CBL6112B	10/07/14	12/07/14	2737
<input checked="" type="checkbox"/>	Amplifier (22dB)	H.P	8447E	11/01/11	12/01/11	2945A02865
<input type="checkbox"/>	EMI TEST RECEIVER	R&S	ESCI	11/03/08	12/03/08	100364

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input checked="" type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/11/29	11/11/29	91032789
<input checked="" type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/11/29	12/11/29	1098
<input type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
<input type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/07/07	12/07/07	0590
<input type="checkbox"/>	Low Noise Pre Amplifier	TSJ	MLA-100K01-B01-2	11/03/07	12/03/07	1252741
<input checked="" type="checkbox"/>	Low Noise Pre Amplifier	TSJ	MLA-00108-B02-36	11/01/11	12/01/11	1518831
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	11/03/07	12/03/07	2944A10144
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	11/07/01	12/07/01	2648A04922
<input type="checkbox"/>	Spectrum Analyzer(CE)	H.P	8591E	11/03/07	12/03/07	3649A05889
<input type="checkbox"/>	LISN	Kyoritsu	KNW-407	11/01/11	12/01/11	8-317-8
<input type="checkbox"/>	LISN	Kyoritsu	KNW-242	11/07/02	12/07/02	8-654-15
<input type="checkbox"/>	CVCF	NF Electronic	4420	11/03/08	12/03/08	304935/337980
<input type="checkbox"/>	50 ohm Terminator	HME	CT-01	11/01/11	12/01/11	N/A
<input type="checkbox"/>	RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	11/07/02	12/07/02	4N-170-3
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	10/10/21	11/10/21	100988