



FCC TEST REPORT

**Test report
On Behalf of
Quanzhou Feidixin Electronics Co., Ltd.
For
3G network radio
Model No.: FD-798W, AT-588W**

FCC ID: ZS4FD-798W

Prepared for : Quanzhou Feidixin Electronics Co., Ltd.
Feidixin Building, Tandxi Industrial Zone, Luojiang District, Quanzhou, Fujian, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

Date of Test: Nov. 13, 2018~Nov. 16, 2018

Date of Report: Nov. 16, 2018

Report Number: HK1811141572E



TEST RESULT CERTIFICATION

Applicant's name : Quanzhou Feidaxin Electronics Co., Ltd.
Address : Feidaxin Building, Tandxi Industrial Zone, Luojiang District, Quanzhou , Fujian, China
Manufacturer's Name : Quanzhou Feidaxin Electronics Co., Ltd.
Address : Feidaxin Building, Tandxi Industrial Zone, Luojiang District, Quanzhou , Fujian, China
Product description : 3G network radio
Brand Name : FDX, ANYTALK
Model Name : FD-798W, AT-588W
Difference Description : Only model name and brand name are different.
Standards : FCC Rules and Regulations Part 15B

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : **Nov. 13, 2018~Nov. 16, 2018**

Date of Issue : **Nov. 16, 2018**

Test Result : **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



| Revision | Issue Date | Revisions | Revised By |
|----------|---------------|---------------|------------|
| V1.0 | Nov. 16, 2018 | Initial Issue | Jason Zhou |



TABLE OF CONTENTS

| | |
|---|-----------|
| 1. SYSTEM DESCRIPTION | 5 |
| 2. MEASUREMENT UNCERTAINTY | 6 |
| 3. PRODUCT INFORMATION | 7 |
| 4. SUPPORT EQUIPMENT | 8 |
| 5. TEST FACILITY | 9 |
| 6. TEST ITEMS AND THE RESULTS | 10 |
| 7. FCCLINE CONDUCTED EMISSION TEST | 11 |
| 7.1. LIMITS OF LINE CONDUCTED EMISSION TEST | 11 |
| 7.2. BLOCK DIAGRAM OF TEST SETUP | 11 |
| 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST | 12 |
| 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST | 13 |
| 8. FCC RADIATED EMISSION TEST | 15 |
| 8.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS AT A DISTANCE OF 3 METERS SHALL NOT EXCEED THE FOLLOWING VALUES: | 15 |
| 8.2. BLOCK DIAGRAM OF TEST SETUP | 16 |
| 8.3. PROCEDURE OF RADIATED EMISSION TEST | 17 |
| 8.4. TEST RESULT OF RADIATED EMISSION TEST | 18 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP | 22 |



1. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral devices (PC) through USB port.
2. Power on the EUT, use the software to transfer data between EUT and PC.
3. Make sure the EUT operates normally during the test.

Test Mode

| TEST MODE DESCRIPTION | | |
|---------------------------|--|-------|
| NO. | TEST MODE DESCRIPTION | WORST |
| 1 | USB (connection for data transferring) | V |
| Note: | | |
| 1. V means EMI worst mode | | |



2. MEASUREMENT UNCERTAINTY

| Test | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted | ±0.57 dB | (1) |
| Transmitter power Radiated | ±2.20 dB | (1) |
| Conducted spurious emission 9KHz-40 GHz | ±2.20 dB | (1) |
| Occupied Bandwidth | ±0.01ppm | (1) |
| Radiated Emission 30~1000MHz | ±4.10dB | (1) |
| Radiated Emission Above 1GHz | ±4.32dB | (1) |
| Conducted Disturbance 0.15~30MHz | ±3.20dB | (1) |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. PRODUCT INFORMATION

| | |
|------------------|---|
| Housing Type | Plastic and metal |
| Hardware Version | 798W-F |
| Software Version | M021_FDX_3G_B2B5_V1_3_20180727 |
| EUT Input Rating | DC3.7V by battery or DC 5V by Micro-USB |

I/O Port Information (Applicable Not Applicable)

| I/O Port of EUT | | | |
|-----------------|--------|----------------|-------------|
| I/O Port Type | Number | Specific | Tested With |
| USB Port | 1 | 0.8 Unshielded | 1 |



4. SUPPORT EQUIPMENT

| Device Type | Manufacturer | Model Name | Serial No. | Data Cable | Power Cable |
|-------------|--------------|------------|------------|------------|------------------|
| PC | Lenovo Inc. | -- | -- | -- | 0.8m Unshielded |
| Adapter | Lenovo Inc. | -- | -- | -- | 1.25m Unshielded |

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.



5. TEST FACILITY

| | |
|--|---|
| Site | Shenzhen HUA Testing Technology Co., Ltd. |
| Location | 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China |
| Designation Number | CN1229 |
| Test Firm Registration Number : 616276 | |

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Conducted Emission Shielding Room Test Site (744) | | | | |
|---|--------------|-----------------|---------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Receiver | R&S | ESCI 7 | HKE-010 | Dec. 28, 2018 |
| LISN | R&S | ENV216 | HKE-002 | Dec. 28, 2018 |
| Conducted test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-081 | N/A |

TEST EQUIPMENT OF RADIATED EMISSION TEST

| Radiated Emission Test Site (966) | | | | |
|-----------------------------------|--------------|-----------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Receiver | R&S | ESCI-7 | HKE-010 | Dec. 28, 2018 |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 28, 2018 |
| Preamplifier | EMCI | EMC051845SE | HKE-015 | Dec. 28, 2018 |
| Preamplifier | Agilent | 83051A | HKE-016 | Dec. 28, 2018 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Dec. 28, 2018 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-012 | Dec. 28, 2018 |
| Horn antenna | Schwarzbeck | 9120D | HKE-013 | Dec. 28, 2018 |
| Antenna Mast | Keleto | CC-A-4M | N/A | N/A |
| Position controller | Taiwan MF | MF7802 | HKE-011 | Dec. 28, 2018 |
| Radiated test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-082 | N/A |
| RF cable (9KHz-1GHz) | Times | 381806-001 | N/A | N/A |
| RF cable | Times | 1-40G | HKE-034 | Dec. 28, 2018 |



6. TEST ITEMS AND THE RESULTS

| Test item | Test Requirement | Test Method | Class/Severity | Result |
|--------------------|-----------------------|-----------------|----------------|--------|
| CONDUCTED EMISSION | FCC Part 15.107 Rules | ANSI C63.4:2014 | Class B | Pass |
| RADIATED EMISSION | FCC Part 15.109 Rules | ANSI C63.4:2014 | Class B | Pass |

7. FCC LINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency | Maximum RF Line Voltage | |
|---------------|-------------------------|----------------|
| | Q.P.(dBuV) | Average(dBuV) |
| 150kHz-500kHz | 66-56 | 56-46 |
| 500kHz-5MHz | 56 | 46 |
| 5MHz-30MHz | 60 | 50 |

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

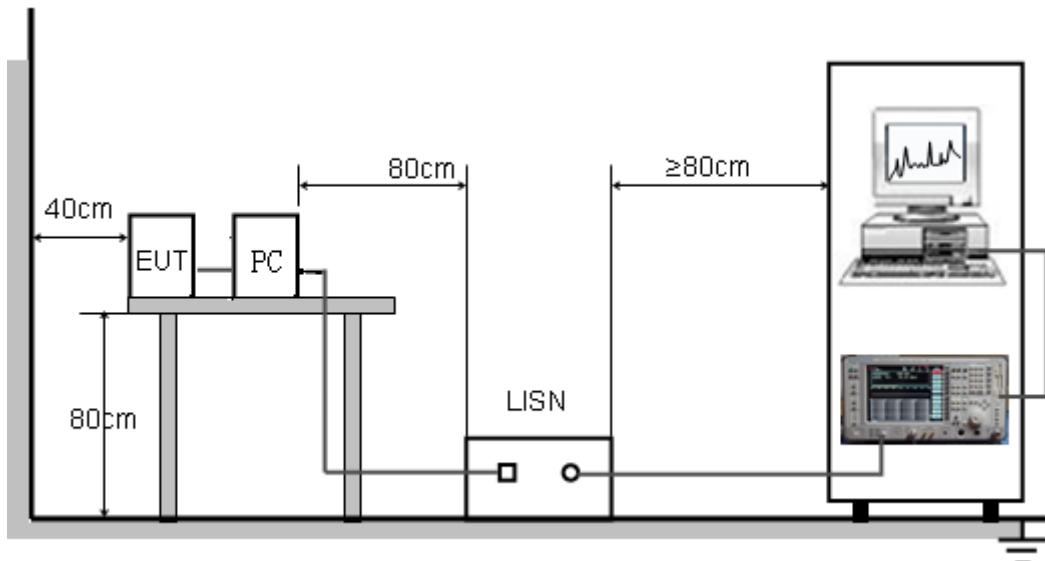



7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC with receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.


The test data of the worst case condition (mode 1) was reported on the Summary Data page.



7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

FCC PART 15 B CLASS B(L)

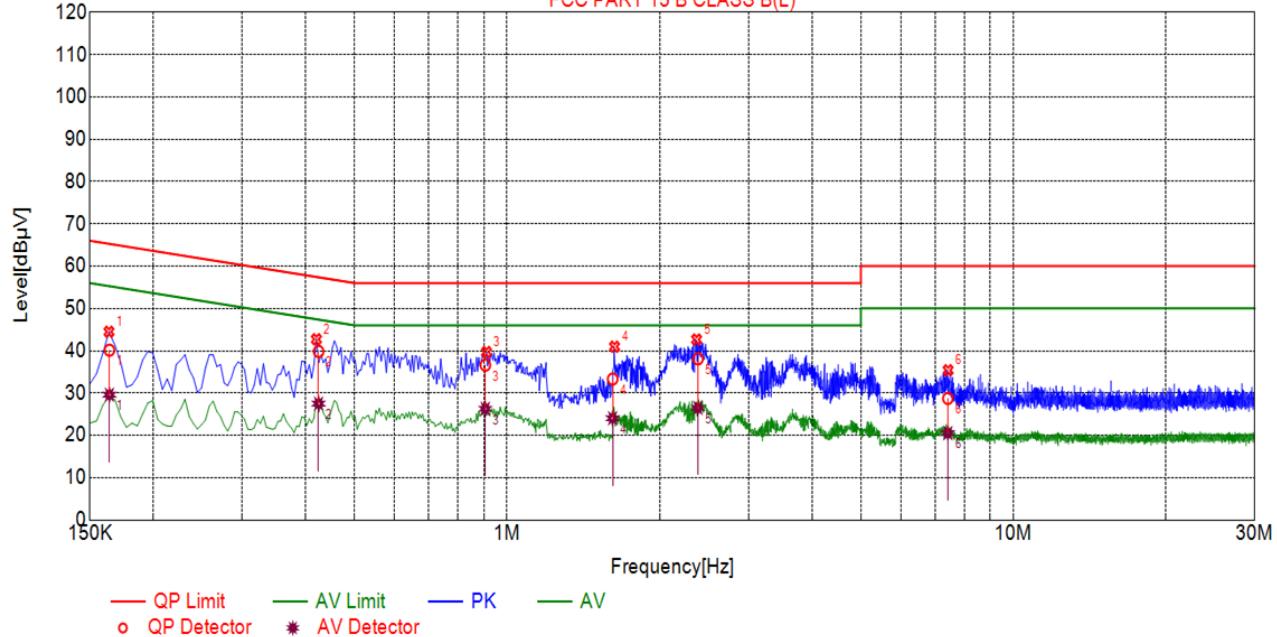

Suspected List


| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector |
|-----|----------------|-----------------|----------------|-----------------|----------------|----------|
| 1 | 0.1635 | 44.50 | 9.98 | 65.28 | 20.78 | PK |
| 2 | 0.4200 | 42.72 | 10.04 | 57.45 | 14.73 | PK |
| 3 | 0.9105 | 39.70 | 10.06 | 56.00 | 16.30 | PK |
| 4 | 1.6305 | 40.96 | 10.11 | 56.00 | 15.04 | PK |
| 5 | 2.3685 | 42.66 | 10.18 | 56.00 | 13.34 | PK |
| 6 | 7.4355 | 35.40 | 10.18 | 60.00 | 24.60 | PK |

Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] |
|-----|----------------|----------------|-----------------------|-----------------------|----------------------|-----------------------|-----------------------|----------------------|
| 1 | 0.1638 | 9.98 | 40.15 | 65.27 | 25.12 | 29.61 | 55.27 | 25.66 |
| 2 | 0.4242 | 10.04 | 39.85 | 57.37 | 17.52 | 27.51 | 47.37 | 19.86 |
| 3 | 0.9057 | 10.06 | 36.60 | 56.00 | 19.40 | 26.28 | 46.00 | 19.72 |
| 4 | 1.6159 | 10.11 | 33.33 | 56.00 | 22.67 | 24.05 | 46.00 | 21.95 |
| 5 | 2.3823 | 10.18 | 38.09 | 56.00 | 17.91 | 26.49 | 46.00 | 19.51 |
| 6 | 7.4269 | 10.18 | 28.73 | 60.00 | 31.27 | 20.53 | 50.00 | 29.47 |



LINE CONDUCTED EMISSION TEST-N

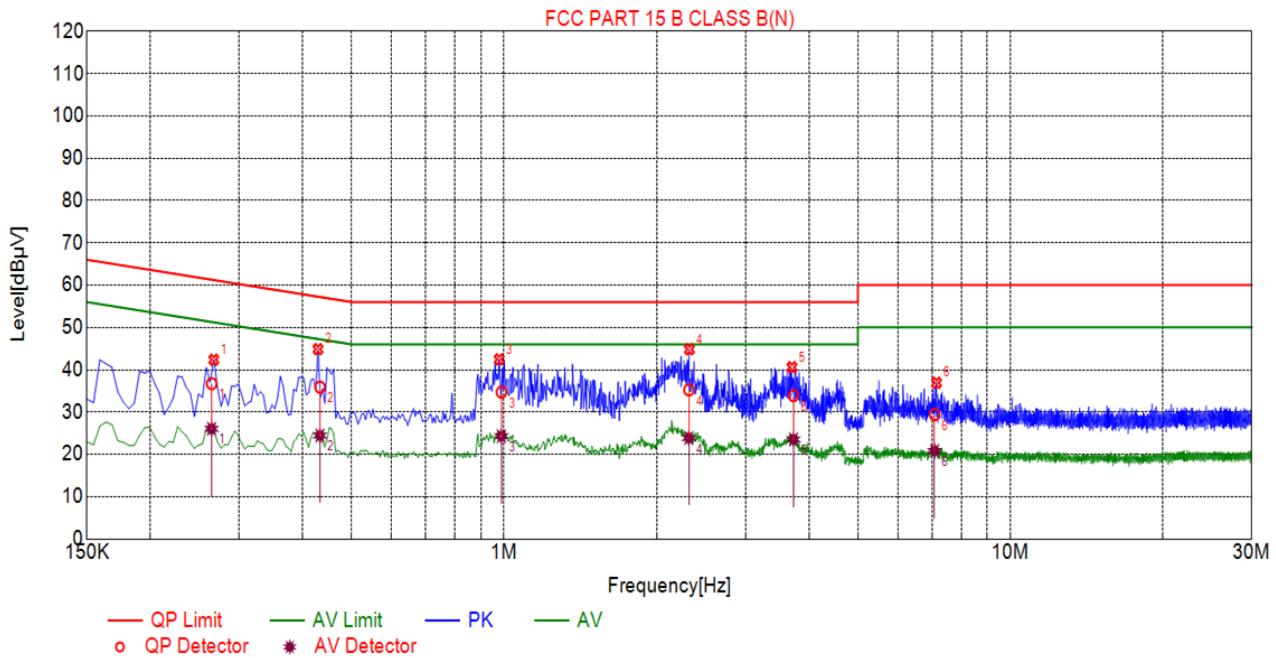

Suspected List

| NO. | Freq. [MHz] | Level [dB μ V] | Factor [dB] | Limit [dB μ V] | Margin [dB] | Detector |
|-----|----------------|-----------------------|----------------|-----------------------|----------------|----------|
| 1 | 0.2670 | 42.38 | 10.03 | 61.21 | 18.83 | PK |
| 2 | 0.4290 | 44.87 | 10.05 | 57.27 | 12.40 | PK |
| 3 | 0.9780 | 42.47 | 10.06 | 56.00 | 13.53 | PK |
| 4 | 2.3235 | 44.84 | 10.18 | 56.00 | 11.16 | PK |
| 5 | 3.7050 | 40.60 | 10.25 | 56.00 | 15.40 | PK |
| 6 | 7.1520 | 36.93 | 10.19 | 60.00 | 23.07 | PK |

Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dB μ V] | QP Limit [dB μ V] | QP Margin [dB] | AV Value [dB μ V] | AV Limit [dB μ V] | AV Margin [dB] |
|-----|----------------|----------------|-----------------------------|-----------------------------|----------------------|-----------------------------|-----------------------------|----------------------|
| 1 | 0.2643 | 10.03 | 36.72 | 61.29 | 24.57 | 26.05 | 51.29 | 25.24 |
| 2 | 0.4327 | 10.05 | 35.89 | 57.20 | 21.31 | 24.47 | 47.20 | 22.73 |
| 3 | 0.9878 | 10.06 | 34.72 | 56.00 | 21.28 | 24.31 | 46.00 | 21.69 |
| 4 | 2.3176 | 10.18 | 35.25 | 56.00 | 20.75 | 23.87 | 46.00 | 22.13 |
| 5 | 3.7308 | 10.25 | 33.89 | 56.00 | 22.11 | 23.55 | 46.00 | 22.45 |
| 6 | 7.0880 | 10.19 | 29.41 | 60.00 | 30.59 | 20.82 | 50.00 | 29.18 |

RESULT: PASS



8. FCC RADIATED EMISSION TEST

8.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS AT A DISTANCE OF 3 METERS SHALL NOT EXCEED THE FOLLOWING VALUES:

| Frequency (MHz) | Distance (m) | Maximum Field Strength Limit (dBuV/m/ Q.P.) |
|-----------------|--------------|---|
| 30~88 | 3 | 40.0 |
| 88~216 | 3 | 43.5 |
| 216~960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note: The lower limit shall apply at the transition frequency.


8.1.1 The following table is the setting of spectrum analyzer and receiver:

| Spectrum Parameter | Setting |
|-----------------------|---|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |
| Start ~Stop Frequency | 1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average |


| Receiver Parameter | Setting |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |

8.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

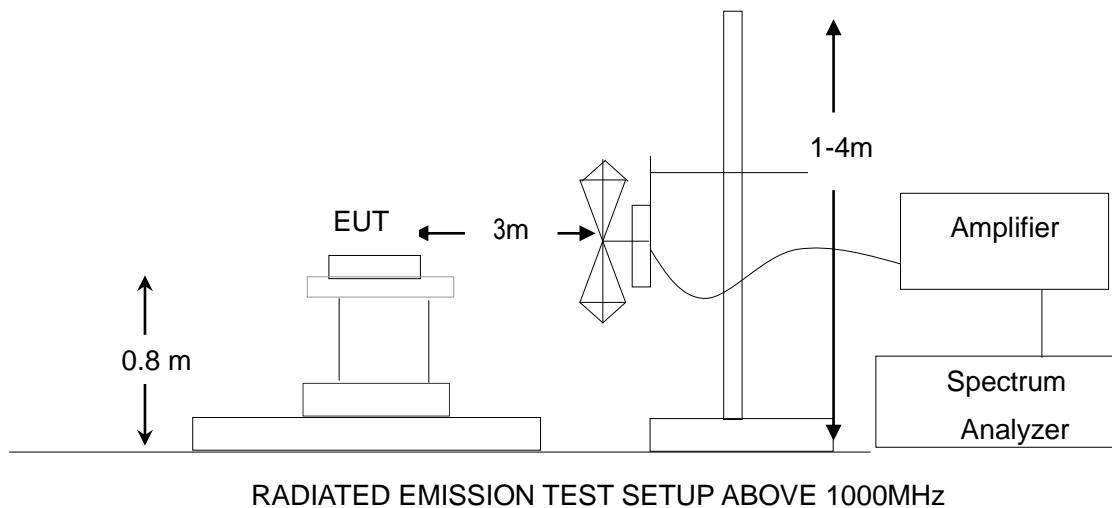

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

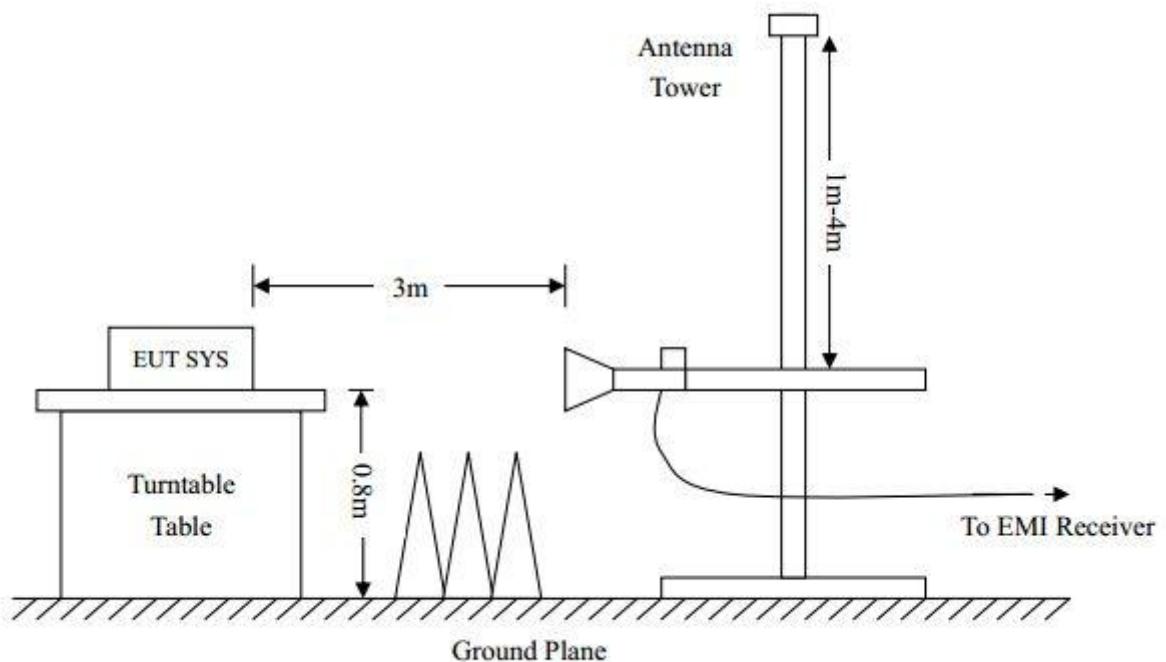




8.3. PROCEDURE OF RADIATED EMISSION TEST

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 3MHz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
11. The test data of the worst case condition (mode 1) was reported on the Summary Data page.



8.4. TEST RESULT OF RADIATED EMISSION TEST

RADIATED EMISSION TEST AT 3M DISTANCE-HORIZONTAL

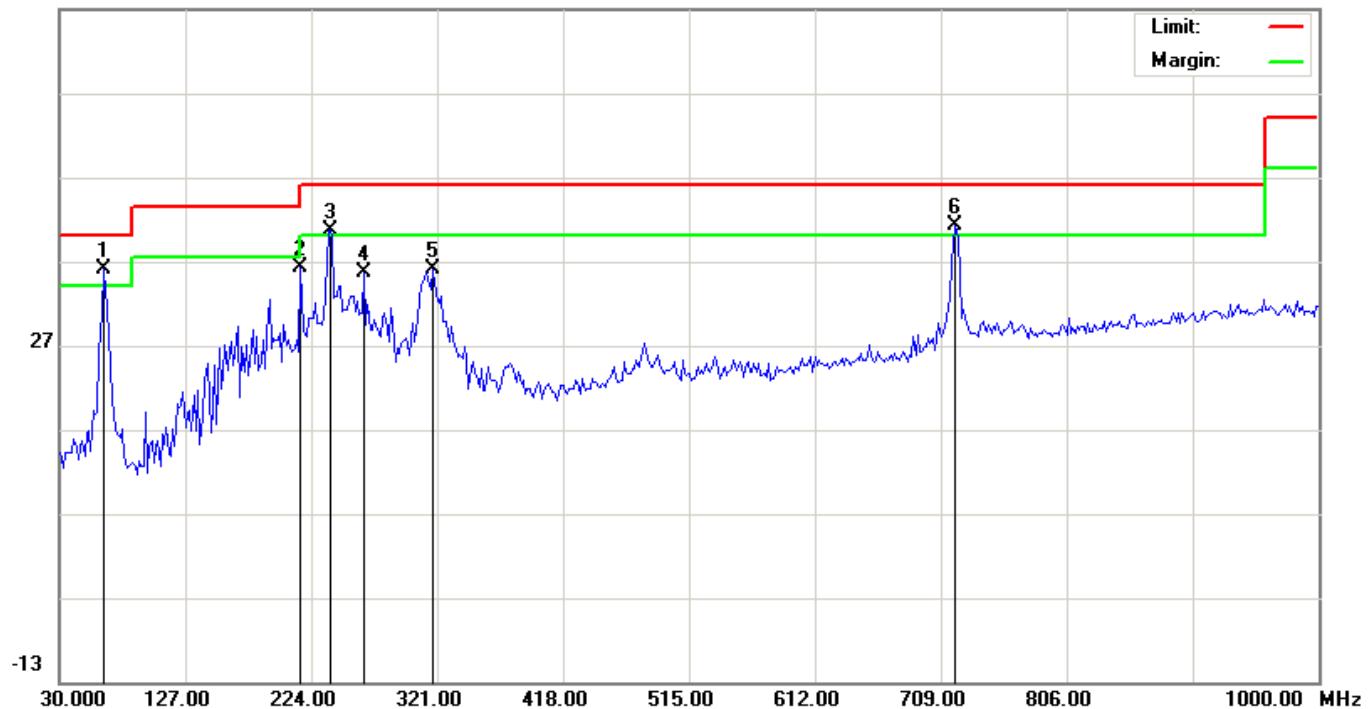66.9 dB_{UV}/m


| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|------------------|--------|---------------------|---------------------|--------|----------|----------------|--------------|---------|
| | | MHz | dB _{UV} | dB/m | dB _{UV} /m | dB _{UV} /m | dB | | cm | degree | |
| 1 | * | 63.9500 | 23.09 | 12.88 | 35.97 | 40.00 | -4.03 | peak | | | |
| 2 | | 215.9167 | 23.89 | 12.37 | 36.26 | 43.50 | -7.24 | peak | | | |
| 3 | ! | 238.5500 | 26.66 | 14.00 | 40.66 | 46.00 | -5.34 | peak | | | |
| 4 | | 264.4166 | 21.52 | 14.12 | 35.64 | 46.00 | -10.36 | peak | | | |
| 5 | | 317.7667 | 20.16 | 15.78 | 35.94 | 46.00 | -10.06 | peak | | | |
| 6 | ! | 720.3167 | 16.03 | 25.24 | 41.27 | 46.00 | -4.73 | peak | | | |

RESULT: PASS



RADIATED EMISSION TEST AT 3M DISTANCE-VERTICAL

66.9 dBuV/m

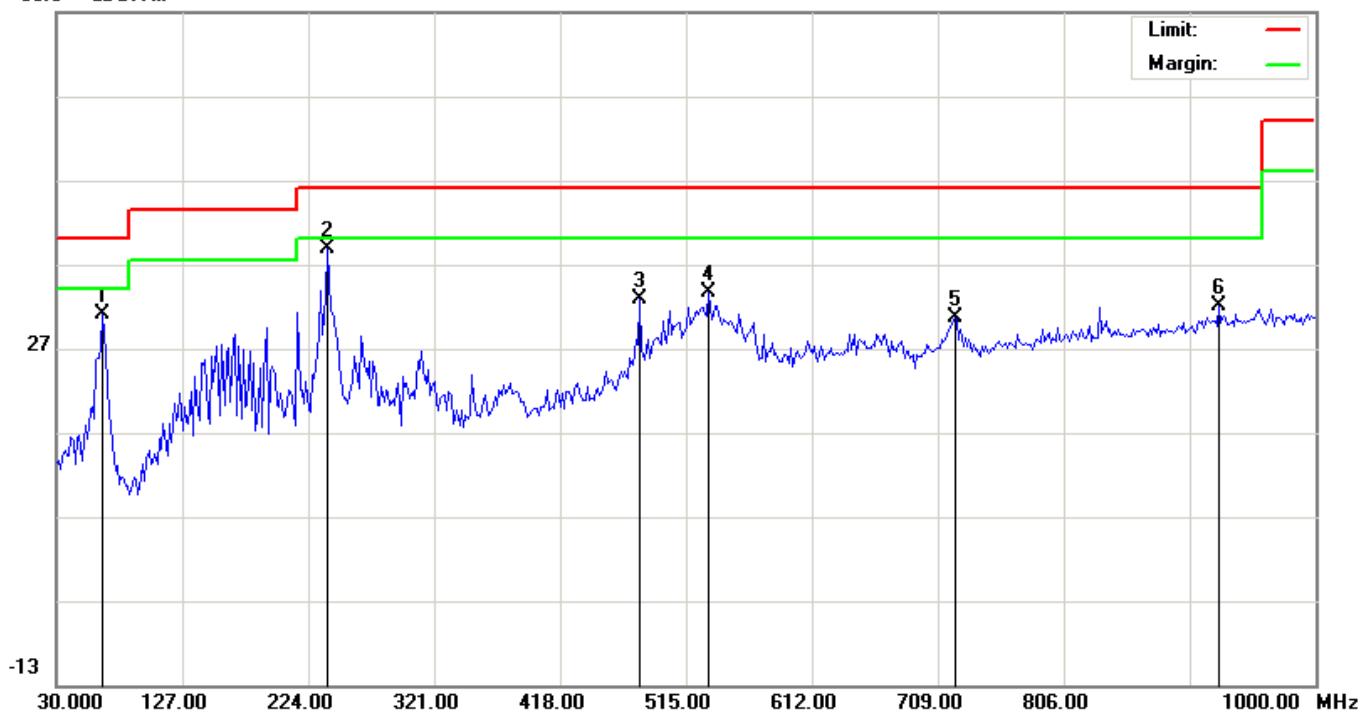


| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna | Table | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|---------|--------|---------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | | Height | Degree | |
| 1 | | 65.5667 | 18.36 | 12.60 | 30.96 | 40.00 | -9.04 | peak | | | |
| 2 | * | 238.5500 | 24.86 | 14.00 | 38.86 | 46.00 | -7.14 | peak | | | |
| 3 | | 479.4333 | 12.04 | 20.67 | 32.71 | 46.00 | -13.29 | peak | | | |
| 4 | | 532.7833 | 11.82 | 21.82 | 33.64 | 46.00 | -12.36 | peak | | | |
| 5 | | 721.9333 | 5.25 | 25.28 | 30.53 | 46.00 | -15.47 | peak | | | |
| 6 | | 925.6333 | 2.98 | 28.93 | 31.91 | 46.00 | -14.09 | peak | | | |


RESULT: PASS

Note: 1. Measurement = Reading + Factor, Over = Measurement – Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

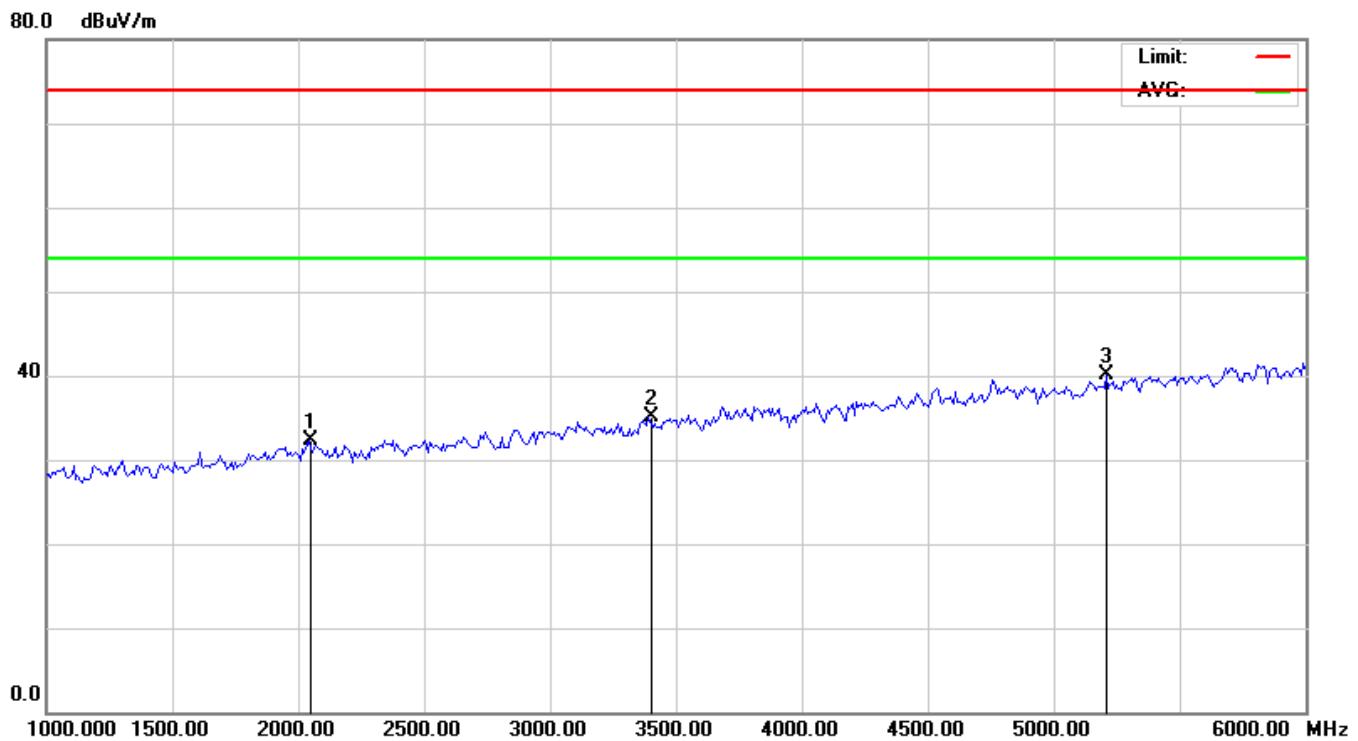RADIATED EMISSION ABOVE 1GHZ (1-10TH HARMONICS) –HORIZONTAL

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna | Table | Comment |
|-----|----|----------|------------------|---------------------|---------------------|---------------------|--------|----------|---------|--------|---------|
| | | MHz | dB _{UV} | dB _{UV} /m | dB _{UV} /m | dB _{UV} /m | dB | | cm | Degree | |
| 1 | | 2041.667 | 16.69 | 15.59 | 32.28 | 74.00 | -41.72 | peak | | | |
| 2 | | 3391.667 | 18.78 | 16.26 | 35.04 | 74.00 | -38.96 | peak | | | |
| 3 | * | 5208.333 | 24.33 | 15.68 | 40.01 | 74.00 | -33.99 | peak | | | |

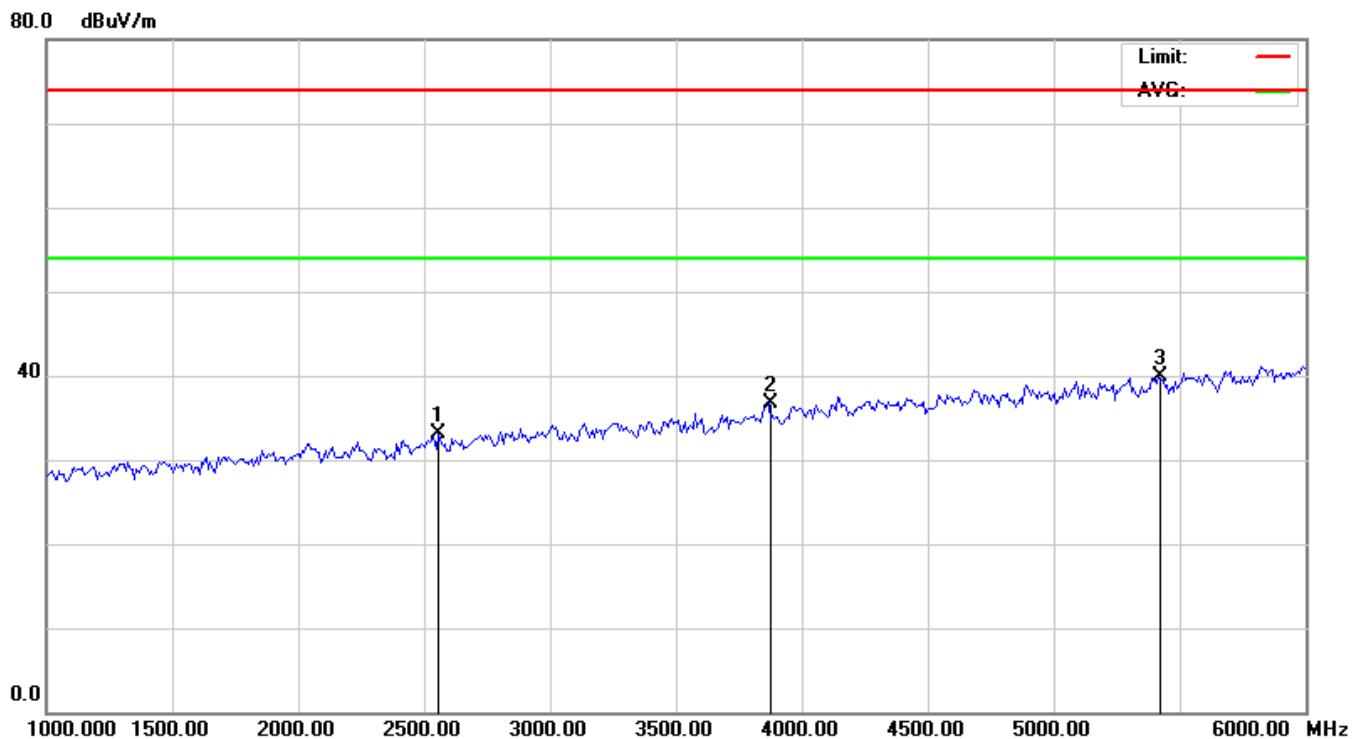
RADIATED EMISSION ABOVE 1GHZ (1-10TH HARMONICS) –VERTICAL

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|------------------|---------------------|---------------------|---------------------|--------|----------|----------------|--------------|---------|
| | | MHz | dB _{UV} | dB _{UV} /m | dB _{UV} /m | dB _{UV} /m | dB | | cm | degree | |
| 1 | | 2558.333 | 17.32 | 15.74 | 33.06 | 74.00 | -40.94 | peak | | | |
| 2 | | 3866.667 | 19.76 | 16.95 | 36.71 | 74.00 | -37.29 | peak | | | |
| 3 | * | 5416.667 | 24.20 | 15.79 | 39.99 | 74.00 | -34.01 | peak | | | |


Note: 1. Emissions range from 6GHz to 12.5GHz have 20dB margin. No recording in the test report.
2. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
3. The “Factor” value can be calculated automatically by software of measurement system.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP

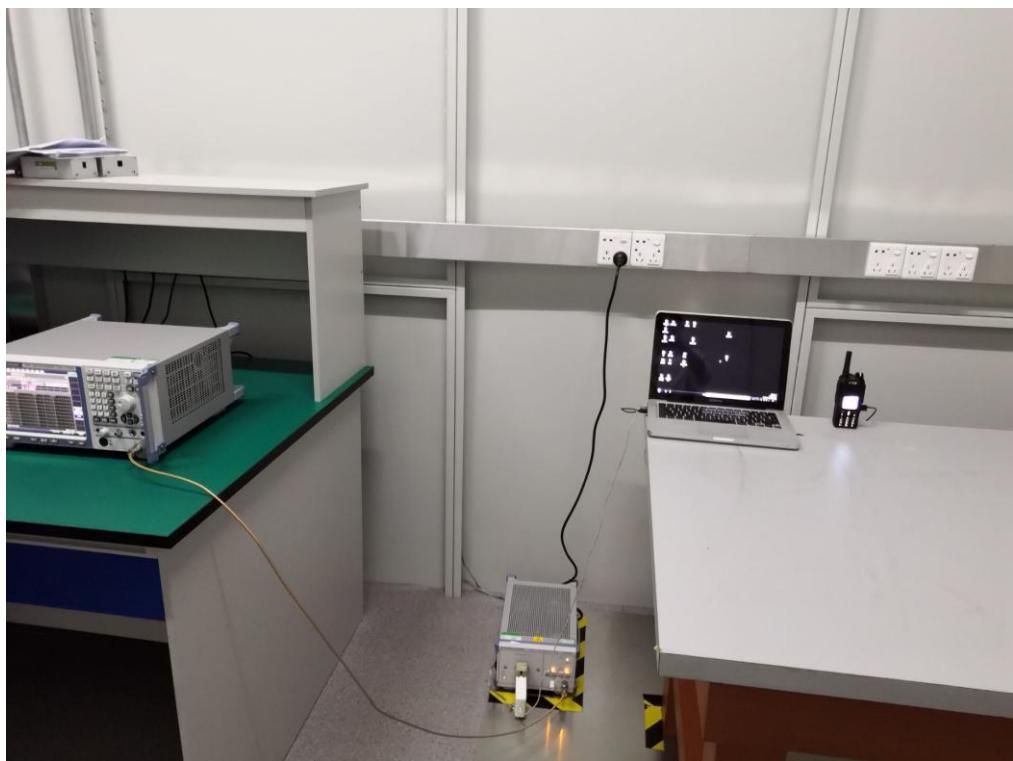


FCC RADIATED EMISSION TEST SETUP

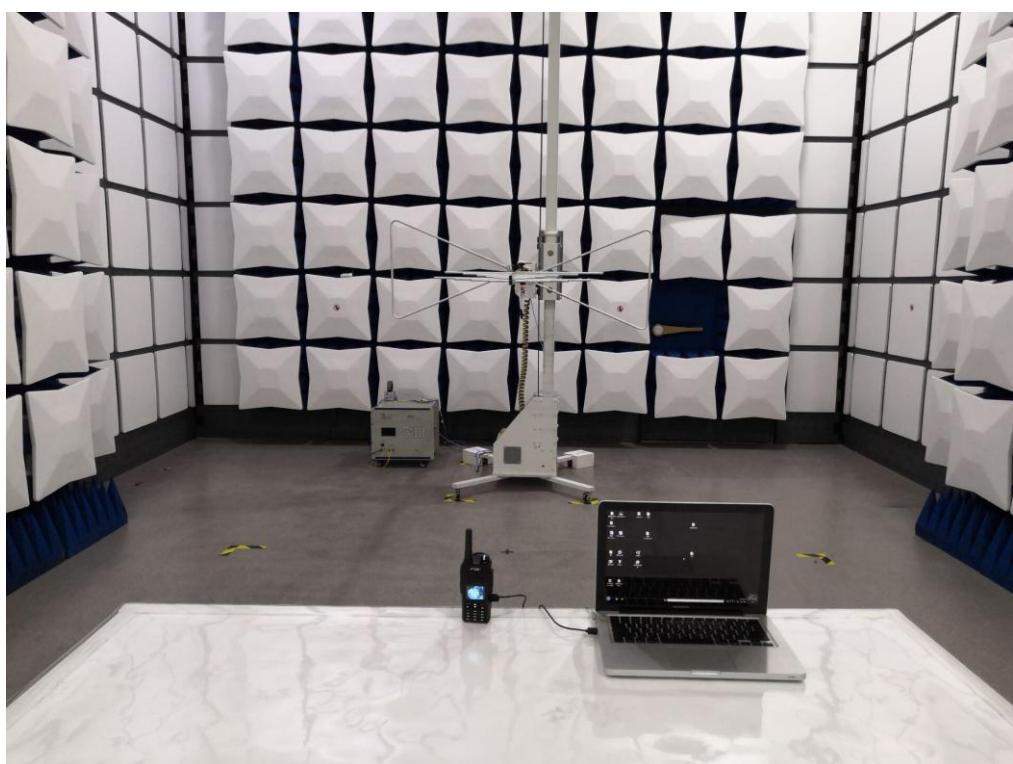



FCC RADIATED EMISSION TEST SETUP

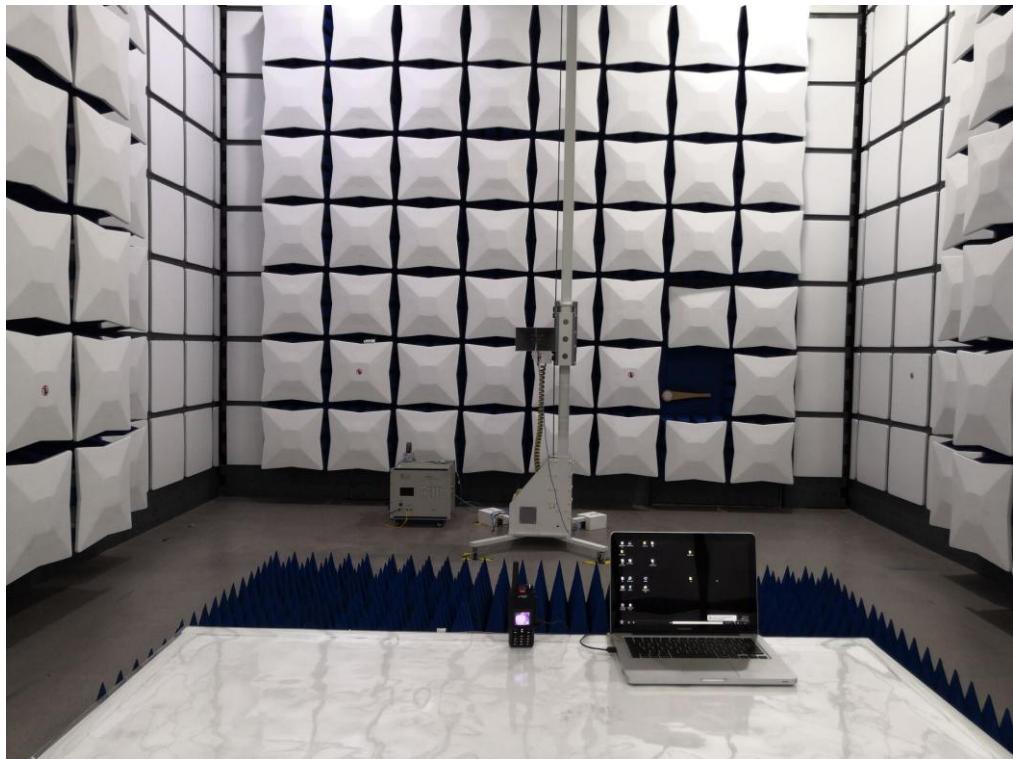

----END OF REPORT----