

FCC Test Report

FCC ID: ZSHR7S

Product: Mobile phone

Trade Mark: Kenxinda, Ken mobile, KXD, EL, E&L

Model Number: R7S

Family Model: N/A

Report No.: STR190705002006E

Prepared for

SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
18TH FLOOR,FUCHUN ORIENT BUILDING, SHENNAN AV 7006,
SHENZHEN, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
Address : 18TH FLOOR,FUCHUN ORIENT BUILDING, SHENNAN AV 7006,
SHENZHEN, China

Manufacturer's Name : SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
Address : 18TH FLOOR,FUCHUN ORIENT BUILDING, SHENNAN AV 7006,
SHENZHEN, China

Product description

Product name : Mobile phone

Model and/or type reference : R7S

Family Model: N/A

FCC Part15B

Standards : ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... : 05 Jul. 2019 ~ 25 Jul. 2019

Date of Issue : 30 Jul, 2019

Test Result..... : **Pass**

Testing Engineer : 

(Mary Hu)

Technical Manager : 

(Jason Chen)

Authorized Signatory : 

(Sam Chen)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
3.2.2 TEST PROCEDURE	17
3.2.3 TEST SETUP	18
3.2.4 TEST RESULTS	19
3.2.5 TEST RESULTS(1000~26500MHz)	21

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

FCC Registration Number:463705; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile phone				
Trade Mark	Kenxinda, Ken mobile, KXD, EL, E&L				
Model Name	R7S				
Family Model	N/A				
Model Difference	N/A				
Product Description	<p>The EUT is a Mobile phone.</p> <table border="1"><tr><td>Connecting I/O port:</td><td>Micro USB, Earphone</td></tr><tr><td>Operation Frequency:</td><td>2.568GHz</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Connecting I/O port:	Micro USB, Earphone	Operation Frequency:	2.568GHz
Connecting I/O port:	Micro USB, Earphone				
Operation Frequency:	2.568GHz				
Power Source	DC 3.85V/2650mAh from Battery or DC 5V from USB Port.				
Adapter	Model: K12S Input: 100-240V~50/60Hz 0.25A Output: 5V ---1A				
HW Version	S1_MB_V2.0				
SW Version	MRA58K				

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB Data Transmission
Mode 2	TF card Playing
Mode 3	REC
Mode 4	FM

For Conducted Test	
Final Test Mode	Description
Mode 1	USB Data Transmission
Mode 2	TF card Playing
Mode 3	REC
Mode 4	FM


For Radiated Test	
Final Test Mode	Description
Mode 1	USB Data Transmission
Mode 2	TF card Playing
Mode 3	REC
Mode 4	FM

Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worst case.


Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

CE

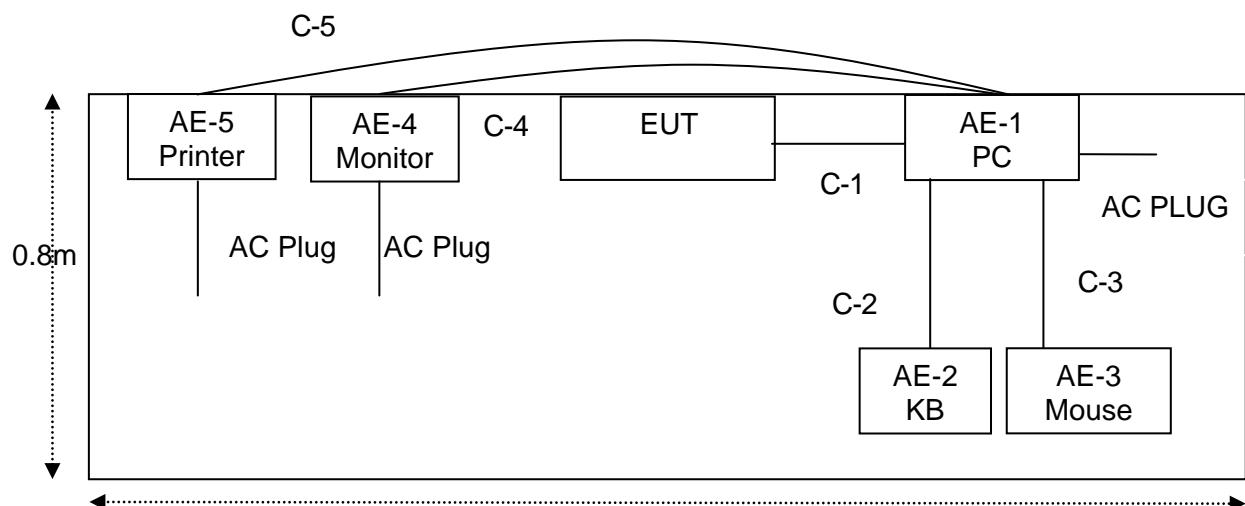

RE

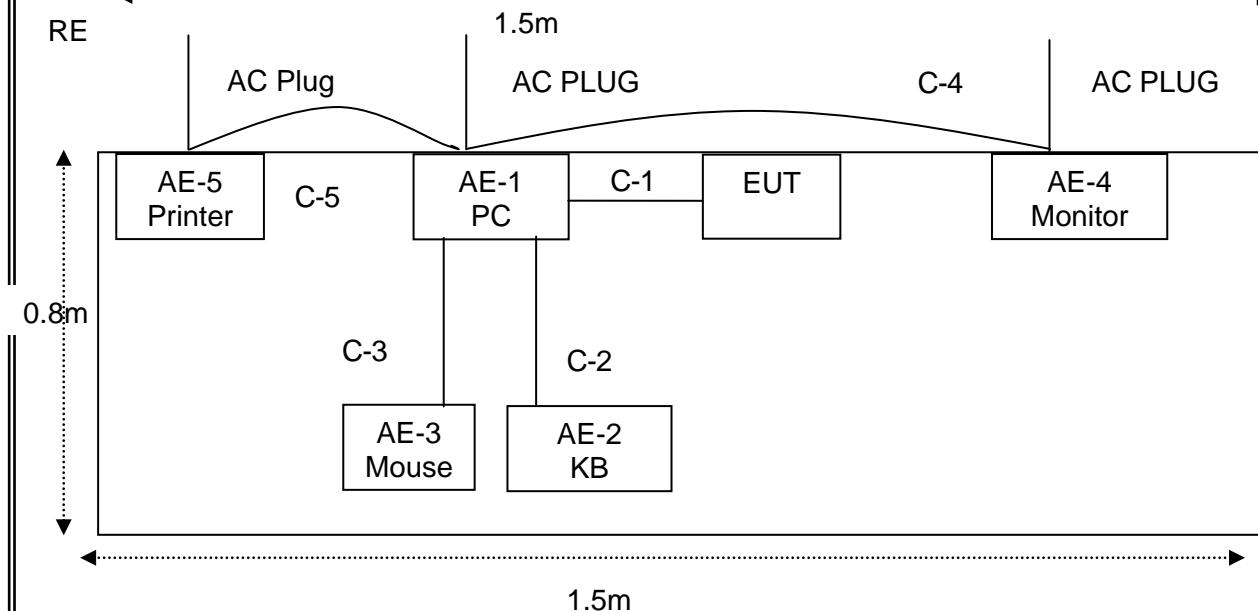

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	PC	DELL	FT4Y23X	N/A	Peripherals
AE-2	KB	DELL	SK-8185	N/A	Peripherals
AE-3	Mouse	DELL	MS111-P	N/A	Peripherals
AE-4	Monitor	N/A	N/A	N/A	Peripherals
AE-5	Printer	Canon	L11121E	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.0m	
C-2	KB Cable	NO	NO	1.2m	
C-3	Mouse Cable	NO	NO	1.2m	
C-4	HDMI Cable	YES	YES	1.0m	
C-5	USB Cable	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.4 MEASUREMENT INSTRUMENTS LIST

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Test Receiver	R&S	ESPI	101318	2019.05.13	2020.05.12	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2019.05.13	2020.05.12	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2019.05.13	2020.05.12	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.05.13	2020.05.12	1 year
8	Amplifier	EMC	EMC051835SE	980246	2018.08.05	2019.08.04	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2019.05.13	2020.05.12	1 year
10	Power Meter	DARE	RPR3006W	15I00041S NO84	2018.08.05	2019.08.04	1 year
11	Power Sensor	R&S	URR7S-Z4	0395.1619.05	2019.05.13	2020.05.12	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
13	High Test Cable(1G-40 GHz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
14	High Test Cable(1G-40 GHz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2019.05.13	2020.05.12	1 year
2	LISN	R&S	ENV216	101313	2019.04.15	2020.04.14	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2019.05.13	2020.05.12	1 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

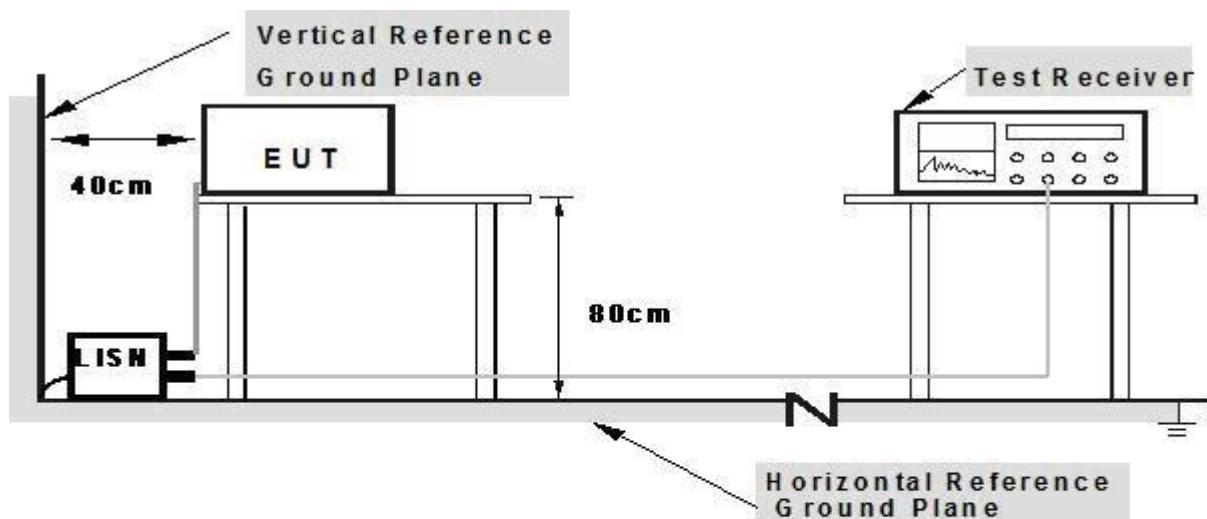

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.5 TEST RESULTS


EUT:	Mobile phone	Model Name. :	R7S
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date:	2019-07-23
Test Mode:	Mode 1	Phase :	L
Test Voltage:	DC 5V from PC AC120V/60Hz		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1940	37.21	9.76	46.97	63.86	-16.89	QP
0.1940	33.21	9.76	42.97	53.86	-10.89	AVG
0.4620	36.12	9.74	45.86	56.66	-10.80	QP
0.4620	31.61	9.74	41.35	46.66	-5.31	AVG
0.5740	35.96	9.74	45.70	56.00	-10.30	QP
0.5740	30.49	9.74	40.23	46.00	-5.77	AVG
0.9300	35.16	9.74	44.90	56.00	-11.10	QP
0.9300	27.36	9.74	37.10	46.00	-8.90	AVG
1.1019	32.15	9.74	41.89	56.00	-14.11	QP
1.1019	26.27	9.74	36.01	46.00	-9.99	AVG
1.6620	29.76	9.77	39.53	56.00	-16.47	QP
1.6620	19.42	9.77	29.19	46.00	-16.81	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

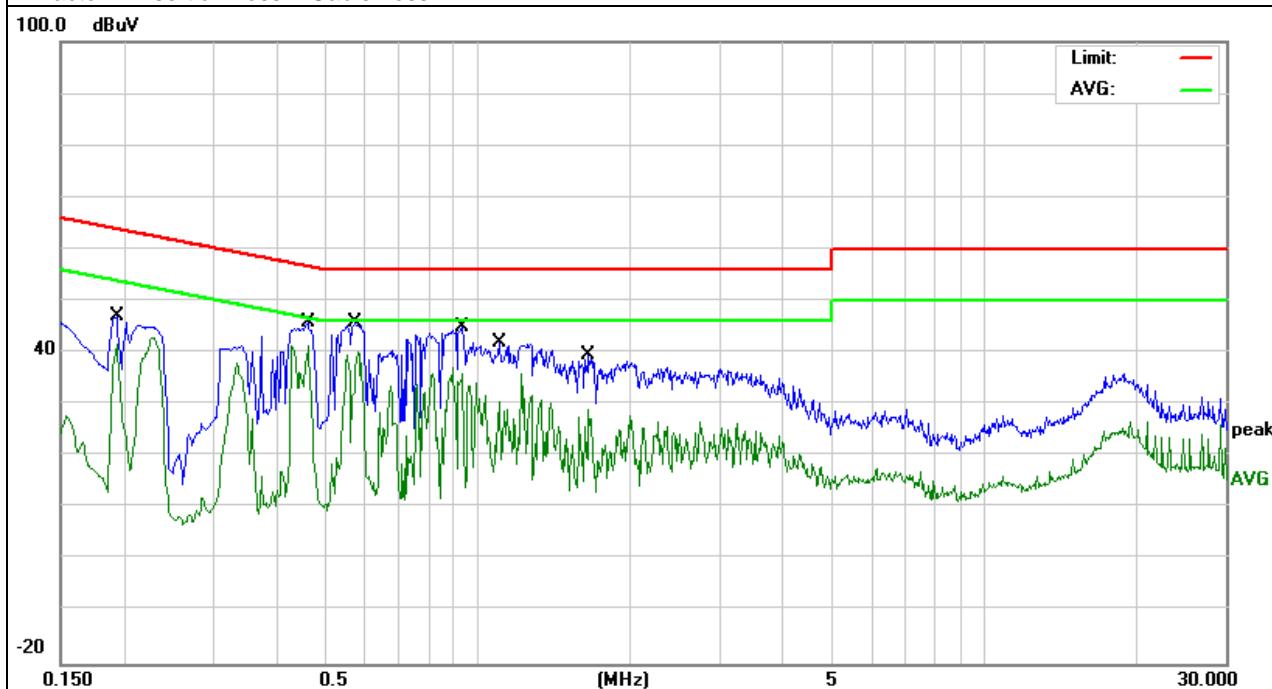


EUT:	Mobile phone	Model Name. :	R7S
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date:	2019-07-23
Test Mode:	Mode 1	Phase :	N
Test Voltage:	DC 5V from PC AC120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1580	37.46	9.74	47.20	65.56	-18.36	QP
0.1580	14.35	9.74	24.09	55.56	-31.47	AVG
0.2620	31.67	9.74	41.41	61.36	-19.95	QP
0.2620	12.82	9.74	22.56	51.36	-28.80	AVG
0.3060	31.38	9.74	41.12	60.08	-18.96	QP
0.3060	29.18	9.74	38.92	50.08	-11.16	AVG
0.6100	26.65	9.75	36.40	56.00	-19.60	QP
0.6100	19.15	9.75	28.90	46.00	-17.10	AVG
1.2180	29.67	9.75	39.42	56.00	-16.58	QP
1.2180	20.96	9.75	30.71	46.00	-15.29	AVG
1.7540	28.79	9.79	38.58	56.00	-17.42	QP
1.7540	17.25	9.79	27.04	46.00	-18.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

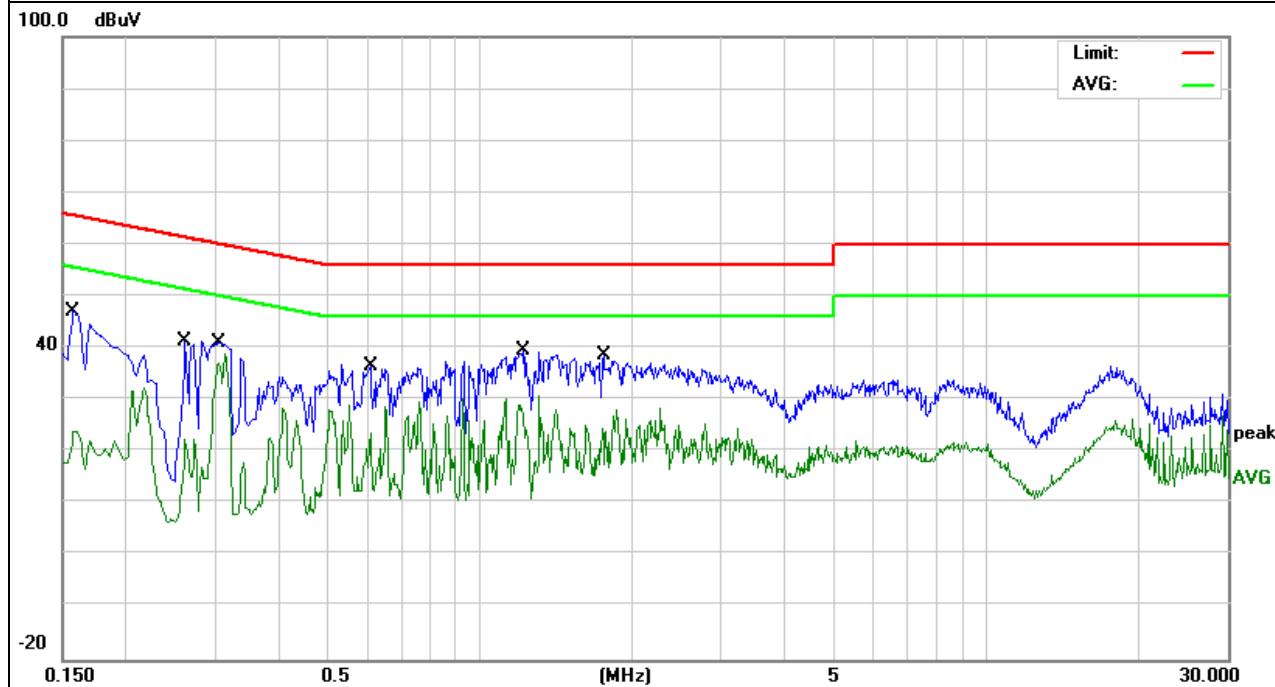


EUT:	Mobile phone	Model Name. :	R7S
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date:	2019-07-23
Test Mode:	Mode 1	Phase :	L
Test Voltage:	DC 5V from PC AC240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.2099	36.26	9.76	46.02	63.21	-17.19	QP
0.2099	26.00	9.76	35.76	53.21	-17.45	AVG
0.5060	36.10	9.74	45.84	56.00	-10.16	QP
0.5060	25.00	9.74	34.74	46.00	-11.26	AVG
0.6540	37.32	9.74	47.06	56.00	-8.94	QP
0.6540	29.03	9.74	38.77	46.00	-7.23	AVG
0.9220	35.16	9.74	44.90	56.00	-11.10	QP
0.9220	22.15	9.74	31.89	46.00	-14.11	AVG
1.1979	33.93	9.74	43.67	56.00	-12.33	QP
1.1979	23.61	9.74	33.35	46.00	-12.65	AVG
18.2739	31.64	10.18	41.82	60.00	-18.18	QP
18.2739	18.87	10.18	29.05	50.00	-20.95	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

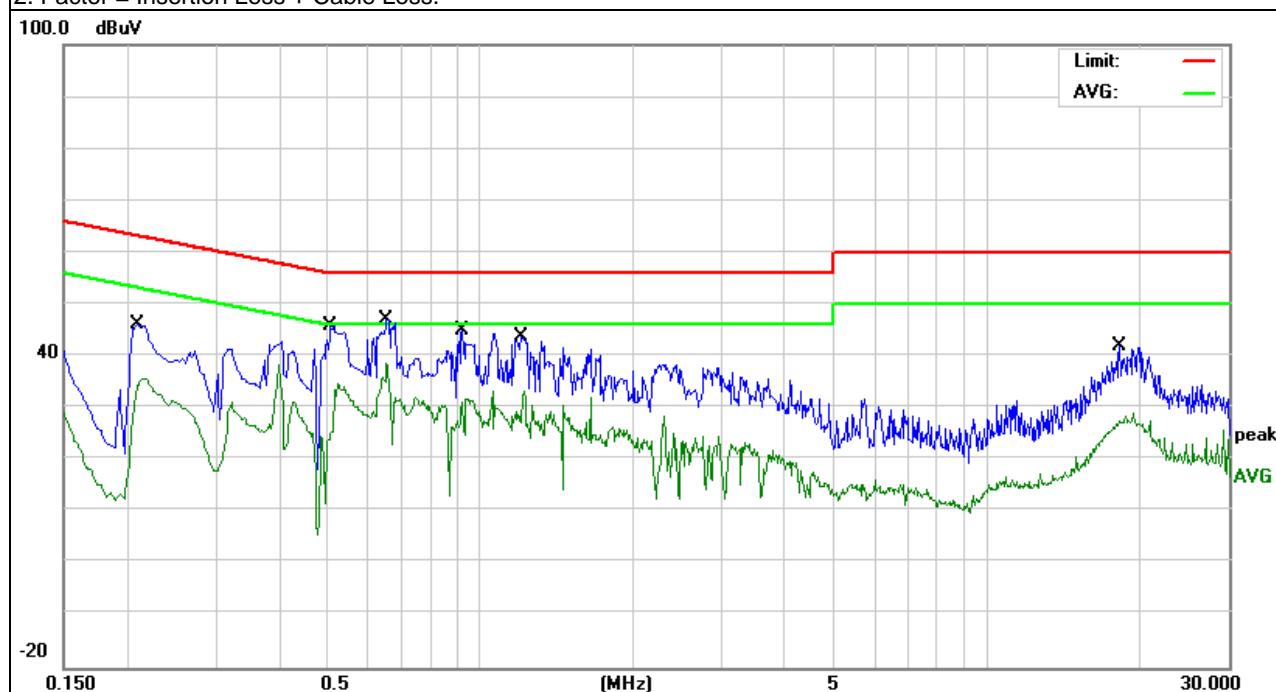


EUT:	Mobile phone	Model Name. :	R7S
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date:	2019-07-23
Test Mode:	Mode 1	Phase :	N
Test Voltage:	DC 5V from PC AC240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.3260	30.97	9.73	40.70	59.55	-18.85	QP
0.3260	19.65	9.73	29.38	49.55	-20.17	AVG
0.7500	29.87	9.74	39.61	56.00	-16.39	QP
0.7500	18.97	9.74	28.71	46.00	-17.29	AVG
1.2540	31.00	9.74	40.74	56.00	-15.26	QP
1.2540	19.86	9.74	29.60	46.00	-16.40	AVG
1.9378	29.37	9.78	39.15	56.00	-16.85	QP
1.9378	17.67	9.78	27.45	46.00	-18.55	AVG
2.5619	27.60	9.79	37.39	56.00	-18.61	QP
2.5619	16.01	9.79	25.80	46.00	-20.20	AVG
19.4618	35.99	10.21	46.20	60.00	-13.80	QP
19.4618	21.83	10.21	32.04	50.00	-17.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

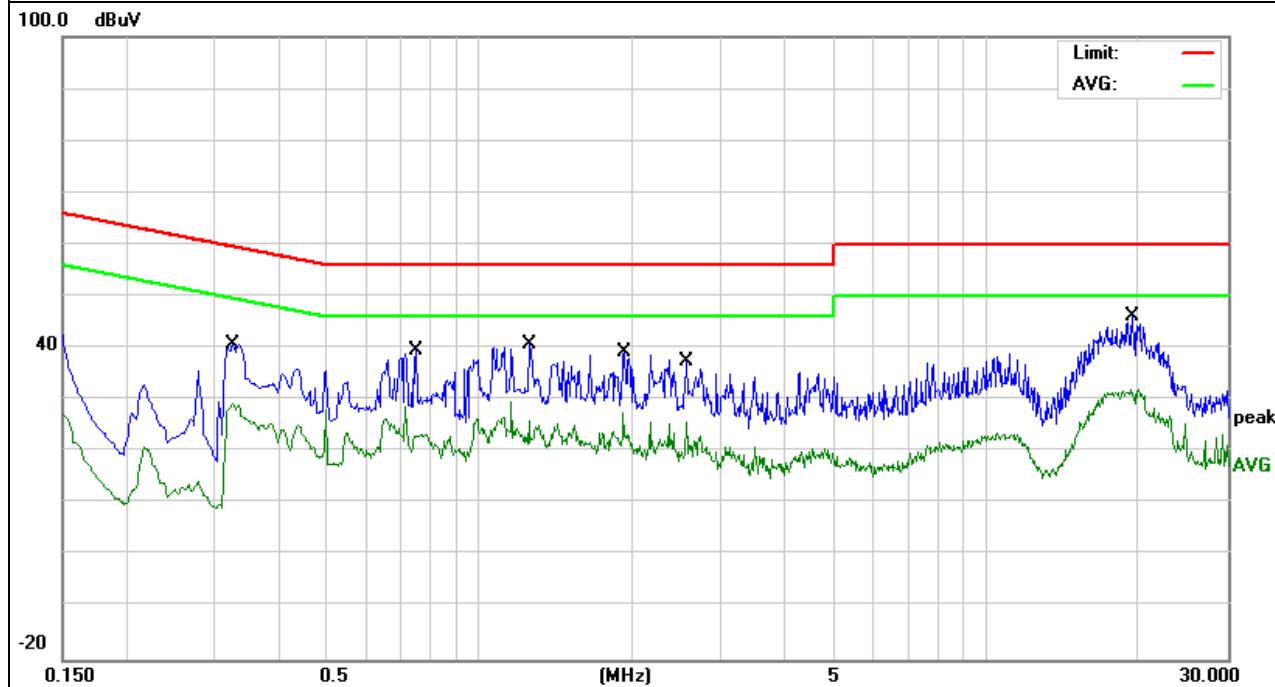

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Avg	1 MHz	10 Hz

3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

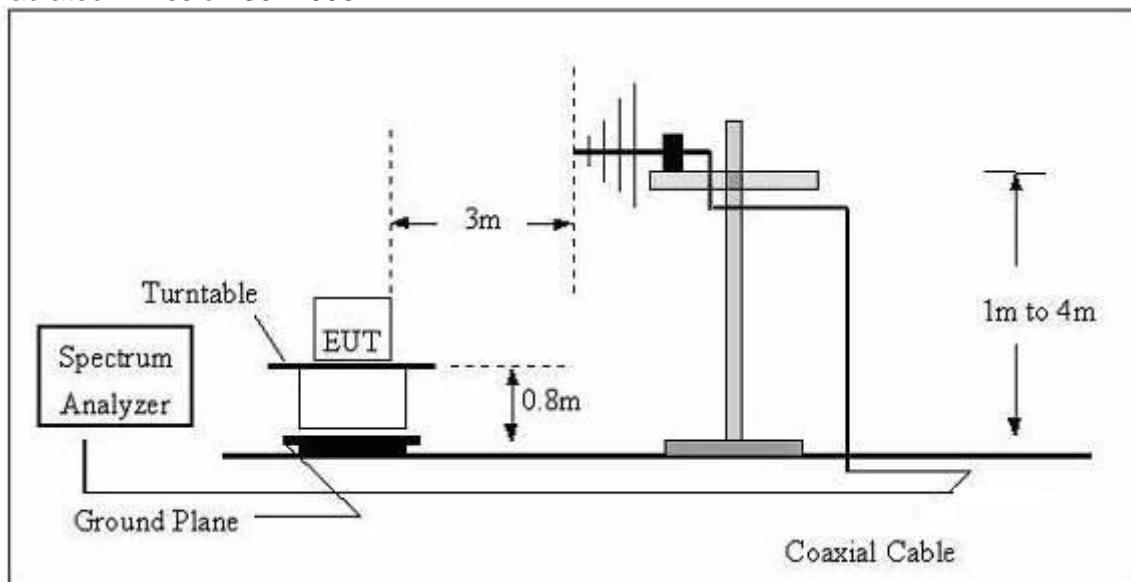

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

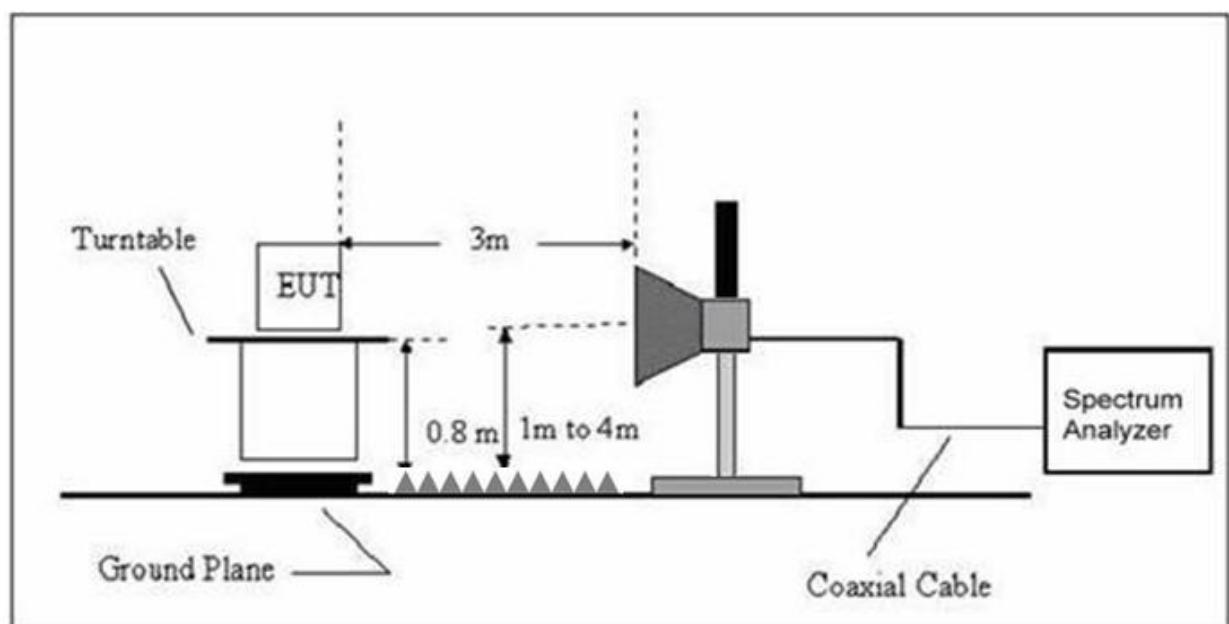

3.2.4 TEST RESULTS


TEST RESULTS (30~1000 MHz)

EUT:	Mobile phone	Model Name:	R7S
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2019-07-23
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V from PC AC120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	95.7622	17.66	11.08	28.74	43.50	-14.76	QP
H	195.8220	30.29	9.81	40.10	43.50	-3.40	QP
H	304.6099	21.56	16.20	37.76	46.00	-8.24	QP
H	394.8544	16.46	19.30	35.76	46.00	-10.24	QP
H	480.5276	18.77	21.41	40.18	46.00	-5.82	QP
H	724.2611	14.37	26.85	41.22	46.00	-4.78	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

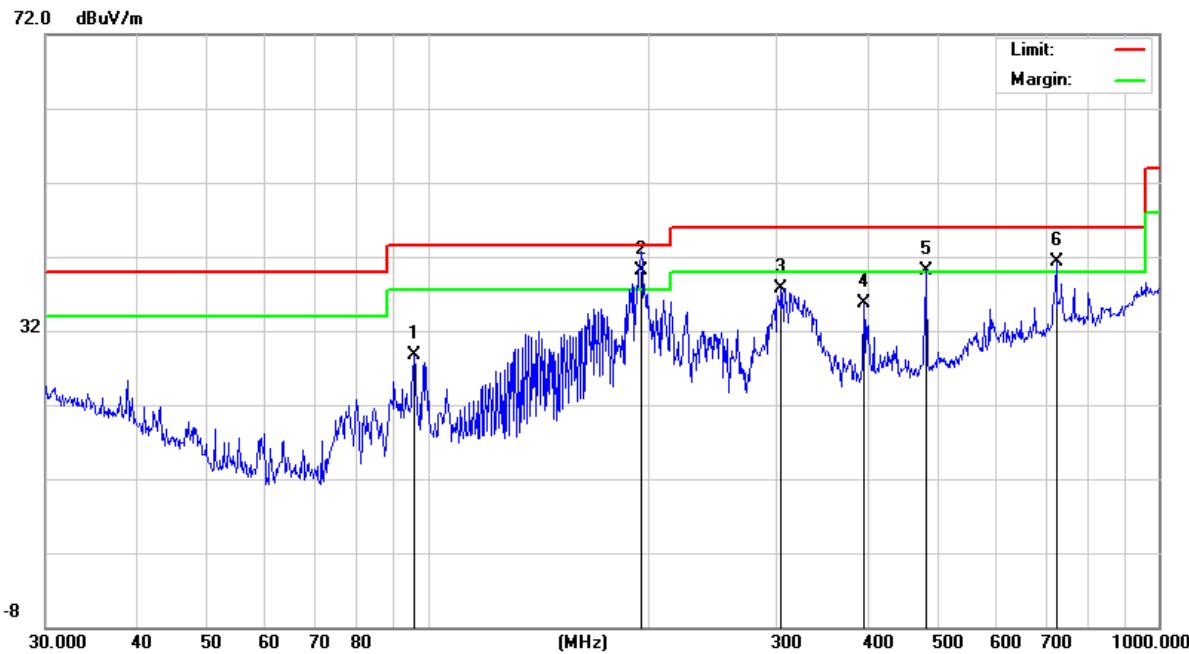


EUT:	Mobile phone	Model Name :	R7S
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2019-07-23
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V from PC AC120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	146.3735	16.95	13.03	29.98	43.50	-13.52	QP
V	158.1123	19.26	11.93	31.19	43.50	-12.31	QP
V	195.8220	29.59	9.81	39.40	43.50	-4.10	QP
V	616.3718	13.86	24.72	38.58	46.00	-7.42	QP
V	721.7259	15.02	26.66	41.68	46.00	-4.32	QP
V	804.6028	13.88	27.33	41.21	46.00	-4.79	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

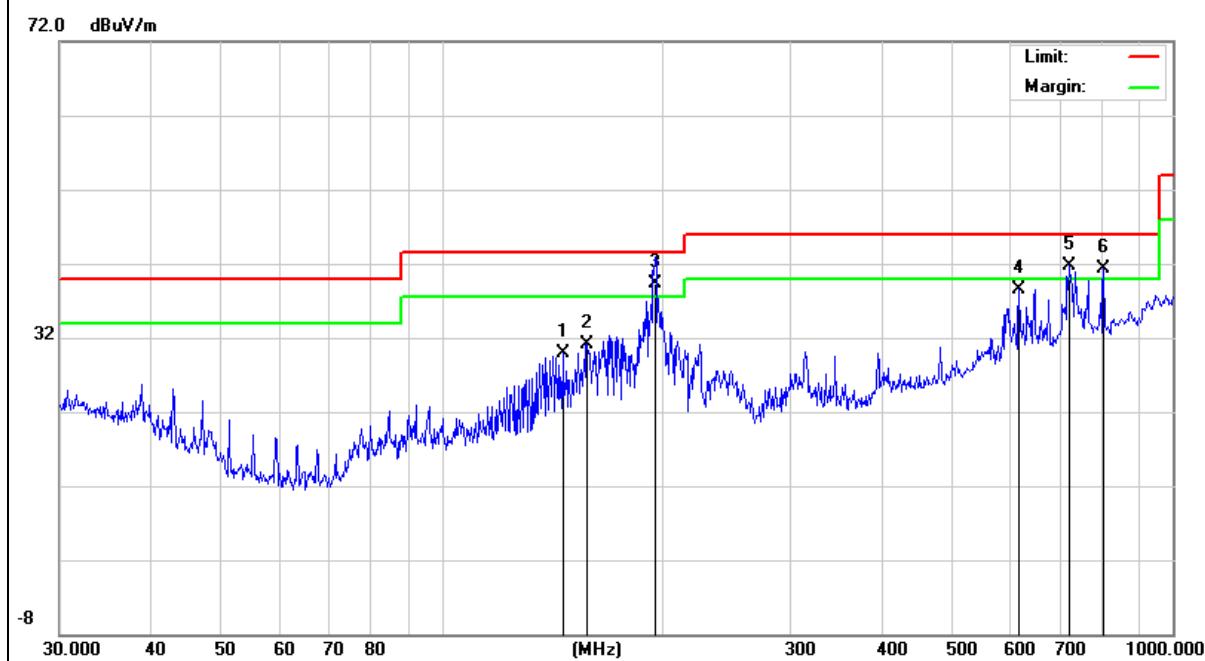

3.2.5 TEST RESULTS(1000~26500MHz)

EUT:	Mobile phone	Model Name :	R7S
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2019-07-23
Test Mode :	Mode 1		
Test Power :	DC 5V from PC AC120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency	Reading	Correc	Result	Limit	Over Limit	Remar
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
V	6525	-7.13	49.58	42.45	74.00	-31.55	peak
V	6525	-17.32	49.58	32.26	54.00	-21.74	AVG
V	8310	-7.76	53.31	45.55	74.00	-28.45	peak
V	8310	-22.63	53.31	30.68	54.00	-23.32	AVG
V	10520	-7.72	56.06	48.34	74.00	-25.66	peak
V	10520	-22.37	56.06	33.69	54.00	-20.31	AVG
V	13622.5	-9.30	60.69	51.39	74.00	-22.61	peak
V	13622.5	-22.06	60.69	38.63	54.00	-15.37	AVG
V	14727.5	-10.54	61.45	50.91	74.00	-23.09	peak
V	14727.5	-24.44	61.45	37.01	54.00	-16.99	AVG
V	15705	-10.10	60.66	50.56	74.00	-23.44	peak
V	15705	-24.63	60.66	36.03	54.00	-17.97	AVG
H	6567.5	-7.08	49.80	42.72	74.00	-31.28	peak
H	6567.5	-21.74	49.80	28.06	54.00	-25.94	AVG
H	8310	-7.40	53.31	45.91	74.00	-28.09	peak
H	8310	-22.66	53.31	30.65	54.00	-23.35	AVG
H	10562.50	-8.24	56.38	48.14	74.00	-25.86	peak
H	10562.50	-22.69	56.38	33.69	54.00	-20.31	AVG
H	13325.00	-9.70	60.88	51.18	74.00	-22.82	peak
H	13325.00	-23.19	60.88	37.69	54.00	-16.31	AVG
H	14090.00	-10.37	61.00	50.63	74.00	-23.37	peak
H	14090.00	-25.74	61.00	35.26	54.00	-18.74	AVG
H	15492.50	-10.82	60.64	49.82	74.00	-24.18	peak
H	15492.50	-25.78	60.64	34.86	54.00	-19.14	AVG

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

Note: Only the worst results data points are reported in the report.