# **FCC Test Report**

Report No.: AGC00L110701F2B

**FCC ID** : ZSHS-7000

**PRODUCT DESIGNATION**: MOBILE PHONE

**BRAND NAME** : SEFTON

TEST MODEL : S-7000

**CLIENT**: SHENZHEN KENXINDA TECHNOLOGY CO.,LTD

**DATE OF ISSUE** : July 23, 2011

**STANDARD(S)** : FCC Part 15 Rules

### Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 43

#### **VERIFICATION OF COMPLIANCE**

|                     | SHENZHEN KENXINDA TECHNOLOGY CO.,LTD  |  |  |
|---------------------|---|--|--|
| Applicant           | 18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV<br>7006, SHENZHEN, P.R.CHINA   |  |  |
|                     | SHENZHEN KENXINDA TECHNOLOGY CO., LTD (BAO'AN BRANCH)   |  |  |
| Manufacturer        | 1-6 FLOOR, NO.105 WORK SHOP & 1-5 FLOOR, NO.104 WORK SHOP, XINWEIHUANING ROAD, DALANG COMMUNITY, DALANG STREET, BAO'AN DISTRICT, SHENZHEN P.R.CHINA |  |  |
| Product Designation | MOBILE PHONE  |  |  |
| Brand Name          | SEFTON  |  |  |
| Model Name          | S-7000  |  |  |
| FCC ID              | ZSHS-7000   |  |  |
| Report Number       | AGC00L110701F2B   |  |  |
| Date of Test        | July 03, 2011 to July 07, 2011  |  |  |

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By:

Curoky Chen July 23, 2011

Review By:

Forrest Lei July 23, 2011

Approved By:

Solger Zhang July 23, 2011

### **TABLE OF CONTENTS**

| 1. GENERAL INFORMATION   | ······································ |
|--|--|
| 1.1 PRODUCT DESCRIPTION  1.2 TABLE OF CARRIER FREQUENCYS  1.3 RECEIVER INPUT BANDWIDTH  1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE  1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR  1.6 RELATED SUBMITTAL(S) / GRANT (S)  1.7 TEST METHODOLOGY  1.8 TEST FACILITY  1.9 SPECIAL ACCESSORIES  1.10 EQUIPMENT MODIFICATIONS  2. SYSTEM TEST CONFIGURATION |  |
| 2.1 CONFIGURATION OF TESTED SYSTEM 2.2 EQUIPMENT USED IN TESTED SYSTEM   |  |
| 3. SUMMARY OF TEST RESULTS   |  |
| 4. DESCRIPTION OF TEST MODES   |  |
| 5. PEAK OUTPUT POWER   |  |
| 5.1 MEASUREMENT PROCEDURE 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 5.3 MEASUREMENT EQUIPMENT USED 5.4 LIMITS AND MEASUREMENT RESULT  |  |
| 6 20 DB BANDWIDTH  | 11                                     |
| 6.1 MEASUREMENT PROCEDURE 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 6.3 MEASUREMENT EQUIPMENT USED 6.4 LIMITS AND MEASUREMENT RESULTS   | 11                                     |
| 7 CONDUCTED SPURIOUS EMISSION  | 13                                     |
| 7.1 MEASUREMENT PROCEDURE 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 7.3 MEASUREMENT EQUIPMENT USED 7.4 LIMITS AND MEASUREMENT RESULT  | 13<br>13                               |
| 8 RADIATED EMISSION  | 17                                     |
| 8.1 MEASUREMENT PROCEDURE<br>8.2 TEST SETUP<br>8.4 TEST RESULT   | 18                                     |
| 9 BAND EDGE EMISSION   | 24                                     |
| 9.1 MEASUREMENT PROCEDURE<br>9.2 TEST SET-UP<br>9.3 TEST RESULT  | 24                                     |
| 10 NUMBER OF HOPPING FREQUENCY   | 28                                     |
| 10.1 MEASUREMENT PROCEDURE  10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)  10.3 MEASUREMENT EQUIPMENT USED  10.4 LIMITS AND MEASUREMENT RESULT  | 28<br>28                               |

Report No.: AGC00L110701F2B Page 3 of 43

| 11 TIME OF OCCUPANCY (DWELL TIME)                          | 29 |
|--|----|
| 11.1 MEASUREMENT PROCEDURE                                 |    |
| 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)           |    |
| 11.3 MEASUREMENT EQUIPMENT USED                            |    |
| 11.4 LIMITS AND MEASUREMENT RESULT                         |    |
| 12. FREQUENCY SEPARATION                                   | 32 |
| 12.1 MEASUREMENT PROCEDURE                                 | 32 |
| 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)           |    |
| 12.3 MEASUREMENT EQUIPMENT USED                            | 32 |
| 12.4 LIMITS AND MEASUREMENT RESULT                         |    |
| 13 FCC LINE CONDUCTED EMISSION TEST                        |    |
| 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST                | 33 |
| 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST         | 33 |
| 13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST | 34 |
| 13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST       | 34 |
| 13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST           | 35 |
| APPENDIX I   | 37 |
| PHOTOGRAPHS OF THE EUT                                     | 37 |
| APPENDIX II  | 43 |
| PHOTOGRAPHS OF THE TEST SETUP                              | 43 |

Page 4 of 43

#### 1. GENERAL INFORMATION

#### 1.1 PRODUCT DESCRIPTION

The EUT is a **MOBILE PHONE** designed as an "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

| Operation Frequency   | 2.402 GHz to 2.480GHz                                |  |
|---|--|--|
| Rated Output Power  | 2.61dBm  |  |
| Bluetooth Version:  | V2.0 without EDR                                     |  |
| Modulation  | GFSK   |  |
| Number of channels  | 79   |  |
| Antenna Designation   | Integrated Antenna                                   |  |
| Antenna Gain  | 0.8dBi   |  |
| Power Supply  | DC3.7V by Built-in Li-ion Battery(or charging by PC) |  |
| **note: the EUT could charged by PC while transfer information. |  |  |

#### 1.2 TABLE OF CARRIER FREQUENCYS

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
|                | 0              | 2402MHZ   |
|                | 1              | 2403MHZ   |
|                | :              | :         |
|                | 38             | 2440 MHZ  |
| 2400~2483.5MHZ | 39             | 2441 MHZ  |
|                | 40             | 2442 MHZ  |
|                | :              | :         |
|                | 77             | 2479 MHZ  |
|                | 78             | 2480 MHZ  |

#### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Page 5 of 43

#### 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and Is never turned off. For synchronisation with other units only offset are used. It has no relation to the time Of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te

Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **ZSHS-7000** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Page 6 of 43

#### 1.8 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance Co., Ltd.

1&2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, XiXiang, Baoan District, Shenzhen The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

#### 1.9 SPECIAL ACCESSORIES

Refer to section 2.2.


#### 1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 7 of 43

#### 2. SYSTEM TEST CONFIGURATION

## 2.1 CONFIGURATION OF EUT SYSTEM Configure:



Note: All the accessories have been used during the test, the earphone and adapter could not connect to mobile phone at the same time.

#### 2.2 EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment    | Mfr/Brand | Model/Type No. | Remark    |
|------|--------------|-----------|----------------|-----------|
| 1    | MOBILE PHONE | SEFTON    | S-7000         | EUT       |
| 2    | Adapter      | SEFTON    | HWT-2.5W-5050G | accessory |
| 3    | battery      | SEFTON    | BL-5A          | accessory |
| 4    | USB Cable    | N/A       | N/A            | accessory |

Note: all the following "EUT" in setup diagram means EUT system

Page 8 of 43

#### 3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST         | RESULT    |
|-----------|-----------------------------|-----------|
| §15.247   | Peak Output Power           | Compliant |
| §15.247   | 20 dB Bandwidth             | Compliant |
| §15.247   | Spurious Emission           | Compliant |
| §15.209   | Radiated Emission           | Compliant |
| §15.247   | Band Edges                  | Compliant |
| §15.207   | Conduction Emission         | Compliant |
| §15.247   | Number of Hopping Frequency | Compliant |
| §15.247   | Time of Occupancy           | Compliant |
| §15.247   | Frequency Separation        | Compliant |

#### 4. DESCRIPTION OF TEST MODES

The following operating modes were applied for the related test items. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

| No. | TEST MODES         |
|-----|--------------------|
| 1   | Low Channel(TX)    |
| 2   | Middle Channel(TX) |
| 3   | High Channel(TX)   |
| 4   | Normal Hopping     |

**Note:** All the test modes can be supply by Built-in Li-ion battery and adapter, only the result of the worst case was recorded in the report.


Page 9 of 43

#### **5. PEAK OUTPUT POWER**

#### **5.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### **5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

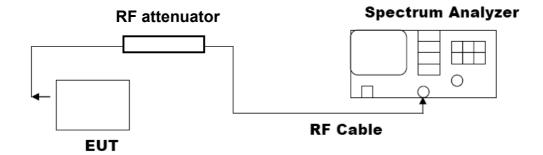

Report No.: AGC00L110701F2B Page 10 of 43

#### **5.3 MEASUREMENT EQUIPMENT USED**

| Description       | Manufacturer | Model   | SERIAL<br>NUMBER | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------------|------------|------------|
| Spectrum Analyzer | Agilent      | E4440A  | N/A              | 06/27/2011 | 06/26/2012 |
| RF attenuator     | N/A          | RFA20db | N/A              | N/A        | N/A        |

#### **5.4 LIMITS AND MEASUREMENT RESULT**

| LIMITS AND MEASUREMENT RESULT |                 |                         |              |  |
|-------------------------------|-----------------|-------------------------|--------------|--|
| Frequency<br>(GHz)            | Result<br>(dBm) | Applicable Limits (dBm) | Pass or Fail |  |
| 2.402                         | 2.61            | 30                      | Pass         |  |
| 2.441                         | 2.58            | 30                      | Pass         |  |
| 2.480                         | 2.57            | 30                      | Pass         |  |

Page 11 of 43

#### 6 20 DB BANDWIDTH

#### **6.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 5.2

#### **6.3 MEASUREMENT EQUIPMENT USED**

The same as described in Section 5.3

#### **6.4 LIMITS AND MEASUREMENT RESULTS**

| LIMITS AND MEASUREMENT RESULT |                    |       |          |
|-------------------------------|--------------------|-------|----------|
| Applicable Limits             | Measurement Result |       |          |
| Applicable Limits             | Test Data (MHz)    |       | Criteria |
|                               | Low Channel        | 0.958 | PASS     |
| N/A                           | Middle Channel     | 0.960 | PASS     |
|                               | High Channel       | 0.969 | PASS     |

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 12 of 43

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

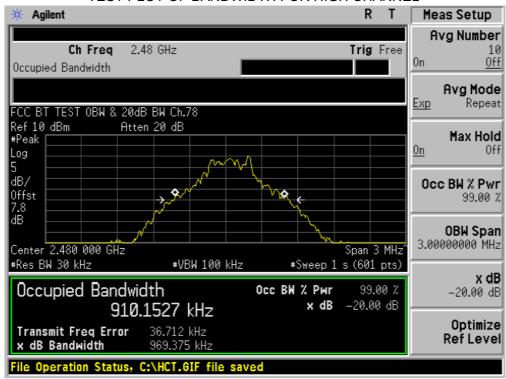

Page 13 of 43

#### **7 CONDUCTED SPURIOUS EMISSION**

#### 7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

#### 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

#### 7.3 MEASUREMENT EQUIPMENT USED


The Same as described in section 5.3


#### 7.4 LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT  |  |          |  |
|--|--|----------|--|
| Applicable Limite  | Measurement Result   |          |  |
| Applicable Limits  | Test Data  | Criteria |  |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest | At least -20dBc than the<br>limit Specified on the<br>BOTTOM Channel | PASS     |  |
| level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))   | At least -20dBc than the limit Specified on the TOP Channel          | PASS     |  |

Page 14 of 43


TEST PLOT OF OUT OF BAND EMISSIONS FOR LOW CHANNEL

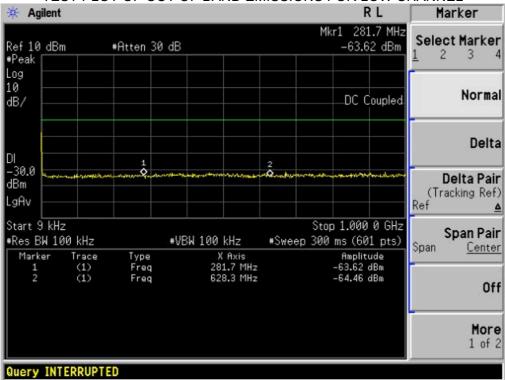


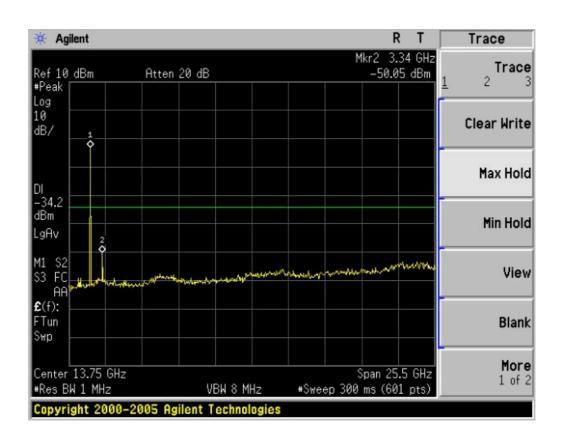

Page 15 of 43




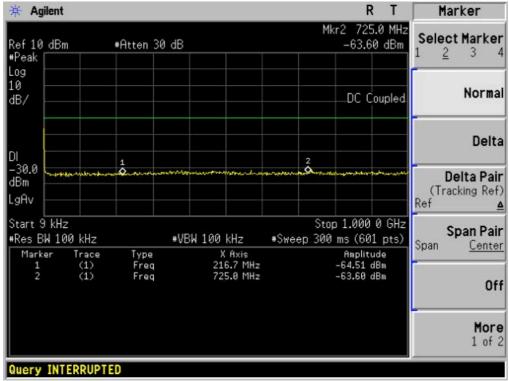


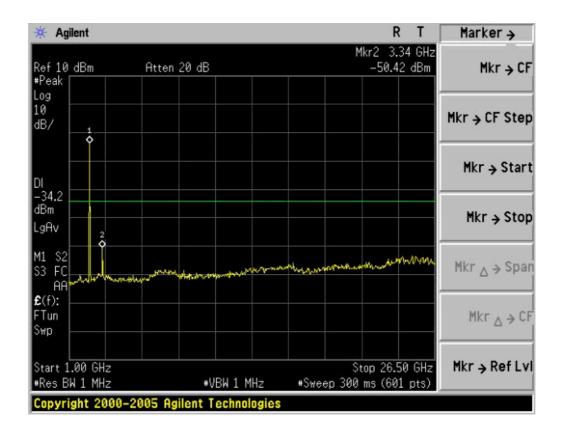

Page 16 of 43

TEST PLOT OF OUT OF BAND EMISSIONS FOR HIGH CHANNEL

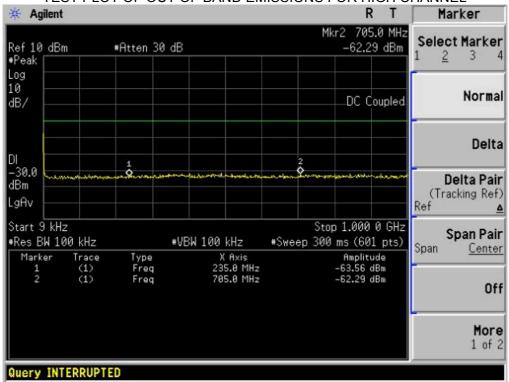

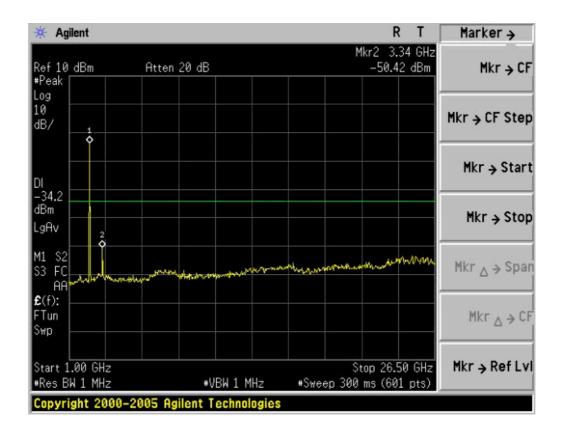

Page 17 of 43

#### 8 RADIATED EMISSION

#### **8.1 MEASUREMENT PROCEDURE**

 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

Report No.: AGC00L110701F2B Page 18 of 43


The following table is the setting of spectrum analyzer and receiver.'

| Spectrum Parameter    | Setting  |
|-----------------------|--|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP                                |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP                                |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP                             |
| Start ~Stop Frequency | 1GHz~26.5GHz<br>1MHz/1MHz for Peark, 1MHz/10Hz for Average |

| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |


#### **8.2 TEST SETUP**

#### RADIATED EMISSION TEST SETUP BELOW 30MHz

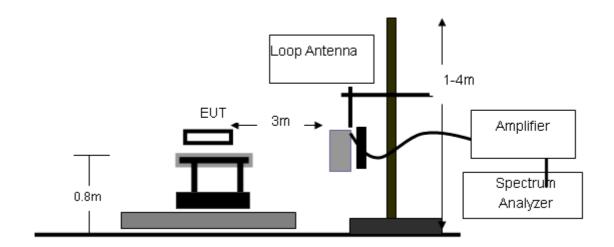


Page 19 of 43

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

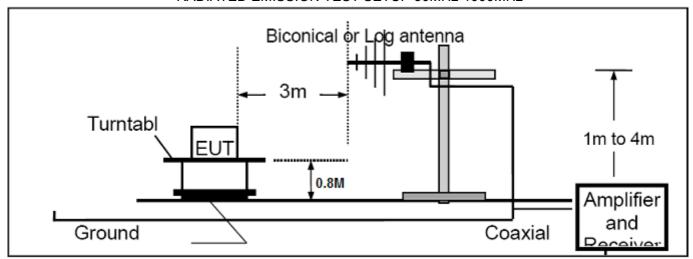

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

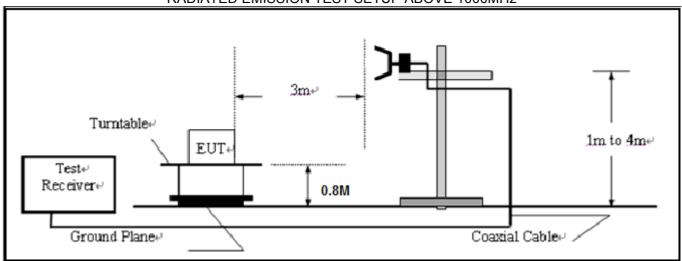

#### **8.3 TEST EQUIMENT LIST**

| Description           | Manufacturer      | Model       | SERIAL<br>NUMBER | Cal. Date  | Cal. Due   |
|-----------------------|-------------------|-------------|------------------|------------|------------|
| Spectrum Analyzer     | Agilent           | E4440A      | N/A              | 06/27/2011 | 06/26/2012 |
| Amplifier             | EM                | EM30180     | 0607030          | 06/27/2011 | 06/26/2012 |
| Horn Antenna          | EM                | EM-AH-10180 | N/A              | 06/27/2011 | 06/26/2012 |
| Horn Antenna          | A.H. Systems Inc. | SAS-574     |                  | 06/27/2011 | 06/26/2012 |
| EMI Test Receiver     | Rohde & Schwarz   | ESCI        | N/A              | 06/27/2011 | 06/26/2012 |
| Amplifier             | EM                | EM30180     | N/A              | 06/27/2011 | 06/26/2012 |
| Bilogical Antenna     | A.H. Systems Inc. | SAS-521-4   | N/A              | 06/27/2011 | 06/26/2012 |
| Loop Antenna          | Daze              | ZN30900N    | SEL0097          | 06/27/2011 | 06/26/2012 |
| Isolation Transformer | LETEAC            | LTBK        |                  | 06/27/2011 | 06/26/2012 |

Temperature: 26 Humidity: 60 %

Page 20 of 43

#### **8.4 TEST RESULT**

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequency to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**



Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

LIIIII. FOO Class B SW Radiau

EUT: MOBILE PHONE

M/N: S-7000

Mode: Normal Hopping


Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     |    | MHz      | dBu∀    | dB/m   | dBuV/m      | dBu∀/m | dB     | ]        | cm                | degree          |         |
| 1   | *  | 51.0167  | 23.96   | 8.79   | 32.75       | 40.00  | -7.25  | peak     |                   |                 |         |
| 2   |    | 114.0666 | 19.95   | 13.93  | 33.88       | 43.50  | -9.62  | peak     |                   |                 |         |
| 3   |    | 128.6167 | 17.85   | 16.49  | 34.34       | 43.50  | -9.16  | peak     |                   |                 |         |
| 4   |    | 186.8166 | 16.24   | 17.48  | 33.72       | 43.50  | -9.78  | peak     |                   |                 |         |
| 5   |    | 301.6000 | 15.78   | 17.10  | 32.88       | 46.00  | -13.12 | peak     |                   |                 |         |
| 6   |    | 364.6499 | 12.04   | 19.14  | 31.18       | 46.00  | -14.82 | peak     |                   |                 |         |

Power:

Distance: 3m

Page 21 of 43

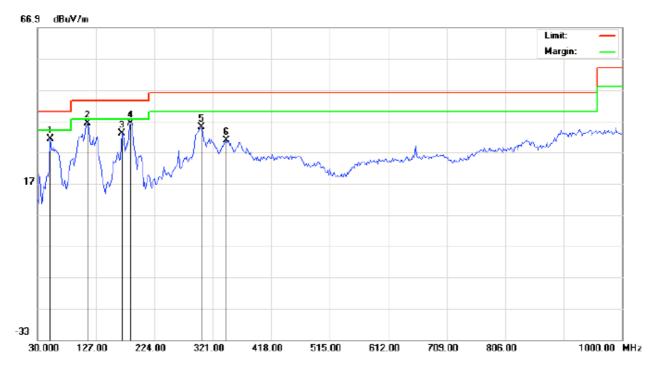

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m


M/N: S-7000

Mode: Normal Hopping

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     |    | MHz      | dBu∀    | dB/m   | dBu∀/m      | dBu∀/m | dB     |          | cm                | degree          |         |
| 1   |    | 51.0167  | 23.10   | 8.25   | 31.35       | 40.00  | -8.65  | peak     |                   |                 |         |
| 2   |    | 114.0666 | 20.02   | 16.31  | 36.33       | 43.50  | -7.17  | peak     |                   |                 |         |
| 3   |    | 170.6500 | 16.91   | 16.03  | 32.94       | 43.50  | -10.56 | peak     |                   |                 |         |
| 4   | *  | 185.1999 | 20.43   | 15.96  | 36.39       | 43.50  | -7.11  | peak     |                   |                 |         |
| 5   |    | 301.6000 | 18.00   | 17.10  | 35.10       | 46.00  | -10.90 | peak     |                   |                 |         |
| 6   |    | 343.6333 | 11.81   | 19.00  | 30.81       | 46.00  | -15.19 | peak     |                   |                 |         |

Page 22 of 43

### RADIATED EMISSION ABOVE 1GHZ(1-10<sup>th</sup> Harmonics)

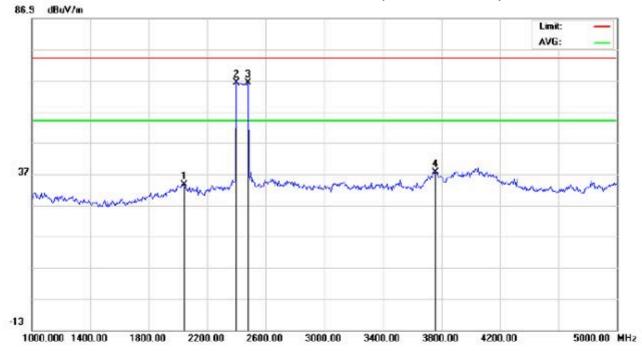

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %


EUT: MOBILE PHONE Distance: 3m

M/N: S-7000

Mode: Normal Hopping

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | 3  | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm                | degree          |         |
| 1   |    | 2040.000 | 33.51   | -0.08  | 33.43       | 74.00  | -40.57 | peak     |                   |                 |         |
| 2   |    | 2402.000 | 65.85   | 0.32   | 66.17       | 74.00  | -7.83  | peak     |                   |                 |         |
| 3   | *  | 2480.000 | 65.82   | 0.41   | 66.23       | 74.00  | -7.77  | peak     |                   |                 |         |
| 4   |    | 3760.000 | 33.76   | 3.71   | 37.47       | 74.00  | -36.53 | peak     |                   |                 |         |

Page 23 of 43

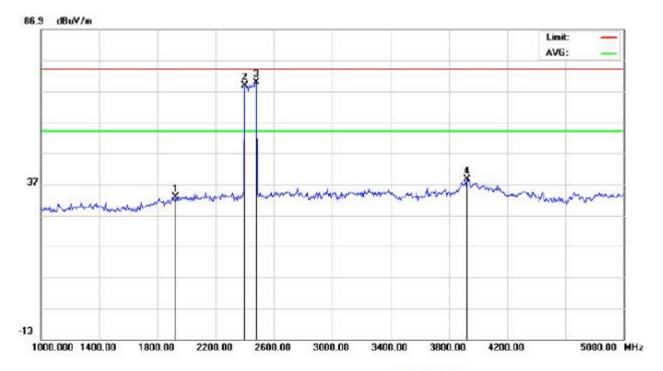

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m

M/N: S-7000

Mode: Normal Hopping

Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | 3  | MHz      | dBuV    | dĐ/m   | dBuV/m      | dBuV/m | dB     |          | cm                | degree          |         |
| 1   |    | 1926.667 | 33.66   | -0.89  | 32.77       | 74.00  | -41.23 | peak     |                   |                 |         |
| 2   |    | 2402.000 | 68.37   | 0.32   | 68.69       | 74.00  | -5.31  | peak     |                   |                 |         |
| 3   | *  | 2480.000 | 69.38   | 0.41   | 69.79       | 74.00  | -4.21  | peak     |                   | 100             |         |
| 4   |    | 3926.667 | 33.88   | 4.74   | 38.62       | 74.00  | -35.38 | peak     |                   |                 |         |

**Note:**5~25GHz at leat have 20dB margin. no recording in the test report. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 24 of 43

#### 9 BAND EDGE EMISSION


#### 9.1 MEASUREMENT PROCEDURE

- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.

#### 9.2 TEST SET-UP

Radiated same as 8.2

#### 9.3 TEST RESULT

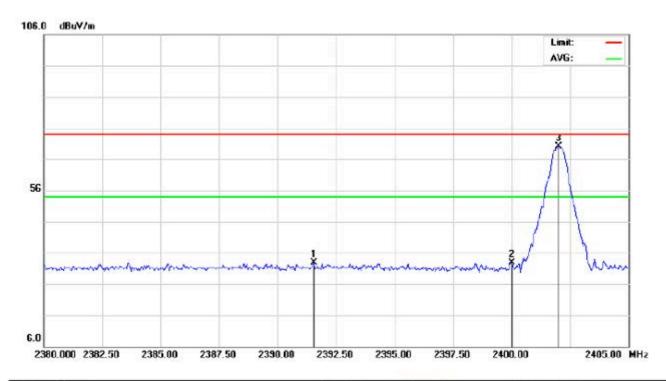


Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120 V/60 Hz Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m

M/N: S-7000 Mode: 2402TX

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | 8  | MHz      | dBu∀    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm                | degree          |         |
| 1   |    | 2391.542 | 32.69   | 0.31   | 33.00       | 74.00  | -41.00 | peak     |                   |                 |         |
| 2   |    | 2400.000 | 32.62   | 0.32   | 32.94       | 74.00  | -41.06 | peak     |                   |                 |         |
| 3   | *  | 2402.000 | 69.92   | 0.32   | 70.24       | 74.00  | -3.76  | peak     |                   |                 |         |

Page 25 of 43

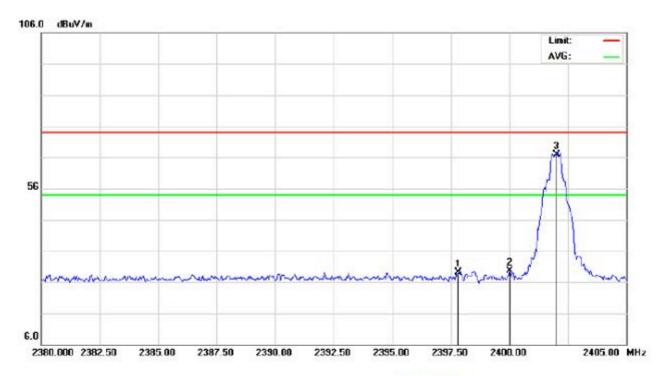


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m

M/N: S-7000 Mode: 2042TX

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit         | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |        |    |  |    |        |  |
|-----|----|----------|---------|--------|-------------|---------------|--------|----------|-------------------|-----------------|---------|--------|----|--|----|--------|--|
|     | ः  | MHz      | dBu∀    | dB/m   | dBuV/m      | //m dBuV/m dB | dBuV/m | dBuV/m   | dBuV/m            | dBuV/m          | dBuV/m  | dBuV/m | dΒ |  | cm | degree |  |
| 1   |    | 2397.833 | 28.84   | 0.32   | 29.16       | 74.00         | -44.84 | peak     |                   |                 |         |        |    |  |    |        |  |
| 2   |    | 2400.000 | 29.28   | 0.32   | 29.60       | 74.00         | -44.40 | peak     |                   |                 |         |        |    |  |    |        |  |
| 3   | *  | 2402.000 | 66.59   | 0.32   | 66.91       | 74.00         | -7.09  | peak     |                   |                 |         |        |    |  |    |        |  |

Page 26 of 43

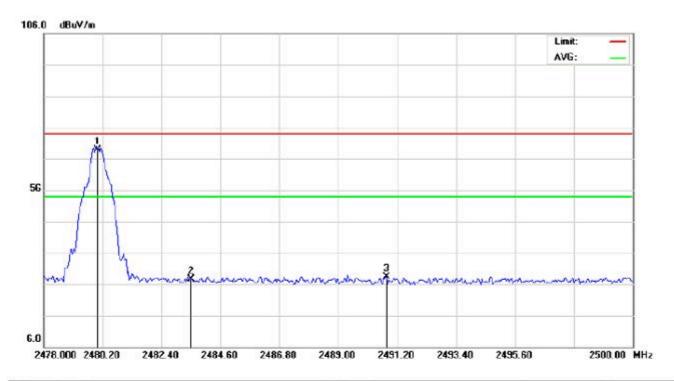


Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m

M/N: S-7000 Mode: 2480TX

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
|     | 3  | MHz      | dBu∀    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm                | degree          |         |
| 1   | *  | 2480.000 | 68.51   | 0.41   | 68.92       | 74.00  | -5.08  | peak     |                   |                 |         |
| 2   |    | 2483.500 | 27.10   | 0.41   | 27.51       | 74.00  | -46.49 | peak     |                   |                 |         |
| 3   |    | 2490.797 | 28.07   | 0.42   | 28.49       | 74.00  | -45.51 | peak     |                   |                 |         |

Page 27 of 43

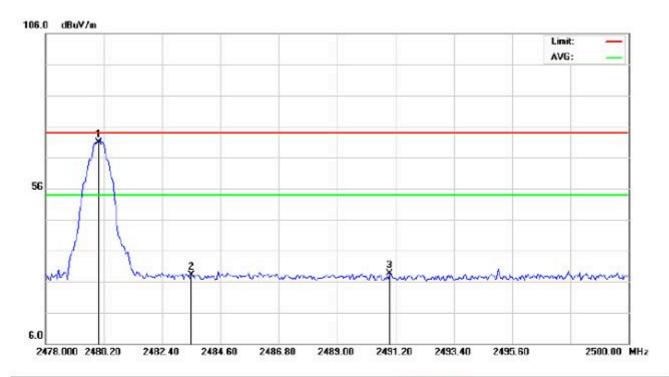

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: MOBILE PHONE Distance: 3m

M/N: S-7000 Mode: 2480TX

| No. | Mk | Freq.    | Reading                    | Factor                | Measurement | Limit | Over   | Detector | Antenna<br>Height | Table<br>Degree | Comment |
|-----|----|----------|----------------------------|-----------------------|-------------|-------|--------|----------|-------------------|-----------------|---------|
|     |    | MHz      | dBuV dB/m dBuV/m dBuV/m dB | m dBuV/m dBuV/m dB cm |             |       |        | cm       | degree            | 838300000000000 |         |
| 1   |    | 2480.000 | 70.51                      | 0.41                  | 70.92       | 74.00 | -3.08  | peak     |                   |                 |         |
| 2   |    | 2483.500 | 27.81                      | 0.41                  | 28.22       | 74.00 | -45.78 | peak     |                   |                 |         |
| 3   |    | 2490.980 | 28.31                      | 0.42                  | 28.73       | 74.00 | -45.27 | peak     |                   |                 |         |

Page 28 of 43

#### 10 NUMBER OF HOPPING FREQUENCY

#### **10.1 MEASUREMENT PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

#### 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2


#### **10.3 MEASUREMENT EQUIPMENT USED**

The Same as described in section 5.3

#### **10.4 LIMITS AND MEASUREMENT RESULT**

| TOTAL NO. OF    | LIMIT (NO. OF CH) | MEASUREMENT (NO. OF CH) | RESULT |
|-----------------|-------------------|-------------------------|--------|
| HOPPING CHANNEL | >=15              | 79                      | PASS   |



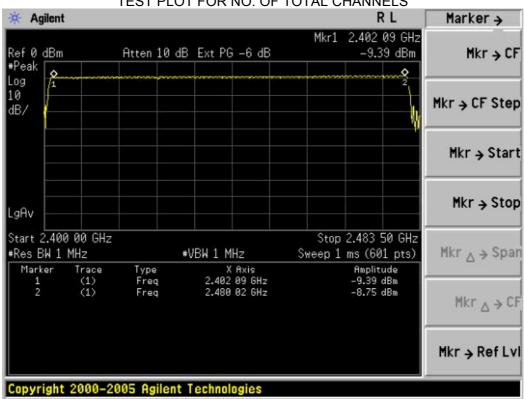

Page 29 of 43

#### 11 TIME OF OCCUPANCY (DWELL TIME)

#### 11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

#### 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

#### 11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3


#### 11.4 LIMITS AND MEASUREMENT RESULT

| Channel | Time of Pulse for DH5 (ms) | Period Time<br>(s) | Sweep Time<br>(ms) | Limit<br>(ms) |
|---------|----------------------------|--------------------|--------------------|---------------|
| Low     | 2.905                      | 31.6               | 309.87             | 400           |
| Middle  | 2.905                      | 31.6               | 309.87             | 400           |
| High    | 2.917                      | 31.6               | 311.15             | 400           |


Low Channel Time 2.905\*(1600/6)/79\*31.6=309.87ms Middle Channel Time 2.905\*(1600/6)/79\*31.6=309.87ms High Channel Time 2.917\*(1600/6)/79\*31.6=311.15ms

Page 30 of 43

#### TEST PLOT OF LOW CHANNEL

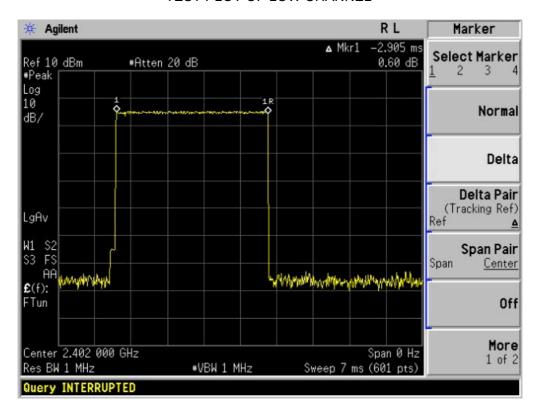


#### TEST PLOT OF MIDDLE CHANNEL

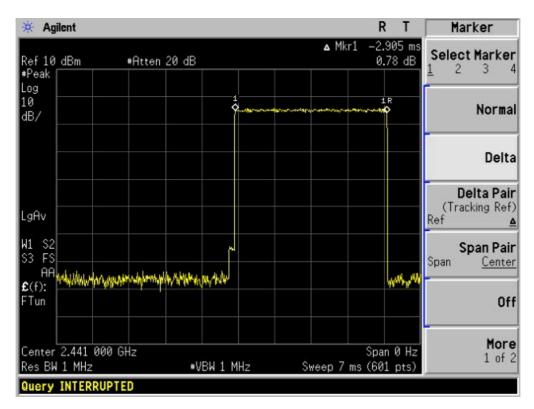

Page 31 of 43

#### TEST PLOT OF HIGH CHANNEL

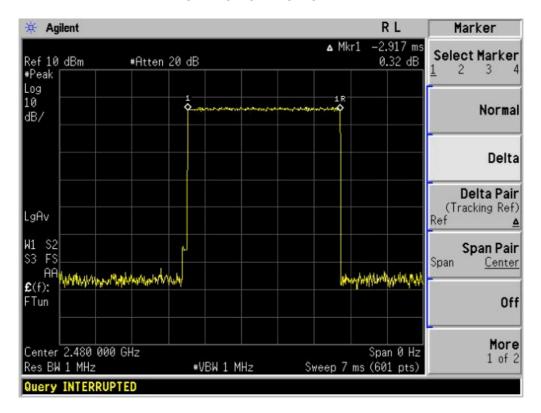

Page 32 of 43

## 12. FREQUENCY SEPARATION 12.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

#### 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2


#### 12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

#### 12.4 LIMITS AND MEASUREMENT RESULT

| CHANNEL   | CHANNEL SEPARATION | LIMIT                       | RESULT |
|-----------|--------------------|-----------------------------|--------|
| CHANNEL   | KHz                | KHz                         |        |
| CH00-CH01 | 1000               | >=25 KHz or 2/3 20 dB<br>BW | Pass   |

#### TEST PLOT FOR FREQUENCY SEPARATION

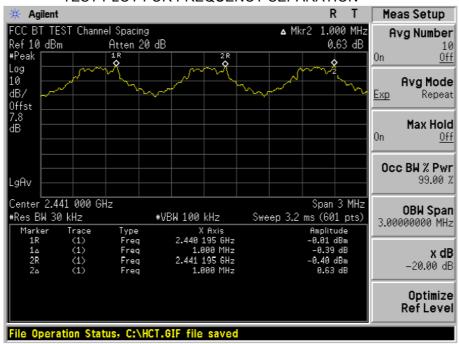


Page 33 of 43

#### 13 FCC LINE CONDUCTED EMISSION TEST

#### 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

| Fraguency     | Maximum RF Line Voltage |                |  |  |  |  |  |
|---------------|-------------------------|----------------|--|--|--|--|--|
| Frequency     | Q.P.( dBuV)             | Average( dBuV) |  |  |  |  |  |
| 150kHz~500kHz | 66-56                   | 56-46          |  |  |  |  |  |
| 500kHz~5MHz   | 56                      | 46             |  |  |  |  |  |
| 5MHz~30MHz    | 60                      | 50             |  |  |  |  |  |

#### 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

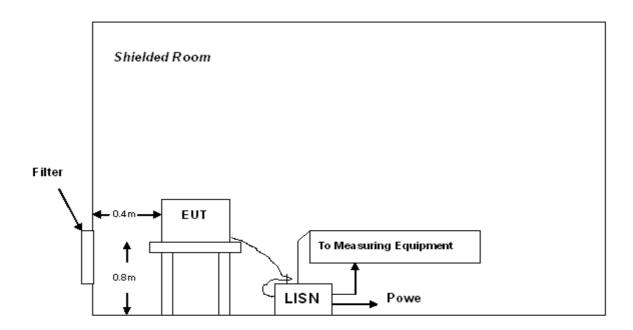

A: Powered through filter

<sup>\*\*</sup>Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 34 of 43

#### 13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 35 of 43

#### 13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

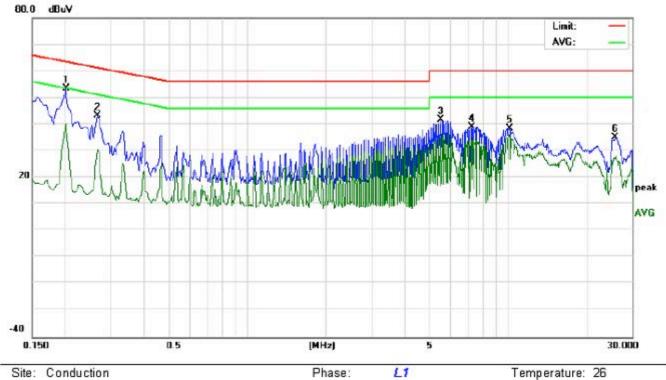

Site: Conduction

Limit: FCC Class B Conduction(QP)

EUT: MOBILE PHONE

M/N: S-7000 Mode: BT Note:


| No. | Freq.<br>(MHz) | Reading_Level<br>(dBuV) |    |       | Correct<br>Factor | Measurement<br>(dBuV) |    |       | Limit<br>(dBuV) |       | Margin<br>(dB) |        | P/F      | Comment                  |
|-----|----------------|-------------------------|----|-------|-------------------|-----------------------|----|-------|-----------------|-------|----------------|--------|----------|--------------------------|
| 550 |                | Peak                    | QP | AVG   | dB                | Peak                  | QP | AVG   | QP              | AVG   | QP             | AVG    | etotchi. | ALSTOTERATION AND STATES |
| 1   | 0.2020         | 43.19                   |    | 30.03 | 10.22             | 53.41                 |    | 40.25 | 63.52           | 53.52 | -10.11         | -13.27 | Р        |                          |
| 2   | 0.2660         | 32.85                   |    | 20.47 | 10.28             | 43.13                 |    | 30.75 | 61.24           | 51.24 | -18.11         | -20.49 | Р        |                          |
| 3   | 5.5500         | 31.54                   |    | 25.27 | 10.25             | 41.79                 |    | 35.52 | 60.00           | 50.00 | -18.21         | -14.48 | Р        |                          |
| 4   | 7.2860         | 28.75                   |    | 24.16 | 10.34             | 39.09                 | į  | 34.50 | 60.00           | 50.00 | -20.91         | -15.50 | Р        |                          |
| 5   | 10.1620        | 28.48                   |    | 25.89 | 10.09             | 38.57                 |    | 35.98 | 60.00           | 50.00 | -21.43         | -14.02 | Р        |                          |
| 6   | 25.7340        | 25.01                   |    | 17.03 | 10.11             | 35.12                 |    | 27.14 | 60.00           | 50.00 | -24.88         | -22.86 | Р        |                          |

Power:

Humidity: 60 %

Page 36 of 43

#### Line Conducted Emission Test Line 2-N

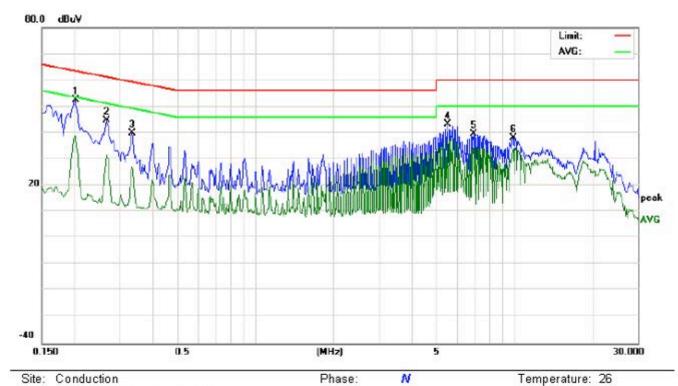

Power:

Li i conduction

Limit: FCC Class B Conduction(QP)

EUT: MOBILE PHONE

M/N: S-7000 Mode: BT Note:

| No. | Freq.<br>(MHz) |       |                |       |       | asurei<br>(dBuV |     |       | 1.000 P.000 |       | P/F    | Comment |   |  |
|-----|----------------|-------|----------------|-------|-------|-----------------|-----|-------|---|-------|--------|---------|---|--|
|     |                | Peak  | Peak QP AVG dB | dB    | Peak  | QP              | AVG | QP    | AVG   | QP    | AVG    |         |   |  |
| 1   | 0.2020         | 42.34 |                | 28.94 | 10.22 | 52.56           |     | 39.16 | 63.52   | 53.52 | -10.96 | -14.36  | Р |  |
| 2   | 0.2660         | 34.42 |                | 21.21 | 10.28 | 44.70           |     | 31.49 | 61.24   | 51.24 | -16.54 | -19.75  | Р |  |
| 3   | 0.3339         | 29.70 |                | 16.84 | 10.30 | 40.00           |     | 27.14 | 59.35   | 49.35 | -19.35 | -22.21  | Р |  |
| 4   | 5.5460         | 32.90 |                | 27.05 | 10.25 | 43.15           |     | 37.30 | 60.00   | 50.00 | -16.85 | -12.70  | Р |  |
| 5   | 7.0180         | 29.35 |                | 24.28 | 10.36 | 39.71           |     | 34.64 | 60.00   | 50.00 | -20.29 | -15.36  | Р |  |
| 6   | 9.9580         | 28.11 |                | 23.91 | 10.11 | 38.22           |     | 34.02 | 60.00   | 50.00 | -21.78 | -15.98  | Р |  |
|     |                |       |                |       |       |                 |     | -     |   |       |        |         |   |  |

Page 37 of 43

## APPENDIX I PHOTOGRAPHS OF THE EUT

TOP VIEW OF SAMPLE



**BOTTOM VIEW OF SAMPLE** 



Report No.: AGC00L110701F2B Page 38 of 43





Report No.: AGC00L110701F2B Page 39 of 43








Page 40 of 43



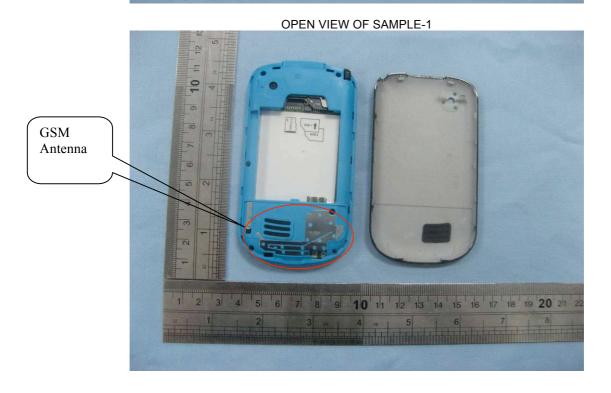

Page 41 of 43






**OPEN VIEW OF EUT-3** 



Report No.: AGC00L110701F2B Page 42 of 43



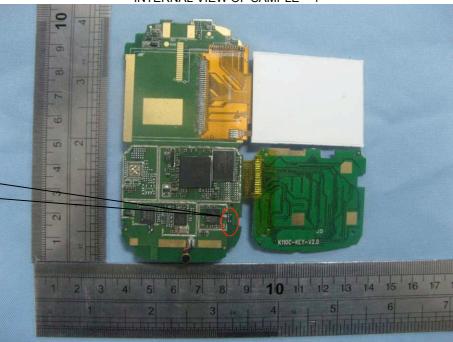

Bluetooth Antenna

INTERNAL VIEW OF SAMPLE - 2




Report No.: AGC00L110701F2B Page 43 of 43

APPENDIX II PHOTOGRAPHS OF THE TEST SETUP CONDUCTED EMISSION TEST SETUP





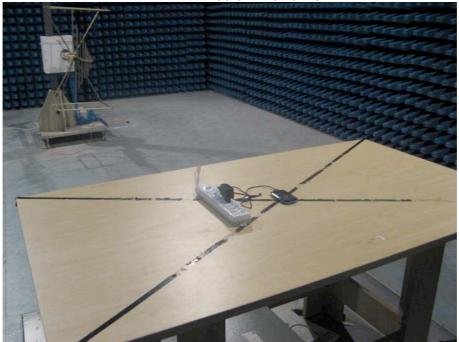

----END OF REPORT----