

**FCC PART 15.247
TEST REPORT**

For

B Mobile HK Limited

G/F., 144 UN CHAU STREET, SHAM SHUI PO, KOWLOON, HONG KONG

FCC ID: ZSW-QS830-CARISMA

Report Type: Original Report	Product Type: GSM mobile phone
Test Engineer: Jimmy Xiao	<i>Jimmy Xiao</i>
Report Number: RSZ121115005-00B	
Report Date: 2012-12-10	
Reviewed By: EMC Engineer	<i>Sunny Sun</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
RESULT	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20

TEST DATA	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) - BAND EDGES TESTING	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *B Mobile HK Limited*'s product, model number: *Carisma* (FCC ID: ZSW-QS830-CARISMA) or the "EUT" in this report was a *GSM mobile phone*, which was measured approximately: 108.1 mm (L) x 59.0 mm (W) x 12.0 mm (H), rated input voltage: DC 3.7 V Li-ion battery or DC 5V charging from adapter.

Adapter Information:

Input: AC 100-240V 50/60Hz

Output: DC 5V 850mA

** All measurement and test data in this report was gathered from production sample serial number: 1211090 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2012-11-15.*

Objective

This test report is prepared on behalf of *B Mobile HK Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE and Part 15B JBP submissions with FCC ID: ZSW-QS830-CARISMA.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by bluetooth tester.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The test software was provided by client, which was embedded in the product.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B650083

External I/O Cable

Cable Description	Length (m)	From Port	To
Shielding Detachable USB Cable	0.8	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

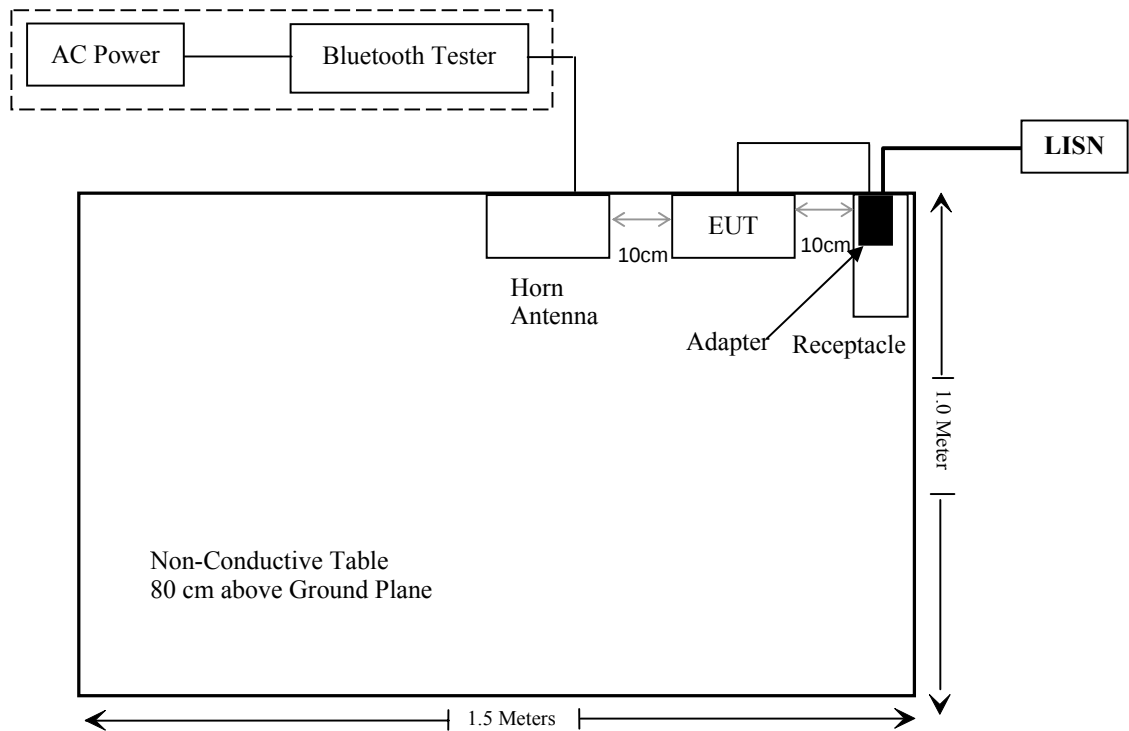

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The distance between antenna and test point is 5 mm
The Max output power: 6.714 mW

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

Conclusion:

The time-averaged output power is 6.714 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a monopole antenna arrangement for bluetooth, which was permanently attached, the antenna gain is -2.0dBi, fulfill the requirement of this section. Please refer to the internal photos.


Result: Compliance.

Applicable Standard

Measurement Uncertainty

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

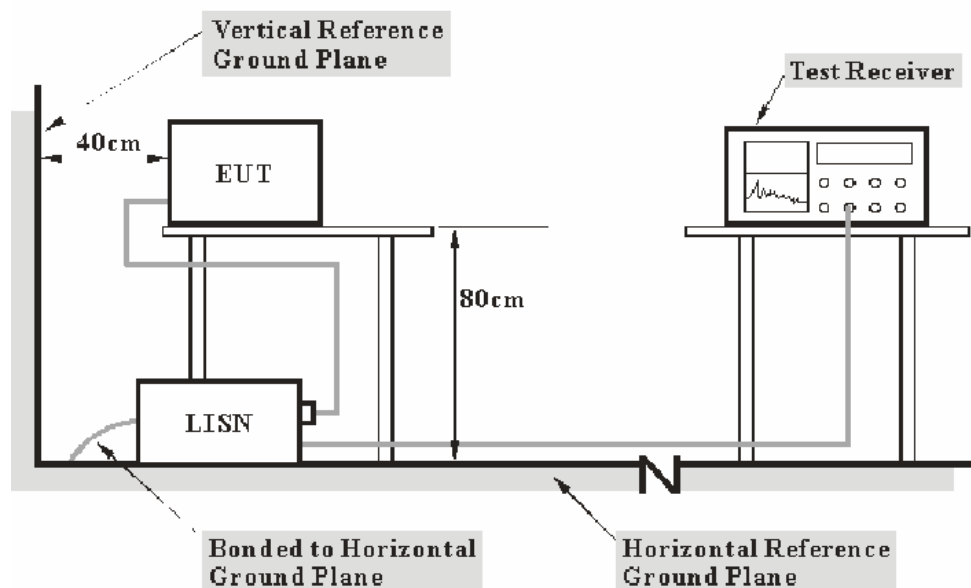

- The receptacle was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the receptacle was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

9.79 dB at 1.235 MHz in the Line conducted mode for transmitting


Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jimmy Xiao on 2012-12-07.

EUT operation mode: Charging&Transmitting

AC 120 V, 60 Hz, Line:

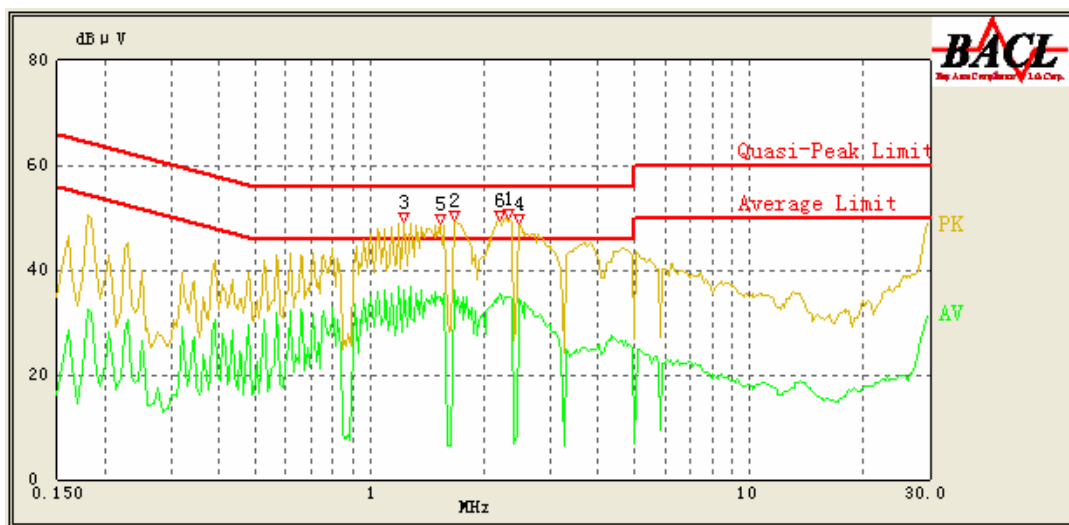

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1.235	36.21	10.18	46.00	9.79	Ave.
2.190	35.38	10.21	46.00	10.62	Ave.
2.330	35.00	10.21	46.00	11.00	Ave.
1.530	34.89	10.19	46.00	11.11	Ave.
2.470	34.52	10.22	46.00	11.48	Ave.
2.330	42.51	10.21	56.00	13.49	QP
1.675	32.49	10.19	46.00	13.51	Ave.
2.195	41.25	10.21	56.00	14.75	QP
2.470	40.97	10.22	56.00	15.03	QP
1.675	40.70	10.19	56.00	15.30	QP
1.535	39.95	10.19	56.00	16.05	QP
1.235	39.83	10.18	56.00	16.17	QP

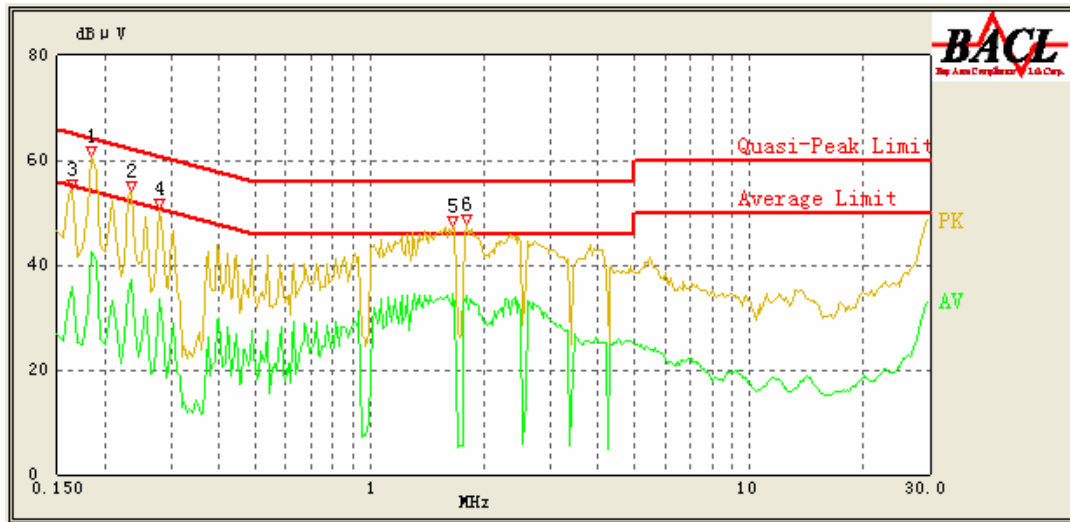AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1.650	34.65	10.19	46.00	11.35	Ave.
1.795	34.32	10.19	46.00	11.68	Ave.
0.185	42.43	10.24	55.00	12.57	Ave.
0.185	52.30	10.24	65.00	12.70	QP
1.800	39.62	10.19	56.00	16.38	QP
0.235	37.14	10.25	53.57	16.43	Ave.
1.660	39.04	10.19	56.00	16.96	QP
0.235	45.92	10.25	63.57	17.65	QP
0.280	33.37	10.25	52.29	18.92	Ave.
0.165	46.53	10.24	65.57	19.04	QP
0.165	35.89	10.24	55.57	19.68	Ave.
0.280	41.30	10.25	62.29	20.99	QP

Note:

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB(k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

Below 1 GHz:

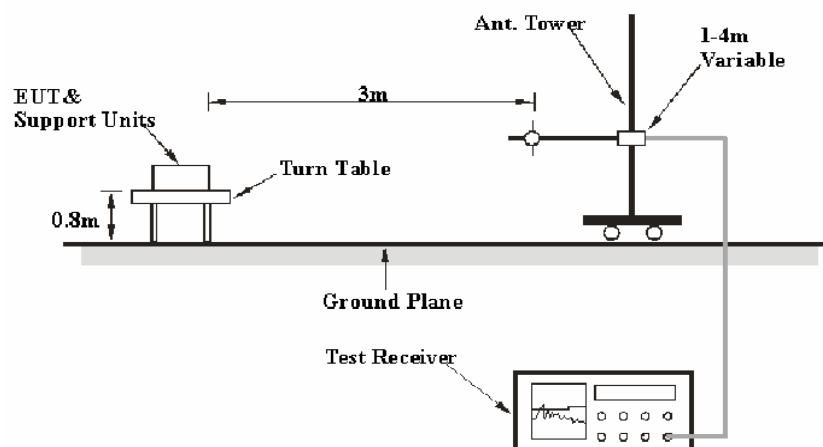

Above 1 GHz:

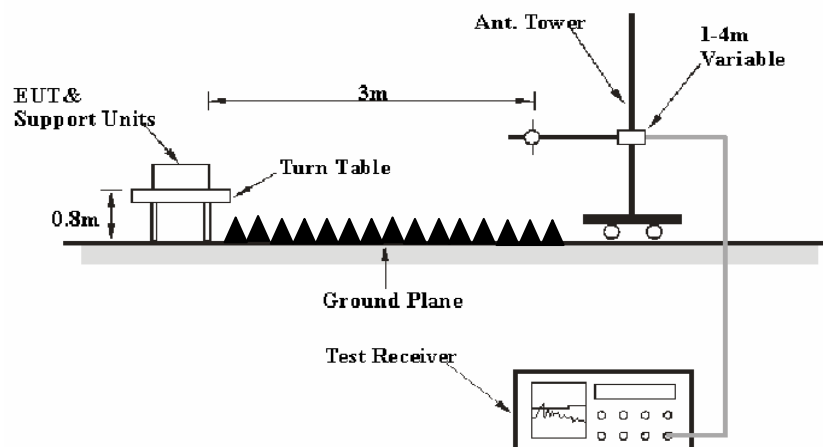

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The receptacle was connected to an AC 120V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For radiated emissions, the receptacle was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

7.69 dB at 4804.0 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-12-07.

EUT operation mode: Transmitting

30 MHz ~25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	96.35	PK	12	1.1	H	6.13	102.48	/	/
2402.0	50.53	Ave.	12	1.1	H	6.13	56.66	/	/
2402.0	93.89	PK	138	1.3	V	6.13	100.02	/	/
2402.0	48.72	Ave.	138	1.3	V	6.13	54.85	/	/
2325.8	35.32	PK	93	1.2	V	5.48	40.80	74	33.20
2325.8	21.23	Ave.	93	1.2	V	5.48	26.71	54	27.29
2389.5	35.78	PK	77	1.1	H	6.13	41.91	74	32.09
2389.5	21.71	Ave.	77	1.1	H	6.13	27.84	54	26.16
2490.6	35.78	PK	135	1.2	H	7.21	42.99	74	31.01
2490.6	21.71	Ave.	135	1.2	H	7.21	28.92	54	25.08
4804.0	53.91	PK	234	1.0	H	12.40	66.31	74	7.69
4804.0	27.09	Ave.	234	1.0	H	12.40	39.49	54	14.51
7206.0	33.16	PK	83	1.1	V	17.06	50.22	74	23.78
7206.0	18.31	Ave.	83	1.1	V	17.06	35.37	54	18.63
9608.0	31.49	PK	168	1.4	V	19.28	50.77	74	23.23
9608.0	18.06	Ave.	168	1.4	V	19.28	37.34	54	16.66
Middle Channel (2441 MHz)									
2441.0	95.79	PK	86	1.1	H	7.21	103.00	/	/
2441.0	46.56	Ave.	86	1.1	H	7.21	53.77	/	/
2441.0	91.45	PK	115	1.4	V	7.21	98.66	/	/
2441.0	44.89	Ave.	115	1.4	V	7.21	52.10	/	/
2312.9	46.98	PK	73	1.2	H	5.48	52.46	74	21.54
2312.9	28.65	Ave.	73	1.2	H	5.48	34.13	54	19.87
2313.8	44.42	PK	35	1.3	V	5.48	49.90	74	24.10
2313.8	26.53	Ave.	35	1.3	V	5.48	32.01	54	21.99
2489.6	32.56	PK	257	1.2	V	7.21	39.77	74	34.23
2489.6	18.47	Ave.	257	1.2	V	7.21	25.68	54	28.32
4882.0	46.56	PK	93	1.1	H	12.46	59.02	74	14.98
4882.0	26.01	Ave.	93	1.1	H	12.46	38.47	54	15.53
7323.0	32.43	PK	77	1.4	H	16.49	48.92	74	25.08
7323.0	20.04	Ave.	77	1.4	H	16.49	36.53	54	17.47
9764.0	32.07	PK	145	1.0	V	19.40	51.47	74	22.53
9764.0	19.83	Ave.	145	1.0	V	19.40	39.23	54	14.77

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	93.74	PK	74	1.1	H	7.21	100.95	/	/
2480.0	45.66	Ave.	74	1.1	H	7.21	52.87	/	/
2480.0	89.45	PK	33	1.0	V	7.21	96.66	/	/
2480.0	43.93	Ave.	33	1.0	V	7.21	51.14	/	/
2352.3	46.11	PK	187	1.3	H	5.48	51.59	74	22.41
2352.3	28.13	Ave.	187	1.3	H	5.48	33.61	54	20.39
2353.7	42.51	PK	39	1.2	V	5.48	47.99	74	26.01
2353.7	23.81	Ave.	39	1.2	V	5.48	29.29	54	24.71
2483.6	46.33	PK	11	1.1	H	7.21	53.54	74	20.46
2483.6	25.72	Ave.	11	1.1	H	7.21	32.93	54	21.07
4960.0	46.22	PK	135	1.0	H	12.50	58.72	74	15.28
4960.0	26.04	Ave.	135	1.0	H	12.50	38.54	54	15.46
7440.0	31.72	PK	93	1.4	H	15.91	47.63	74	26.37
7440.0	19.83	Ave.	93	1.4	H	15.91	35.74	54	18.26
9920.0	32.57	PK	87	1.3	H	19.38	51.95	74	22.05
9920.0	20.02	Ave.	87	1.3	H	19.38	39.40	54	14.60

Note:

Below 1GHz, the data which is 20 dB below the limit was not recorded.

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Jimmy Xiao on 2012-11-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.000	0.645	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.643	Pass
	Adjacent	2442			
	High	2480	1.000	0.640	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.000	0.864	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.864	Pass
	Adjacent	2442			
	High	2480	1.000	0.864	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.000	0.843	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.840	Pass
	Adjacent	2442			
	High	2480	1.000	0.843	Pass
	Adjacent	2479			


Note: Limit = 20 dB bandwidth *2/3

BDR (GFSK): Low Channel

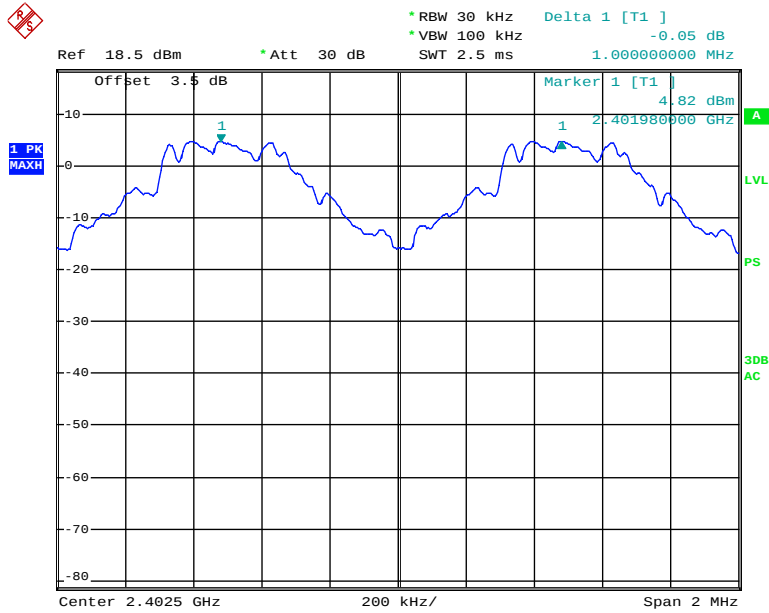


Date: 16.NOV.2012 18:57:19

BDR (GFSK): Middle Channel

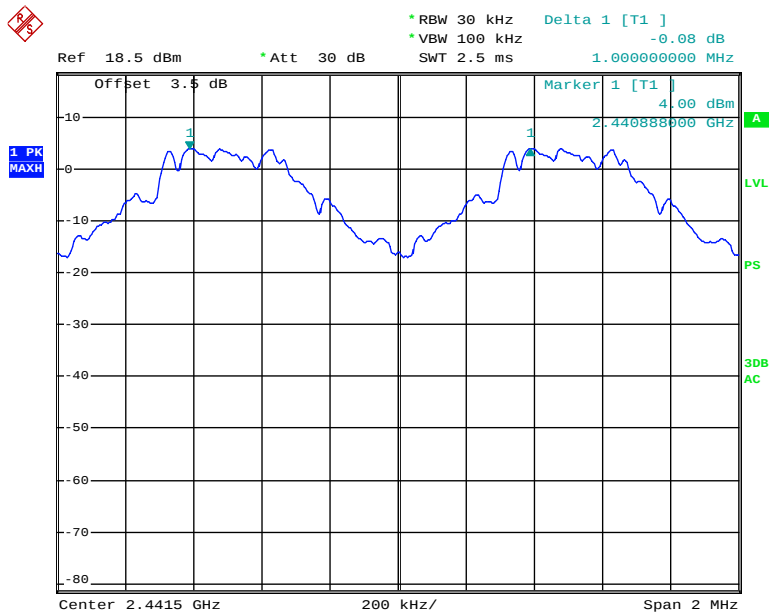


Date: 16.NOV.2012 19:00:43

BDR (GFSK): High Channel

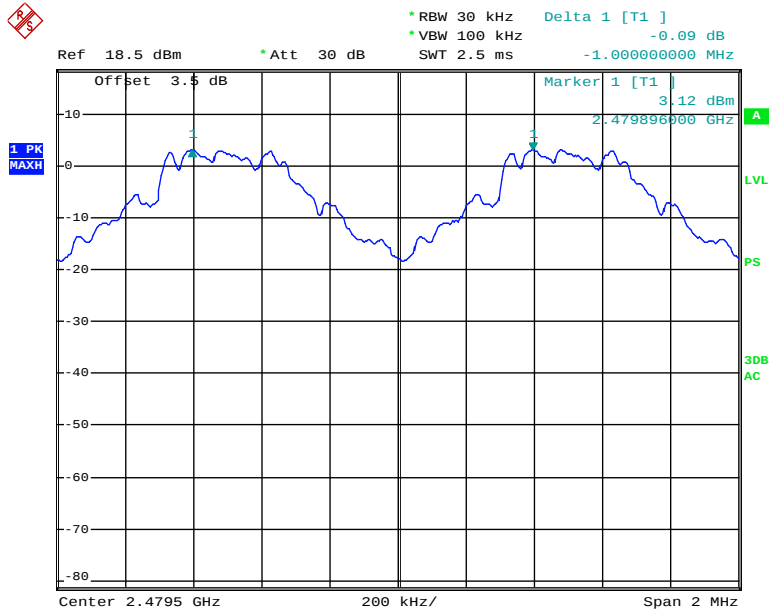


Date: 16.NOV.2012 19:06:03

EDR ($\pi/4$ -DQPSK): Low Channel

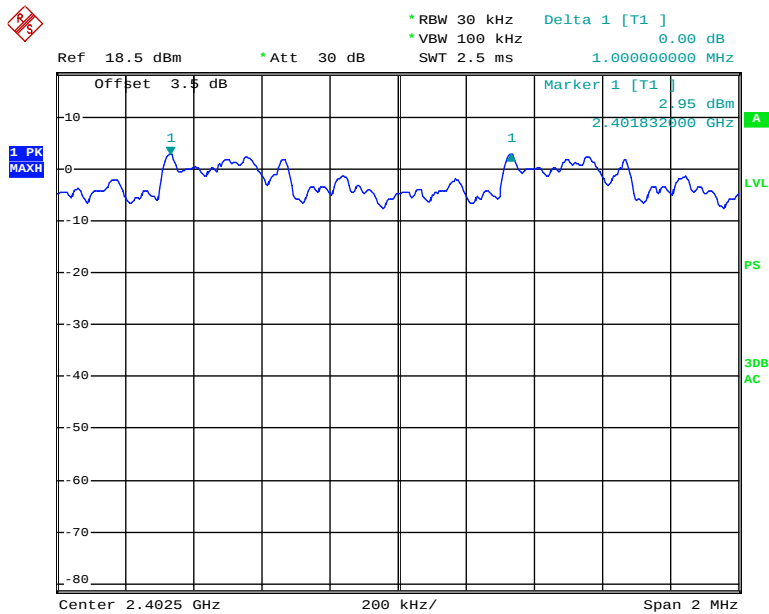


Date: 16.NOV.2012 19:20:45

EDR ($\pi/4$ -DQPSK): Middle Channel

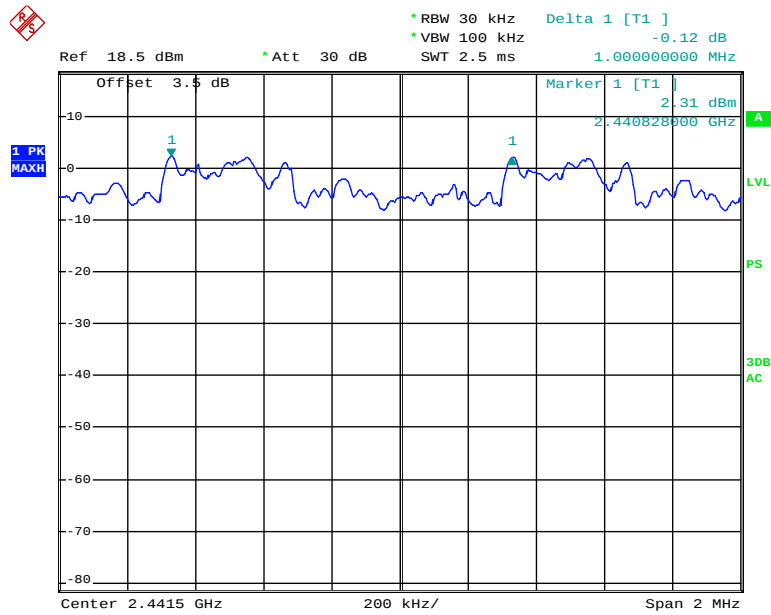


Date: 16.NOV.2012 19:24:53

EDR ($\pi/4$ -DQPSK): High Channel

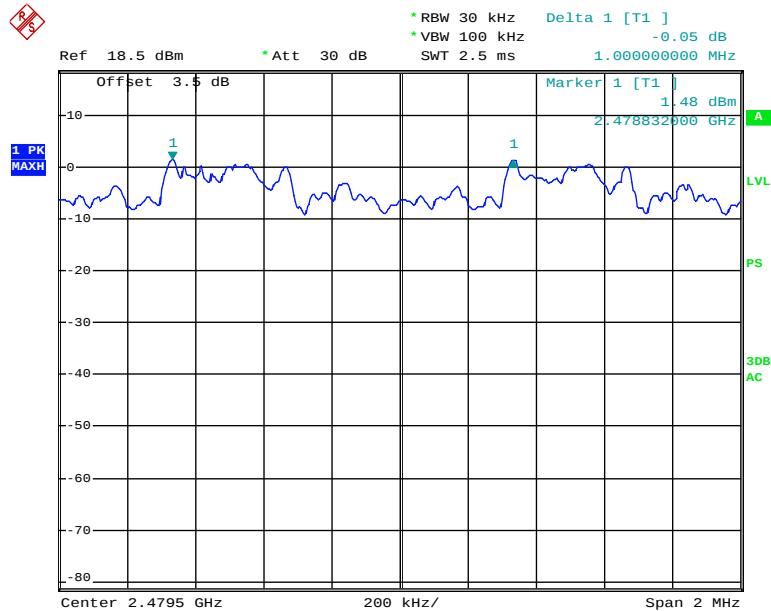


Date: 16.NOV.2012 19:29:42

EDR (8DPSK): Low Channel

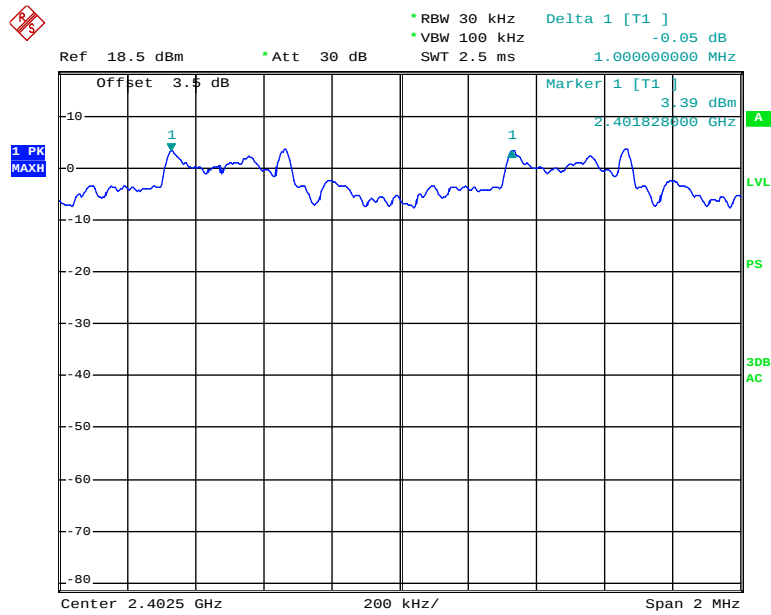


Date: 16.NOV.2012 19:47:34

EDR (8DPSK): Middle Channel

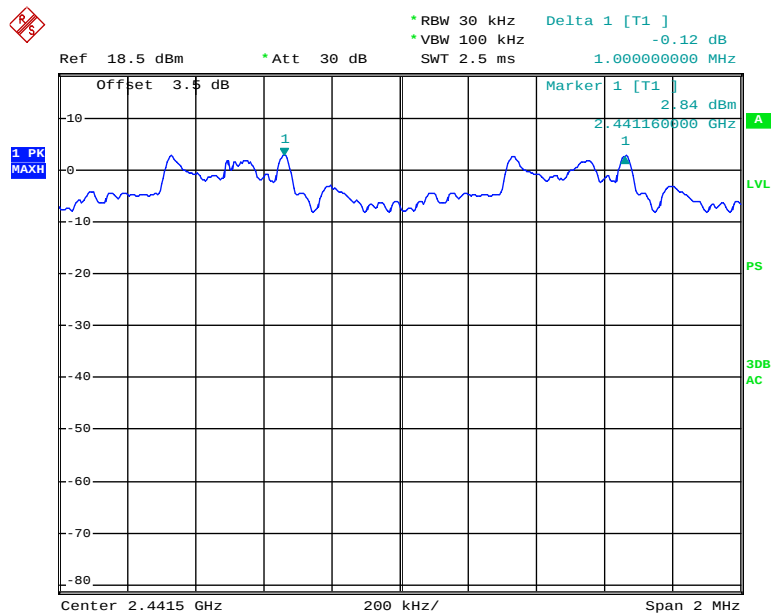

Date: 16.NOV.2012 19:50:16

EDR (8DPSK): High Channel

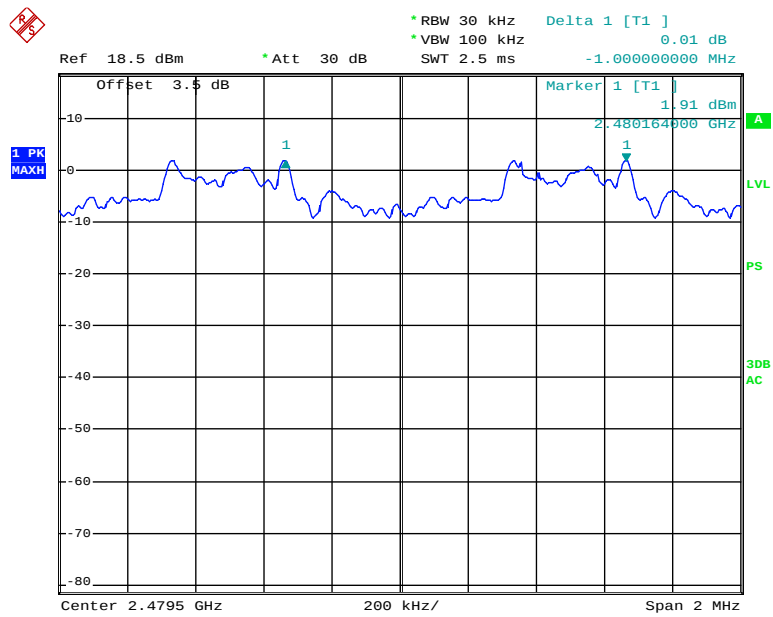

Date: 16.NOV.2012 19:54:09

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Jimmy Xiao on 2012-11-16.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.968
	Middle	2441	0.964
	High	2480	0.960
EDR ($\pi/4$-DQPSK)	Low	2402	1.296
	Middle	2441	1.296
	High	2480	1.296
EDR (8DPSK)	Low	2402	1.264
	Middle	2441	1.260
	High	2480	1.264

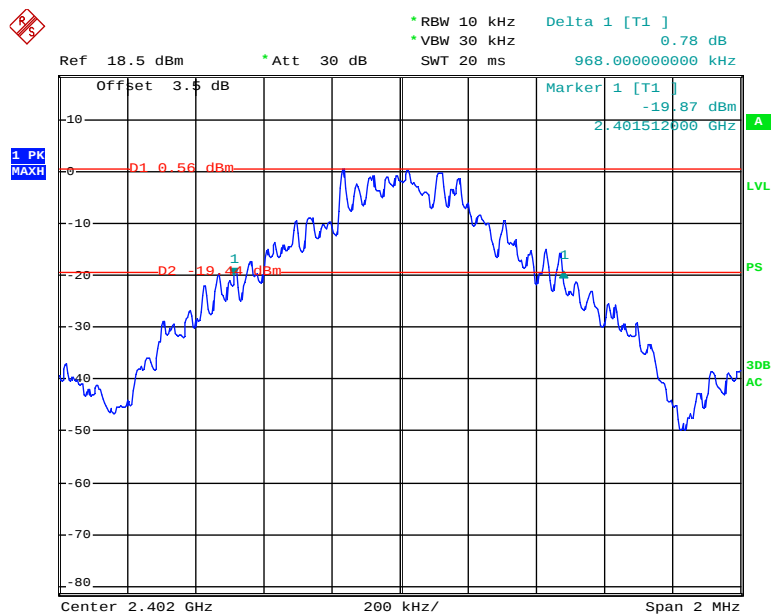BDR (GFSK): Low Channel


Date: 16.NOV.2012 18:53:10

BDR (GFSK): Middle Channel

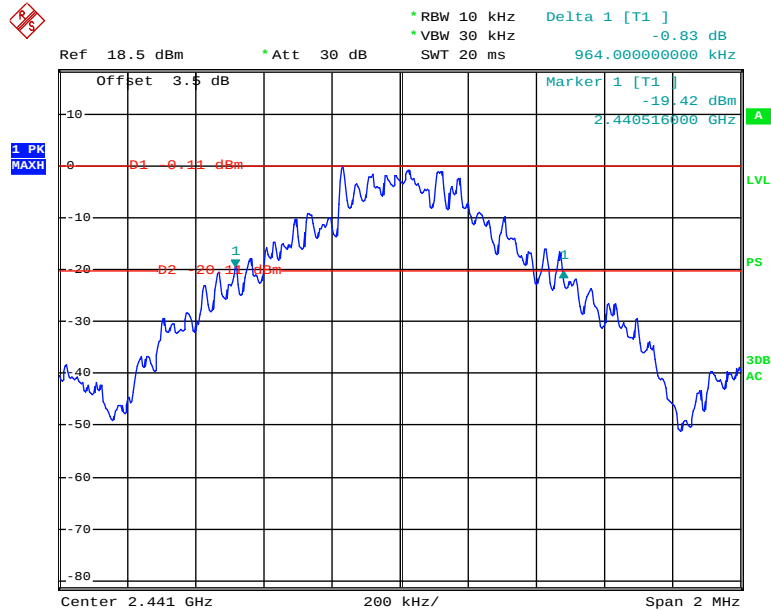


Date: 16.NOV.2012 18:59:13

BDR (GFSK): High Channel

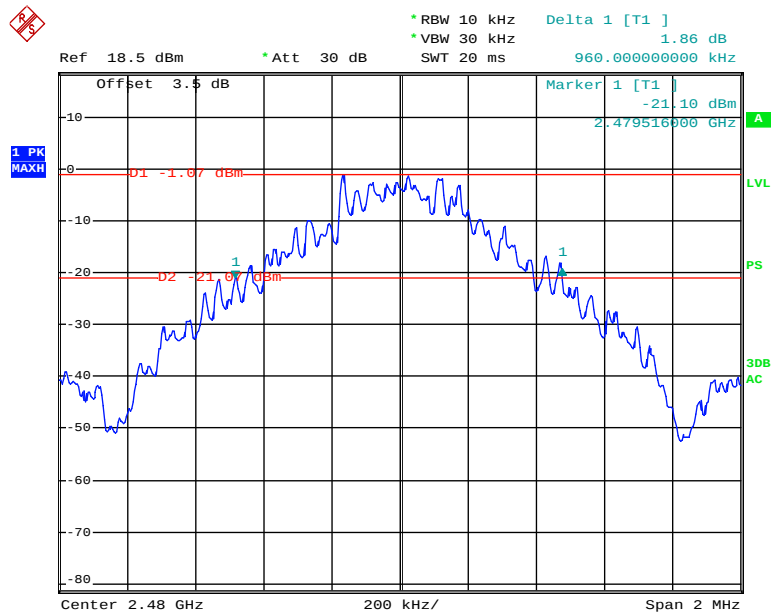


Date: 16.NOV.2012 19:02:05

EDR ($\pi/4$ -DQPSK): Low Channel

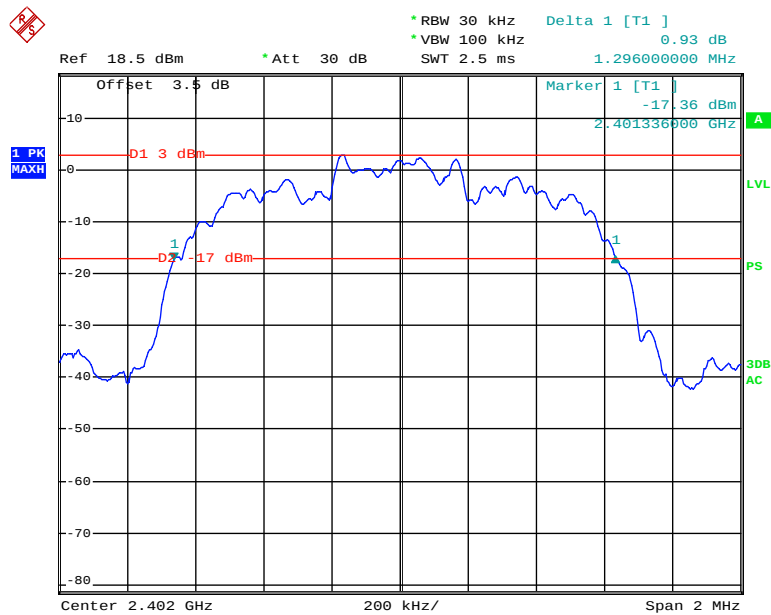

Date: 16.NOV.2012 19:17:01

EDR ($\pi/4$ -DQPSK): Middle Channel

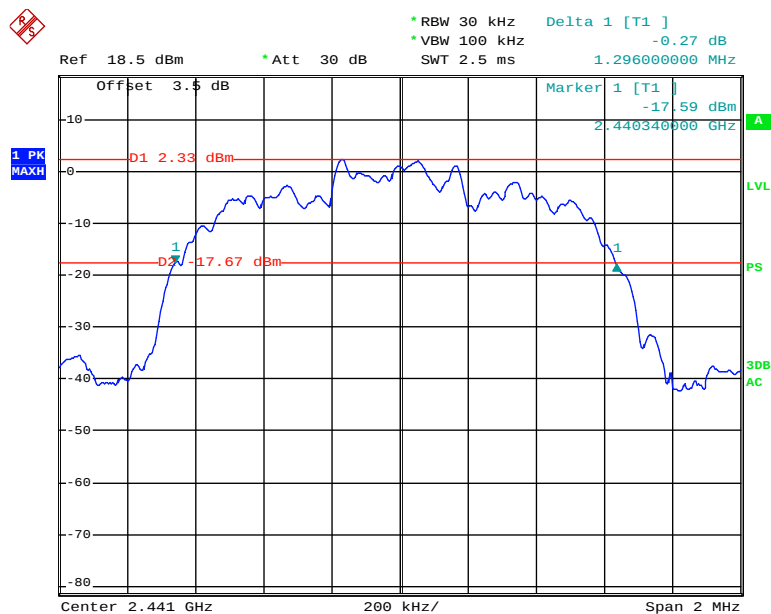

Date: 16.NOV.2012 19:22:25

1. PK
MAXH

Ref 18.5 dBm * Att 30 dB

* RBW 30 kHz Delta 1 [T1]
* VBW 100 kHz 0.35 dB
SWT 2.5 ms 1.296000000 MHz

Offset 3.5 dB

Marker 1 [T1]
-18.63 dBm
2.479340000 GHz

D1 1.36 dBm

D2 -18.64 dBm

1

1

LVL

PS

3DB

AC

Center 2.48 GHz 200 kHz/ Span 2 MHz

1 PK MAXH

Ref 18.5 dBm Att 30 dB RBW 30 kHz VBW 100 kHz SWT 2.5 ms Delta 1 [T1] 0.41 dB 1.264000000 MHz

Offset 3.5 dB

Marker 1 [T1] -16.46 dBm 2.401364000 GHz

D1 3.64 dBm

D2 16.36 dBm

Center 2.402 GHz 200 kHz/ Span 2 MHz

Page 31 of 62

* RBW 30 kHz
 * VBW 100 kHz
 SWT 2.5 ms
 Delta 1 [T1]
 0.37 dB
 1.260000000 MHz

Ref 18.5 dBm
 * Att 30 dB

Offset 3.5 dB
 Marker 1 [T1]
 -16.98 dBm
 2.440364000 GHz


1 PK
 MAXH

D1 2.86 dBm
 D2 17.14 dBm

LVL
 PS
 3DB
 AC

Center 2.441 GHz
 200 kHz/
 Span 2 MHz

EDR (8DPSK): High Channel



FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jimmy Xiao on 2012-11-16.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥15
EDR ($\pi/4$ -DQPSK)	2402-2480	79	≥15
EDR (8DPSK)	2402-2480	79	≥15


BDR (GFSK): Number of Hopping Channels

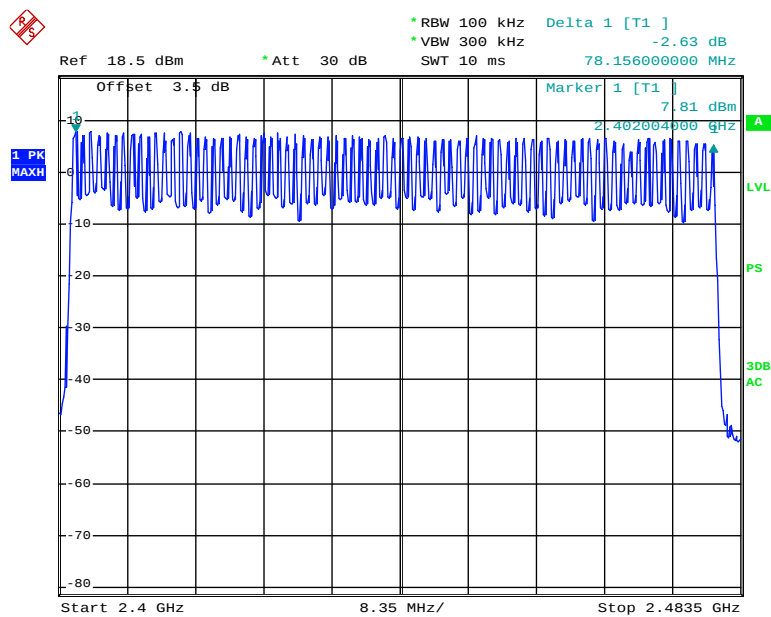

Date: 16.NOV.2012 18:49:50

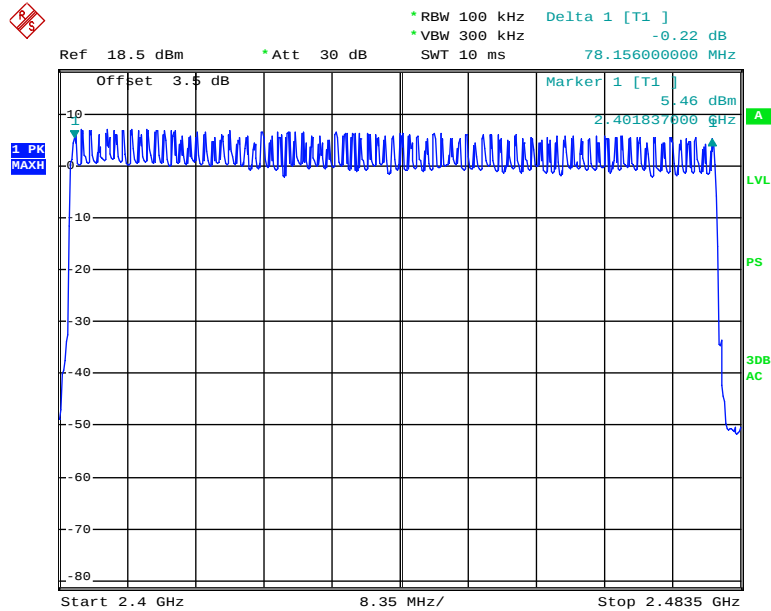EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Date: 16.NOV.2012 19:15:43

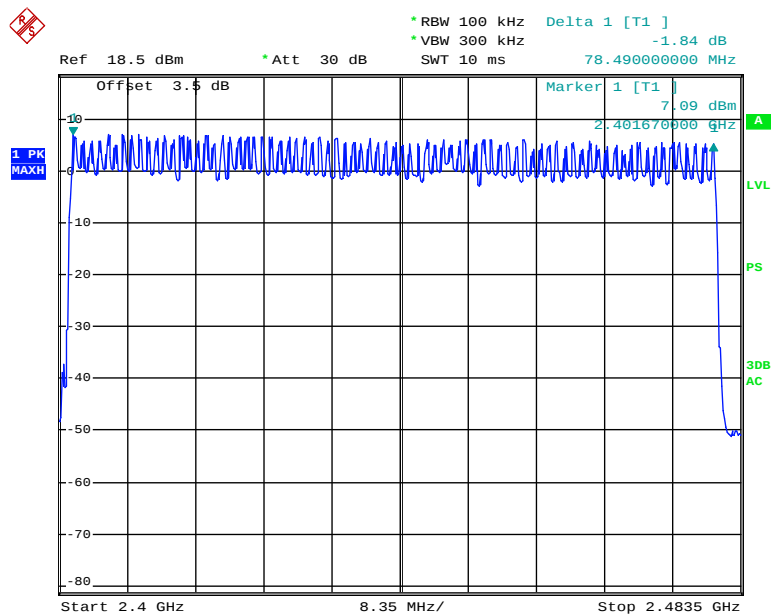(8DPSK): Number of Hopping Channels

Date: 16.NOV.2012 19:43:32

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S
Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-11-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.394	0.126	0.4	Pass
		Middle	0.392	0.125	0.4	Pass
		High	0.394	0.126	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.680	0.269	0.4	Pass
		Middle	1.688	0.270	0.4	Pass
		High	1.664	0.266	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.916	0.311	0.4	Pass
		Middle	2.940	0.314	0.4	Pass
		High	2.940	0.314	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	DH 1	Low	0.406	0.130	0.4	Pass
		Middle	0.404	0.129	0.4	Pass
		High	0.402	0.129	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.672	0.268	0.4	Pass
		Middle	1.664	0.266	0.4	Pass
		High	1.672	0.268	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.940	0.314	0.4	Pass
		Middle	2.940	0.314	0.4	Pass
		High	2.940	0.314	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.400	0.128	0.4	Pass
		Middle	0.400	0.128	0.4	Pass
		High	0.400	0.128	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.680	0.269	0.4	Pass
		Middle	1.696	0.271	0.4	Pass
		High	1.664	0.266	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.940	0.314	0.4	Pass
		Middle	2.952	0.315	0.4	Pass
		High	2.964	0.316	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK):

Pulse time, Low Channel, DH1

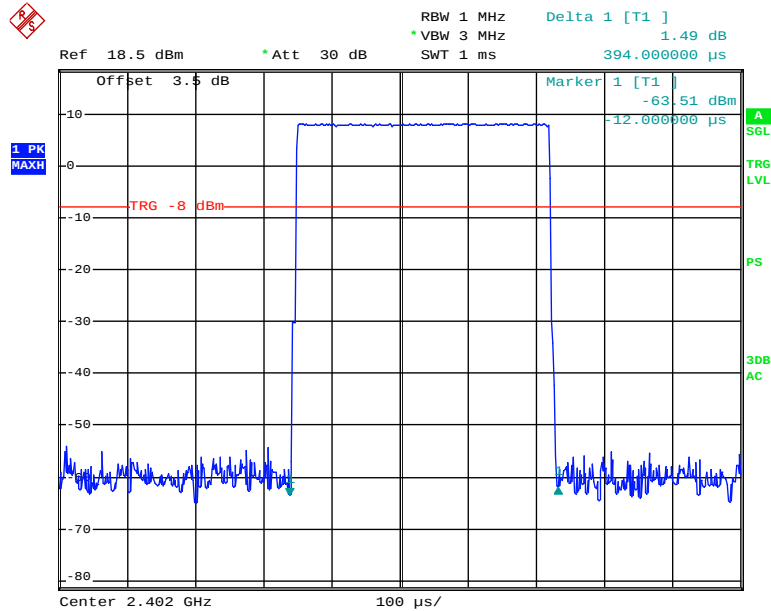


Date: 16.NOV.2012 19:07:20

Pulse time, Middle Channel, DH1

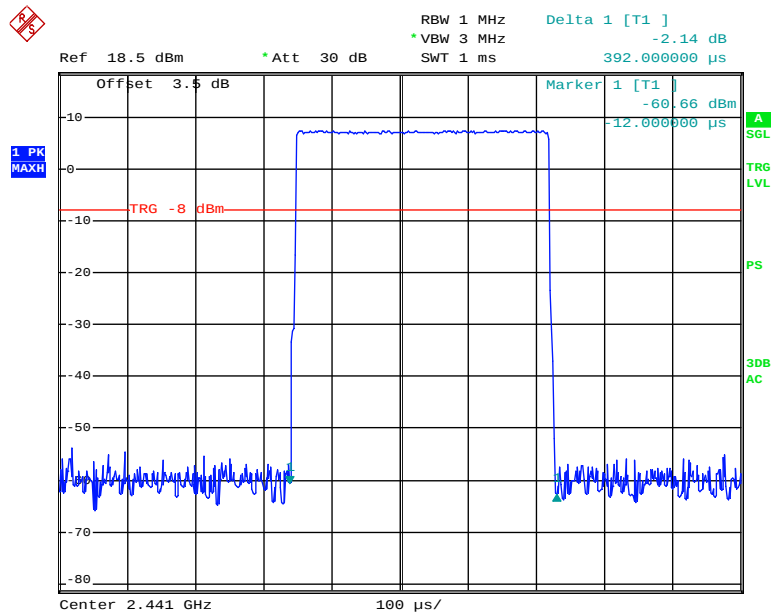


Date: 16.NOV.2012 19:07:59

Pulse time, High Channel, DH1

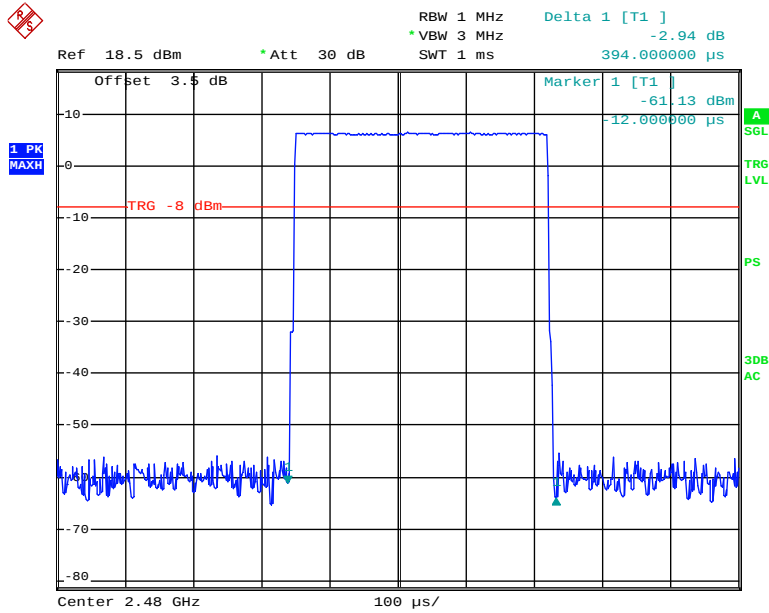


Date: 16.NOV.2012 19:08:27

Pulse time, Low Channel, DH3

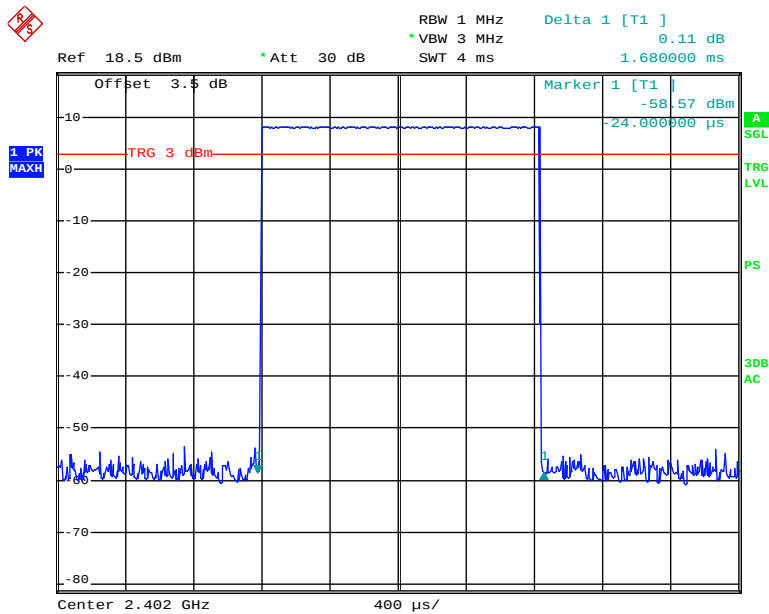


Date: 16.NOV.2012 19:10:14

Pulse time, Middle Channel, DH3

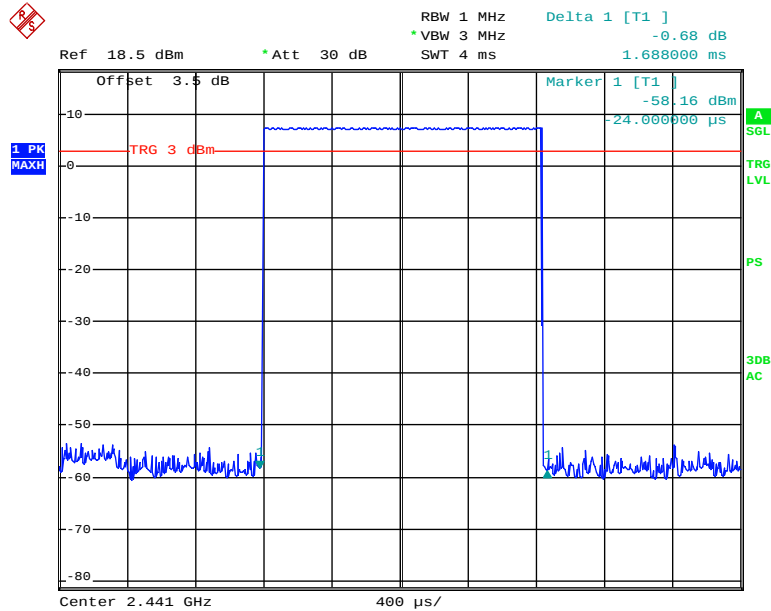


Date: 16.NOV.2012 19:09:51

Pulse time, High Channel, DH3

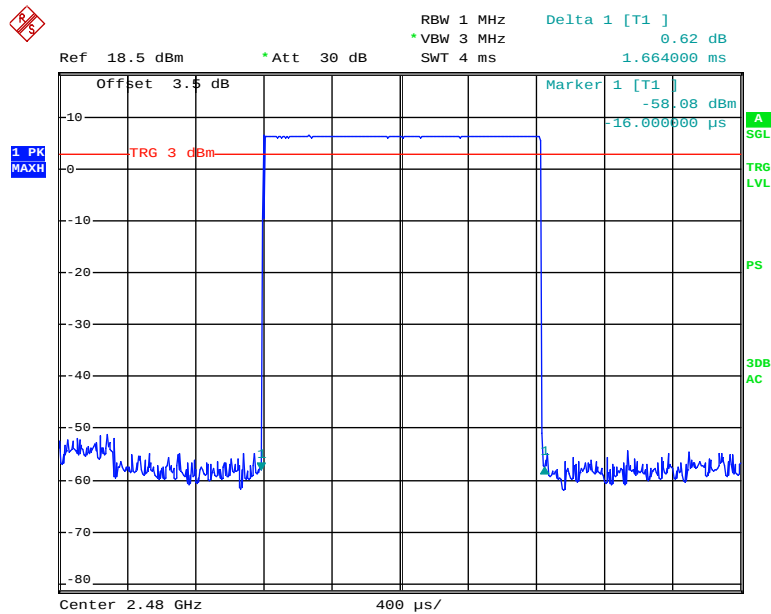


Date: 16.NOV.2012 19:09:24

Pulse time, Low Channel, DH5

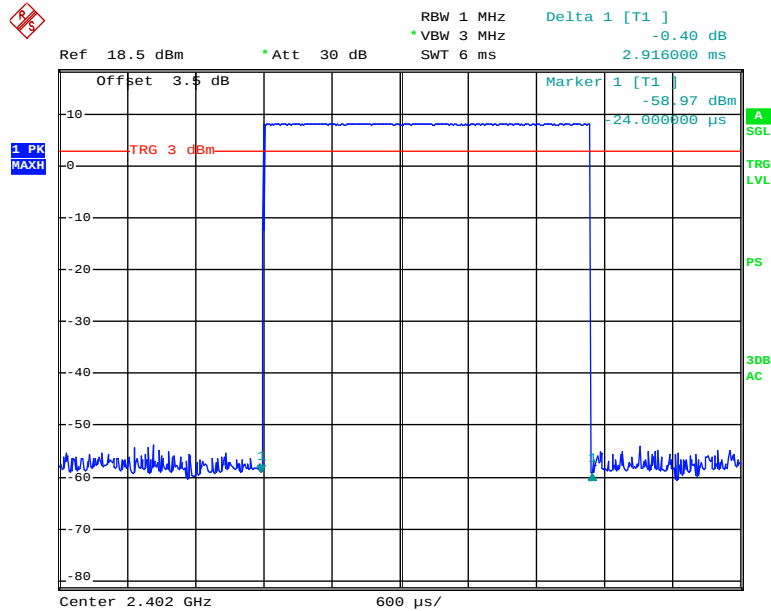


Date: 16.NOV.2012 19:10:56

Pulse time, Middle Channel, DH5

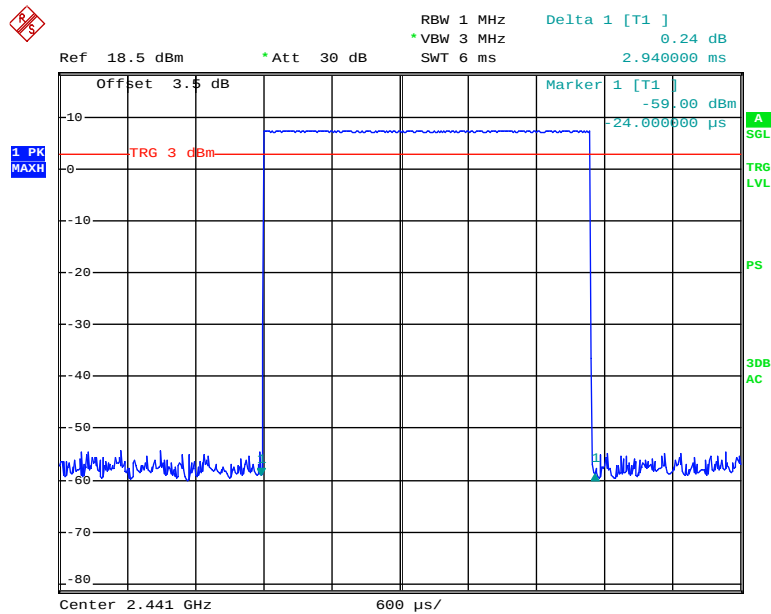

Date: 16.NOV.2012 19:11:21


Pulse time, High Channel, DH5

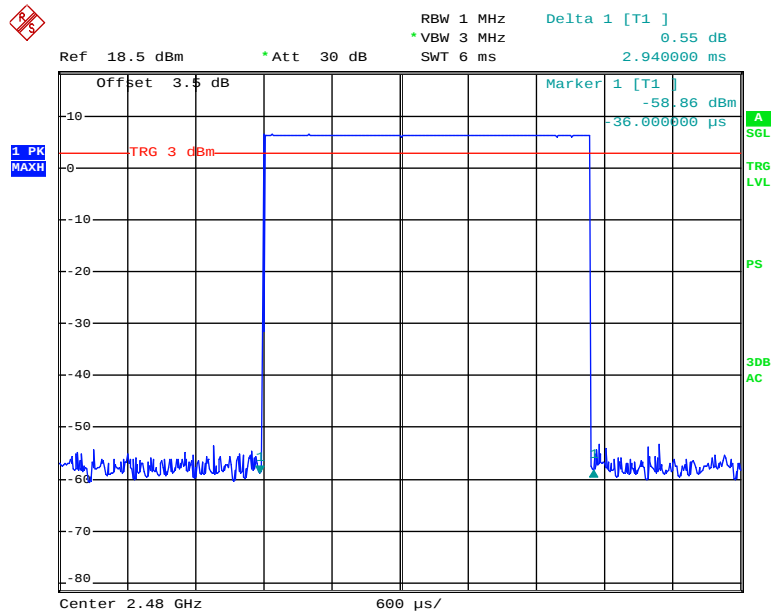

Date: 16.NOV.2012 19:11:46


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, DH1

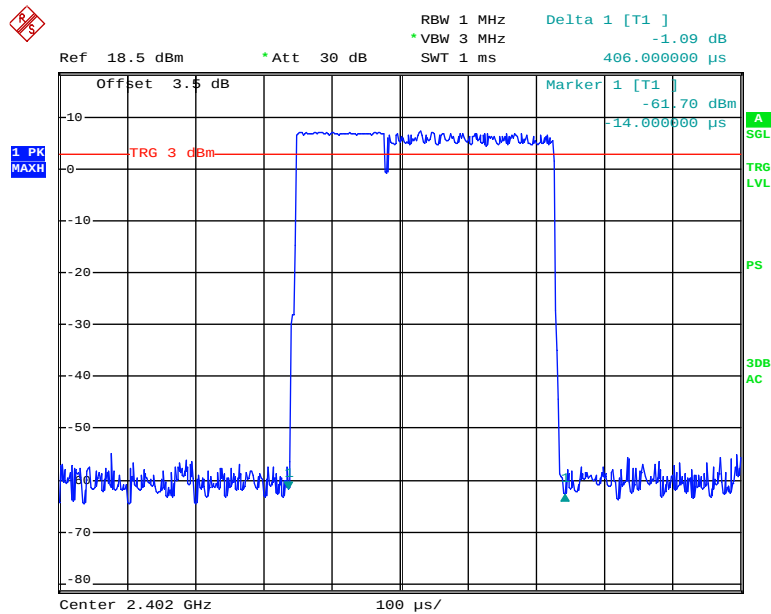


Date: 16.NOV.2012 19:30:54

Pulse time, Middle Channel, DH1

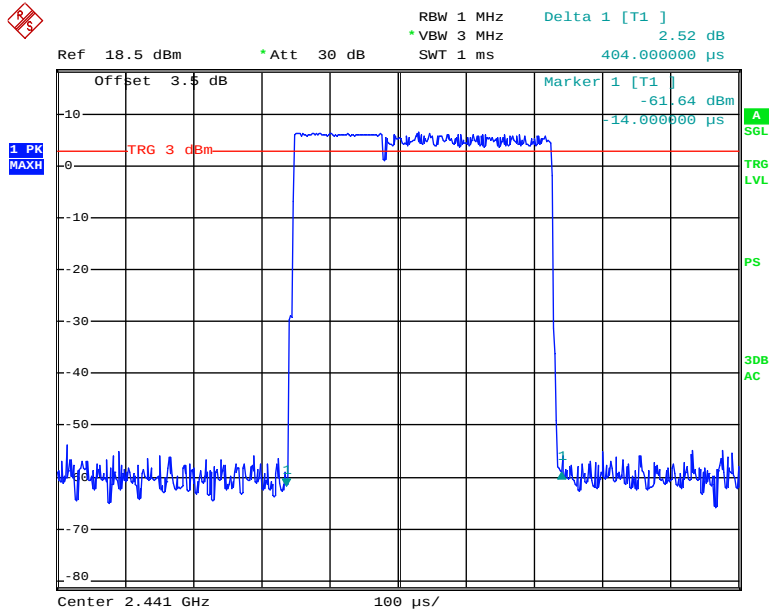


Date: 16.NOV.2012 19:31:32

Pulse time, High Channel, DH1

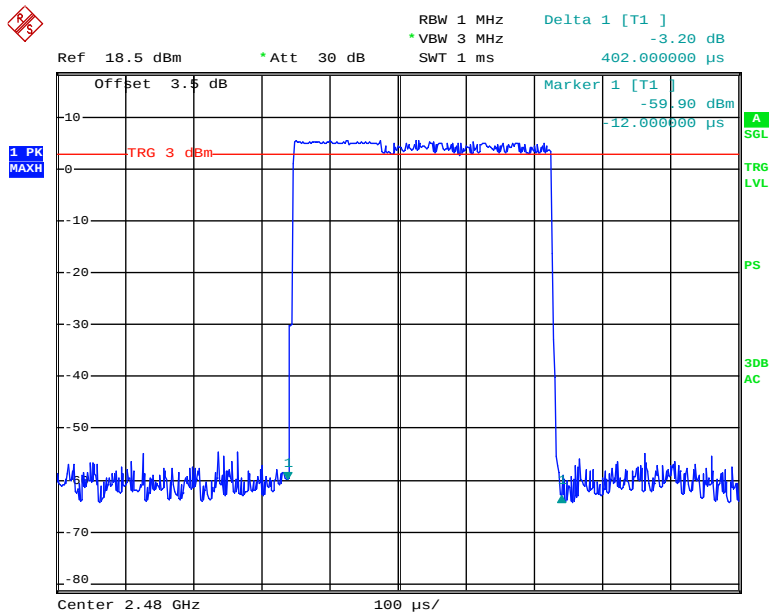


Date: 16.NOV.2012 19:32:02

Pulse time, Low Channel, DH3

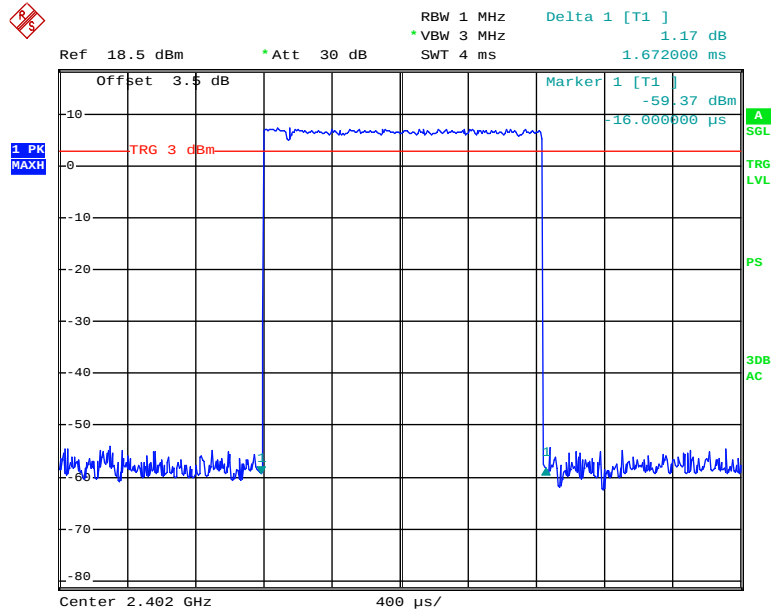


Date: 16.NOV.2012 19:33:40

Pulse time, Middle Channel, DH3

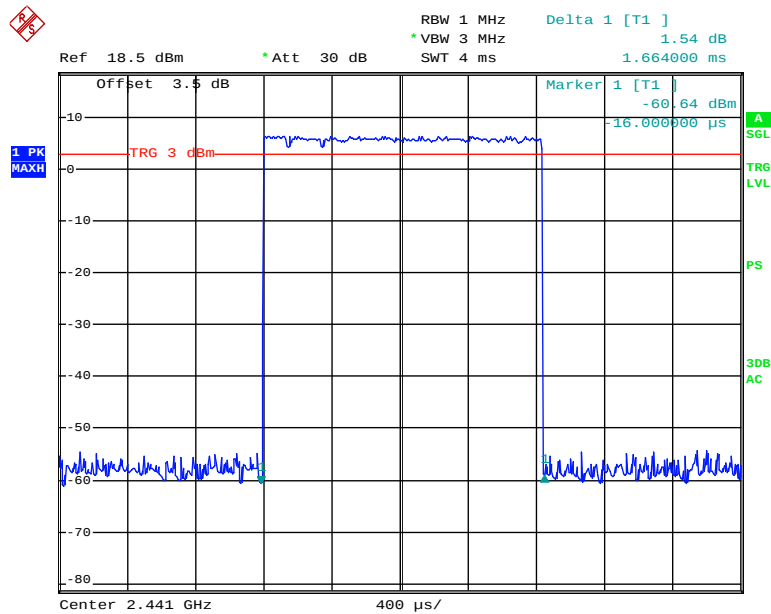


Date: 16.NOV.2012 19:33:16

Pulse time, High Channel, DH3

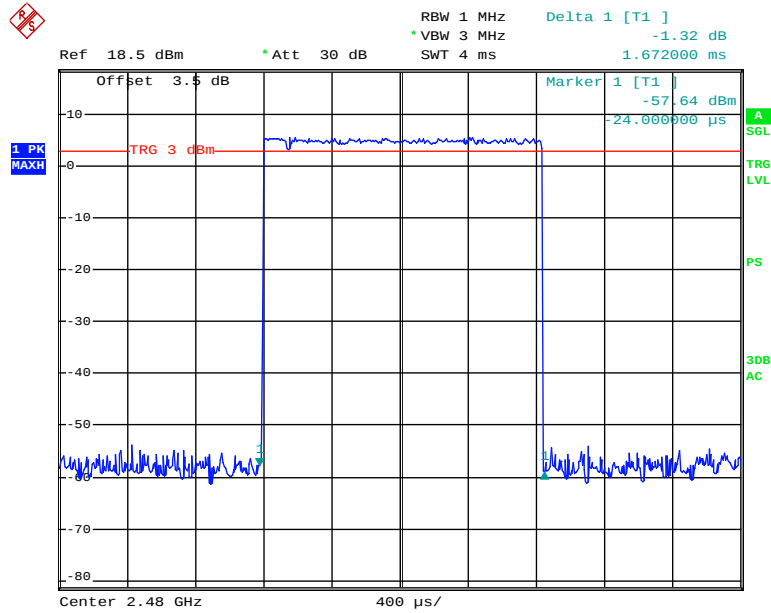


Date: 16.NOV.2012 19:32:45

Pulse time, Low Channel, DH5

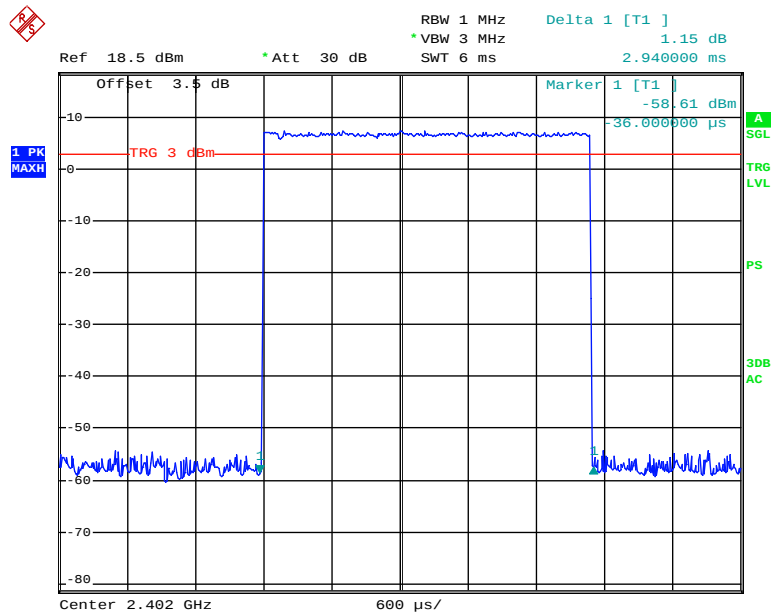


Date: 16.NOV.2012 19:34:24

Pulse time, Middle Channel, DH5

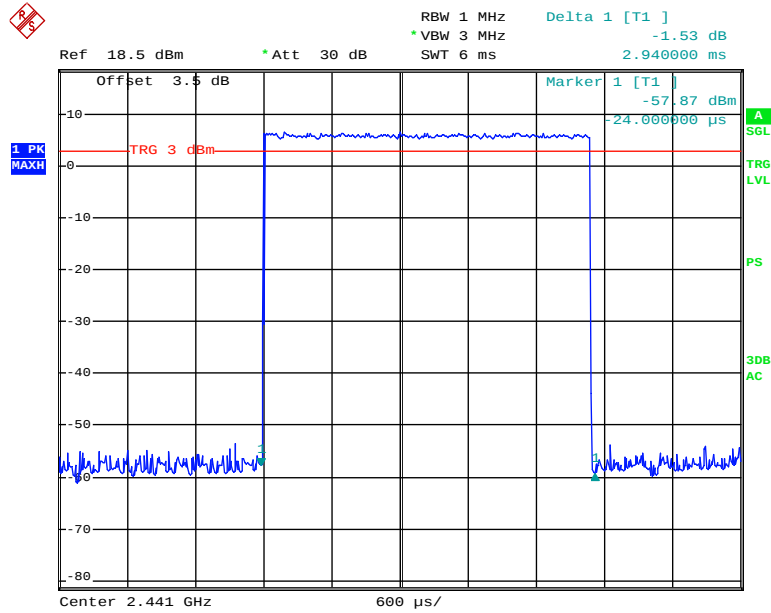

Date: 16.NOV.2012 19:34:46


Pulse time, High Channel, DH5

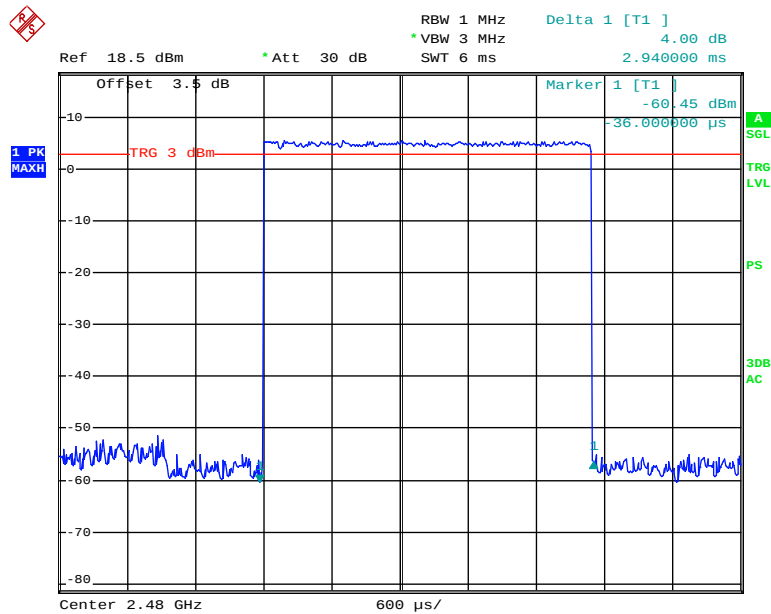

Date: 16.NOV.2012 19:35:15


EDR (8DPSK):

Pulse time, Low Channel, DH1

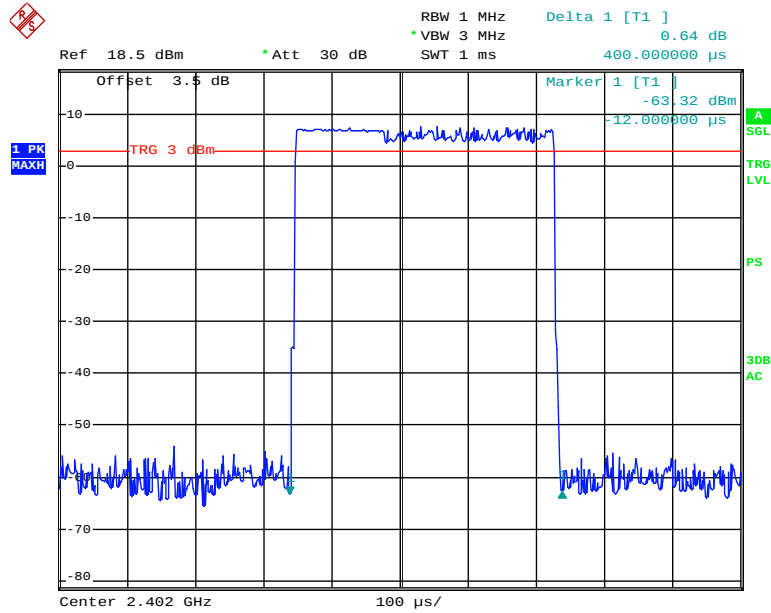


Date: 16.NOV.2012 19:56:02

Pulse time, Middle Channel, DH1

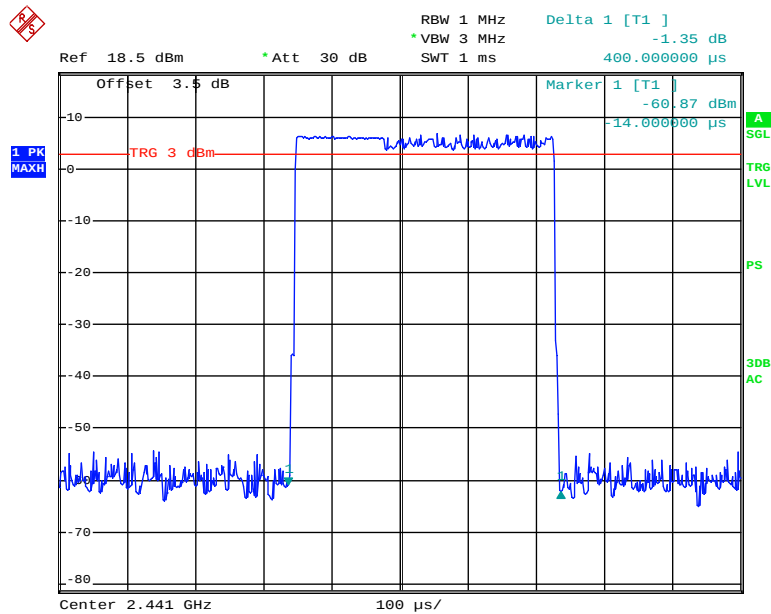


Date: 16.NOV.2012 19:56:32

Pulse time, High Channel, DH1

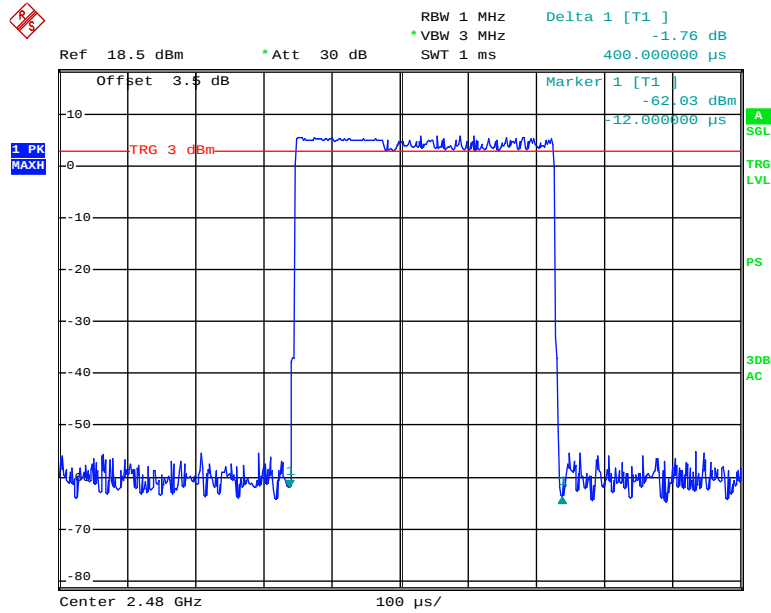


Date: 16.NOV.2012 19:56:56

Pulse time, Low Channel, DH3

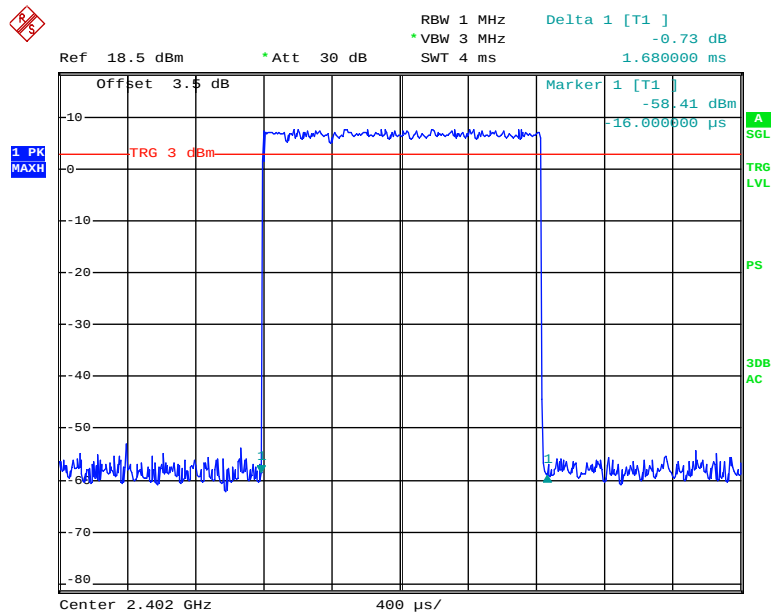


Date: 16.NOV.2012 19:58:48

Pulse time, Middle Channel, DH3

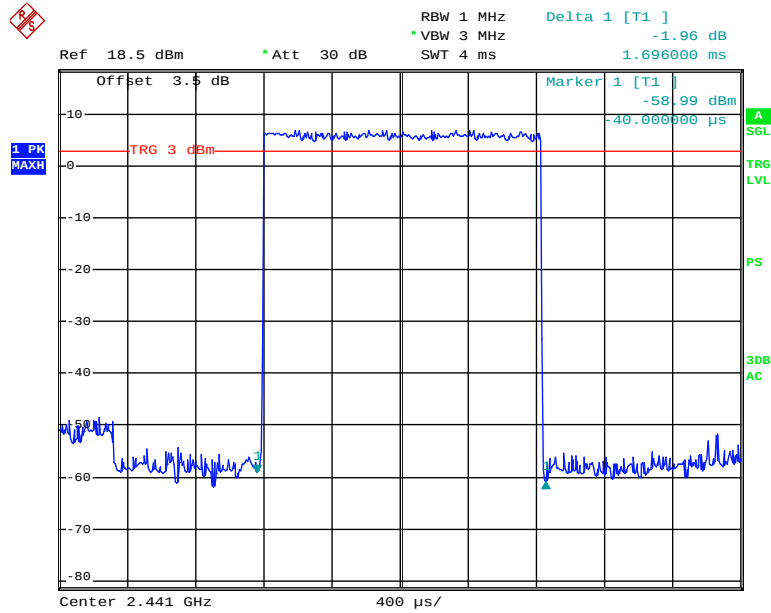


Date: 16.NOV.2012 19:58:15

Pulse time, High Channel, DH3

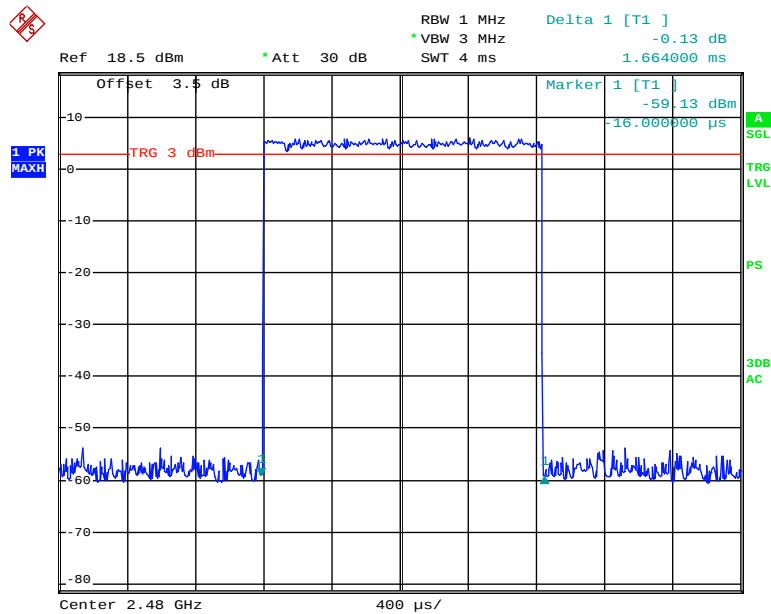


Date: 16.NOV.2012 19:57:49

Pulse time, Low Channel, DH5

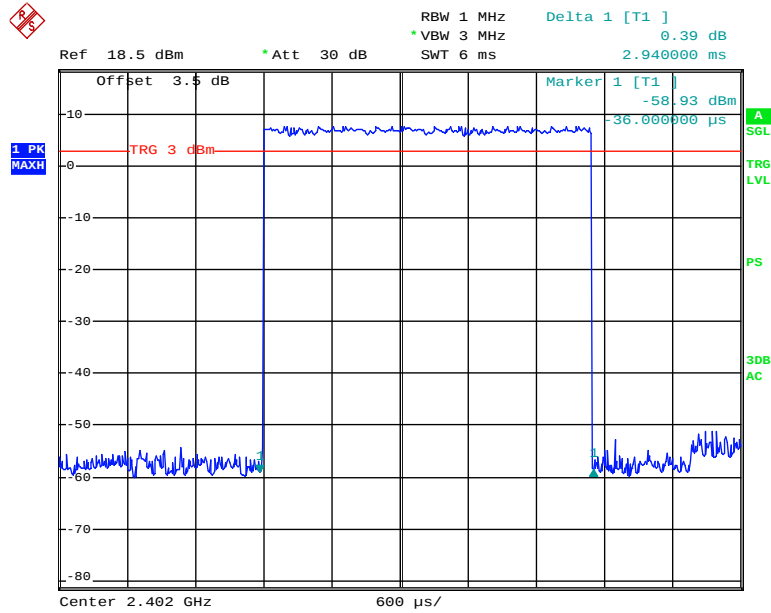


Date: 16.NOV.2012 19:59:28

Pulse time, Middle Channel, DH5

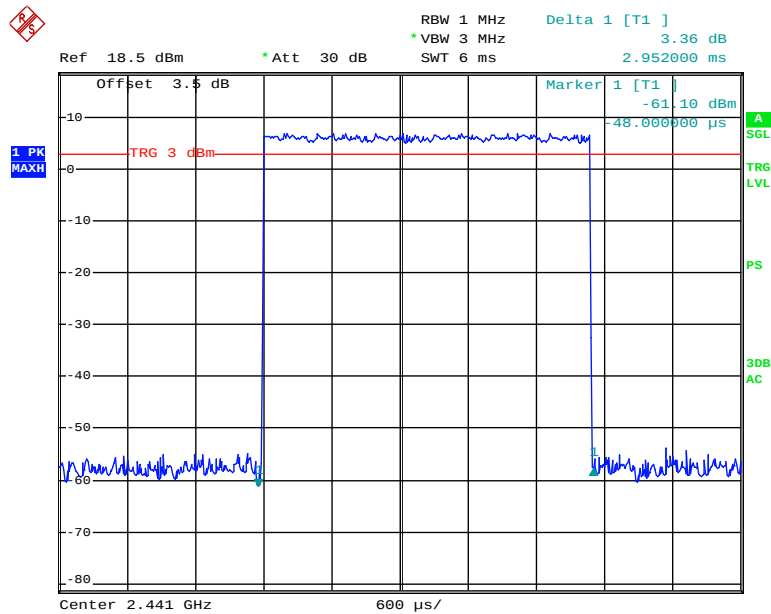

Date: 16.NOV.2012 19:59:51

Pulse time, High Channel, DH5

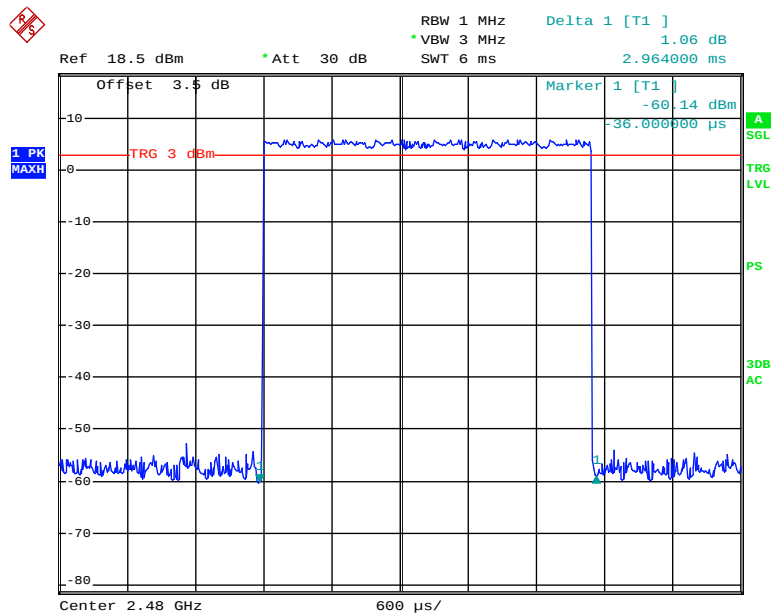

Date: 16.NOV.2012 20:00:19


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

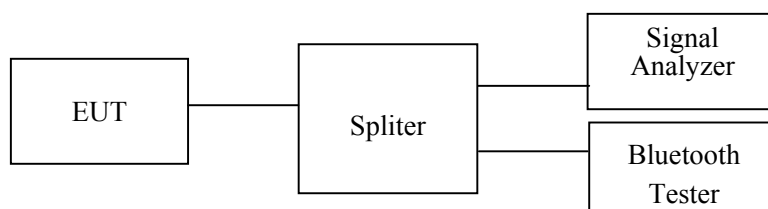

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-11-16.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	8.27	6.714	1000
	Middle	2441	7.47	5.585	1000
	High	2480	6.50	4.467	1000
EDR ($\pi/4$-DQPSK)	Low	2402	8.02	6.339	1000
	Middle	2441	7.25	5.309	1000
	High	2480	6.28	4.246	1000
EDR (8DPSK)	Low	2402	8.24	6.668	1000
	Middle	2441	7.46	5.572	1000
	High	2480	6.53	4.498	1000

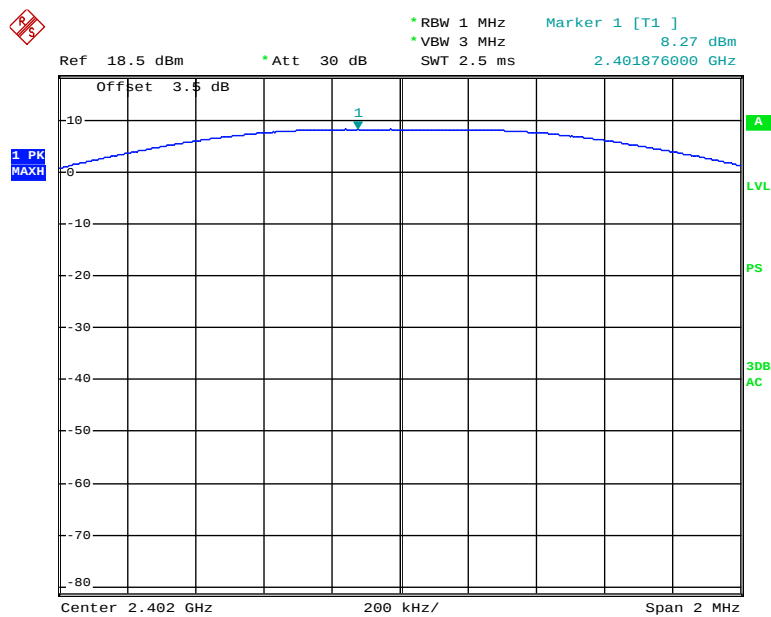BDR (GFSK): Low Channel


Date: 16.NOV.2012 18:54:01

BDR (GFSK): Middle Channel

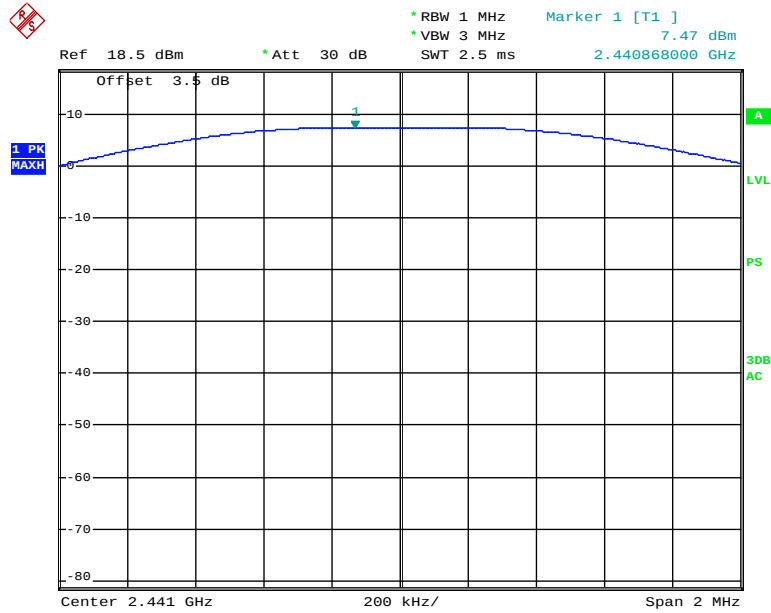


Date: 16.NOV.2012 18:59:51

BDR (GFSK): High Channel

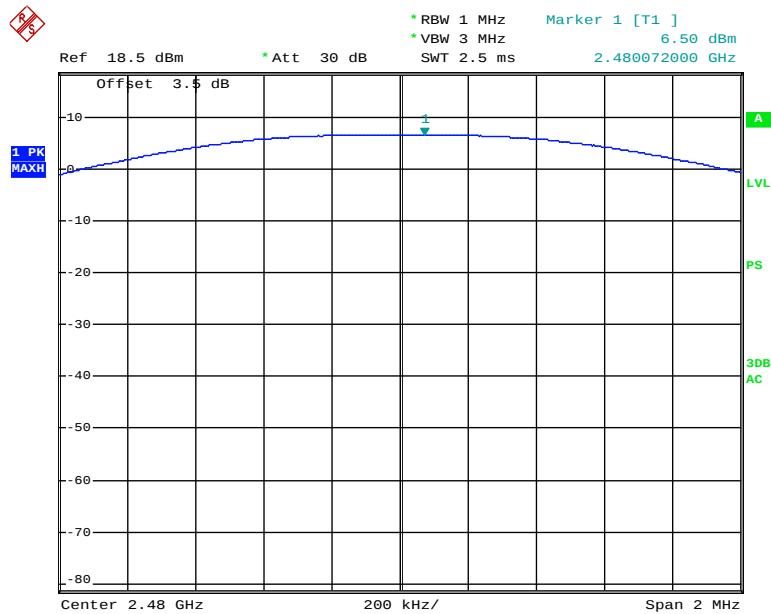


Date: 16.NOV.2012 19:02:36

EDR($\pi/4$ -DQPSK): Low Channel

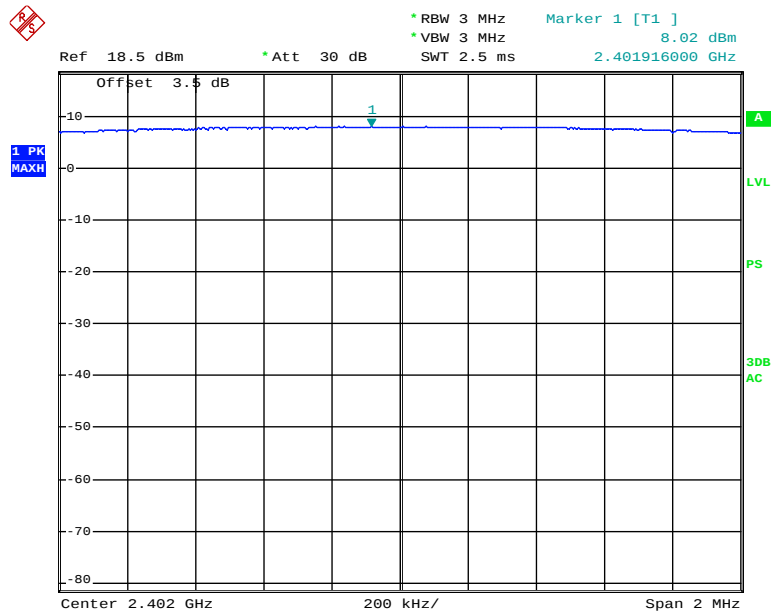


Date: 16.NOV.2012 19:17:36

EDR($\pi/4$ -DQPSK): Middle Channel

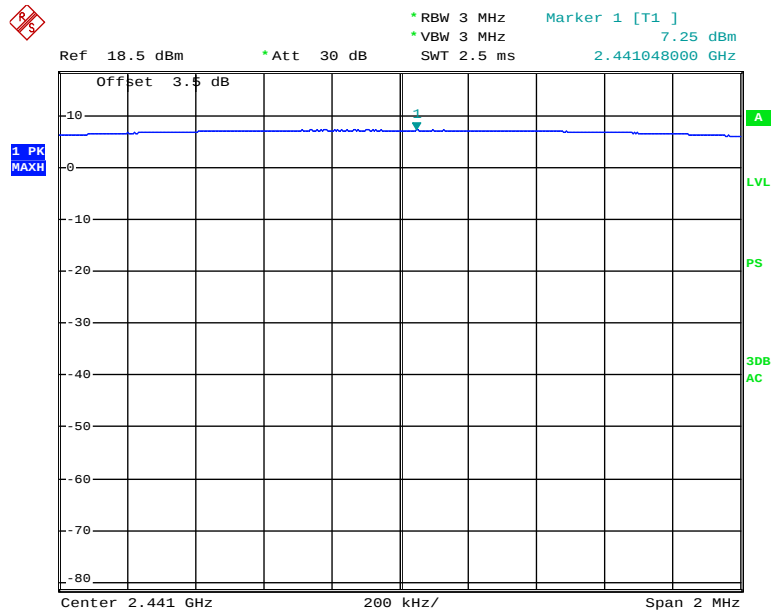


Date: 16.NOV.2012 19:23:19

EDR($\pi/4$ -DQPSK): High Chanel

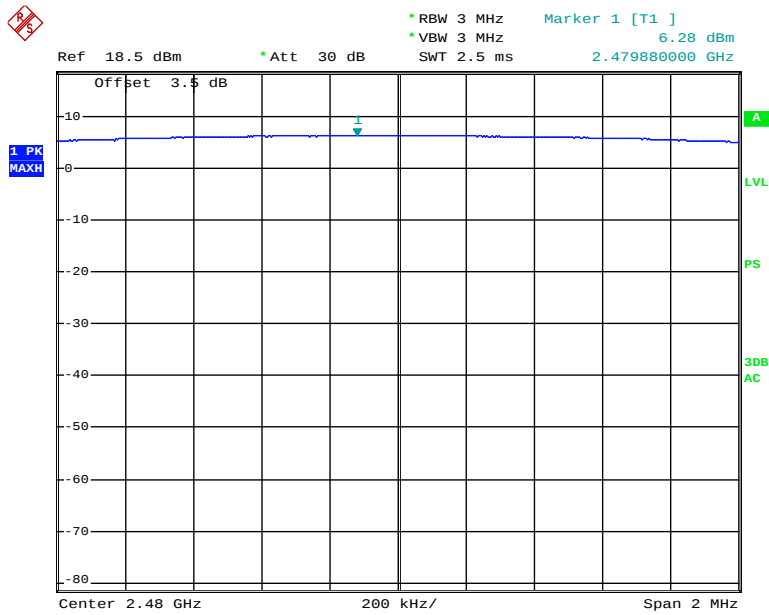


Date: 16.NOV.2012 19:27:09

EDR(8DPSK): Low Channel

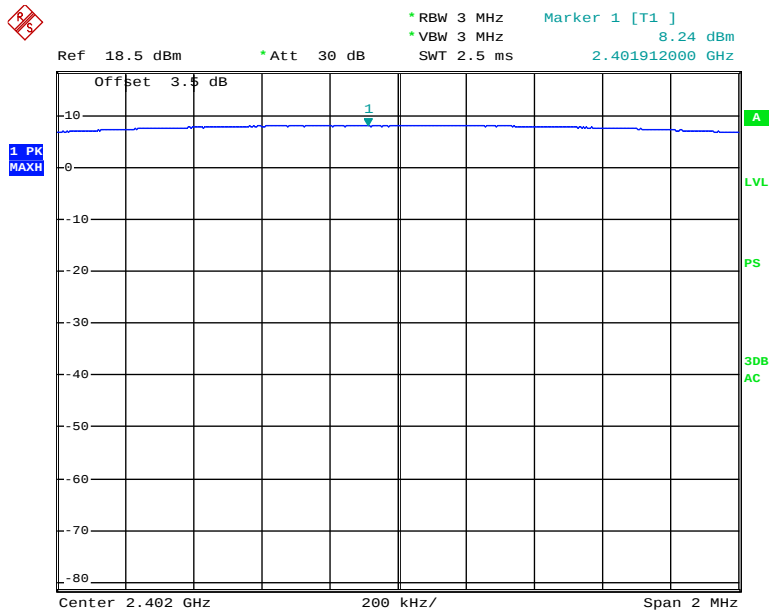


Date: 16.NOV.2012 19:45:21

EDR(8DPSK): Middle Channel

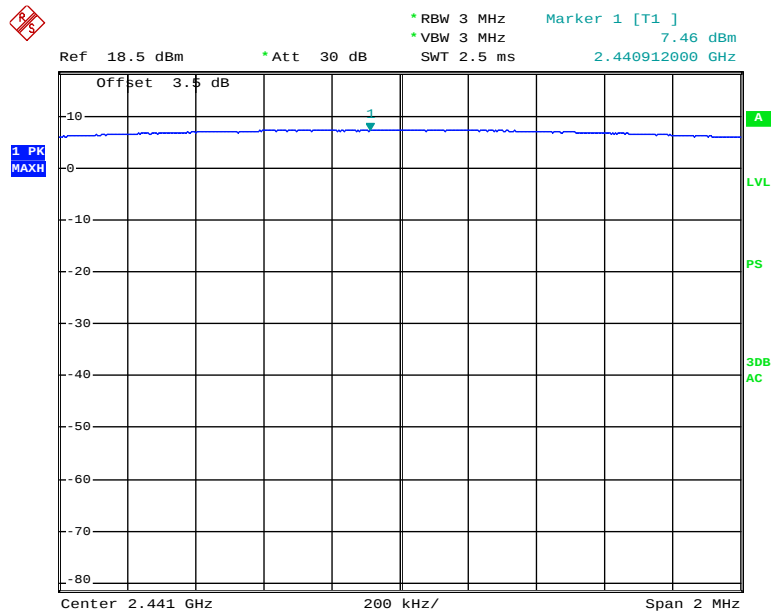

Date: 16.NOV.2012 19:49:22

EDR(8DPSK): High Chanel

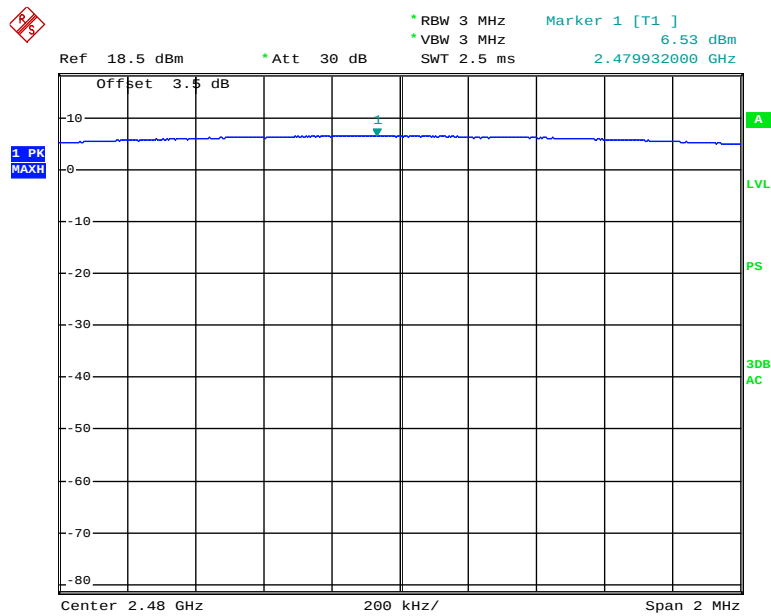

Date: 16.NOV.2012 19:52:00

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-11-16.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots

BDR (GFSK): Band Edge-Left Side

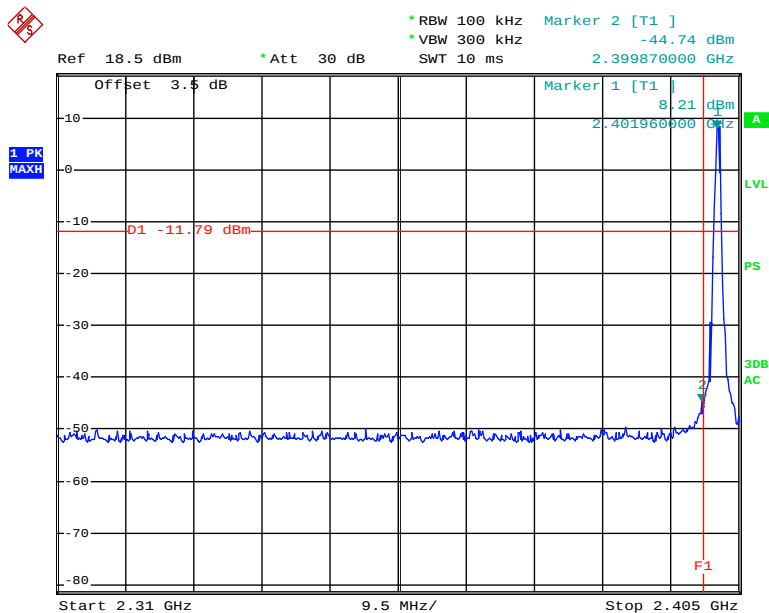


Date: 16.NOV.2012 18:55:21

BDR (GFSK): Band Edge-Right Side

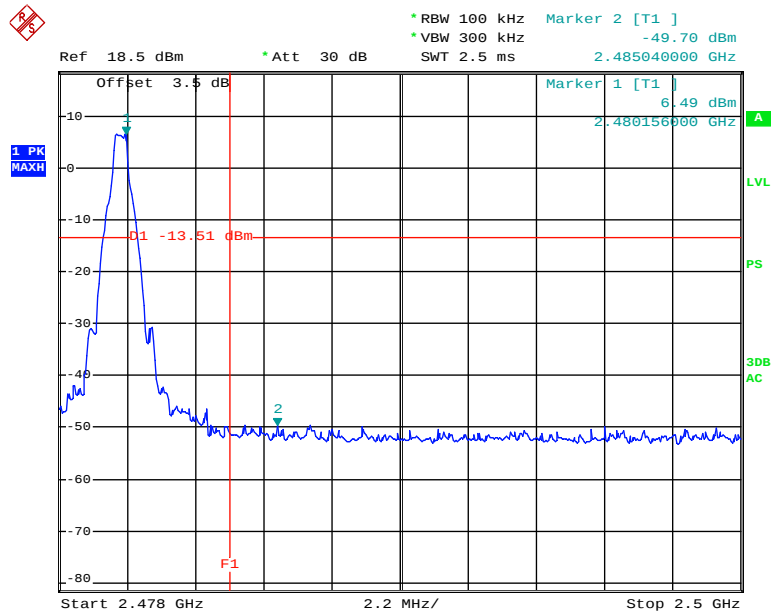


Date: 16.NOV.2012 19:04:12

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

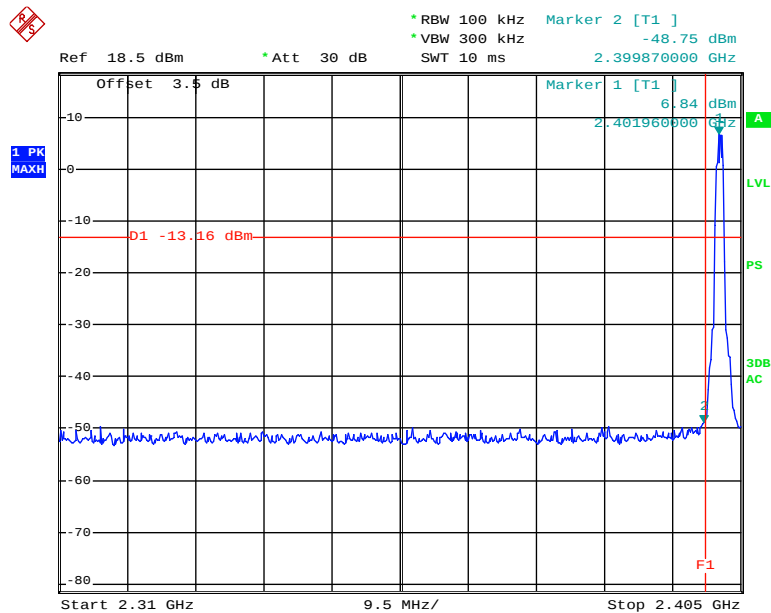


Date: 16.NOV.2012 19:18:26

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

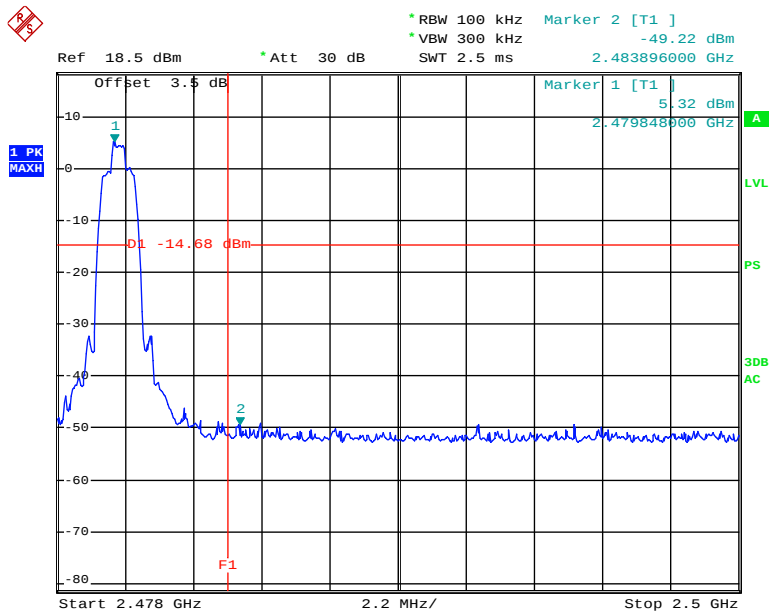


Date: 16.NOV.2012 19:28:30

EDR (8DPSK): Band Edge-Left Side

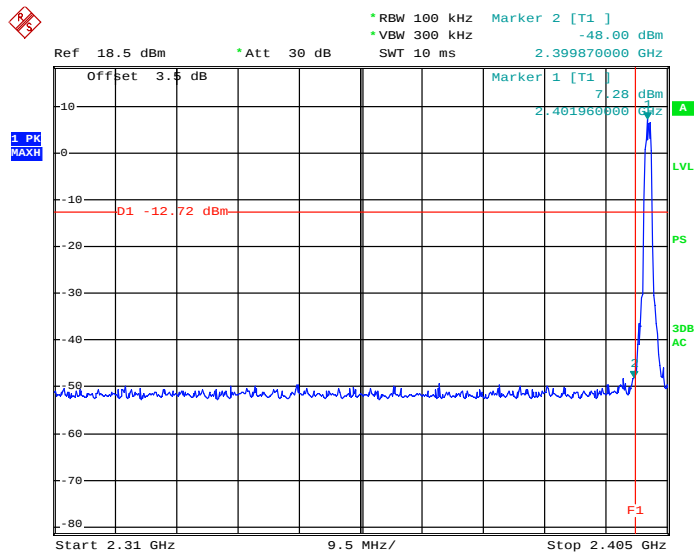

Date: 16.NOV.2012 19:46:27

BDR (8DPSK): Band Edge-Right Side

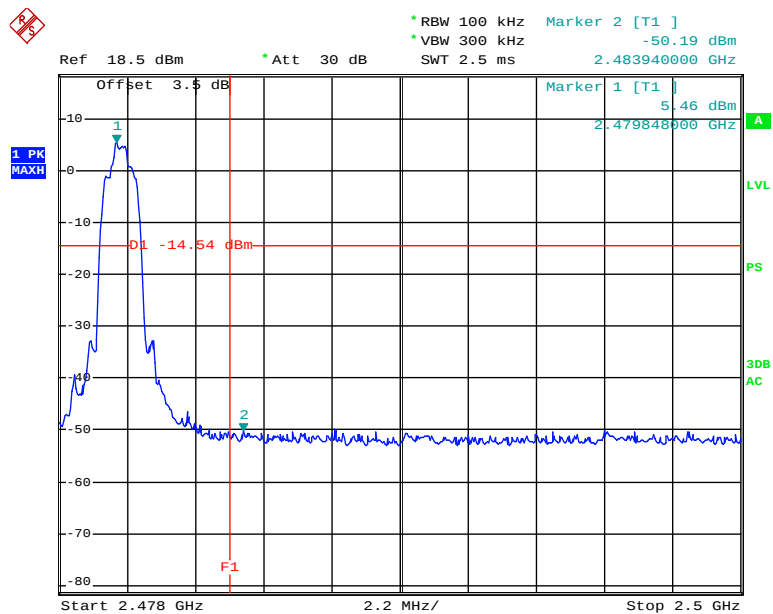

Date: 16.NOV.2012 19:53:01

***** END OF REPORT *****