

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Report No.: SZEM170900969703

Fax: +86 (0) 755 2671 0594 Page: 1 of 41

### TEST REPORT

Application No.: SZEM1709009697CR

Applicant: JINXINGDA PLASTIC TOYS FACTORY

Address of Applicant: CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

Manufacturer: JINXINGDA PLASTIC TOYS FACTORY

Address of Manufacturer: CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

Factory: JINXINGDA PLASTIC TOYS FACTORY

Address of Factory: CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

**Equipment Under Test (EUT):** 

**EUT Name:** X-PREDATORS

Model No.: Please refer to section 2 ♣

Please refer to section 2 of this report which indicates which model was actually

tested and which were electrically identical.

FCC ID: ZSYJXDFCC1234

Standard(s): 47 CFR Part 15, Subpart C 15.249

**Date of Receipt:** 2017-09-11

**Date of Test:** 2017-09-14 to 2017-09-25

**Date of Issue:** 2017-09-28

Test Result: Pass\*

Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM170900969703

Page: 2 of 41

Revision Record							
Version	Chapter	Date	Modifier	Remark			
01		2017-09-28		Original			

Authorized for issue by:		
	Brix Chen	
	Bill Chen /Project Engineer	
	Eric Fu	
	Eric Fu /Reviewer	



Report No.: SZEM170900969703

Page: 3 of 41

### 2 Test Summary

Radio Spectrum Technical Requirement							
Item	Standard	Method	Requirement	Result			
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass			

Radio Spectrum Matter Part							
Item	Standard	Method	Requirement	Result			
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass			
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass			
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass			
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass			

#### Remark:

Model No.: 510W, 398, 399, 511, 511V, 515W, 523, 506W, 507W, 509W, 512W, 516W, 518W, 518, 519W, 520, 520W, 522, 522W, 525, 525W, 526, 526W, 528, 528W, 529, 529W, 530, 530W 532, 532W, 533, 533W, 535, 535W, 536, 536W, 538, 538W, 539, 539W, 550, 550W, 552, 552W, 553, 553W, 555, 555W, 556, 556W, 510, 558, 559, 559W, 560, 560W, 562, 562W, 563, 563W, 565, 565W, 566, 566W, 568, 568W, 569, 569W, 580, 580W, 582, 582W, 583, 583W, 584, 584W, 585, 585W, 586, 586W, 588, 588W, 589, 589W, 590, 590W, 592, 592W, 593, 593W, 595, 595W, 596, 596W, 598, 598W, 599, 599W

Only the model 510 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on model name.



Report No.: SZEM170900969703

Page: 4 of 41

### 3 Contents

		Page
1	1 COVER PAGE	1
2	2 TEST SUMMARY	3
3	3 CONTENTS	4
4	4 GENERAL INFORMATION	5
	4.1 DETAILS OF E.U.T	5
	4.2 DESCRIPTION OF SUPPORT UNITS	5
	4.3 MEASUREMENT UNCERTAINTY	
	4.4 Test Location	_
	4.5 Test Facility	
	4.6 DEVIATION FROM STANDARDS	
	4.7 ABNORMALITIES FROM STANDARD CONDITIONS	
5	5 EQUIPMENT LIST	7
6	RADIO SPECTRUM TECHNICAL REQUIREMENT	10
	6.1 ANTENNA REQUIREMENT	
	6.1.1 Test Requirement:	
	6.1.2 Conclusion	
7	7 RADIO SPECTRUM MATTER TEST RESULTS	11
	7.1 20dB Bandwidth	11
	7.1.1 E.U.T. Operation	
	7.1.2 Test Setup Diagram	
	7.1.3 Measurement Procedure and Data	
	7.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(a))	
	7.2.1 E.U.T. Operation	
	7.2.2 Test Setup Diagram	
	7.2.3 Measurement Procedure and Data	
	7.3.1 E.U.T. Operation	
	7.3.2 Test Setup Diagram	
	7.3.3 Measurement Procedure and Data	
	7.4 RADIATED EMISSIONS	
	7.4.1 E.U.T. Operation	
	7.4.2 Test Setup Diagram	30
	7.4.3 Measurement Procedure and Data	30
8	B PHOTOGRAPHS	40
	8.1 RADIATED EMISSIONS TEST SETUP	40
	8.2 EUT CONSTRUCTIONAL DETAILS	41



Report No.: SZEM170900969703

Page: 5 of 41

### 4 General Information

### 4.1 Details of E.U.T.

Power supply: Remote control:6.0V DC (1.5V x 4 "AA" Size Batteries)

Frequency Range: 2450MHz ~ 2460MHz

Modulation Type: GFSK

Number of Channels: 11 (declared by the client)

Sample Type: Portable production

Antenna Gain: 1dBi

Operation Frequency each of channel								
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2450MHz	4	2453MHz	7	2456MHz	10	2459MHz	
2	2451MHz	5	2454MHz	8	2457MHz	11	2460MHz	
3	2452MHz	6	2455MHz	9	2458MHz			

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 <sup>-8</sup>
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	DE Dadiated newer	4.5dB (below 1GHz)
/	RF Radiated power	4.8dB (above 1GHz)
8	Dadiated Caurious emission test	4.5dB (30MHz-1GHz)
0	Radiated Spurious emission test	4.8dB (1GHz-18GHz)
9	Temperature test	1℃
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%



Report No.: SZEM170900969703

Page: 6 of 41

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### · CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

### 4.6 Deviation from Standards

None

### 4.7 Abnormalities from Standard Conditions

None



Report No.: SZEM170900969703

Page: 7 of 41

### 5 Equipment List

20dB Bandwidth							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09		
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09		
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A		
Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2017-04-14	2018-04-13		
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09		

Field Strength of the Fu	ndamental Signal (1	15.249(a))			
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014- 6-27	N/A	N/A	N/A
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2017-03-05	2020-03-05
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-14	2017-06-16	2020-06-15
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA- 0118-352810	SEM005-05	2016-10-09	2017-10-09
Pre-amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2016-10-17	2017-10-17
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A
Cable	SGS	CE		2016-10-09	2017-10-09



Report No.: SZEM170900969703

Page: 8 of 41

Restricted Band Around	d Fundamental Freq	uency			
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014- 6-27	N/A	N/A	N/A
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2017-03-05	2020-03-05
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-14	2017-06-16	2020-06-15
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA- 0118-352810	SEM005-05	2016-10-09	2017-10-09
Pre-amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2016-10-17	2017-10-17
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A
Cable	SGS	CE		2016-10-09	2017-10-09

General used equipment							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12		
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12		
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-18		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sg.com/en/Terms-and-Conditions.aspx">http://www.sg.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sg.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sg.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM170900969703

Page: 9 of 41

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-10	2018-05-10		
2	EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2017-06-05	2018-06-04		
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2014-11-01	2017-11-01		
4	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13		
5	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09		
6	Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2016-10-09	2017-10-09		
7	Band filter	N/A	N/A	N/A	N/A	N/A		
8	Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A		
9	Cable	SGS	CE		2016-10-09	2017-10-09		

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
2	MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-02	2017-03-05	2020-03-05
4	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2017-04-14	2018-04-13
5	Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
6	Cable	SGS	CE		2016-10-09	2017-10-09



Report No.: SZEM170900969703

Page: 10 of 41

### 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203


#### 6.1.2 Conclusion

#### Standard Requirment:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently

attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### EUT Antenna:

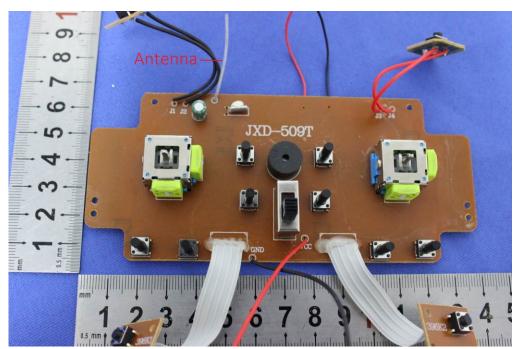

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.



Report No.: SZEM170900969703

Page: 11 of 41

### 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9

Limit: N/A


### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.

### 7.1.2 Test Setup Diagram

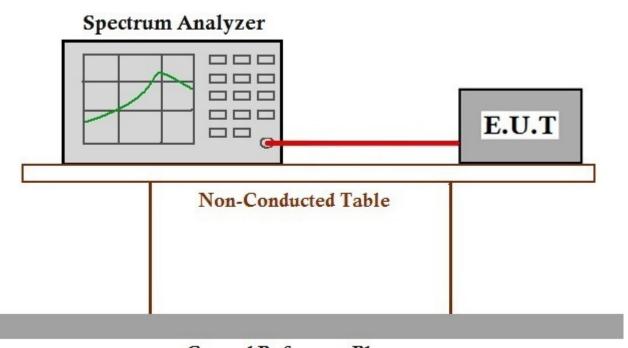

### Ground Reference Plane

#### 7.1.3 Measurement Procedure and Data


Test channel	20dB bandwidth (MHz)	Results
Lowest	2.74	Pass
Middle	2.80	Pass
Highest	2.90	Pass



Report No.: SZEM170900969703

Page: 12 of 41

### Mode:a; ; Channel:Low

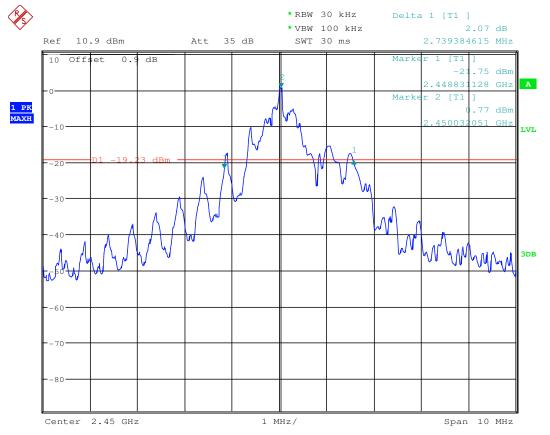




Report No.: SZEM170900969703

Page: 13 of 41

### Mode:a; ; Channel:middle

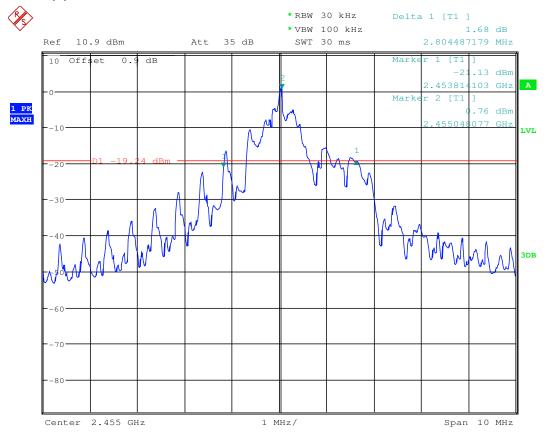




Report No.: SZEM170900969703

Page: 14 of 41

### Mode:a; ; Channel:High

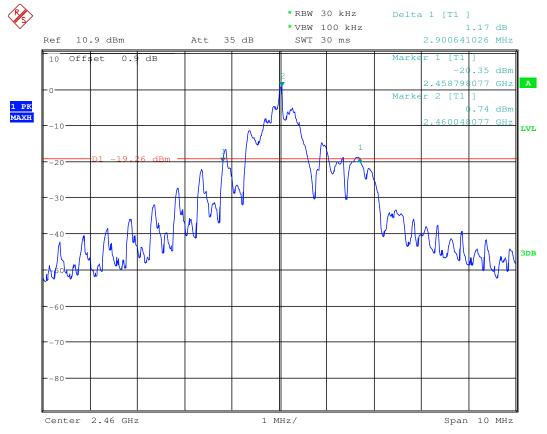



Report No.: SZEM170900969703

Page: 15 of 41

### 7.2 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)
Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
0400MI I= 0400 EMI I=	94.0	Average Value
2400MHz-2483.5MHz	114.0	Peak Value



Report No.: SZEM170900969703

Page: 16 of 41


### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode Keep the EUT in transmitting with modulation mode.

### 7.2.2 Test Setup Diagram





Above 1GHz

### 7.2.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM170900969703

Page: 17 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

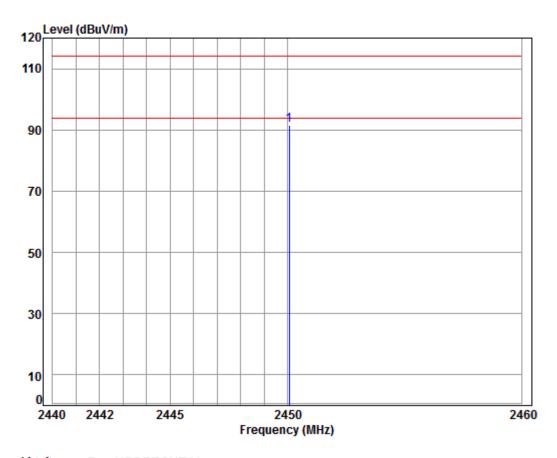

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2450 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


1 pp 2450.073 5.55 29.26 37.95 94.67 91.53 114.00 -22.47 Peak



Report No.: SZEM170900969703

Page: 18 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

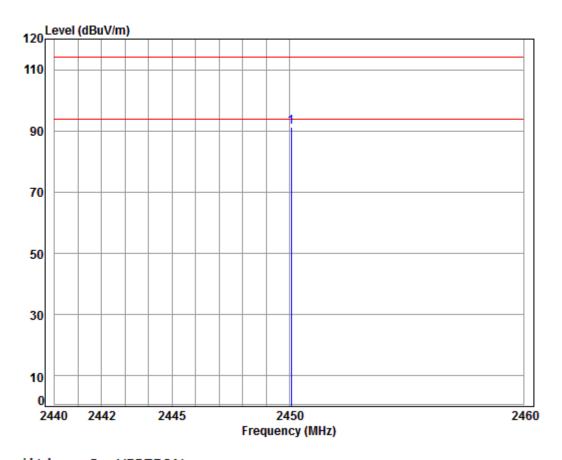

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2450 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


1 pp 2450.073 5.55 29.26 37.95 94.30 91.16 114.00 -22.84 Peak



Report No.: SZEM170900969703

Page: 19 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:middle

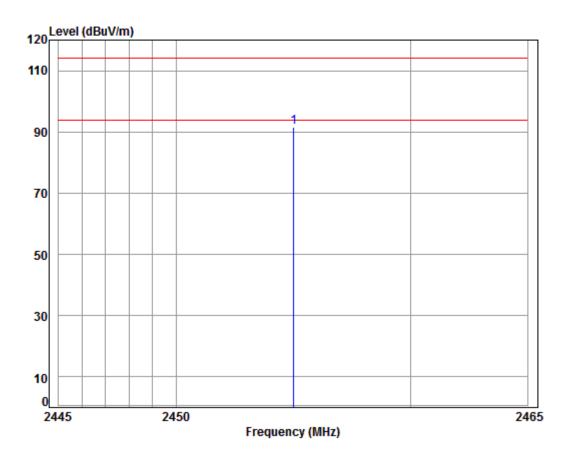

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2455 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


1 pp 2455.020 5.56 29.27 37.95 94.77 91.65 114.00 -22.35 Peak



Report No.: SZEM170900969703

Page: 20 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:middle

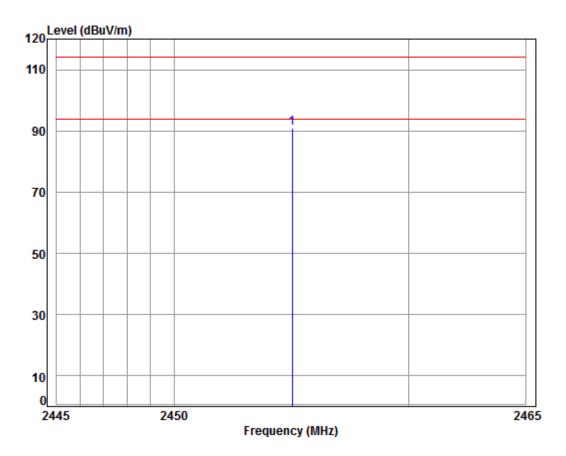

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2455 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


1 pp 2455.040 5.56 29.27 37.95 94.07 90.95 114.00 -23.05 Peak



Report No.: SZEM170900969703

Page: 21 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

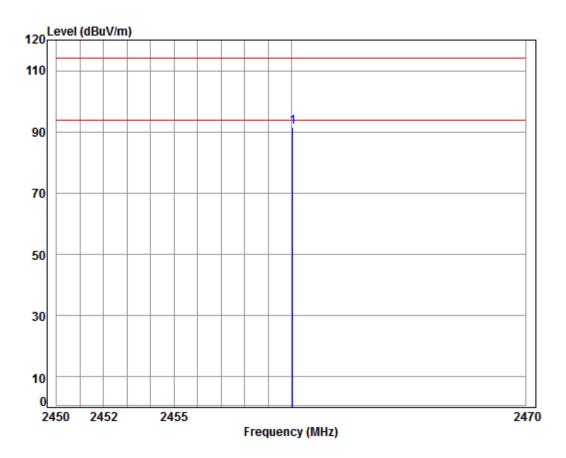

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2460 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


1 pp 2460.044 5.57 29.28 37.95 94.57 91.47 114.00 -22.53 Peak



Report No.: SZEM170900969703

Page: 22 of 41

Mode:a; Polarization: Vertical; Modulation Type: GFSK; Channel: High

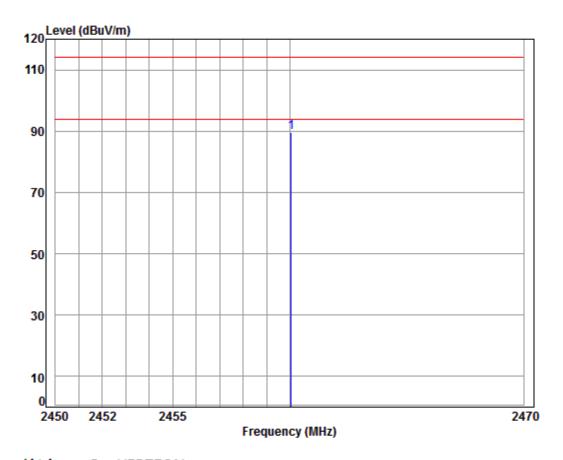

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2460 Field Strength

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit Remark

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB

1 pp 2460.044 5.57 29.28 37.95 92.67 89.57 114.00 -24.43 Peak



Report No.: SZEM170900969703

Page: 23 of 41

### 7.3 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.



Report No.: SZEM170900969703

Page: 24 of 41


### 7.3.1 E.U.T. Operation


**Operating Environment:** 

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode Keep the EUT in transmitting with modulation mode.

### 7.3.2 Test Setup Diagram





Above 1GHz

### 7.3.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM170900969703

Page: 25 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

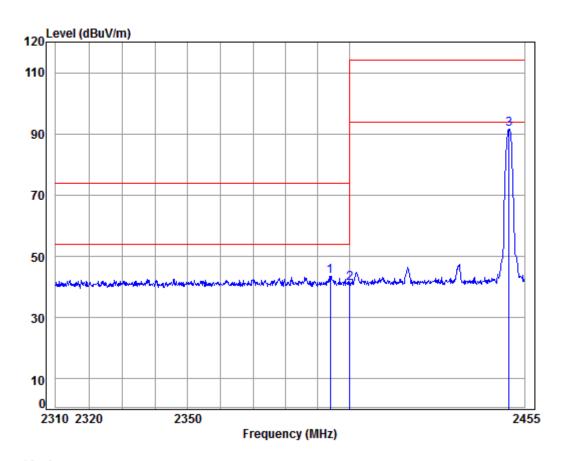

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2450 Band edge


ouc	. 245	o Duna	Cugc							
		Cable	Ant	Preamp	Read		Limit	0ver		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		_
1	2393.897	5.48	29.09	37.96	47.03	43.64	74.00	-30.36	Peak	
2	2400.000	5.49	29.11	37.96	44.64	41.28	74.00	-32.72	Peak	
3 p	p 2450.073	5.55	29.26	37.95	94.67	91.53	114.00	-22.47	Peak	



Report No.: SZEM170900969703

Page: 26 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

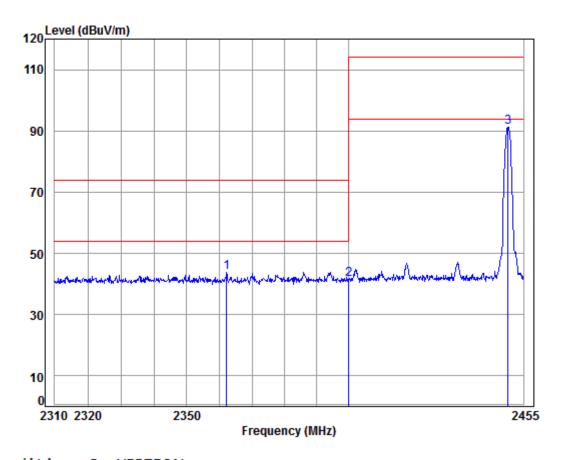

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2450 Band edge


Juc		. 245	o Duna	Cugc							
			Cable	Ant	Preamp	Read		Limit	0ver		
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1		2362.192	5.44	28.99	37.96	47.42	43.89	74.00	-30.11	Peak	
2		2400.000	5.49	29.11	37.96	44.91	41.55	74.00	-32.45	Peak	
3	рр	2450.073	5.55	29.26	37.95	94.30	91.16	114.00	-22.84	Peak	



Report No.: SZEM170900969703

Page: 27 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

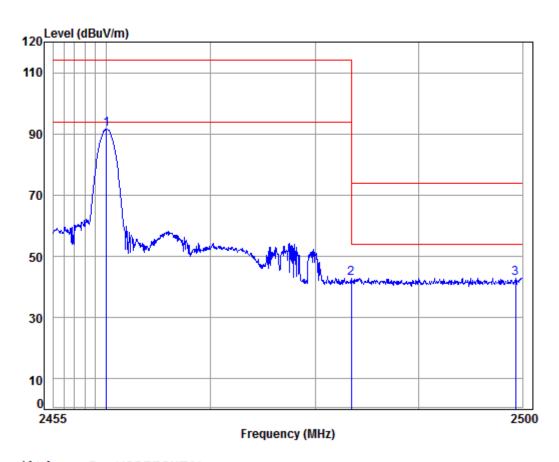

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2460 Band edge


ouc		. 240	Duna	Cugc							
			Cable	Ant	Preamp	Read		Limit	0ver		
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	op 2	460.044	5.57	29.28	37.95	94.57	91.47	114.00	-22.53	Peak	
2	2	483.500	5.60	29.35	37.95	45.68	42.68	74.00	-31.32	Peak	
3	2	499.319	5.62	29.40	37.95	45.92	42.99	74.00	-31.01	Peak	



Report No.: SZEM170900969703

Page: 28 of 41

Mode:a; Polarization: Vertical; Modulation Type: GFSK; Channel: High

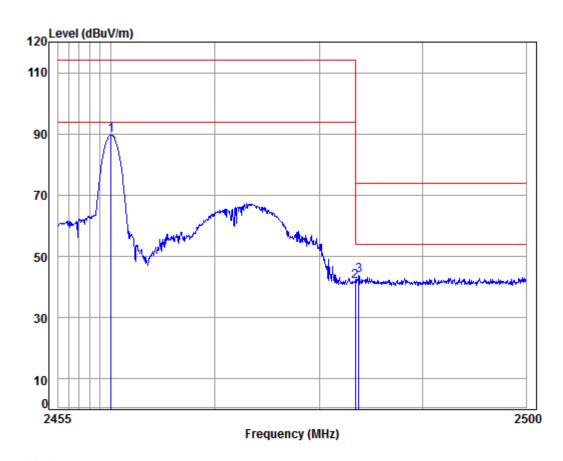

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2460 Band edge

				Preamp					
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.044	5.57	29.28	37.95	92.67	89.57	114.00	-24.43	Peak
2	2483.500	5.60	29.35	37.95	44.88	41.88	74.00	-32.12	Peak
3	2483.841	5.60	29.35	37.95	46.81	43.81	74.00	-30.19	Peak

### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM170900969703

Page: 29 of 41

### 7.4 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength	Limit	Detector	Measurement Distance
i requericy(ivii iz)	(microvolts/meter)	(dBuV/m)	Detector	(meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3



Report No.: SZEM170900969703

Page: 30 of 41


### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 25 °C Humidity: 45 % RH Atmospheric Pressure: 1005 mbar

Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.


### 7.4.2 Test Setup Diagram

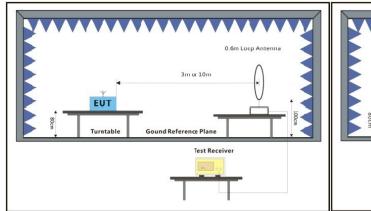



Below 30MHz

30MHz-1GHz



Above 1GHz

#### 7.4.3 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.




Report No.: SZEM170900969703

Page: 31 of 41

30MHz~1GHz Detector:QP

Mode:a; Polarization:Horizontal

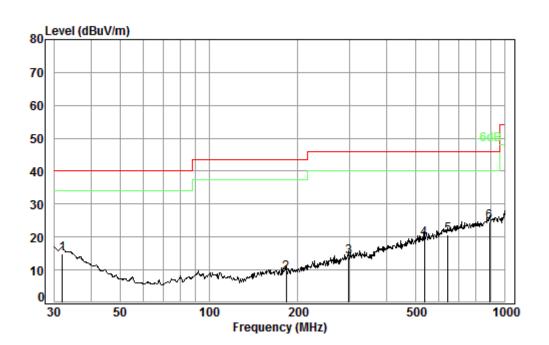

Condition: 3m HORIZONTAL

Job No. : 09697CR

Test mode: a


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	24.17	15.03	40.00	-24.97
2	182.56	1.37	9.95	26.77	24.68	9.23	43.50	-34.27
3	297.22	1.89	13.78	26.41	24.62	13.88	46.00	-32.12
4	535.71	2.64	18.67	27.64	25.92	19.59	46.00	-26.41
5	642.86	2.79	20.57	27.49	24.79	20.66	46.00	-25.34
6 рр	887.61	3.55	23.10	26.85	24.81	24.61	46.00	-21.39



Report No.: SZEM170900969703

Page: 32 of 41

Mode:a; Polarization:Vertical

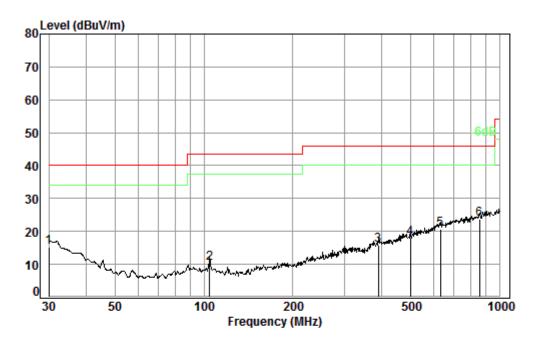

Condition: 3m VERTICAL Job No. : 09697CR

Test mode: a

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	18.70	27.36	23.36	15.30	40.00	-24.70
2	104.54	1.21	8.87	27.17	27.37	10.28	43.50	-33.22
3	389.35	2.17	16.17	27.07	24.65	15.92	46.00	-30.08
4	499.42	2.60	17.80	27.70	25.29	17.99	46.00	-28.01
5	629.48	2.76	20.52	27.50	24.95	20.73	46.00	-25.27
6 pp	854.02	3.42	22.50	26.99	24.77	23.70	46.00	-22.30




Report No.: SZEM170900969703

Page: 33 of 41

Above 1GHz:

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

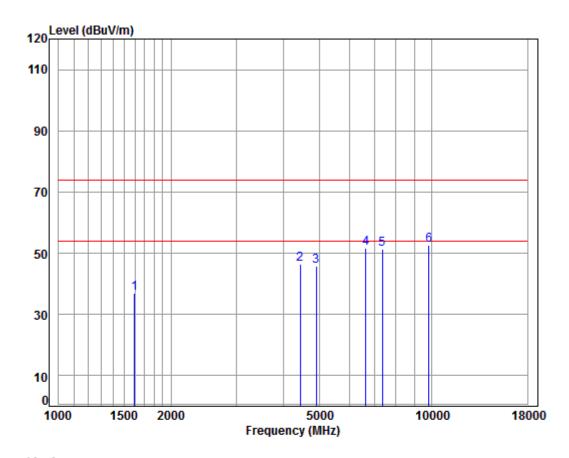

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2450 TX RSE


ou	_	. 245	0 170 10							
			Cable	Ant	Preamp	Read		Limit	0ver	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		1597.181	5.35	26.24	38.03	43.36	36.92	74.00	-37.08	peak
2		4430.628	7.48	33.60	38.23	43.72	46.57	74.00	-27.43	peak
3		4900.000	7.99	34.33	38.45	41.85	45.72	74.00	-28.28	peak
4		6640.542	11.13	35.50	37.64	42.68	51.67	74.00	-22.33	peak
5		7350.000	10.04	36.36	36.97	41.99	51.42	74.00	-22.58	peak
6	pp	9800.000	10.84	37.56	35.00	39.29	52.69	74.00	-21.31	peak



Report No.: SZEM170900969703

Page: 34 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

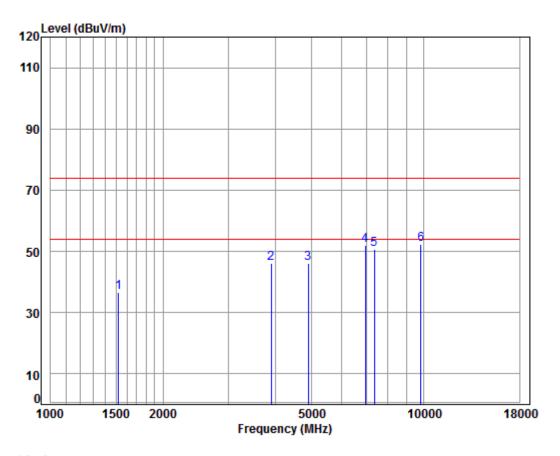

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2450 TX RSE


oue	=	. 245	O IA I	JL.						
			Cable	Ant	Preamp	Read		Limit	0ver	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB	
1		1520.598	5.45	25.89	38.04	43.23	36.53	74.00	-37.47	peak
2		3901.516	6.88	33.34	37.99	44.01	46.24	74.00	-27.76	peak
3		4900.000	7.99	34.33	38.45	42.31	46.18	74.00	-27.82	peak
4		6954.852	10.25	36.38	37.34	42.81	52.10	74.00	-21.90	peak
5		7350.000	10.04	36.36	36.97	41.30	50.73	74.00	-23.27	peak
6	pp	9800.000	10.84	37.56	35.00	38.86	52.26	74.00	-21.74	peak



Report No.: SZEM170900969703

Page: 35 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:middle

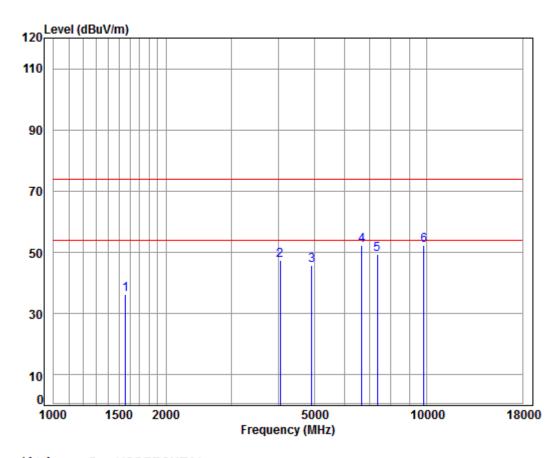

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2455 TX RSE


loue	. 243	2 IV I	JL							
		Cable	Ant	Preamp	Read		Limit	0ver		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	1560.673	5.40	26.08	38.04	42.88	36.32	74.00	-37.68	peak	
2	4039.212	7.03	33.60	38.02	44.75	47.36	74.00	-26.64	peak	
3	4910.000	8.00	34.34	38.46	41.87	45.75	74.00	-28.25	peak	
4	6679.040	11.02	35.61	37.60	43.37	52.40	74.00	-21.60	peak	
5	7365.000	10.03	36.35	36.96	40.07	49.49	74.00	-24.51	peak	
6	pp 9820.000	10.85	37.56	34.99	39.01	52.43	74.00	-21.57	peak	



Report No.: SZEM170900969703

Page: 36 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:middle

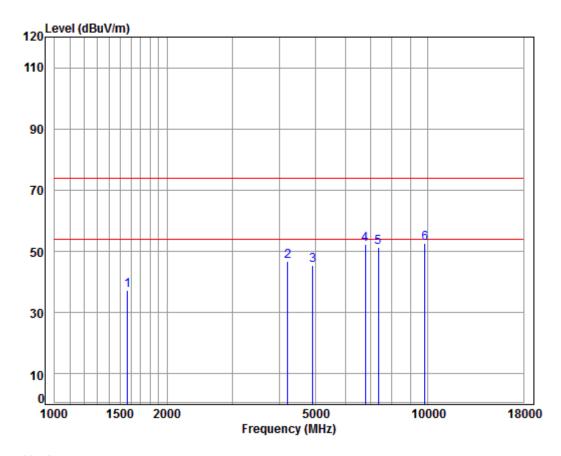

Condition: 3m VERTICAL Job No : 09697CR

Mode : 2455 TX RSE


loue	. 245	) IV I	3E						
		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1569.721	5.39	26.12	38.03	43.88	37.36	74.00	-36.64	peak
2	4206.011	7.23	33.60	38.11	44.06	46.78	74.00	-27.22	peak
3	4910.000	8.00	34.34	38.46	41.45	45.33	74.00	-28.67	peak
4	6795.879	10.69	35.94	37.49	43.24	52.38	74.00	-21.62	peak
5	7365.000	10.03	36.35	36.96	41.94	51.36	74.00	-22.64	peak
6	op 9820.000	10.85	37.56	34.99	39.06	52.48	74.00	-21.52	peak



Report No.: SZEM170900969703

Page: 37 of 41

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

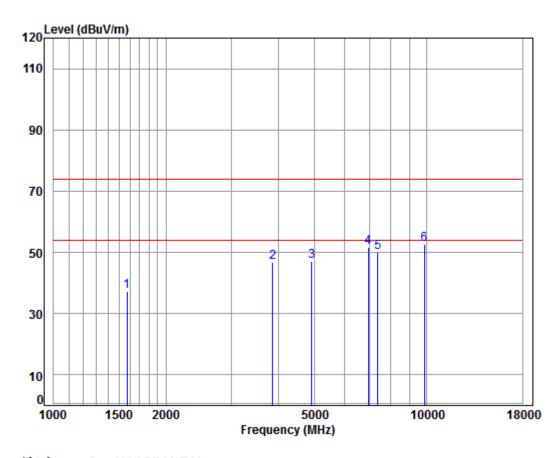

Condition: 3m HORIZONTAL

Job No : 09697CR

Mode : 2460 TX RSE


ou	_	. 240	U IA II	JL						
			Cable	Ant	Preamp	Read		Limit	0ver	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		1574.265	5.38	26.14	38.03	43.90	37.39	74.00	-36.61	peak
2		3856.668	6.84	33.22	37.99	44.75	46.82	74.00	-27.18	peak
3		4920.000	8.01	34.36	38.46	43.09	47.00	74.00	-27.00	peak
4		6954.852	10.25	36.38	37.34	42.34	51.63	74.00	-22.37	peak
5		7380.000	10.03	36.35	36.94	40.66	50.10	74.00	-23.90	peak
6	pp	9840.000	10.86	37.57	34.98	39.09	52.54	74.00	-21.46	peak



Report No.: SZEM170900969703

Page: 38 of 41

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:High

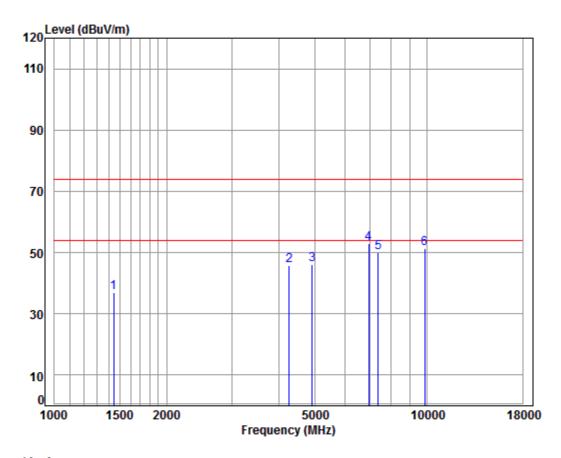

Condition: 3m VERTICAL

Job No : 09697CR

Mode : 2460 TX RSE

oue	. 240	O IV IV	3L						
		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1442 500	E 20	25 57	20 AE	44.02	26 05	74.00	27 15	noole
1	1443.509	5.50	25.5/	30.03	44.05	30.03	74.00	-3/.13	peak
2	4267.237	7.30	33.60	38.14	43.08	45.84	74.00	-28.16	peak
3	4920.000	8.01	34.36	38.46	42.28	46.19	74.00	-27.81	peak
4 p	op 6954.852	10.25	36.38	37.34	43.83	53.12	74.00	-20.88	peak
5	7380.000	10.03	36.35	36.94	40.44	49.88	74.00	-24.12	peak
6	9840.000	10.86	37.57	34.98	37.91	51.36	74.00	-22.64	peak



Report No.: SZEM170900969703

Page: 39 of 41

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.





Report No.: SZEM170900969703

Page: 40 of 41

### 8 Photographs

### 8.1 Radiated Emissions Test Setup

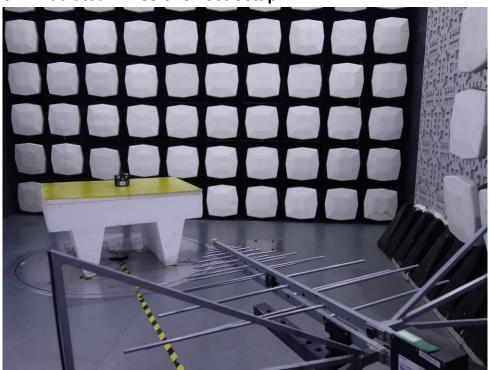

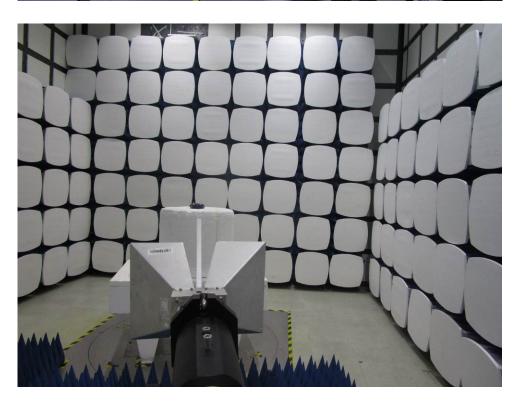

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sg.com/en/Terms-and-Conditions.aspx">http://www.sg.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sg.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sg.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM170900969703

Page: 41 of 41

### 8.2 EUT Constructional Details

Refer to EUT external and internal photos.