


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz

Horizontal

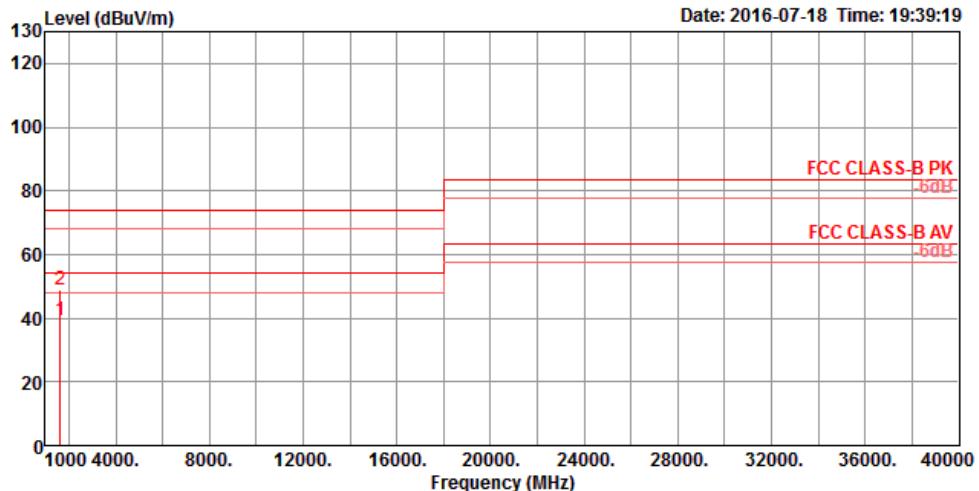

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit									
MHz	dBuV/m	dBuV/m										
1	1623.04	39.38	54.00	-14.62	41.98	4.60	25.62	32.82	110	203	Average	HORIZONTAL
2	1624.88	48.91	74.00	-25.09	51.51	4.60	25.62	32.82	110	203	Peak	HORIZONTAL

Vertical

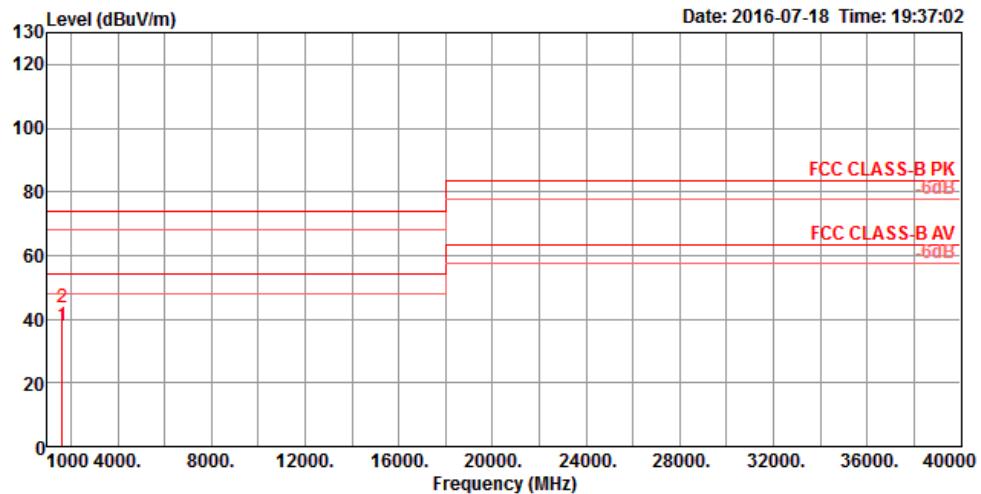

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1624.46	37.87	54.00	-16.13	40.46	4.61	25.62	32.82	107	321	Average VERTICAL
2	1625.11	43.83	74.00	-30.17	46.42	4.61	25.62	32.82	107	321	Peak VERTICAL