



# FCC PART 15D

## **TEST REPORT**

For

# CETIS,INC.

4975 N. 30th Street, Colorado Springs, Colorado, United States 80919

FCC ID: ZTU-9602IPMWD

Report Type: Product Type: Original Report VoIP Phone (Handset) yle. Xu **Test Engineer:** Kyle Xu **Report Number:** RSHA180126001-00B 2018-04-12 **Report Date:** Oscar. Ye Oscar Ye **Reviewed By:** RF Leader Bay Area Compliance Laboratories Corp. (Kunshan) **Prepared By:** No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

# TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
JUSTIFICATION	6
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1307 & §2.1093 - RF EXPOSURE	10
APPLICABLE STANDARD	
TEST RESULT	
FCC§15.203 - ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
ANTENNA CONNECTED CONSTRUCTION	11
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP	
Test Procedure	
CORRECTED FACTOR & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	
FCC § 15.323 (A) - EMISSION BANDWIDTH	16
APPLICABLE STANDARD	16
Test Procedure	
Test Data	16
FCC § 15.319 (A) - PEAK TRANSMIT POWER	19
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC § 15.319 (D) - POWER SPECTRAL DENSITY	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC § 15.323 (D) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND	26
APPLICABLE STANDARD	

Bay Area Comphance Laboratories Corp. (Kunshan)	Report No.: RSHA180126001-00B
TEST PROCEDURE	26
FCC § 15.323 (F) - FREQUENCY STABILITY	36
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	36
FCC§15.323 (C) (E) & §15.319(F) - SPECIFIC REQUIREMENTS F	OR UPCS DEVICE38
APPLICABLE STANDARD	38
TEST PROCEDURE	
TEST DATA	
1) AUTOMATIC DISCONTINUATION OF TRANSMISSION, FCC §15.319(F)	
2) MONITORING TIME, FCC §15.323(c) (1)	
3) LOWER MONITORING THRESHOLD, FCC §15.323(C) (2)	
4) MAXIMUM TRANSMIT PERIOD, FCC §15.323(c) (3)	
5) SYSTEM ACKNOWLEDGEMENT, FCC §15.323(c) (4)	
6) LEAST INTERFERED CHANNEL (LIC), FCC §15.323(c) (5)	
8) Monitoring Bandwidth and Reaction Time, FCC §15.323(c) (7	
9) MONITORING BANDWIDTH AND REACTION TIME, F-CC §15.323(C) (7	
10) Monitoring threshold relaxation, FCC §15.323(c) (9)	
11) DUPLEX CONNECTIONS, FCC §15.323(C) (10)	
12) ALTERNATIVE MONITORING INTERVAL, FCC §15.323(c) (11)	
13) FAIR ACCESS, FCC §15.323(c) (12)	
14) FRAME REPETITION STABILITY FRAME PERIOD AND JITTER, FCC§1	
·	

FCC Part 15D Page 3 of 48

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

Applicant	CETIS,INC.
Tested Model	9602IPMWD
Series Model	9602IPMWD5, 9600IPMWD, 9600IPMWD5
Product Type	VoIP Phone (Handset)
Dimension	195 mm(L)*48 mm(W)*38 mm(H)
Power Supply	DC 3.6V from Battery

Report No.: RSHA180126001-00B

#### **Objective**

This test report was based on the *CETIS,INC*. tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 - 2013.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.207, 15.315, 15.317, 15.319 and 15.323 rules.

#### Related Submittal(s)/Grant(s)

FCC Part 15D Base PUB submissions with FCC ID: ZTU-9602IPMWD.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.17 - 2013, American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15D Page 4 of 48

<sup>\*</sup> Note: The difference between tested model and series model was explained in the declaration letter.

<sup>\*</sup>All measurement and test data in this report was gathered from production sample serial number: 20180126001 (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-01-26)

#### **Measurement Uncertainty**

	Item	Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducte	ed test with spectrum	0.9dB
	30MHz~1GHz	6.11dB
Radiated emission	1GHz~6GHz	4.45dB
Radiated emission	6GHz ∼18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occup	ied Bandwidth	0.5kHz
Temperature		1.0℃
	Humidity	6%

Report No.: RSHA180126001-00B

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FCC Part 15D Page 5 of 48

## **SYSTEM TEST CONFIGURATION**

#### **Justification**

The system was configured to testing mode which is provided by the manufacturer.

#### **EUT Exercise Software**

No Software was used during the test.

## **Equipment Modifications**

No modification was made to the EUT.

## **Support Equipment List and Details**

Manufacturer	Manufacturer Description Model			
TP-LINK	PoE (Input: 120V~60Hz 0.3A Output: 48V 0.35A +4,5pins;-7,8pins)	TL-POE160S	1177643000671	
DELL	DELL Notebook		D65874152	
DELL	Adapter	LA65NS0-00	DF263	

Report No.: RSHA180126001-00B


#### **External I/O Cable**

Cable Description Length (m)		From Port	То	
RJ45 Cable	1.5	EUT	РоЕ	
RJ45 Cable	1.5	EUT	PC	
Power Cable	1.0	Notebook	Adapter	

FCC Part 15D Page 6 of 48

## **Block Diagram of Test Setup**

For Conducted Emissions:

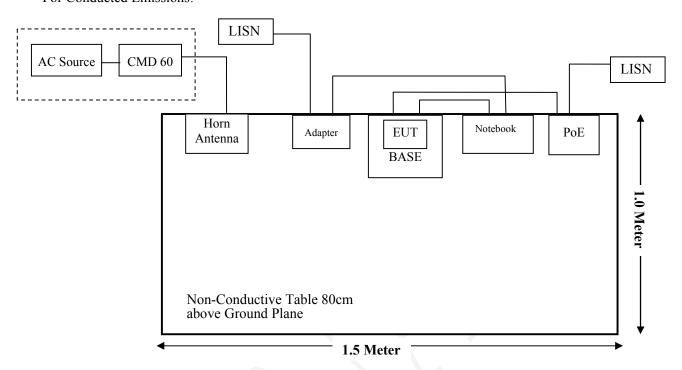

FCC Part 15D Page 7 of 48

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 & §2.1093	RF EXPOSURE	Compliant
§ 15.317, § 15.203	Antenna Requirement	Compliant
§ 15.315, § 15.207	Conducted Emission	Compliant
§ 15.323 (a)	Emission Bandwidth	Compliant
§ 15.319 (c)	Peak Transmit Power	Compliant
§ 15.319 (d)	Power Spectral Density	Compliant
§ 15.323 (d)	Emission Inside and Outside the sub-band	Compliant
§ 15.319 (g)	Radiated Emission	Not Applicable (See Note 1)
§ 15.323 (f)	Frequency Stability Handset	Compliant
§ 15.323 (c)(e) § 15.319 (f)	Specific Requirements for UPCS	Compliant

Report No.: RSHA180126001-00B

Note 1: EUT is compliance with 15.323 (d)

FCC Part 15D Page 8 of 48

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date		
RF Conducted Test							
Rohde & Schwarz	2017-07-22	2018-07-21					
Rohde & Schwarz	Digital Radio Communication Test	CMD60	830553/018	2017-07-22	2018-07-21		
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14		
BACL	Temperature & Humidity Chamber	BTH-150	30023	2017-10-10	2018-10-09		
Rohde & Schwarz SMBV100A Vector Signal Generator		SMBV100A	261558	2017-07-22	2018-07-21		
HONOVA	HONOVA Power Splitter		019411452	2017-07-22	2018-07-21		
CETIS,INC. RF Cable		/	/	Each Time	/		
	C	onducted Emissio	on Test				
Rohde & Schwarz	Digital Radio Communication Test	CMD60	830553/018	2017-07-22	2018-07-21		
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11		
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11		
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-12	2018-11-11		
BACL	Auto test Software	BACL-EMC	CE001	/	/		
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09		
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14		

Report No.: RSHA180126001-00B

FCC Part 15D Page 9 of 48

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 & §2.1093 - RF EXPOSURE

## **Applicable Standard**

FCC§1.1307 and §2.1093.

## **Test Result**

 $Compliance, please \ refer \ to \ the \ SAR \ report: \ RSH180523050-20A.$ 

Report No.: RSHA180126001-00B

FCC Part 15D Page 10 of 48

## FCC§15.203 - ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSHA180126001-00B

#### **Antenna Connected Construction**

The EUT has Monopole antenna arrangement which was permanently attached and the antenna gain is 0 dBi; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC Part 15D Page 11 of 48


## FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC§15.315, an unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.

Report No.: RSHA180126001-00B

#### **EUT Setup**

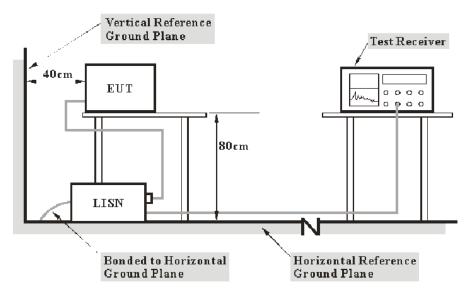

Note: 1. Support units were connected to second LISN.

Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.17-2013 measurement procedure. The specification used was with the FCC 15.315 and FCC 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

#### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W		
150 kHz – 30 MHz	9 kHz		

FCC Part 15D Page 12 of 48

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Report No.: RSHA180126001-00B

Corrected Factor = LISN VDF + Cable Loss

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit - Reading

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-06.

EUT operation mode: Transmitting

FCC Part 15D Page 13 of 48

## AC 120V/60 Hz, Line

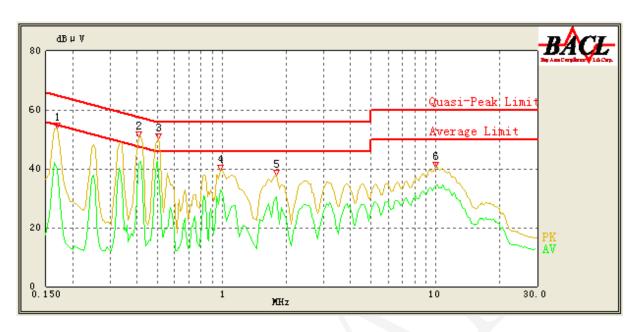


Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.170	53.95	QP	9.000	L1	16.04	65.43	11.48	Compliance
0.170	40.05	AV	9.000	L1	16.04	55.43	15.38	Compliance
0.410	50.94	QP	9.000	L1	16.06	58.57	7.63	Compliance
0.410	41.85	AV	9.000	L1	16.06	48.57	6.72	Compliance
0.505	50.06	QP	9.000	L1	16.08	56.00	5.94	Compliance
0.500	42.42	AV	9.000	L1	16.08	46.00	3.58	Compliance
0.985	39.62	QP	9.000	L1	15.88	56.00	16.38	Compliance
0.995	32.47	AV	9.000	L1	15.88	46.00	13.53	Compliance
1.800	37.69	QP	9.000	L1	15.86	56.00	18.31	Compliance
1.800	30.44	AV	9.000	L1	15.86	46.00	15.56	Compliance
10.050	40.41	QP	9.000	L1	16.06	60.00	19.59	Compliance
10.050	34.18	AV	9.000	L1	16.06	50.00	15.82	Compliance

FCC Part 15D Page 14 of 48

## AC 120V/60 Hz, Neutral

Report No.: RSHA180126001-00B

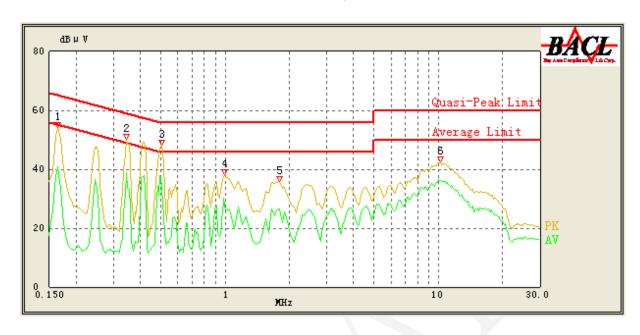

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.165	54.23	QP	9.000	N	16.06	65.57	11.34	Compliance
0.165	40.92	AV	9.000	N	16.06	55.57	14.65	Compliance
0.345	50.29	QP	9.000	N	16.08	60.43	10.14	Compliance
0.345	38.68	AV	9.000	N	16.08	50.43	11.75	Compliance
0.505	48.04	QP	9.000	N	16.11	56.00	7.96	Compliance
0.500	37.65	AV	9.000	N	16.11	46.00	8.35	Compliance
0.990	38.02	QP	9.000	N	15.94	56.00	17.98	Compliance
0.985	30.12	AV	9.000	N	15.94	46.00	15.88	Compliance
1.800	35.93	QP	9.000	N	15.92	56.00	20.07	Compliance
1.800	26.64	AV	9.000	N	15.92	46.00	19.36	Compliance
10.200	42.41	QP	9.000	N	15.99	60.00	17.59	Compliance
10.150	36.33	AV	9.000	N	15.99	50.00	13.67	Compliance

#### Note:

1) Corrected Factor = LISN VDF + Cable Loss

2) Margin = Limit – Reading

FCC Part 15D Page 15 of 48

## FCC § 15.323 (a) - EMISSION BANDWIDTH


#### **Applicable Standard**

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less then 2.5 MHz and greater than 50 kHz.

Report No.: RSHA180126001-00B

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

Test Setup 1:



The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

Resolution bandwidth

Video bandwidth

Number of sweeps

Detection mode

1.0% of the emission bandwidth (as close as possible)

>3 times the resolution bandwidth

sufficient to stability the trace

peak detection with maximum hold

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-07.


FCC Part 15D Page 16 of 48

Test mode: Transmitting

Channel	Center Frequency (MHz)	26 dB Emission Bandwidth (MHz)	Limit
Low	1921.536	1.459	50 kHz < EBW < 2.5 MHz
Middle	1924.992	1.459	50 kHz < EBW < 2.5 MHz
High	1928.448	1.459	50 kHz < EBW < 2.5 MHz

Report No.: RSHA180126001-00B


#### **Low Channel**

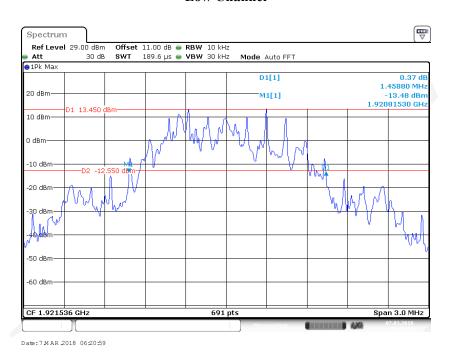

FCC Part 15D Page 17 of 48


#### **Middle Channel**

Report No.: RSHA180126001-00B

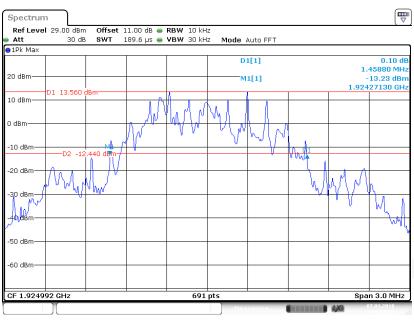

Date: 7 M AR 2018 06:23:10

#### **High Channel**

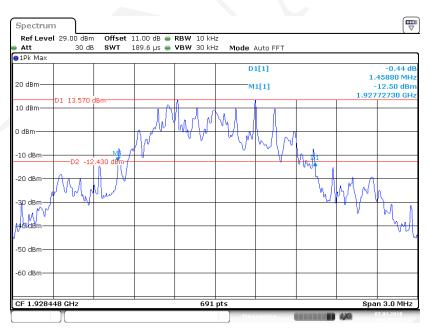

Date: 7 M AR 2018 06:15:37

FCC Part 15D Page 18 of 48

## FCC § 15.319 (a) - PEAK TRANSMIT POWER

#### **Applicable Standard**

The peak power output as measured over an interval of time equal to the frame rate or transmission burst of the device under all conditions of modulation. Usually this parameter is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used[47 CFR 15, subpart D, 15.303].

Report No.: RSHA180126001-00B

The peak transmit power is according to ANSI C63.17-2013 §6.1.2

Per FCC Part15.319 (c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Per FCC Part15.319 (e), the peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit: Peak Transmit Power Limit =  $100\mu W \times (EBW)_{1/2}$ 

EBW is the transmit emission bandwidth in Hz determined in the other test item:

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	≥ Emission bandwidth
Video bandwidth	≥RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa


The testing was performed by Kyle Xu on 2018-03-07.

Test mode: Transmitting

FCC Part 15D Page 19 of 48

Channel	Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)	
Low	1921.536	19.22	20.82	
Middle	1924.992	19.35	20.82	
High 1928.448 19.19 20.82				
EBW $_{\text{Low channel}}$ = 1459000 Hz, EBW $_{\text{Middle channel}}$ = 1459000 Hz, EBW $_{\text{High channel}}$ = 1459000 Hz Peak Transmit Power Limit = 100(EBW) $^{1/2}$ $\mu$ W				

#### **Low Channel**

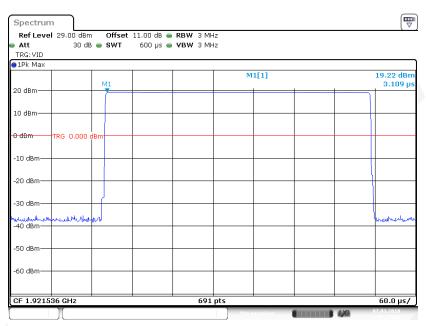


Date: 7 M AR 2018 06:29:02

FCC Part 15D Page 20 of 48


#### **Middle Channel**

Report No.: RSHA180126001-00B

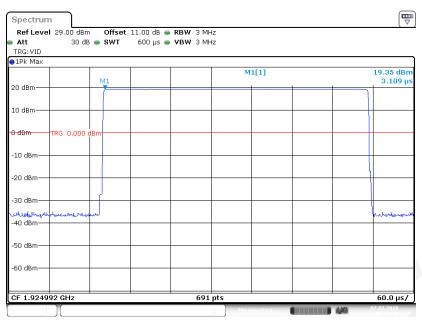

Date: 7 M AR 2018 06:25:56

#### **High Channel**

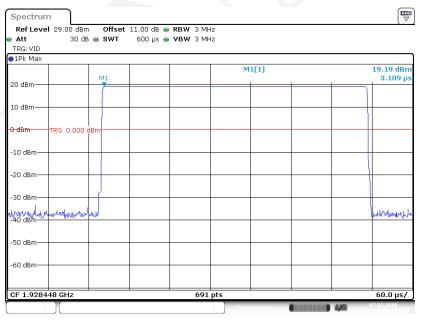

Date: 7 M AR 2018 0628:28

FCC Part 15D Page 21 of 48

## FCC § 15.319 (d) - POWER SPECTRAL DENSITY

#### **Applicable Standard**

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

Report No.: RSHA180126001-00B

The power spectral density is measured in accordance with ANSI C63.17.2013 Clause 6.1.5.

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz	
Video bandwidth	$\geq$ 3 × RBW	
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)	
Center frequency	Spectral peak as determined in 6.1.3	
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 µs). For continuous signals, 20 ms.	
Amplitude scale	Log power	
Detection	Sample detection and averaged for a minimum of 100 sweeps	
Trigger	External or internal	

#### **Test Data**

## **Environmental Conditions**

Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-07.


Test mode: Transmitting

Channel	Frequency	Power Spectral Density		Limit	Result
Спаппеі	(MHz)	(dBm/3kHz)	(mW/3kHz)	(mW/3kHz)	Result
Low	1921.536	-0.87	0.82	3	Pass
Middle	1924.992	-0.79	0.83	3	Pass
High	1928.448	-1.02	0.79	3	Pass


FCC Part 15D Page 22 of 48

#### **Low Channel**

Report No.: RSHA180126001-00B

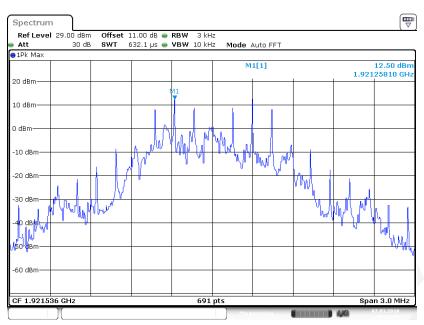

Date: 7 M AR 2018 06:31:19

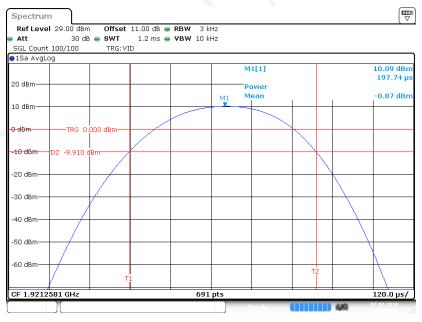


Date: 7 M AR 2018 06:40:13


FCC Part 15D Page 23 of 48

#### **Middle Channel**

Report No.: RSHA180126001-00B

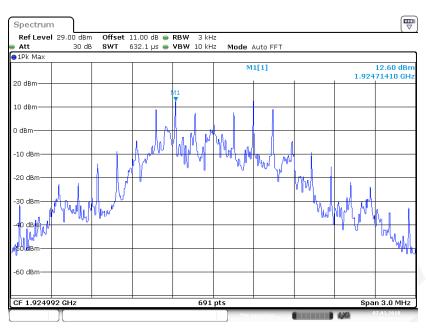

Date: 7 M AR 2018 08:00:02

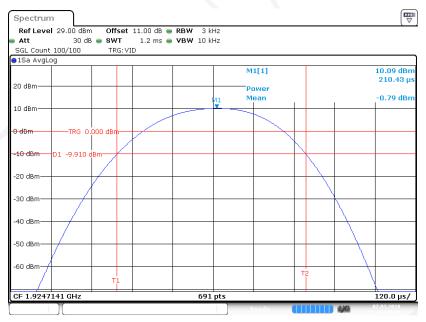


Date: 7 M AR 2018 08:07:01


FCC Part 15D Page 24 of 48

#### **High Channel**

Report No.: RSHA180126001-00B

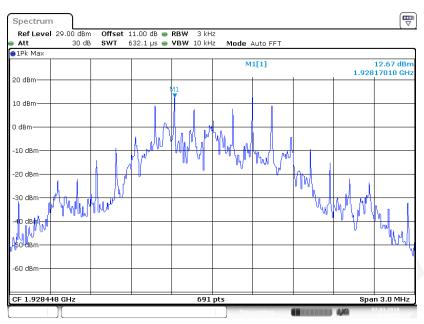

Date: 7 M AR 2018 08:08:57

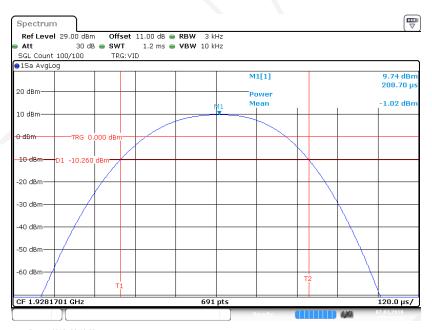

Date: 7 M AR 2018 08:12:58

FCC Part 15D Page 25 of 48

## FCC § 15.323 (d) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND

Report No.: RSHA180126001-00B

#### **Applicable Standard**

Emissions inside the sub-band must comply with the following emission mask:

- 1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
- 2. In the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator:
- 3. In the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5 dBm) as follows:

- 1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
- 2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
- 3. 60 dB at 2.5 MHz or greater above or below the sub-band.

#### **Test Procedure**

According to ANSI C63.17.2013 Clause 6.1.6.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-07.

FCC Part 15D Page 26 of 48


#### Low Channel (Unwanted Emission inside the Sub-band)

Report No.: RSHA180126001-00B

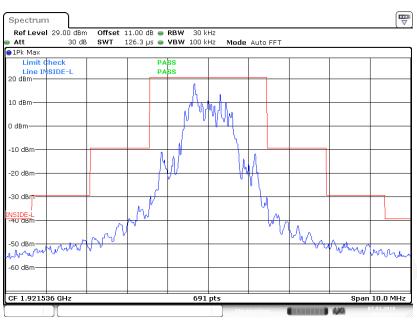

Date: 7 M AR 2018 09:34:03

#### Middle Channel (Unwanted Emission inside the Sub-band)

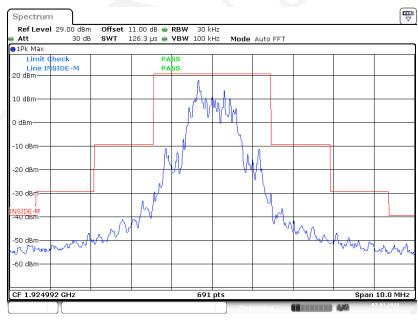


Date: 7 M AR 2018 09:36:15

FCC Part 15D Page 27 of 48


#### **High Channel (Unwanted Emission inside the Sub-band)**

Report No.: RSHA180126001-00B

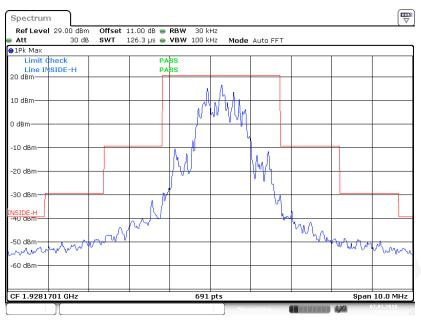


Date: 7 M AR 2018 09:30:05

#### Low Channel (Unwanted Emission outside the Sub-band)

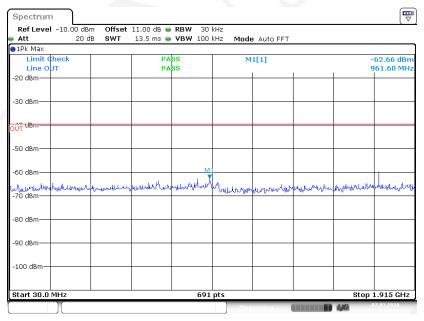


Date: 7 M AR 2018 09:55:14

FCC Part 15D Page 28 of 48

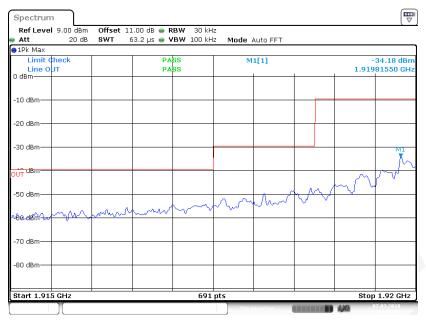


Date: 7 M AR 2018 09:56:34

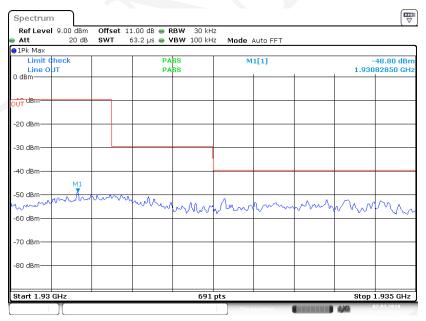


Date: 7 M AR 2018 09:57:22

FCC Part 15D Page 29 of 48

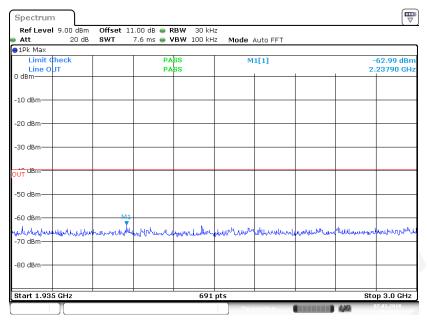

Date: 7 M AR 2018 09:58:24

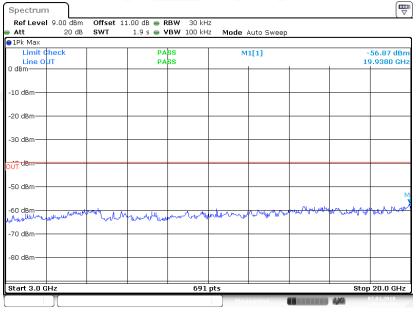


Date: 7 M AR 2018 09:59:16


FCC Part 15D Page 30 of 48

#### Middle Channel (Unwanted Emission outside the Sub-band)

Report No.: RSHA180126001-00B

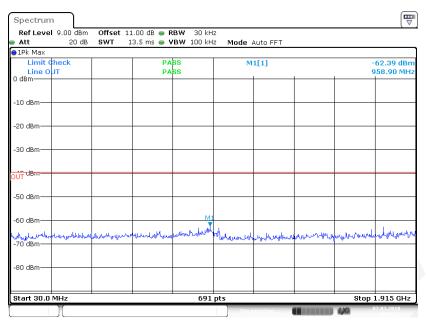


Date: 7 M AR 2018 10:00:22

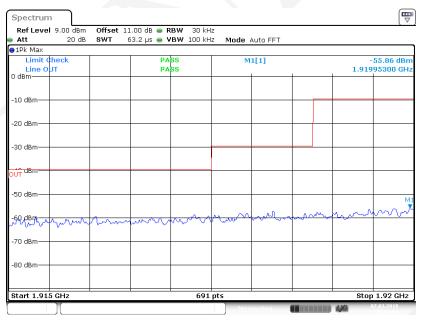

Date: 7 M AR 2018 10:01:03


FCC Part 15D Page 31 of 48

Date: 7 M AR 2018 10:01:48

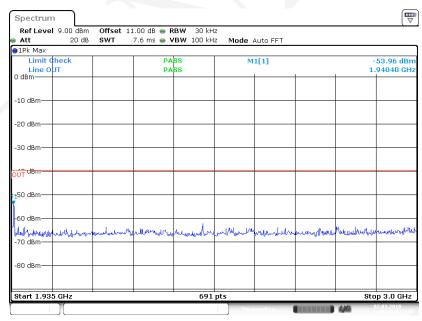


Date: 7 M AR 2018 10:02:54

FCC Part 15D Page 32 of 48

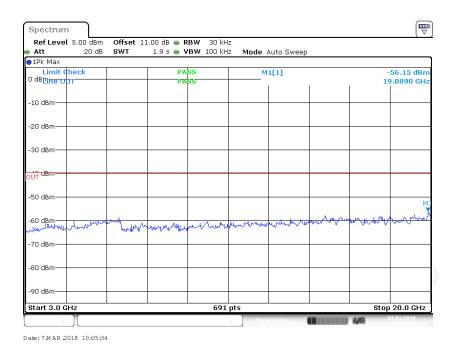


**High Channel (Unwanted Emission outside the Sub-band)** 

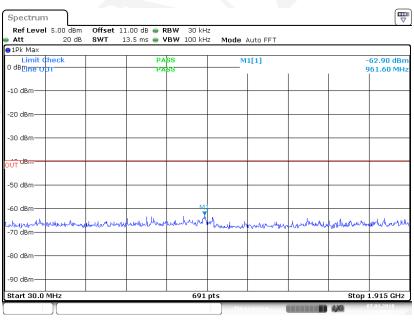

Date: 7 M AR 2018 10:08:57


FCC Part 15D Page 33 of 48

Date: 7 M AR 2018 10:09:48

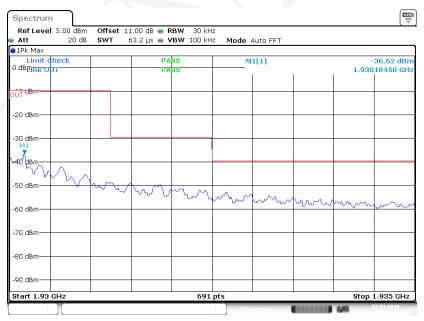


Date: 7 M AR 2018 10:10:29

FCC Part 15D Page 34 of 48

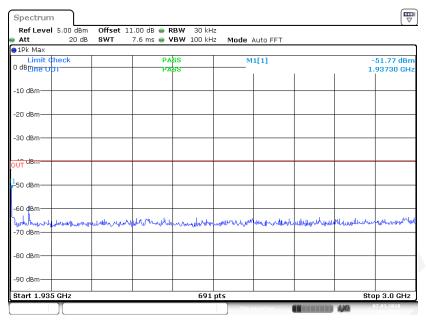

Date: 7 M AR 2018 10:12:29

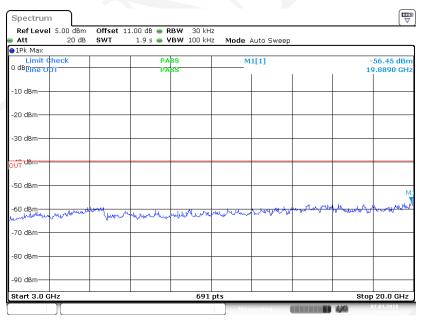

Date: 7 M AR 2018 10:07:55

FCC Part 15D Page 35 of 48

## FCC § 15.323 (f) - FREQUENCY STABILITY

#### **Applicable Standard**

Per  $\S15.323(f)$ , the frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20^{\circ}$ C to  $+50^{\circ}$ C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage

Report No.: RSHA180126001-00B

#### **Test Procedure**

This procedure should be carried out for each of the following test cases:

Temperature	Supply Voltage
20℃	85-115% or new batteries
-20℃	Normal
+50°C	Normal

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

Using the mean carrier frequency at  $20^{\circ}\text{C}$  and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within  $\pm 10$  ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically  $20^{\circ}\text{C}$ ) at the two extreme supply voltages. This test does not apply to a EUT that is capable only of operating from a battery.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-07.

Test Result: Compliant.

FCC Part 15D Page 36 of 48

Temperature (℃)	Voltage (V <sub>DC</sub> )	Frequency (MHz)	Measured Frequency Offset(kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
+20	3.6	1924.992	10	5.195	±10
-20	3.6	1924.992	9	4.675	±10
+50	3.6	1924.992	9	4.675	±10

Report No.: RSHA180126001-00B

FCC Part 15D Page 37 of 48

# FCC§15.323 (c) (e) & §15.319(f) - SPECIFIC REQUIREMENTS FOR UPCS DEVICE


Report No.: RSHA180126001-00B

# **Applicable Standard**

FCC§15.323(c) (e) & §15.319(f) Specific Requirements for UPCS device. ANSI C63.17 2013 §6.2 Frequency and time stability and §7.Monitoring tests and §8.Time and spectrum window access procedure.

#### **Test Procedure**

Measurement method according to ANSI C63.17 2013 Test configuration as below

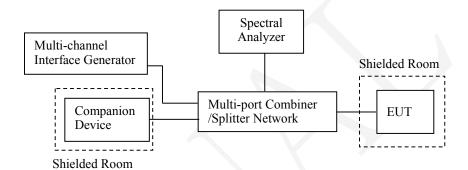

# **Test Data**

# **Environmental Conditions**

Temperature:	24.1 ℃
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa

The testing was performed by Kyle Xu on 2018-03-08.

Test Result: Compliant

# 1) Automatic Discontinuation of Transmission, FCC §15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

FCC Part 15D Page 38 of 48

#### Test result:

Not applicable for handset.

# 2) Monitoring Time, FCC §15.323(c) (1)

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

Report No.: RSHA180126001-00B

# **Test procedure:**

Measurement method is in according to ANSI C63.17 2013 clause 7.3.3.

RF signal generators apply uniform CW interference on all system carriers except two carriers (designated fi and f2), each at level TL + Um. EUT can only transmit on these two carriers.

#### **Test result:**

This requirement is covered by the results of Least Interfered Channel (LIC).

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f1 at level TL+UM+20dB and no interference on f <sub>2</sub> . Initiate transmission and verify the transmission only on f <sub>2</sub> . Then terminate it.	EUT transmits on f2	Pass
b) Apply the interference on f2 at level TL+UM+20dB and immediately remove all interference from $f_1$ . The EUT should immediately attempt transmission on $f_1$ (but at least 20 ms after the interference on $f_2$ is applied), verify the transmission only on f1.	EUT transmission fl	Pass

# 3) Lower Monitoring Threshold, FCC §15.323(c) (2)

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

#### **Test procedure:**

Measurement method according to ANSI C63.17 2013 clause 7.3.1

#### **Test result:**

Not applicable because the EUT has more 40 defined duplex system access channels and meet the provision of the Least Interfered Channel (LIC) based on FCC §15.323(c) (5).

FCC Part 15D Page 39 of 48

# 4) Maximum Transmit Period, FCC §15.323(c) (3)

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Report No.: RSHA180126001-00B

#### **Test procedure:**

Measurement method according to ANSI C63.17 2013 clause 8.2.2

The test procedure is as follows:

- a) Activate the EUT and initiate a communication channel with the companion device, and start a timer or frame counter.
- b) The centre frequency of spectrum analyzer was set to the carrier frequency and SPAN was set to ZERO. The spectrum analyzer was used to monitor the time and spectrum window of the communication channel.
- c) Stop the timer at the end of the EUT transmission on the current time and frequency window (measure the time until the EUT changes to a different slot).

#### Test result:

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	19600	28,800	Pass
Second	19600	28,800	Pass

# 5) System Acknowledgement, FCC §15.323(c) (4)

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

# **Test procedure:**

Measurement method according to ANSI C63.17 2013 clause 8.2.1

During testing initial transmission without acknowledgement, the signal from the EUT to the companion device is blocked by the circulator.

The test of the transmission time after loss of acknowledgements is performed by cutting off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

FCC Part 15D Page 40 of 48

#### **Test result:**

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.12	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	0.54	30	Pass

Report No.: RSHA180126001-00B

Note: N/A=Not Applicable

# 6) Least Interfered Channel (LIC), FCC §15.323(c) (5)

If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.

A device utilizing the provisions of this paragraph (5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.

The power measurement resolution bandwidth for this comparison must be accurate to within 6 dB. No device or group of cooperating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold:  $T_L = -174 + 10Log_{10}B + M_L + P_{MAX}-P_{EUT}(dBm)$ 

Where: B=Emission bandwidth (Hz)

 $M_L = dB$  the threshold may exceed thermal noise (30 for  $T_L$ )

 $P_{MAX} = 5Log_{10}B-10(dBm)$ 

PEUT = Transmitted power (dBm)

## Calculated thresholds:

Monitor Threshold	B (MHz)	MU (dB)	P <sub>MAX</sub> (dBm)	P <sub>EUT</sub> (dBm)	Threshold (dBm)
Lower Threshold	1.4588	30	20.82	19.35	-80.89

Note: The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels

## **Test procedure:**

Measurement method according to ANSI C63.17 clause 7.3.2, 7.3.3

FCC Part 15D Page 41 of 48

## C63.17 clause 7.3.2, LIC procedure test:

- a) Allow EUT transmission on only two carrier frequencies, which will be designated f1 and f2.
- b) Apply interference to the EUT on f1 at a level of TL + UM + 7 dB and on f2 at a level of TL + UM. Initiate transmission. The EUT should transmit on f2. Terminate the connection. Repeat five times. If the EUT transmits once on f1, the test failed.

Report No.: RSHA180126001-00B

- c) Apply interference to the EUT on f1 at a level of TL + UM and on f2 at a level of TL + UM + 7 dB. Initiate transmission. The EUT should transmit on f1. Terminate the connection. Repeat five times. If the EUT transmits once on f2, the test failed.
- d) Apply interference to the EUT on f1 at a level of TL + UM + 1 dB and on f2 at a level of TL + UM 6 dB. Initiate transmission. If the EUT transmits on f2, terminate the connection. Repeat five times. If the EUT transmits once on f1, the test failed.
- e) Apply interference to the EUT on f1 at a level of TL + UM 6 dB and on f2 at a level of TL + UM + 1 dB. Initiate transmission. If the EUT transmits on f1, terminate the connection. Repeat five times. If the EUT transmits once on f2, the test failed.

# C63.17 clause 7.3.3, Selected channel confirmation:

- a) Allow EUT transmission on only two carrier frequencies, which will be designated f1 and f2. This limitation to carriers f1 and f2 is performed preferably by administration commands for the EUT, or alternatively by applying by a multicarrier interference generator uniform interference on all system carriers except f1 and f2, at a level of TL + UM + 20 dB in-band per carrier. Set the interference level to the EUT on f1 to a level of TL + UM + 20dB, and let there be no interference applied on f2.
- b) Initiate transmission and verify that the EUT transmits on f2. If a connection was made, terminate it.
- c) Apply interference on f2 at a level of TL + UM + 20 dB in-band, and immediately remove all interference from f1 and immediately (but not sooner than 20 ms after the interference on f2 is applied) cause the EUT to attempt transmission. The EUT should now transmit on f1, if it transmits.
- d) If the EUT transmits on f2, it fails.

## **Test result:**

# 1) LIC procedure test:

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f1 at level TL+UM+7dB and the		
interference on f <sub>2</sub> at level TL+UM. Initiate transmission and verify	EUT transmits on f <sub>2</sub>	Pass
the transmission only on $f_2$ . Repeat 5 times.		
b) Apply the interference on f1 at level TL+UM and the interference		
on f <sub>2</sub> at level TL+UM+7dB. Initiate transmission and verify the	EUT transmits on f <sub>1</sub>	Pass
transmission only on $f_1$ . Repeat 5 times.		
c) Apply the interference on $f_1$ at level TL+UM+1dB the interference		
on f <sub>2</sub> at level TL+UM-6dB. Initiate transmission and verify the	EUT transmits on f <sub>2</sub>	Pass
transmission only on f <sub>2</sub> . Repeat 5 times.		
d) Apply the interference on f <sub>1</sub> at level TL+UM-6dB and the		
interference on f <sub>2</sub> at level TL+UM+1dB. Initiate transmission and	EUT transmits on f <sub>1</sub>	Pass
verify the transmission only on $f_1$ . Repeat 5 times.		

FCC Part 15D Page 42 of 48

#### 2) Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
a) Apply the interference on f1 at level TU+UM and no interference on f2. Initiate transmission and verify the transmission only on f2.	EUT transmits on f <sub>2</sub>	Pass
Then terminate it. b) Apply the interference on f <sub>2</sub> at level TL+UM and immediately		
remove all interference from $f1$ . The EUT should immediately attempt transmission on $f1$ (but at least 20 ms after the interference on $f2$ is applied), verify the transmission only on $f_1$ .	EUT transmission $\mathbf{f}_1$	Pass

Report No.: RSHA180126001-00B

# 7) Random waiting, FCC §15.323(c) (6)

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

# **Test procedure:**

This test is for EUTs that transmit control and signaling channels and that use the provisions of FCC §15.323(c)(6), thus to verify that the EUT (if in deferral) waits for a channel to go clear, then implements a 10 ms to 150 ms holdoff prior to using the channel. FCC §15.323(c)(6) is not restrictive for EUTs that use the LIC and offer 20 or more duplex communications channels, as a combined time and spectrum window cannot become unavailable as there is no threshold limit. Test method according to ANSI C63.17 2013 clause 8.1.3

- a) Restrict operation of the EUT to a single carrier designated *f*1. For TDMA system, further restrict EUT transmission to a single timeslot of the usable timeslots available in the TDMA frame structure and synchronize the interference so as to occur centered within the timeslot.
- b) Activate the EUT with no interference present. The EUT must transmit on f1. Then apply CW interference on f1. The interference level shall be at TL + UM as appropriate for EUTs that do or do not meet the requirements for using the upper threshold. The EUT must stop transmitting within 30 s.
- c) Cancel the interference. Measure the time interval between the end of the interference transmission and the beginning of transmission by the EUT.
- d) Repeat step b) and step c) 100 times. If the measured time intervals vary uniformly between 10 ms and 150 ms, the EUT passes the test.

Note: This is Not Applicable

FCC Part 15D Page 43 of 48

# 8) Monitoring Bandwidth and Reaction Time, FCC §15.323(c) (7)

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than 50xSQRT (1.25/emission bandwidth in MHz) microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds

Report No.: RSHA180126001-00B

# **Test procedure:**

Measurement method according to ANSI C63.17 2013 clause 7.5

- a) Restrict the EUT to a single transmit carrier frequency f1, and verify that the EUT can establish a connection with no interference applied on f1.
- b) Apply time-synchronized, pulsed interference on f1 at the pulsed level TL + UM, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of 50  $\mu$ s and 50  $\sqrt{1.25/B}$   $\mu$ s, where B is the emission bandwidth of the EUT in megahertz.
- c) With the channel interference level 6 dB above TL + UM, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of 35  $\mu$ s and 35  $\sqrt{1.25}$  /  $B\mu$ s, where B is the emission bandwidth of the EUT in megahertz.

Test Equation (μs)	B(bandwidth) (MHz)	Pulse width (µs)	Limit (μs)	Result
50 (1.25/B) <sup>1/2</sup>	1.4588	46.28	50	Pass
35 (1.25/B) <sup>1/2</sup>	1.4588	32.40	35	Pass

#### **Test result:**

# 1) Monitoring Bandwidth:

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission

#### 2) Reaction Time Test:

No.	Interference Pulse width (μs)	Reaction of EUT	Result
1	50μs with level TL+UM	No transmission	Pass
2	35μs with level TL+UM+6dB	No transmission	Pass

FCC Part 15D Page 44 of 48

# 9) Monitoring Antenna, FCC §15.323(c) (8)

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

Report No.: RSHA180126001-00B

# **Test procedure:**

Measurement method according to ANSI C63.17 2013 paragraph 4

#### **Test result:**

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

# 10) Monitoring threshold relaxation, FCC §15.323(c) (9)

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

## **Test procedure:**

Measurement method according to ANSI C63.17 2013 paragraph 4

#### **Test result:**

This requirement is covered by the results of Least Interfered Channel (LIC) based on FCC §15.323(c) (5).

# 11) Duplex Connections, FCC §15.323(c) (10)

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

FCC Part 15D Page 45 of 48

#### **Test procedure:**

This test validates proper operation of an EUT that operates according to the provisions of FCC §15.323(c) (10) using a check of both transmit and receive channels on one end of the link to qualify both ends of the link for transmissions. Test method according to ANSI C63.17 clause 8.3.2 Validation of dual access criteria check for EUTs that implement the upper threshold

Report No.: RSHA180126001-00B

- a) Adjust the path loss between the EUT and its companion device such that the received signal to the EUT from the companion device is at least 40 dB above TL + UM.
- b) Restrict the EUT and its companion device to operation at a single carrier fl for TDMA systems and on fl and fl and corresponding duplex carriers for FDMA systems. Verify that the EUT and its companion device can establish a connection on a time/spectrum window on the enabled carrier(s). Terminate the connection.
- c) Apply interference to the EUT on the EUT's *transmit* time/spectrum windows at TL + UM per carrier on all time/spectrum windows except for one, which has interference at least 10 dB below TL. Adjust the interference to the EUT on its *receive* time/spectrum windows such that a single time/spectrum window has interference at least 10 dB below TL, and the interference on the other time/spectrum windows is at TL + UM + 7 dB. The interference to the companion device should be at least 10 dB below TL on all active time/spectrum windows. The interference-free *receive* time/spectrum window must not be the duplex mate of the interference-free *transmit* time/spectrum window.
- d) Cause the EUT to attempt to establish a connection. The connection should be made on the interference free *receive* time/spectrum window and its duplex mate. Otherwise, the EUT fails the test.
- e) If a connection exists, terminate it. Reduce the interference on the EUT's *receive* time/spectrum windows to a level of TL + UM per carrier on all time/spectrum windows except for one, which has interference at least 10 dB below TL. Raise the interference on the EUT's *transmit* time/spectrum windows to a level of TL + UM + 7 dB, maintaining one time/spectrum window with interference at least 10 dB below TL. The interference to the companion device should be at least 10 dB below TL on all active time/spectrum windows. Again, the interference-free *transmit* and *receive* time/spectrum windows should not constitute a duplex pair if the system designates a specific duplex pairing for time/spectrum windows.
- f) Cause the EUT to attempt to establish a connection. The connection should be made on the interference-free *transmit* time/spectrum window and its duplex mate. Otherwise, the system fails the test.

#### Test result:

Interference (Refer to ANSI C63.17 § 8.3.2)	Reaction of EUT	Results
a) Only a single carrier f1 for EUT TDMA systems and on f1 and f2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) All Tx windows with level TL+UM except one & Rx windows with level TL+UM+7dB except one, which are not the duplex mate.	Connected on the target Rx window and its duplex mate.	Pass
c) All Tx windows with level TL+UM+7dB except one & Rx windows with level TL+UM except one, which are not duplex mate.	Connected on the target Tx window and its duplex mate.	Pass
d) All Tx & Rx windows with level TU+UM, except one for Tx window & one for Rx window, which are not duplex mate.	No connection possible	Pass

FCC Part 15D Page 46 of 48

# 12) Alternative monitoring interval, FCC §15.323(c) (11)

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

Report No.: RSHA180126001-00B

## **Test procedure:**

This test validates the ability of the EUT to distinguish between same-system and other-system interference for purposes of satisfying the requirement of 47CFR15.323(c) (11). Test method according to ANSI C63.17 2013 clause 8.4

- a) Adjust the path loss between the EUT and its companion device such that the received signal to the EUT from the companion device is at least 30 dB above *TL*.
- b) Restrict the EUT and its companion device to operation at a single carrier f1 for TDMA systems and on f1 and f2 and corresponding duplex carriers for FDMA systems. Verify that the EUT and its companion device can establish a connection.
- c) Apply interference at TL + UM per carrier to the EUT on all *transmit* time/spectrum windows on the enabled carrier(s). The interference must use the same physical layer parameters (modulation, frame format, etc.) as the EUT transmissions, but with a system identifier different from that used by the EUT and the companion device. Ensure that the interference level at the companion device is at least 10 dB below TL. Apply no interference to the *receive* time/spectrum windows on the enabled carriers.
- d) Cause the EUT to attempt to establish a connection. If a connection is established, the test fails.

## **Test result:**

Not appropriate, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

# 13) Fair Access, FCC §15.323(c) (12)

The provisions of FCC §15.323 (c) (10) or (11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

# **Test result:**

The manufacturer declares that this device does not use any mechanisms as provided by FCC §15.323(c)(10) or (11) to extend the range of spectrum occupied over space or time for the purpose of denying fail access to spectrum to other device.

FCC Part 15D Page 47 of 48

# 14) Frame Repetition Stability Frame Period and Jitter, FCC§15.323 (e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (timerelated, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.

Report No.: RSHA180126001-00B

Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

#### **Test procedure:**

Measurement method according to ANSI C63.17 2013 clause 6.2.2, 6.2.3

#### **Test result:**

Frame Period and Jitter:

May nos littor	May nog litton	Frame period	Lin	mit
Max. pos. Jitter (us)	Max. neg. Jitter (us)	Frame period (ms)	Frame Period (ms)	Jitter (μs)
0.08	-0.06	10.00	20 or10/X	0.24

Note: X is a positive whole number.

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15D Page 48 of 48