

KMW Communications

800MHz iDEN RRH

Report #: KMWC0036.1 Rev 1



Report Prepared By Northwest EMC Inc.

NORTHWEST EMC - (888) 364-2378 - www.nwemc.com

California – Minnesota – Oregon – New York – Washington



CERTIFICATE OF TEST

Last Date of Test: July 26, 2013 KMW Communications Model: 800MHz iDEN RRH

Emissions

Test Description	Specification	Test Method	Pass/Fail
Conducted Output Power	FCC 90.635:2011	ANSI/TIA/EIA-603-C-2004	Pass
Occupied Bandwidth*	FCC 90.691:2011	ANSI/TIA/EIA-603-C-2004	Pass
Emission Mask*	FCC 90.691:2011	ANSI/TIA/EIA-603-C-2004	Pass
Spurious Conducted Emissions *	FCC 90.691:2011	ANSI/TIA/EIA-603-C-2004	Pass
Spurious Radiated Emissions	FCC 90.691:2012	ANSI/TIA/EIA-603-C-2004	Pass
Frequency Stability	FCC 90.213:2011	ANSI/TIA/EIA-603-C-2004	Pass

^{*} See Report and Order FCC 12-55 that permits broadband CDMA and LTE technology in the 817 - 824 / 862 - 869 MHz band.

Deviations From Test Standards

None

Approved By:

Victor Ratinoff, Operations Manager

NVLAP

NVLAP Lab Code: 200676-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.



REVISION HISTORY

Revision Number	Description	Date	Page Number
01	Additional test data	9/4/13	14-55

Barometric Pressure

The recorded barometric pressure has been normalized to sea level.



ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

KCC / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Hong Kong

OFTA - Recognized by OFTA as a CAB for the acceptance of test data.

Vietnam

MIC - Recognized by MIC as a CAB for the acceptance of test data.

Russia

GOST – Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.

SCOPE



FACILITIES






Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796	Minnesota Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281	Washington Labs NC01-05,SU02,SU07 19201 120 th Ave. NE Bothell, WA 98011 (425) 984-6600			
VCCI							
A-0108	A-0029		A-0109	A-0110			
	Industry Canada						
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834C-1			
NVLAP							
NVLAP Lab Code: 200630-0	NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200629-0			





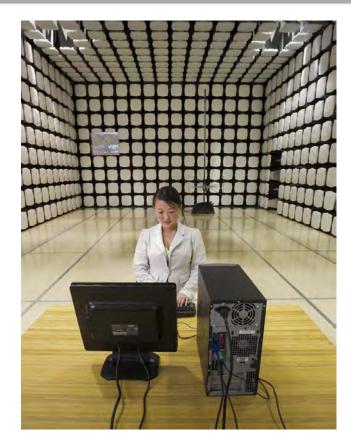



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	KMW Communications			
Address:	1521 E Orangethorpe Ave., Suite #A			
City, State, Zip:	Fullerton, CA 92831			
Test Requested By:	Joshua Jang, Edward Lee			
Model:	800MHz iDEN RRH			
First Date of Test:	July 18, 2011			
Last Date of Test:	July 26, 2013			
Receipt Date of Samples:	July 18, 2011			
Equipment Design Stage:	Production			
Equipment Condition:	No Damage			

Information Provided by the Party Requesting the Test

Functional Description of the EUT (Equipment Under Test):

CDMA / EVDO Rev A / LTE cellular base station transmitting in the 861 - 868.975 MHz band. This corresponds to 3GPP2 Band Class 10 Blocks C + D (Subclass 2 + 3)

Testing Objective:

To demonstrate compliance to FCC Part 90 requirements. See Report and Order FCC 12-55 that permits broadband CDMA and LTE technology in the 817 - 824 / 862 - 869 MHz band.



CONFIGURATIONS

Configuration KMWC0027-1

EUT						
Description	Manufacturer	Model/Part Number	Serial Number			
800MHz iDen RRH	KMW Communications	iDen 800	U311210059			

Peripherals in test setup boundary						
Description Manufacturer Model/Part Number Serial Number						
DC Power Supply	Hewlett Packard	6574A	4S36340150			

Remote Equipment Outside of Test Setup Boundary						
Description Manufacturer Model/Part Number Serial Number						
MXA Signal Analyzer	Agilent	N9020A	MY49100579			
MXA Signal Analyzer	Agilent	N9020A	MY49100570			
MXG Vector Signal Generator	Agilent	N5182	MY49180185			
Reliability Analyzer	KMW Communications	COBRA	None			
Remote Laptop	Fujitsu	A6030	R7908331			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
RF Cable	Yes	3.0m	No	800MHz iDen RRH	Load
RF Cable #2	Yes	3.0m	No	800MHz iDen RRH	Load
Ground Cable	Yes	3.0m	No	800MHz iDen RRH	Ground
Ground Cable	Yes	3.0m	No	800MHz iDen RRH	Ground Cable
Optic Cable	No	5.0m	No	COBRA	800MHz iDEN RRH
DC Power Cable	Yes	5.0m	No	800MHz iDen RRH	HP DC Power Supply
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					



CONFIGURATIONS

Configuration KMWC0030-1

EUT						
Description	Manufacturer	Model/Part Number	Serial Number			
800MHz iDen RRH	KMW Communications	iDen 800	U311210059			

Remote Equipment Outside of Test Setup Boundary						
Description	Manufacturer	Model/Part Number	Serial Number			
MXA Signal Analyzer	Agilent	N9020A	MY49100579			
MXA Signal Analyzer	Agilent	N9020A	MY49100570			
MXG Vector Signal Generator	Agilent	N5182	MY49180185			
Reliability Analyzer	KMW Communications	COBRA	None			
DC Power Supply	Hewlett Packard	6574A	4S36340150			
Remote Laptop	Fujitsu	A6030	R7908331			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
RF Cable	Yes	3.0m	No	800MHz iDen RRH	Load
RF Cable #2	Yes	3.0m	No	800MHz iDen RRH	Load
Ground Cable	Yes	3.0m	No	800MHz iDen RRH	Ground
Ground Cable	Yes	3.0m	No	800MHz iDen RRH	Ground Cable
Optic Cable	No	5.0m	No	COBRA	800MHz iDen RRH
DC Power Cable	Yes	5.0m	No	800MHz iDen RRH	HP DC Power Supply
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					



CONFIGURATIONS

Configuration KMWC0035-1

EUT						
Description	Manufacturer	Model/Part Number	Serial Number			
800MHz iDen RRH	KMW Communications	iDen 800	U3120904124			

Peripherals in test setup boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
DC Power Supply	HP	6574A	US36340150	
Reliability Analyzer	KMW Communications	COBRA	None	
Laptop	Sony	SVS15113FXB	275546003000190	
Band Rejection Filter	KMW Communications	FILTER	None	

Cables							
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2		
RF Cable1	Yes	3.0m	No	800MHz iDen RRH	Filter		
RF Cable2	Yes	3.0m	No	800MHz iDen RRH	Filter		
RF Cable3	Yes	3.0m	No	Filter	SPECTRUM		
Optic Cable	No	5.0m	No	Cobra	800MHz iDen RRH		
DC Power Cable	Yes	5.0m	No	800MHz iDen RRH	DC Power Supply		
PA = Cab	PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.						



Configuration KMWC0036-1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
800MHz iDen RRH	KMW Communications	iDen 800	U311070001

Peripherals in test setup boundary				
Description	Description	Description	Description	
Reliability Analyzer	Reliability Analyzer	Reliability Analyzer	Reliability Analyzer	
Remote Laptop	Remote Laptop	Remote Laptop	Remote Laptop	
Power Meter	Power Meter	Power Meter	Power Meter	
Power Sensor	Power Sensor	Power Sensor	Power Sensor	
Power Sensor	Power Sensor	Power Sensor	Power Sensor	
Attenuator	Attenuator	Attenuator	Attenuator	
Attenuator	Attenuator	Attenuator	Attenuator	
DC Power Supply	DC Power Supply	DC Power Supply	DC Power Supply	

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
RF Cable1	Yes	3.0m	No	800MHz iDen RRH	Filter
RF Cable2	Yes	3.0m	No	800MHz iDen RRH	Filter
RF Cable3	Yes	3.0m	No	Filter	Spectrum
Optic Cable	No	5.0m	No	Cobra	800MHz iDen RRH
DC Power Cable	Yes	5.0m	No	800MHz iDen RRH	DC Power Supply
AC Cable	No	1.8m	No	Reliability Analyzer	AC Mains
AC Cable	No	1.8m	No	Power Meter	AC Mains
PA = Cab	le is permanent	ly attached to the	device. Shi	elding and/or presence of ferri	te may be unknown.



Configuration KMWC0039-1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
800MHz iDen RRH	KMW Communications	iDen 800	U311070001

Peripherals in test setup boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
Reliability Analyzer	KMW Communications	COBRA	NONE	
Remote Laptop	Sony	SVS15113FXB	275546003000190	
Power Meter	Agilent	E4419B	MY45103508	
Power Sensor	Agilent	E9300A	MY41499318	
Attenuator	Aeroflex	49-30-43	None	
Attenuator	Fairview	SA3N5W-20	None	
DC Power Supply	HP	6574A	US36340150	

Cables						
Shield	Length (m)	Ferrite	Connection 1	Connection 2		
Yes	3.0m	No	800MHz iDen RRH	Filter		
Yes	3.0m	No	800MHz iDen RRH	Filter		
Yes	3.0m	No	Filter	Spectrum		
No	5.0m	No	Cobra	800MHz iDen RRH		
Yes	5.0m	No	800MHz iDen RRH	DC Power Supply		
No	1.8m	No	Reliability Analyzer	AC Mains		
No	1.8m	No	Power Meter	AC Mains		
	Yes Yes Yes No Yes No No No	Yes 3.0m Yes 3.0m Yes 3.0m No 5.0m Yes 5.0m No 1.8m No 1.8m	Yes 3.0m No Yes 3.0m No Yes 3.0m No No 5.0m No Yes 5.0m No No 1.8m No No 1.8m No	Yes 3.0m No 800MHz iDen RRH Yes 3.0m No 800MHz iDen RRH Yes 3.0m No Filter No 5.0m No Cobra Yes 5.0m No 800MHz iDen RRH No 1.8m No Reliability Analyzer No 1.8m No Power Meter		



MODIFICATIONS

Equipment Modifications

	Jillelit Moul		NA UC C		D: :: (EUT
Item	Date	Test	Modification	Note	Disposition of EUT
		Spurious	Tested as	No EMI suppression	EUT remained at
1	7/18/2011	Radiated	delivered to	devices were added or	Northwest EMC
		Emissions	Test Station.	modified during this test.	following the test.
		Conducted	Tested as	No EMI suppression	EUT remained at
2	7/21/2011	Conducted	delivered to	devices were added or	Northwest EMC
		Output Power	Test Station.	modified during this test.	following the test.
			Tested as	No EMI suppression	EUT remained at
3	7/20/2011	Occupied	delivered to	devices were added or	Northwest EMC
	1,20,20	Bandwidth	Test Station.	modified during this test.	following the test.
		Spurious	Tested as	No EMI suppression	EUT remained at
4	7/20/2011	Conducted	delivered to	devices were added or	Northwest EMC
	1/20/2011	Emissions	Test Station.	modified during this test.	following the test.
		LIIIISSIOIIS	Tested as		Tollowing the test.
5	7/21/2011	Frequency		No EMI suppression	Scheduled testing was
5	1/21/2011	Stability	delivered to	devices were added or	completed.
		,	Test Station.	modified during this test.	
_	0/=/0044	Emission	Tested as	No EMI suppression	Scheduled testing was
6	9/7/2011	Mask	delivered to	devices were added or	completed.
			Test Station.	modified during this test.	•
		Spurious	Tested as	No EMI suppression	EUT remained at
7	7/19/2011		delivered to	devices were added or	Northwest EMC
		Emissions	Test Station.	modified during this test.	following the test.
		Occupied	Tested as	No EMI suppression	EUT remained at
8	7/20/2011	Bandwidth	delivered to	devices were added or	Northwest EMC
		Danuwiuin	Test Station.	modified during this test.	following the test.
			Tested as	No EMI suppression	Cabadulad taatina uusa
9	7/21/2011	Frequency	delivered to	devices were added or	Scheduled testing was
		Stability	Test Station.	modified during this test.	completed.
			Tested as	No EMI suppression	0.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1
10	9/11/2012	Emissions	delivered to	devices were added or	Scheduled testing was
. •	0,, _ 0	Mask	Test Station.	modified during this test.	completed.
			Tested as	No EMI suppression	EUT remained at
11	11/14/2012	Emissions	delivered to	devices were added or	Northwest EMC
''	11/14/2012	Mask	Test Station.	modified during this test.	following the test.
		Spurious	Tested as	No EMI suppression	
12	11/14/2012	Conducted	delivered to	devices were added or	Scheduled testing was
12	11/14/2012				completed.
		Emissions	Test Station.	modified during this test.	-
40	0/00/0040	Conducted	Tested as	No EMI suppression	Scheduled testing was
13	2/20/2013	Output Power	delivered to	devices were added or	completed.
			Test Station.	modified during this test.	•
		Occupied	Tested as	No EMI suppression	EUT remained at
14	7/26/2013	Bandwidth	delivered to	devices were added or	Northwest EMC
		Danaman	Test Station.	modified during this test.	following the test.
		Conducted	Tested as	No EMI suppression	Scheduled testing was
15	7/26/2013	Output Power	delivered to	devices were added or	completed.
		Output Fowel	Test Station.	modified during this test.	Completed.



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
DC Power Supply	Hewlett Packard	6574A	TPX	NCR	0
Power Sensor	Agilent	E4412A	SQE	4/11/2012	24
Power Meter	Hewlett Packard	E4418A	SPA	4/11/2012	24
Signal Generator	Agilent	E8257D	TGU	2/1/2012	36
Spectrum Analyzer	Agilent	E4440A	AFA	6/15/2012	24

CLIENT EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Interval
COBRA Signal Generator	KMW Communications	N/A	NCR	N/A
Sony Laptop	Sony	SUS151A11C	NCR	N/A
Power Head	Agilent	E9300H	4/1/2012	24
Power Meter	Agilent	E4419B	NCR	N/A
Directional Coupler	S M Electronics	MC4020-20	NCR	N/A
Attenuator 30dB 500W	Fairview Microwave	N/A	NCR	N/A

MEASUREMENT UNCERTAINTY


A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.


TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a power meter. Measurements were taken with RMS average detector.





EUT: 800	0MHz i-DEN RRH				Work Order:	KMWC0039	
Serial Number: U3	11210059					07/26/13	
Customer: KN	IW Communications				Temperature:	24.5°C	
Attendees: no	ne				Humidity:		
Project: No	one				Barometric Pres.:	1013	
Tested by: Jac	emi Suh		Pov	wer: 48 VDC	Job Site:	OC10	
TEST SPECIFICATION	S			Test Method			
CC 90.691:2012				ANSI/TIA/EIA-603-C-2004			
COMMENTS							
Port A							
DEVIATIONS FROM TE	EST STANDARD						
None				<u> </u>	<u> </u>		
			Chan				
Configuration #	1						
		Signature	-				
					Value	Limit	Result
LTE 1.4 MHz Single Car							
	w Channel				39.92 W	251 W	Pass
	d Channel				39.97 W	251 W	Pass
	gh Channel				40.48 W	251 W	Pass
LTE 3 MHz Single Carri							
	w Channel				49.05 W	251 W	Pass
	d Channel				48.46 W	251 W	Pass
Hic	gh Channel				49.83 W	251 W	Pass
TE 5 MHz Single Carri							
TE 5 MHz Single Carri Lov	w Channel				50.07 W	251 W	Pass
LTE 5 MHz Single Carri Lov Mic	w Channel d Channel				49.42 W	251 W	Pass
LTE 5 MHz Single Carri Lov Mic Hig	w Channel d Channel gh Channel						
TE 5 MHz Single Carri Lov Mic Hig TE 1.4 MHz Multi Carri	w Channel d Channel gh Channel ier [2FA]				49.42 W	251 W	Pass
TE 5 MHz Single Carri Lov Mic Hig TE 1.4 MHz Multi Carri	w Channel d Channel gh Channel				49.42 W	251 W	Pass
TE 5 MHz Single Carri Lov Mic Hig TE 1.4 MHz Multi Carri Lov	w Channel d Channel gh Channel ier [2FA]				49.42 W 49.57 W	251 W 251 W	Pass Pass
TE 5 MHz Single Carri Lov Mic Hig TE 1.4 MHz Multi Carri Lov Mic	w Channel d Channel gh Channel ier [2FA] w Channel				49.42 W 49.57 W 50.01 W	251 W 251 W 251 W	Pass Pass Pass
TE 5 MHz Single Carri Lov Mic Hig TE 1.4 MHz Multi Carri Lov Mic	w Channel d Channel jh Channel ier [2FA] w Channel d Channel d Channel jh Channel				49.42 W 49.57 W 50.01 W 49.83 W	251 W 251 W 251 W 251 W	Pass Pass Pass Pass
TE 5 MHz Single Carri Lov Mic Hic TE 1.4 MHz Multi Carri Lov Mic Hig TE 3 MHz Multi Carrie	w Channel d Channel jh Channel ier [2FA] w Channel d Channel d Channel jh Channel				49.42 W 49.57 W 50.01 W 49.83 W	251 W 251 W 251 W 251 W	Pass Pass Pass Pass
LTE 5 MHz Single Carrie Lov Mice Hig LTE 1.4 MHz Multi Carrie Lov Mice LTE 3 MHz Multi Carrier Lov Lov Lov Lov Lov Lov Lov Lov	w Channel d Channel gh Channel ier [2FA] w Channel d Channel d Channel gh Channel r [2FA]				49.42 W 49.57 W 50.01 W 49.83 W 49.79 W	251 W 251 W 251 W 251 W 251 W	Pass Pass Pass Pass Pass




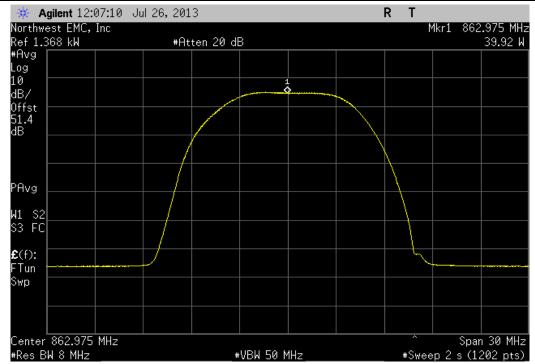


Value Limit Begulf	Value Limit Result	l .		LTE 1.4 MH	z Single Carrier, N	/lid Channel		
	Value Little Result					Value	Limit	Pocult

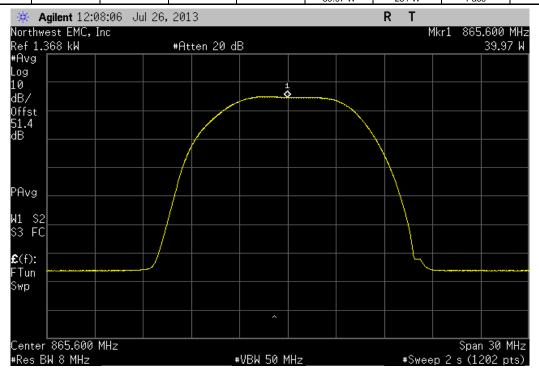





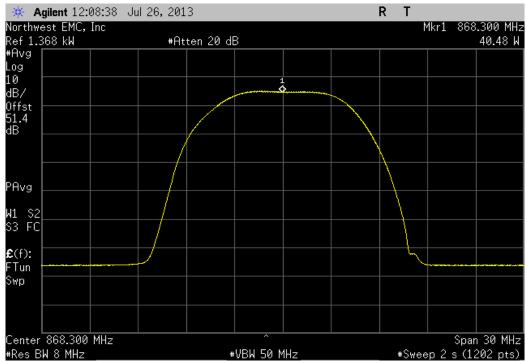


Value Limit Result

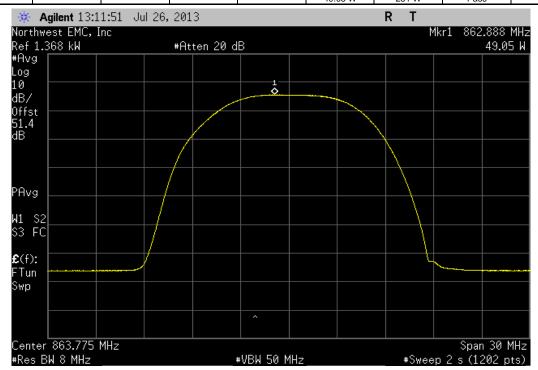





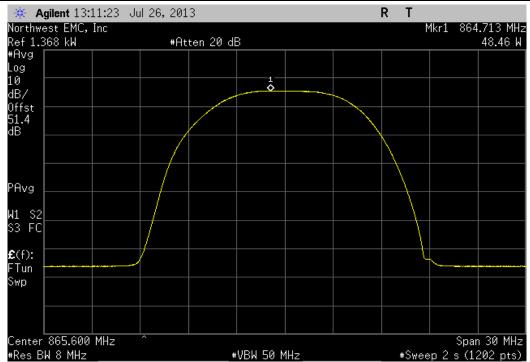


Value Limit Result

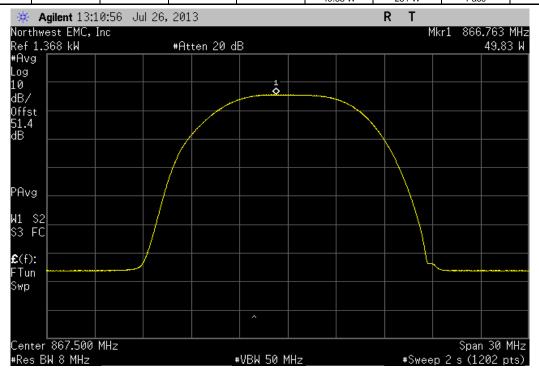





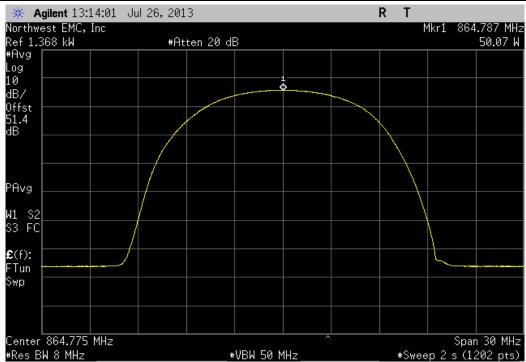


		LTE 5 MHz	z Single Carrier, M	lid Channel		
				Value	Limit	Result
				49 42 W	251 W	Pass

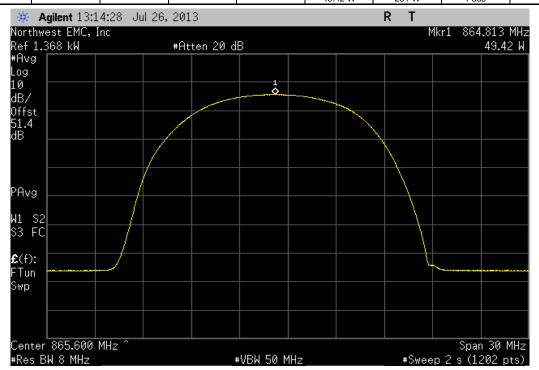





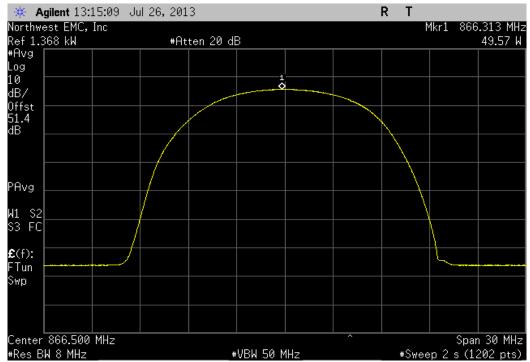


Value Limit Decut	Value Limit Result		LTE 1.4 MHz I	Multi Carrier [2FA]	, Low Channel		
	value Limit Result				Value	1 : :-	Danult

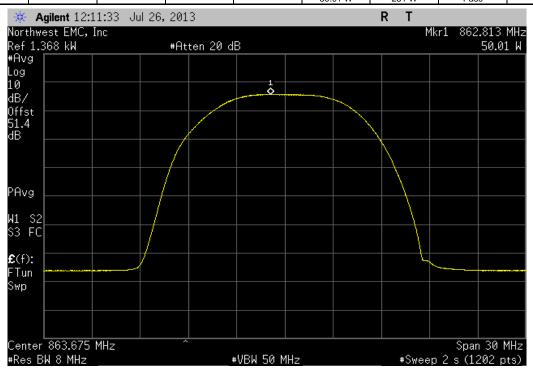





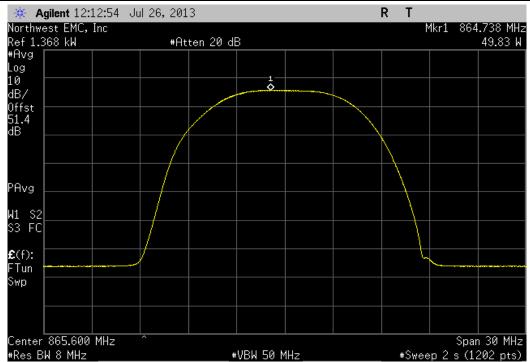


Value Limit Result		LTE 1.4 MHz N	Multi Carrier [2FA]	, High Channel		
				Value	Limit	Result

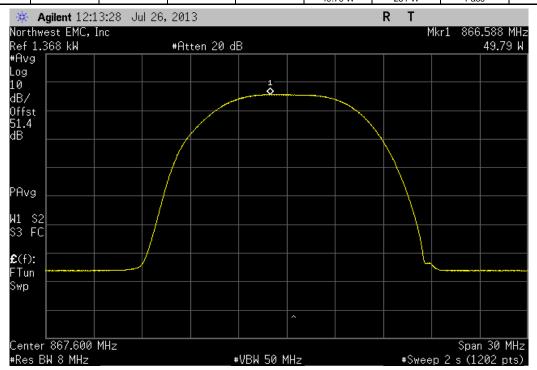




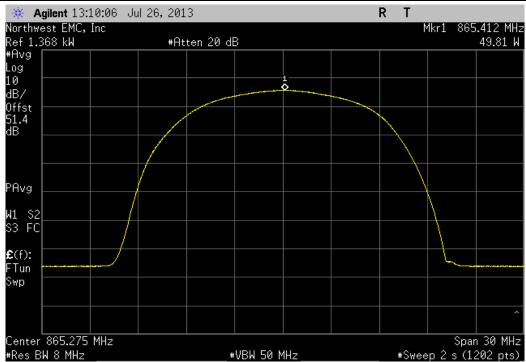


Value Livis Basels	Value Limit Result		LTE 3 MHz N	/ulti Carrier [2FA],	Mid Channel		
	value Limit Result				Value	Limit	Desuit

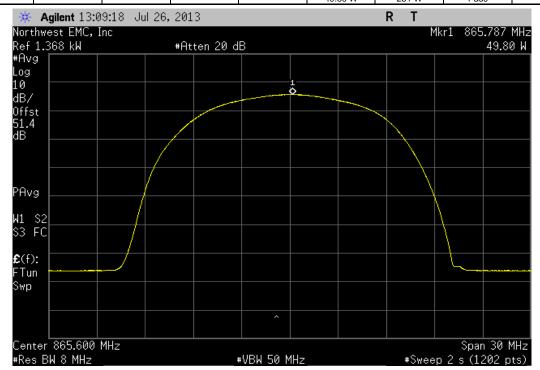







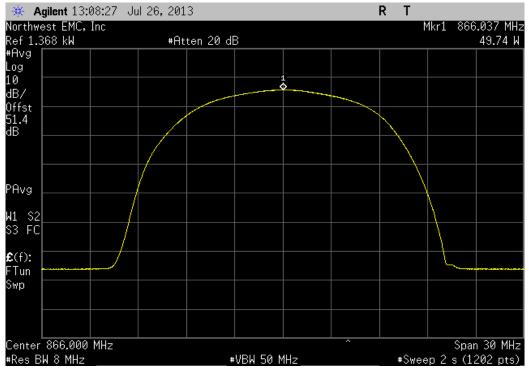






EUT: 80	0MHz i-DEN RRH			•	Work Order:	KMWC0039	
Serial Number: U3	11210059					07/26/13	
Customer: KN	IW Communications				Temperature:	24.5°C	
Attendees: no	ne				Humidity:		
Project: No	ne				Barometric Pres.:	1013	
Tested by: Jac	emi Suh		Pow	ver: 48 VDC	Job Site:	OC10	
TEST SPECIFICATION	S			Test Method			
FCC 90.691:2012				ANSI/TIA/EIA-603-C-2004			
COMMENTS							
Port B							
DEVIATIONS FROM TE	EST STANDARD						
None		•					·
			Chan		_		
Configuration #	1		-				
		Signature					
					Value	Limit	Result
LTE 1.4 MHz Single Car							
	w Channel				39.07 W	251 W	Pass
	d Channel				39.76 W	251 W	Pass
	gh Channel				39.87 W	251 W	Pass
LTE 3 MHz Single Carri							
	w Channel				50.04 W	251 W	Pass
	d Channel				49.00 W	251 W	Pass
	gh Channel				49.19 W	251 W	Pass
_TE 5 MHz Single Carri							
Lo	w Channel				49.27 W	251 W	Pass
	d Channel				48.90W	251 W	Pass
						054 144	Pass
Hig	gh Channel				48.42 W	251 W	
Hiç LTE 1.4 MHz Multi Carri	gh Channel ier [2FA]						
Hiç LTE 1.4 MHz Multi Carri Lo	gh Channel ier [2FA] w Channel				49.97 W	251 W	
Hig TE 1.4 MHz Multi Carri Lo Mid	gh Channel ier [2FA] w Channel d Channel						Pass Pass
Hig _TE 1.4 MHz Multi Carri Lo Mid Hig	gh Channel ier [2FA] w Channel d Channel gh Channel				49.97 W	251 W	
Hig LTE 1.4 MHz Multi Carri Lov Mic Hig LTE 3 MHz Multi Carrier	gh Channel ier [2FA] w Channel d Channel gh Channel r [2FA]				49.97 W 49.06 W	251 W 251 W	Pass
Hiç LTE 1.4 MHz Multi Carri Lov Mic Hiç LTE 3 MHz Multi Carrier	gh Channel ier [2FA] w Channel d Channel gh Channel				49.97 W 49.06 W	251 W 251 W	Pass
Hiç LTE 1.4 MHz Multi Carri Lo Mic Hiç LTE 3 MHz Multi Carrier Lov	gh Channel ier [2FA] w Channel d Channel gh Channel r [2FA]				49.97 W 49.06 W 49.66 W	251 W 251 W 251 W	Pass Pass



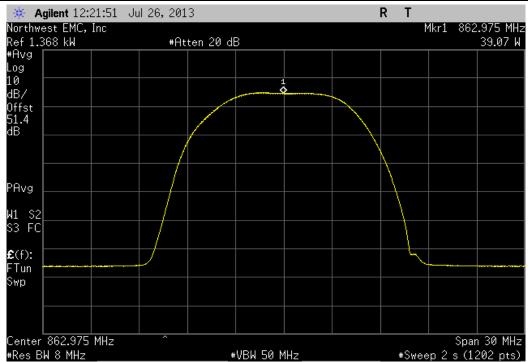


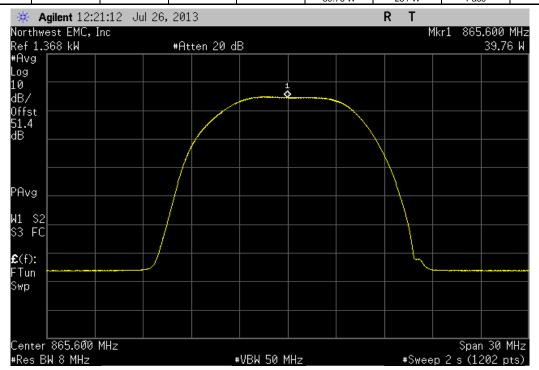





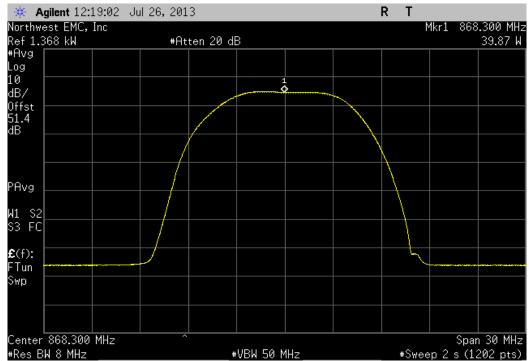


Value Limit Result		LTE 3 MHz	Single Carrier, Lo	ow Channel	
Value Limit Result					 - "

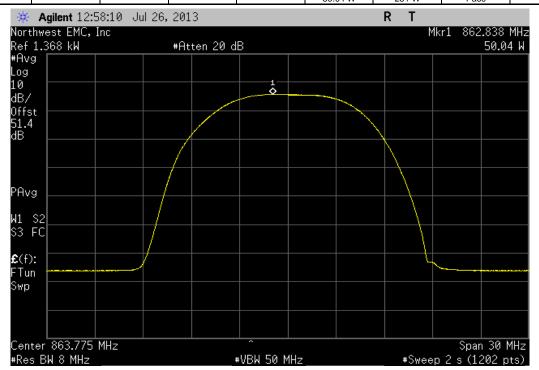





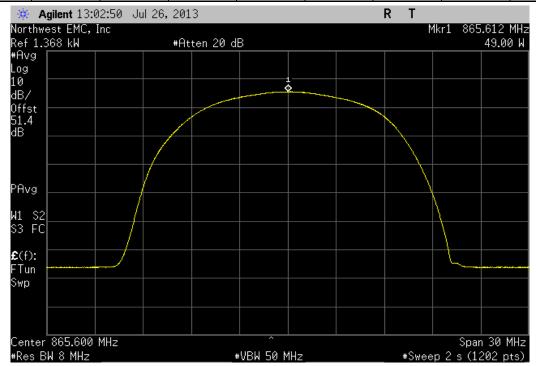


Value Death	Value Limit Result		LTE 3 MHz	Single Carrier, H	igh Channel		
	value Limit Result				Value	Limit	Decult

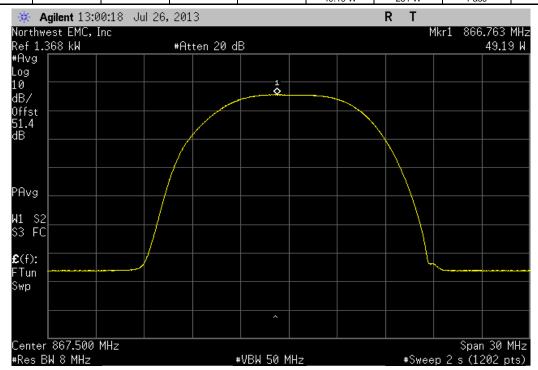





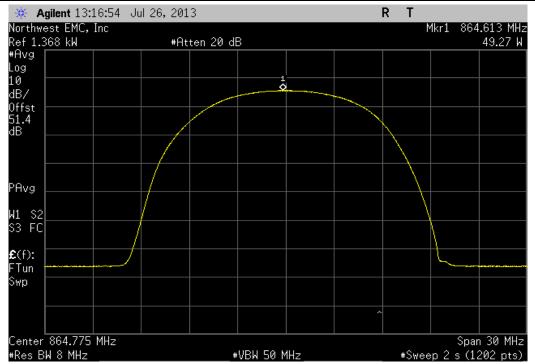



Value Limit Posult	Value Limit Result		LTE 5 MHz	Single Carrier, M	lid Channel		
					Value	Limit	Pocult

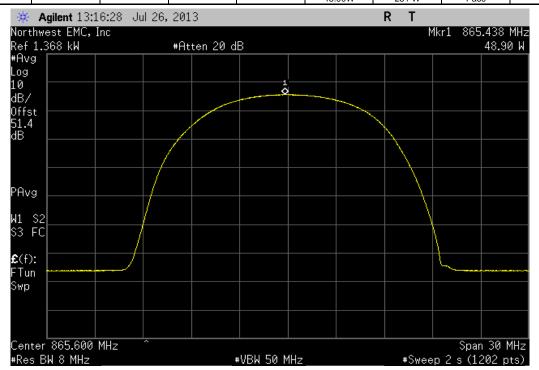




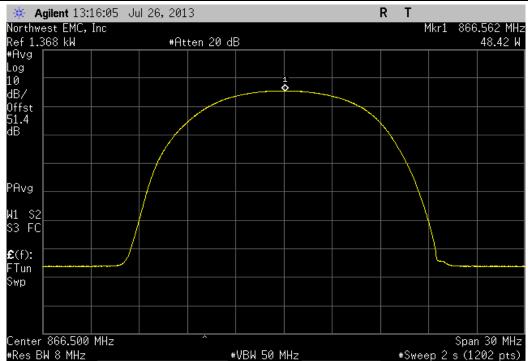


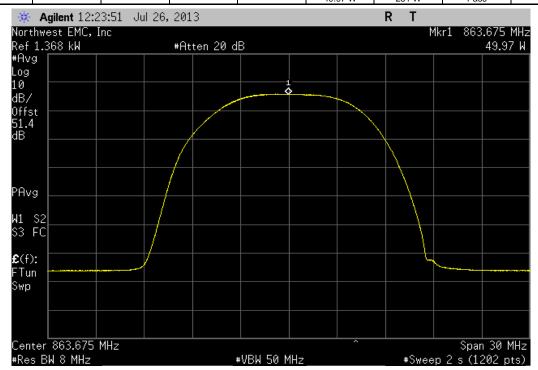





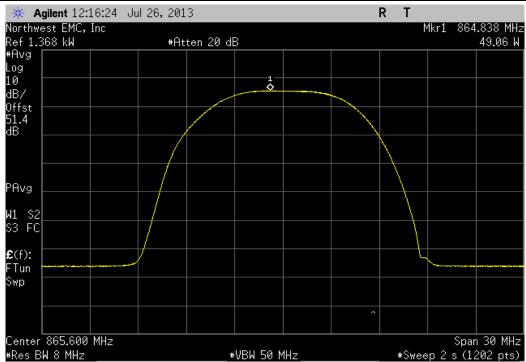


Value Limit Result			LTE 1.4 MHz N	Multi Carrier [2FA]	, High Channel		
	I				Walan	1.1	D It

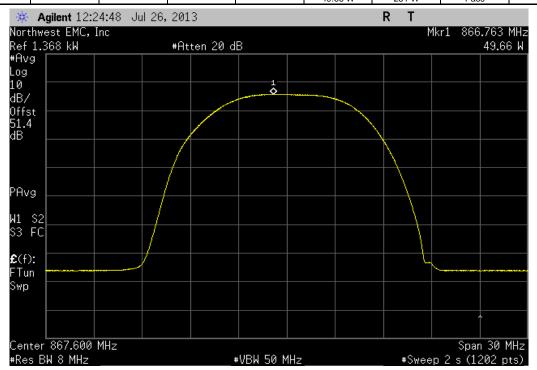




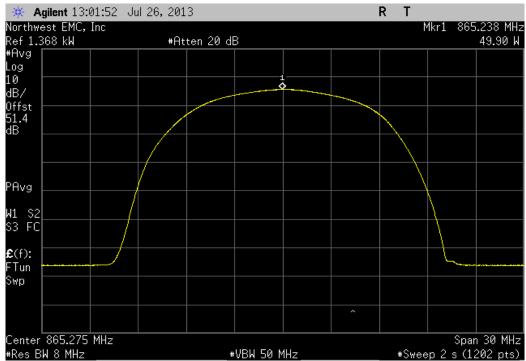


Value Limit Result			LTE 3 MHz N	/lulti Carrier [2FA],	Mid Channel		
	1				W-L	1.1	D!

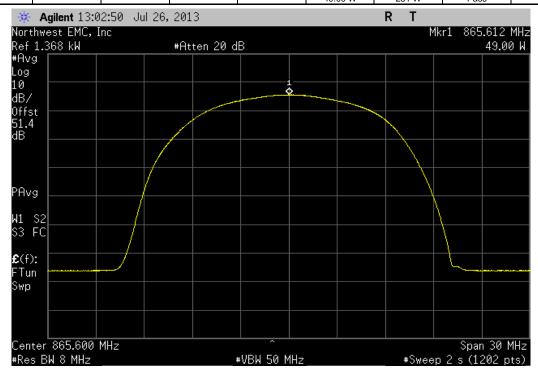





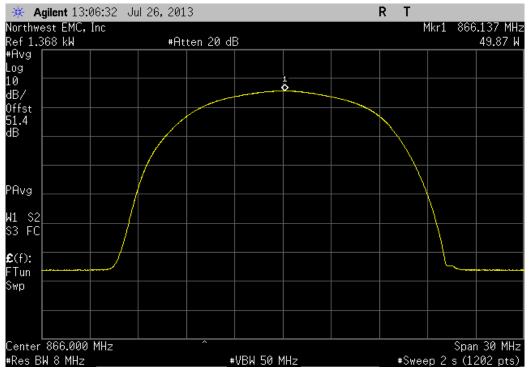



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
DC Power Supply	Hewlett Packard	6574A	TPX	NCR	0
Power Sensor	Agilent	E4412A	SQE	4/11/2012	24
Power Meter	Hewlett Packard	E4418A	SPA	4/11/2012	24
Signal Generator	Agilent	E8257D	TGU	2/1/2012	36
Spectrum Analyzer	Agilent	E4440A	AFA	6/15/2012	24

CLIENT EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Interval
COBRA Signal Generator	KMW Communications	N/A	NCR	N/A
Sony Laptop	Sony	SUS151A11C	NCR	N/A
Power Head	Agilent	E9300H	4/1/2012	24
Power Meter	Agilent	E4419B	NCR	N/A
Directional Coupler	S M Electronics	MC4020-20	NCR	N/A
Attenuator 30dB 500W	Fairview Microwave	N/A	NCR	N/A

MEASUREMENT UNCERTAINTY


A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.


TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a power meter. Measurements were taken with RMS average detector.





EUI:jo	800MHz i-DEN RRH		Work Order:	KMWC0039	
Serial Number: U			Date:	07/26/13	
Customer: K	KMW Communications		Temperature:	24.5°C	
Attendees: E	Edward Lee		Humidity:		
Project: N			Barometric Pres.:		
Tested by: J		Power: 48 VDC	Job Site:	OC10	
TEST SPECIFICATIO	ONS	Test Method			
FCC 90.635:2013		ANSI/TIA/EIA-603-C-2004			
•					
COMMENTS					
None					
DEVIATIONS FROM	TEST STANDARD				
None	IEGI GIANDAND				
TOTAL					
Configuration #	1	The S			
oomigaration #	Signature				
•	<u> </u>				
			Value	Limit	Result
DMA					
F	Port A				
	Single Carrier, Low Channel 862.9 MHz		49.93 W	251 W	Pass
	Single Carrier, High Channel, 867.9 MHz		49.25 W	251 W	Pass
	Multi [2FA] Carrier, (862.9 MHz, 867.9 MHz)		60.10 W	251 W	Pass
	Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI		58.91 W	251 W	Pass
_	Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8	£	59.85 W	251 W	Pass
P	Port B				
	Single Carrier, Low Channel 862.9 MHz		50.10 W	251 W	Pass
	Single Carrier, High Channel, 867.9 MHz		49.37 W	251 W	Pass
	Multi [2FA] Carrier, (862.9 MHz, 867.9 MHz)		59.73 W	251 W	Pass
	Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI	l	58.21 W	251 W	Pass
	Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8	E	59.97 W	251 W	Pass
	Port A				
	Single Carrier, Low Channel 862.9 MHz		39.93 W	251 W	Pass
	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz		39.85 W	251 W	Pass
	Single Carrier, Low Channel 862.9 MHz				
	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz		39.85 W	251 W	Pass
	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Multi [2FA] Carrier, (862.9 MHz, 867.9 MHz)		39.85 W 49.19 W	251 W 251 W	Pass Pass
F	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Mult [2FA] Carrier, (862.9 MHz, 867.9 MHz) Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8		39.85 W 49.19 W 47.28 W	251 W 251 W 251 W	Pass Pass Pass
F	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Multi [2FA] Carrier, (862.9 MHz, 867.9 MHz) Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8		39.85 W 49.19 W 47.28 W	251 W 251 W 251 W	Pass Pass Pass
	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Mult [2FA] Carrier, (862.9 MHz, 867.9 MHz) Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8		39.85 W 49.19 W 47.28 W 49.89 W	251 W 251 W 251 W 251 W 251 W	Pass Pass Pass Pass
F	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Multi [2FA] Carrier, (862.9 MHz, 867.9 MHz) Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 8 Port B Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz		39.85 W 49.19 W 47.28 W 49.89 W 39.54 W	251 W 251 W 251 W 251 W 251 W	Pass Pass Pass Pass
F	Single Carrier, Low Channel 862.9 MHz Single Carrier, High Channel, 867.9 MHz Multi [ZFA] Carrier, (862.9 MHz, 867.9 MHz) Multi [3FA] Carrier, (862.9 MHz, 865.4 MHz, 867.9 MI Multi [5FA] Carrier, (862.9 MHz, 864.15, 865.4 MHz, 867.9 MI Single Carrier, Low Channel 862.9 MHz		39.85 W 49.19 W 47.28 W 49.89 W 39.54 W 38.77 W	251 W 251 W 251 W 251 W 251 W 251 W	Pass Pass Pass Pass Pass Pass




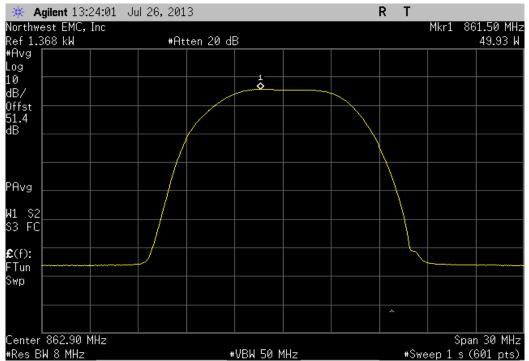


Value Limit Result

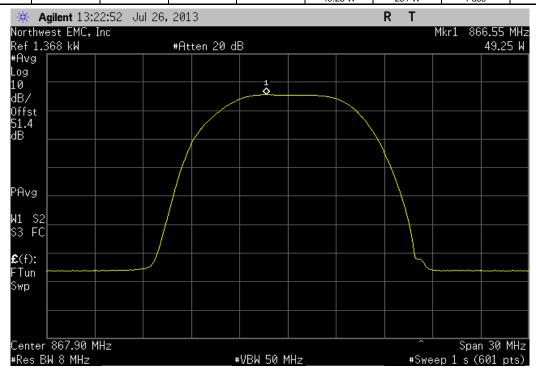





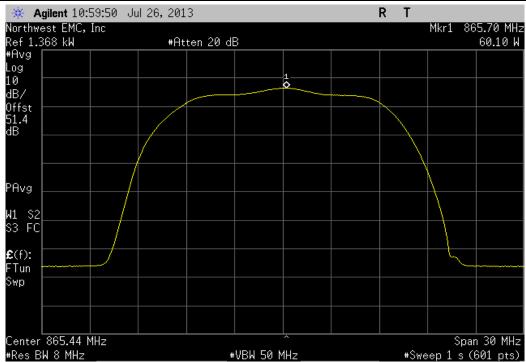


Value Limit Result

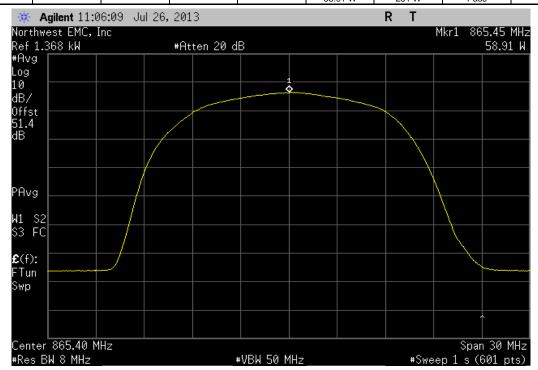





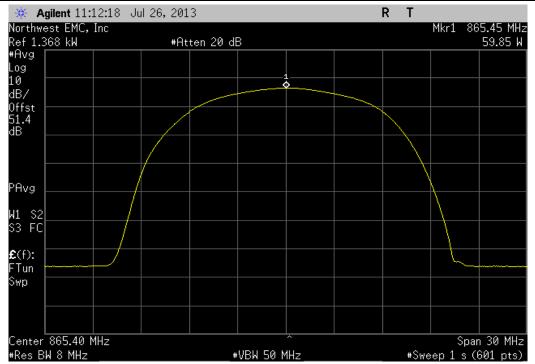


Value Limit Begulf	Value Limit Result		C	DMA, Port B, Sin	gle Carrier, Low C	Channel 862.9 MH	łz	
						Value	Limit	Popult

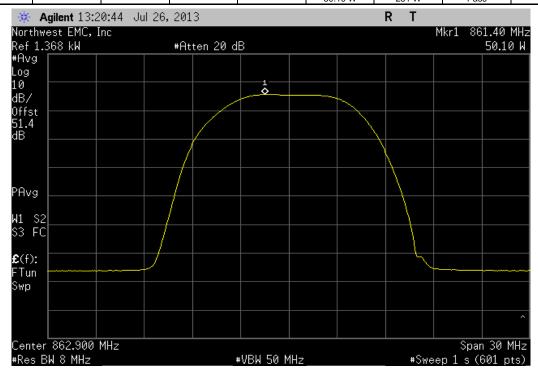





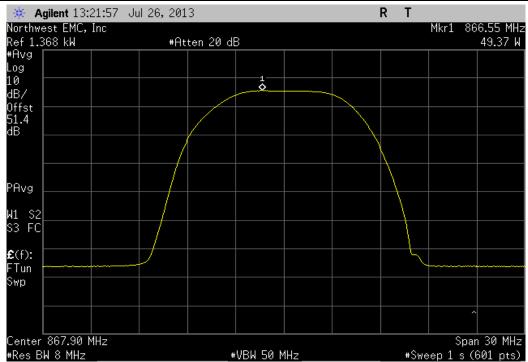


Value Limit Result

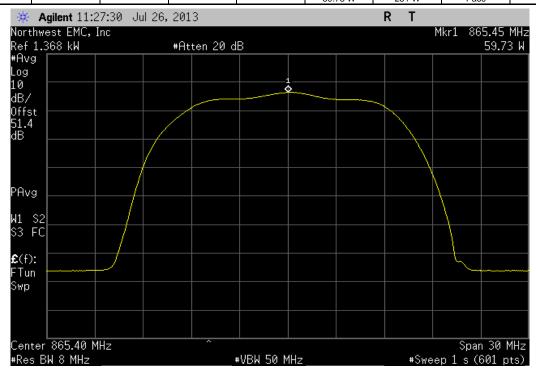





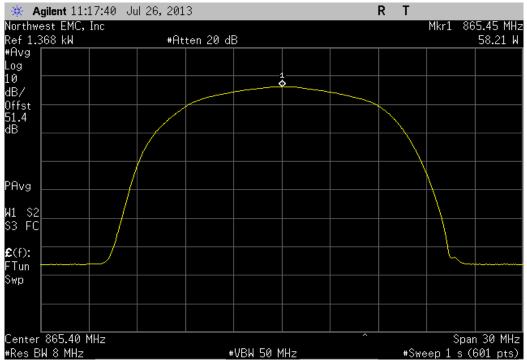


	CDMA, Port B, Mi	ulti [5FA] Carrier, ((862.9 MHz, 864. [,]	15, 865.4 MHz, 86	66.65, 867.9 MHz))
				Value	Limit	Result
				59.97 W	251 W	Pass

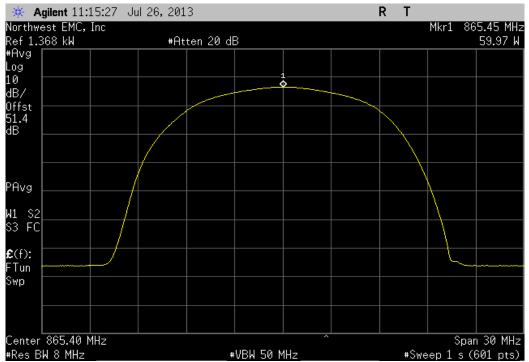





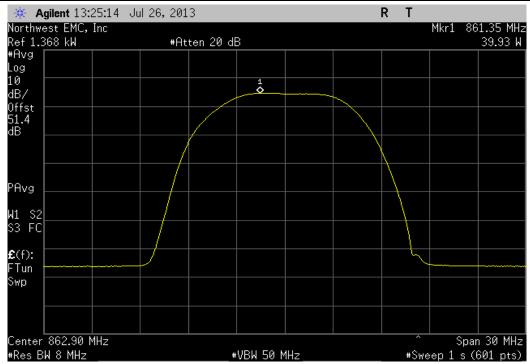


Value Limit Result		E'	VDO, Port A, Sing	gle Carrier, High C	Channel, 867.9 MF	łz	
Value Limit Result							

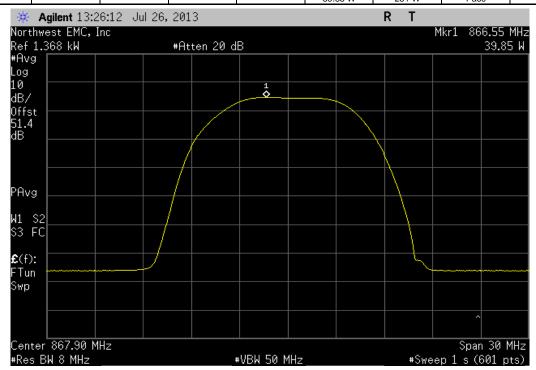





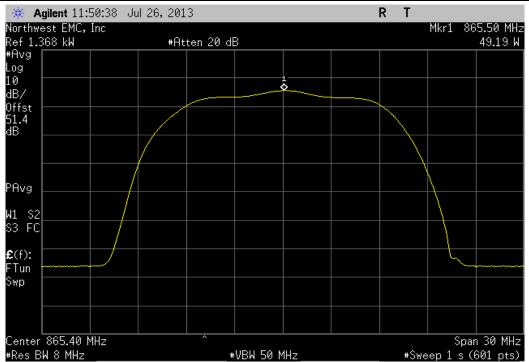


Value Limit Result

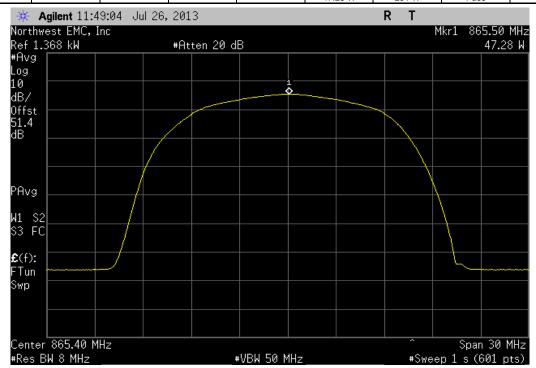





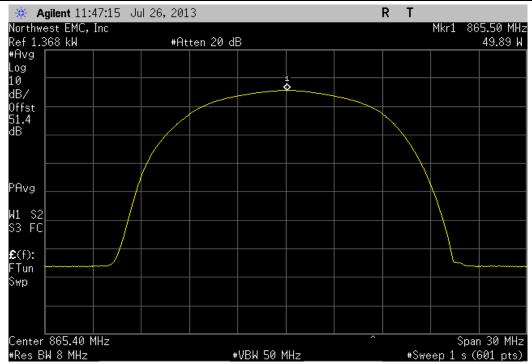


	E	VDO, Port B, Sin	gle Carrier, Low C	Channel 862.9 MH	z		
				Value	Limit	Result	
				39.54 W	251 W	Pass	

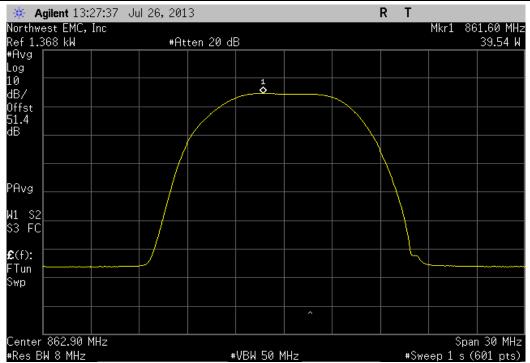





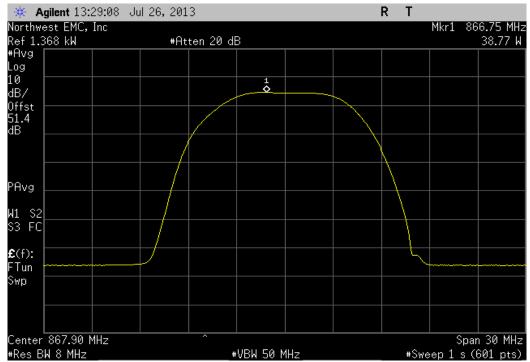


Value Limit Result	EVDO, Port B, Multi [2FA] Carrier,	, (862.9 MHz, 867.9 M	Hz)	
		Value	Limit	Pocult

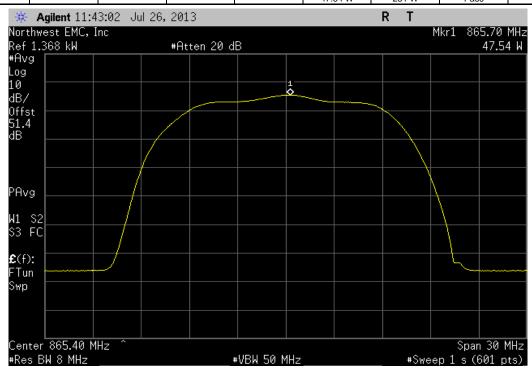



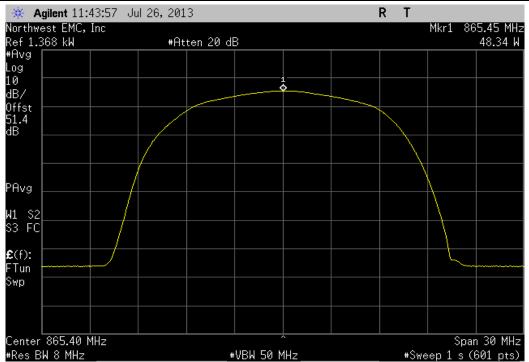

Value Limit Result		EVDO, Port B, Mi	ulti [5FA] Carrier,	(862.9 MHz, 864. ⁻	15, 865.4 MHz, 86	6.65, 867.9 MHz)	
					Value	l imit	Result

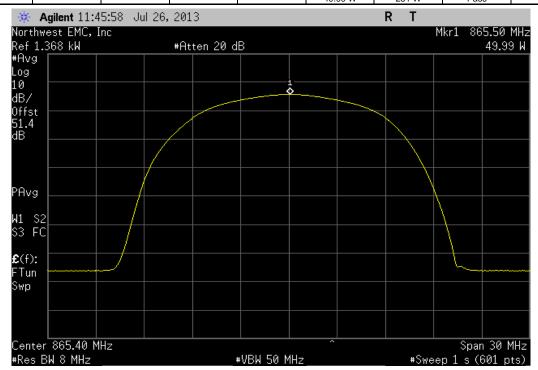



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
DC Power Supply	Hewlett Packard	6574A	TPX	NCR	0
Power Sensor	Agilent	E4412A	SQE	4/11/2012	24
Power Meter	Hewlett Packard	E4418A	SPA	4/11/2012	24
Signal Generator	Agilent	E8257D	TGU	2/1/2012	36
Spectrum Analyzer	Agilent	E4440A	AFA	6/15/2012	24

CLIENT EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Interval
COBRA Signal Generator	KMW Communications	N/A	NCR	N/A
Sony Laptop	Sony	SUS151A11C	NCR	N/A
Power Head	Agilent	E9300H	4/1/2012	24
Power Meter	Agilent	E4419B	NCR	N/A
Directional Coupler	S M Electronics	MC4020-20	NCR	N/A
Attenuator 30dB 500W	Fairview Microwave	N/A	NCR	N/A

MEASUREMENT UNCERTAINTY


A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION


The 99% bandwidth was measured utilizing the analyer's peak detector and measuring the carrier's 26 dB occupied bandwidth based on the peak output power level measured. A plot was taken to show the occupied bandwidth is contained within the allowable transmit band.


A direct connection was made between the EUT and a spectrum analyzer. The resolution bandwidth was approximately equal to 1% of the 20dB bandwidth and the video bandwidth was greater than or equal to the resolution bandwidth.

The occupied bandwidth was measured with the EUT configured in the modes called out in the data sheets.





EUT-	RRH220			Work Order: K	(M/W/C0030	
Serial Number:				Date: 0		
	KMW Communications			Temperature: 2		
	Edward Lee			Humidity: 4		
Project:				Barometric Pres.: 1		
	Jaemi Suh		Power: 48 VDC	Job Site: C		
EST SPECIFICATI	IONS		Test Method			
CC 90.691:2013			ANSI/TIA/EIA-603-C-2004			
OMMENTS			•			
lone						
EVIATIONS FROM	// TEST STANDARD					
None						
lone	1	Signature	Jan St			
	1	Signature	flow St	Value	Limit	Result
configuration #	Carrier	Signature	from Si			
onfiguration # TE 1.4 MHz Single	Carrier Low Chanel	Signature	flor Si	1.145 MHz	N/A	N/A
onfiguration #	Carrier Low Chanel Mid Channel	Signature	Jun Sie	1.145 MHz 1.143 MHz	N/A N/A	N/A N/A
onfiguration #	Carrier Low Chanel Mid Channel High Channel	Signature	Jan Si	1.145 MHz	N/A	N/A
Configuration #	Carrier Low Chanel Mid Channel High Channel arrier	Signature	from Si	1.145 MHz 1.143 MHz 1.149 MHz	N/A N/A N/A	N/A N/A N/A
onfiguration # TE 1.4 MHz Single TE 3 MHz Single C	Carrier Low Chanel Mid Channel High Channel arrier Low Chanel	Signature	fin S	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz	N/A N/A N/A	N/A N/A N/A
onfiguration # TE 1.4 MHz Single TE 3 MHz Single C	Carrier Low Chanel Mid Channel High Channel arrier Low Chanel Mid Channel	Signature	Jan S	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz 2.856 MHz	N/A N/A N/A N/A	N/A N/A N/A N/A
TE 1.4 MHz Single	Carrier Low Chanel Mid Channel High Channel carrier Low Chanel Mid Channel High Channel	Signature	from S	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz	N/A N/A N/A	N/A N/A N/A
onfiguration # IE 1.4 MHz Single IE 3 MHz Single C	Carrier Low Chanel Mid Channel High Channel arrier Low Chanel Mid Channel High Channel High Channel High Channel	Signature	fin S	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz 2.856 MHz 2.806 MHz	N/A N/A N/A N/A N/A N/A	N/A N/A N/A N/A N/A N/A
TE 1.4 MHz Single TE 3 MHz Single C	Carrier Low Chanel Mid Channel High Channel arrier Low Chanel Mid Channel derrier Low Chanel	Signature	Jan S	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz 2.856 MHz 2.806 MHz 4.614 MHz	N/A N/A N/A N/A N/A N/A	N/A N/A N/A N/A N/A N/A
onfiguration # TE 1.4 MHz Single TE 3 MHz Single C	Carrier Low Chanel Mid Channel High Channel arrier Low Chanel Mid Channel High Channel High Channel High Channel	Signature	Jun Sa	1.145 MHz 1.143 MHz 1.149 MHz 2.837 MHz 2.856 MHz 2.806 MHz	N/A N/A N/A N/A N/A N/A	N/A N/A N/A N/A N/A N/A




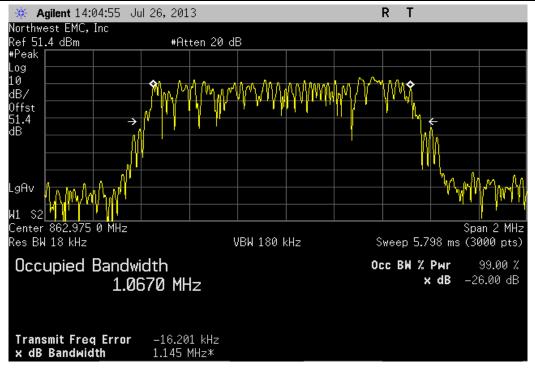


Value Limit Decut	Value Limit Result		LTE 1.4 MH	Iz Single Carrier, I	Mid Channel		
					Value	Limit	Populé

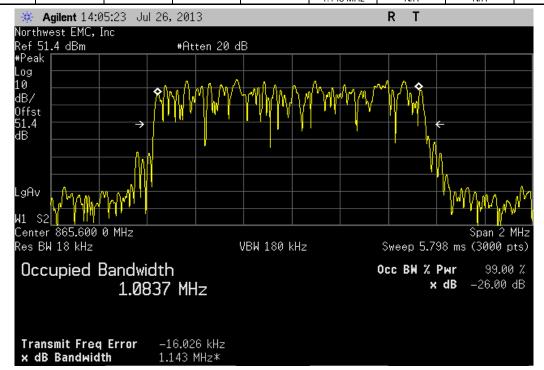





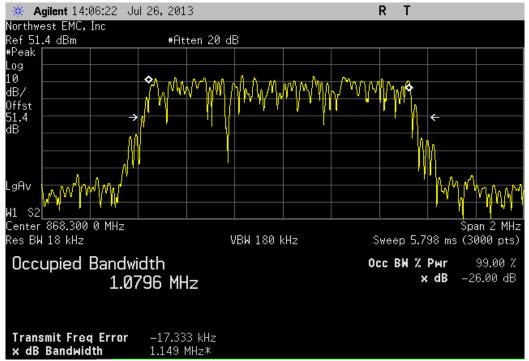



Value Limit Besult		LTE 3 MH	z Single Carrier, L	ow Chanel		
				Value	Limit	Result
				2 837 MHz	N/A	N/A

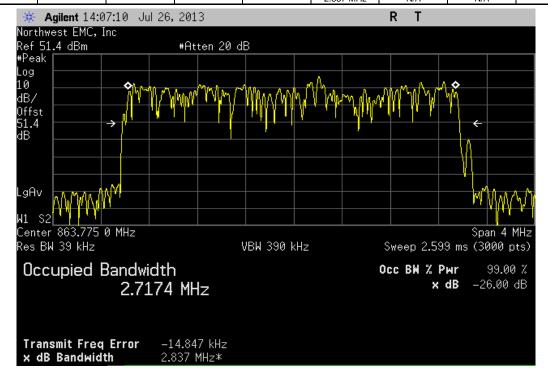




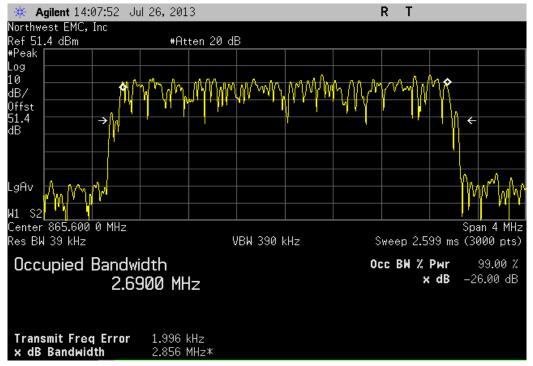


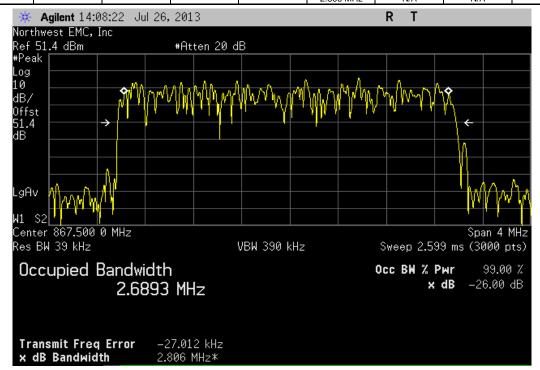





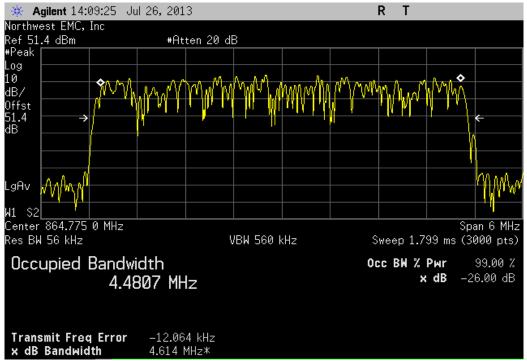

Value Limit Result

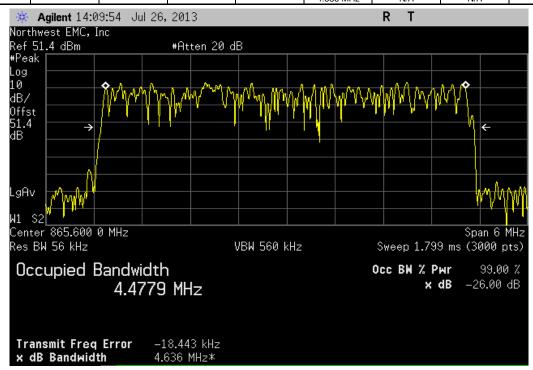



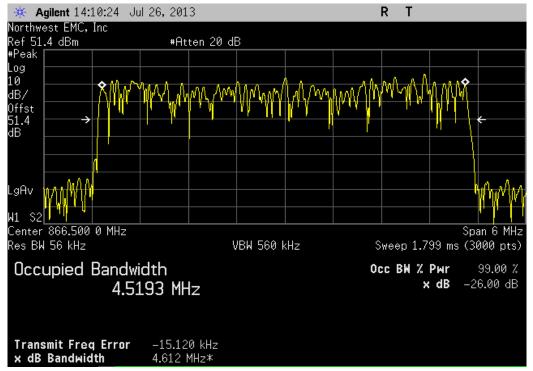



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
DC Power Supply	Hewlett Packard	6574A	TPX	NCR	0
Power Sensor	Agilent	E4412A	SQE	4/11/2012	24
Power Meter	Hewlett Packard	E4418A	SPA	4/11/2012	24
Signal Generator	Agilent	E8257D	TGU	2/1/2012	36
Spectrum Analyzer	Agilent	E4440A	AFA	6/15/2012	24

CLIENT EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Interval
COBRA Signal Generator	KMW Communications	N/A	NCR	N/A
Sony Laptop	Sony	SUS151A11C	NCR	N/A
Power Head	Agilent	E9300H	4/1/2012	24
Power Meter	Agilent	E4419B	NCR	N/A
Directional Coupler	S M Electronics	MC4020-20	NCR	N/A
Attenuator 30dB 500W	Fairview Microwave	N/A	NCR	N/A

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION


The 99% bandwidth was measured utilizing the analyer's peak detector and measuring the carrier's 26 dB occupied bandwidth based on the peak output power level measured. A plot was taken to show the occupied bandwidth is contained within the allowable transmit band.


A direct connection was made between the EUT and a spectrum analyzer. The resolution bandwidth was approximately equal to 1% of the 20dB bandwidth and the video bandwidth was greater than or equal to the resolution bandwidth.

The occupied bandwidth was measured with the EUT configured in the modes called out in the data sheets.





	MHz i-DEN RRH				Work Order:		
Serial Number: U33						07/26/13	
	W Communications				Temperature:		
Attendees: Edv	ward Lee				Humidity:	42%	
Project: No					Barometric Pres.:		
Tested by: Jae			Power:	448 VDC	Job Site:	OC10	
TEST SPECIFICATIONS	S			Test Method			
FCC 90.691:2013				ANSI/TIA/EIA-603-C-2004			
COMMENTS							<u> </u>
Port B.							
DEVIATIONS FROM TE	ST STANDARD						
None							
			Chan				
Configuration #	1		-				
		Signature					
1					Value	Limit	Result
CDMA Single Carrier							
	v Channel				1.303 MHz	N/A	N/A
	l Channel				1.2305 MHz	N/A	N/A
	h Channel				1.277 MHz	N/A	N/A
EVDO Single Carrier							
	v Channel				1.191MHz	N/A	N/A
	l Channel				1.299 MHz	N/A	N/A
Hig	h Channel				1.290 MHz	N/A	N/A




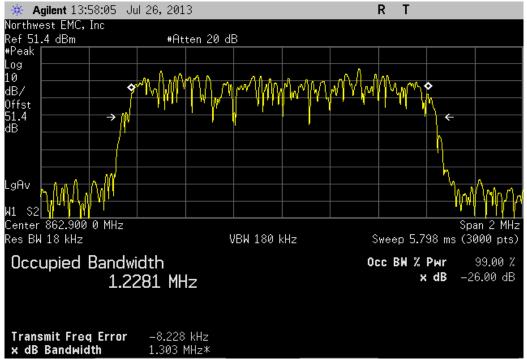


Value Limit Result

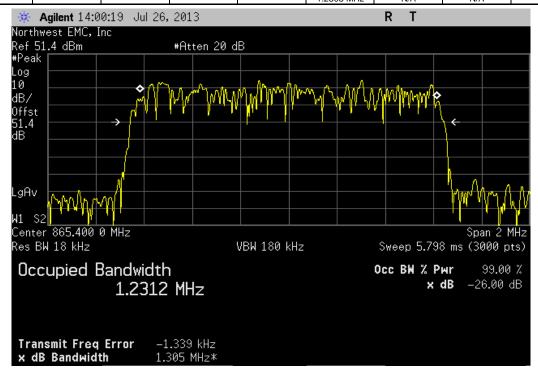





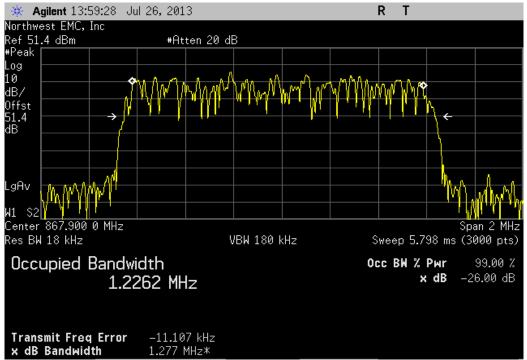


Value Limit Result		EVDO S	ingle Carrier, Low	Channel	
Value Limit Result				Walan	 D 14

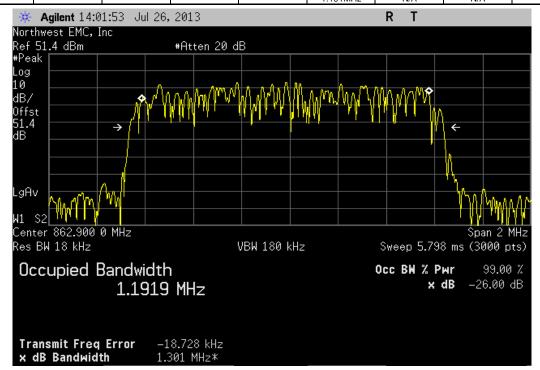



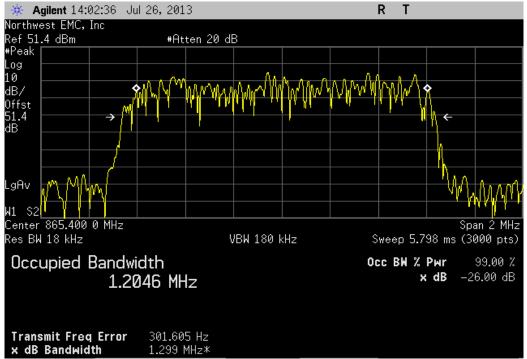

	EVDO Si	ingle Carrier, High	Channel			
			Value	Limit	Result	
			1.290 MHz	N/A	N/A	

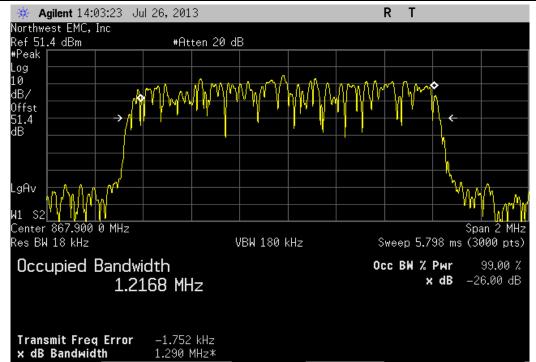

EMISSION MASK-CDMA/EVDO-A

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Meter	Hewlett Packard	E4418A	SPA	4/21/2010	24
Power Sensor	Agilent	E4412A	SQE	4/21/2010	24
Signal Generator	Agilent	E8257D	TGU	1/26/2011	12
Directional Coupler 800MHz-2500MHz	Fairview Microwave	SMC4030	RGN	6/17/2011	24
Spectrum Analyzer	Agilent	E4440A	AFG	4/28/2011	12

CUSTOMER TEST SET				
Description	Manufacturer	Model	Last Cal.	Interval
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Vector Signal Generator	Agilent	N5182	6/7/2010	24
KMW Cobra Reliability Analyzer	KMW Cormmunications	N/A	NCR	N/A
Power Meter	Agilent	E4419B	4/1/2010	24
Power Head	Agilent	E9300H	NCR	N/A
Power Head	Agilent	E9300H	NCR	N/A
DC Power Supply	Hewlett Packard	6574A	NCR	N/A
30 dB Directional Coupler (800-2500 MHz)	Fairview Microwave	SMC4030	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	NCR	N/A
Fujitsu Laptop	Fujitsu	A6030	NCR	N/A
RRH220 Software	KMW Cormmunications	N/A	NCRA	N/A

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.


TEST DESCRIPTION

Per the Sprint Nextel's request for Waiver to permit the operation of Broadband CDMA Technology in the 817 - 824/862 - 869 MHz band, this testing was done for CDMA and EVDO operation.


- § 90.691 Emission mask requirements for EA-based systems.
- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

NORTHWEST	EMISSION MASK - CDMA			XMit 2011.08.04 PsaTx 2011.07.05
EMC EUT: 800MHz		Work Order:	KMWC0030	1 3a1x 2011.07:05
Serial Number: U311210	059	Date:	09/07/11	
Customer: KMW Co Attendees: Joshua		Temperature: Humidity:		
Project: None Tested by: Jaemi St		Barometric Pres.: Job Site:		
TEST SPECIFICATIONS FCC 90.691:2011	TEST METHOD ANSI/TIA/EIA-603-C-2004			
	ANS// IIA/EIA-603-C-2004			
COMMENTS Receive Mode. Scan 2 Upda	ite.			
DEVIATIONS FROM TEST ST	FANDARD			
Configuration #	1 Jan Ste			
Comiguration #	Signature			
		Value	Limit	Result
CDMA Antenna	Port A			
	Single Carrier, 862.9 MHz Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Single Carrier, 867.9 MHz	N/A	See Graphs	Pass
	Upper Band Edge Zoomed In	N/A	See Graphs	Pass
	Upper Band Edge Zoomed Out Multi Carrier [2 FA], (862.9 MHz, 867.9 MHz)	N/A	See Graphs	Pass
	Lower Band Edge Zoomed In Lower Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier (3 FA), (862.9 MHz, 865.4 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out	N/A	See Graphs	Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [5 FA], (862.9 MHz, 864.16 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Upper Band Edge Zoomed In	N/A N/A	See Graphs See Graphs	Pass Pass
Antenna	Upper Band Edge Zoomed Out	N/A	See Graphs	Pass
ratoma	Single Carrier, 862.9 MHz Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out	N/A N/A	See Graphs	Pass
	Single Carrier, 867.9 MHz Upper Band Edge Zoomed In	N/A	See Graphs	Pass
	Upper Band Edge Zoomed Out Multi Carrier [2 FA], (862.9 MHz, 867.9 MHz)	N/A	See Graphs	Pass
	Lower Band Edge Zoomed In Lower Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [3 FA], (862.9 MHz, 865.4 MHz, 867.9 MHz)			
	Lower Band Edge Zoomed In Lower Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [5 FA], (862.9 MHz, 864.16 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Upper Band Edge Zoomed In	N/A N/A	See Graphs See Graphs	Pass Pass
EVDO	Upper Band Edge Zoomed Out	N/A	See Graphs	Pass
Antenna				
	Single Carrier, 862.9 MHz Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Single Carrier, 867.9 MHz	N/A	See Graphs	Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [2 FA], (862.9 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out	N/A	See Graphs	Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [3 FA], (862.9 MHz, 865.4 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Upper Band Edge Zoomed In	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed Out Multi Carrier [5 FA], (862.9 MHz, 864.16 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz)	N/A	See Graphs	Pass
	Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Upper Band Edge Zoomed In	N/A N/A	See Graphs See Graphs	Pass Pass
Antenna	Upper Band Edge Zoomed Out Port B	N/A	See Graphs	Pass
	Single Carrier, 862.9 MHz Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Single Carrier, 867.9 MHz	N/A	See Graphs	Pass
	Upper Band Edge Zoomed In	N/A	See Graphs	Pass
	Upper Band Edge Zoomed Out Multi Carrier [2 FA], (862.9 MHz, 867.9 MHz)	N/A	See Graphs	Pass
	Lower Band Edge Zoomed In Lower Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [3 FA], (862.9 MHz, 865.4 MHz, 867.9 MHz)			
	Lower Band Edge Zoomed In Lower Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed In Upper Band Edge Zoomed Out	N/A N/A	See Graphs See Graphs	Pass Pass
	Multi Carrier [5 FA], (862.9 MHz, 864.16 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz) Lower Band Edge Zoomed In	N/A	See Graphs	Pass
	Lower Band Edge Zoomed Out Upper Band Edge Zoomed In	N/A N/A	See Graphs See Graphs	Pass Pass
	Upper Band Edge Zoomed Out	N/A N/A	See Graphs	Pass




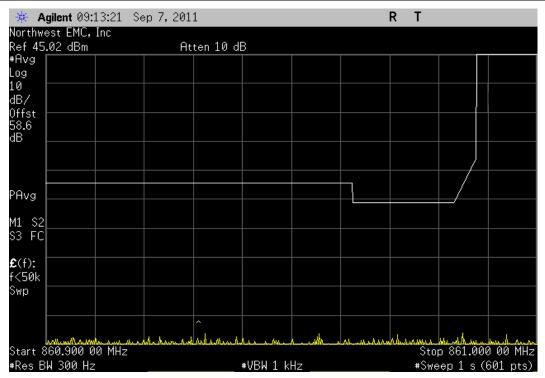


CDMA, Antenna Port A, Single Carrier, 862.9 MHz, Lower Band Edge Zoomed Out							
				Value	Limit	Result	
				N/A	See Graphs	Pass	

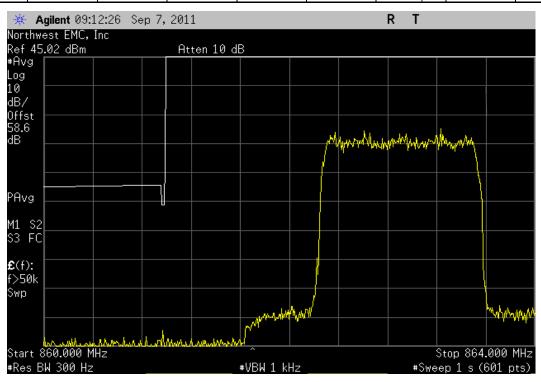




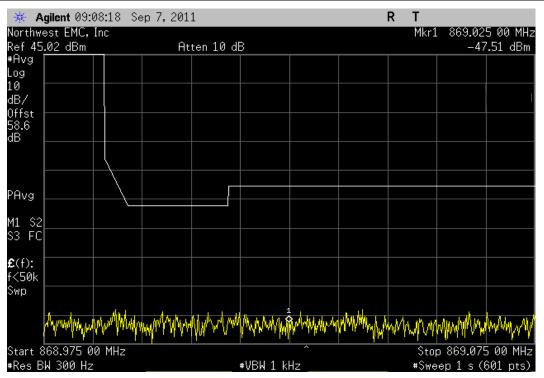


	CDMA, Antenn	a Port A, Single C	Carrier, 867.9 MH	z, Upper Band Ed	dge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

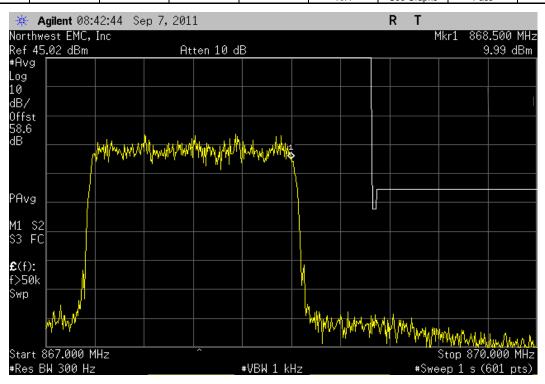




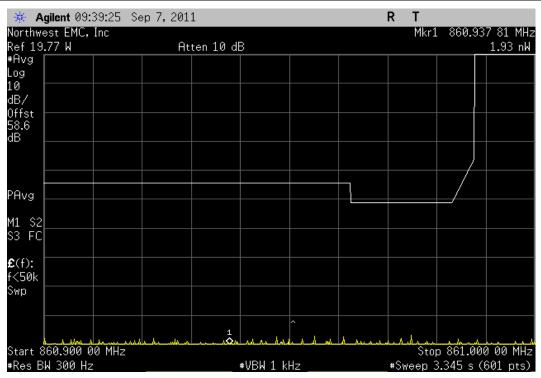


CDMA,	Antenna Port A,	Multi Carrier [2 F	A], (862.9 MHz, 8	67.9 MHz), Lowe	r Band Edge Zoor	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

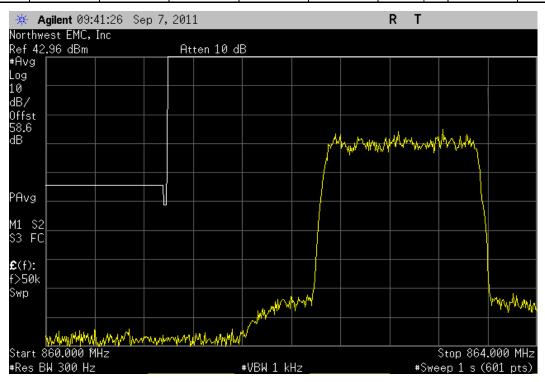




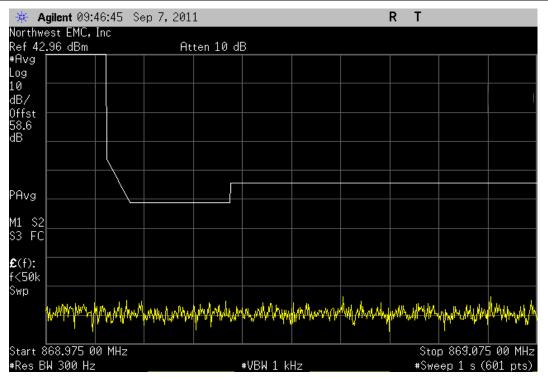


CDMA,	Antenna Port A,	Multi Carrier [2 F	A], (862.9 MHz, 8	67.9 MHz), Uppei	r Band Edge Zoor	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

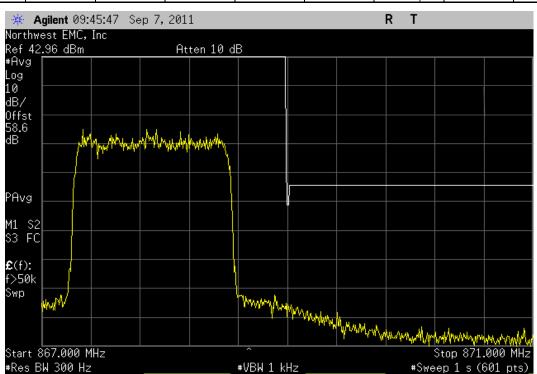




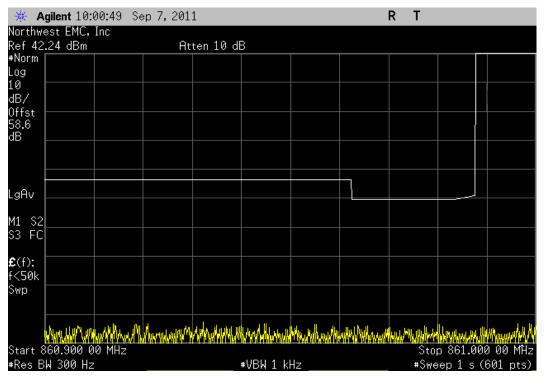


CDMA, Anter	ına Port A, Multi C	Carrier [3 FA], (86	2.9 MHz, 865.4 N	1Hz, 867.9 MHz),	Lower Band Edge	e Zoomed Out
				Value	Limit	Result
				N/A	See Graphs	Pass

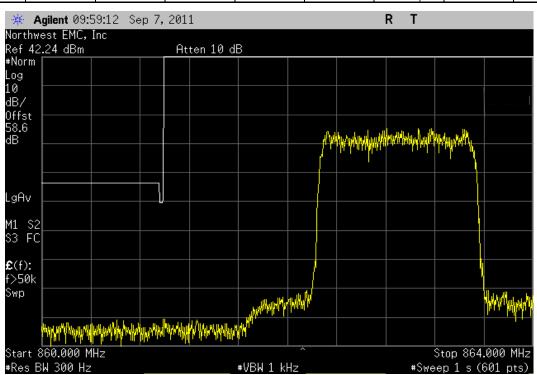




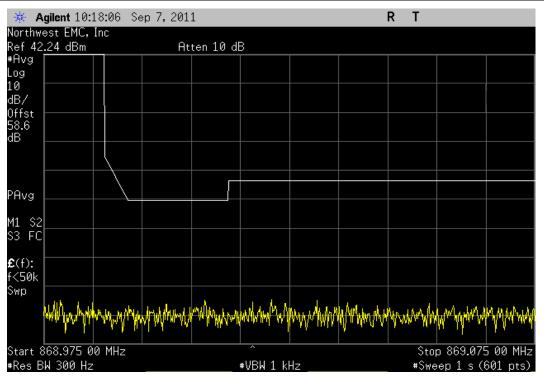


	CDMA, Anten	na Port A, Multi C	Carrier [3 FA], (86	2.9 MHz, 865.4 N	IHz, 867.9 MHz),	Upper Band Edge	e Zoomed Out
					Value	Limit	Result
Γ					N/A	See Graphs	Pass

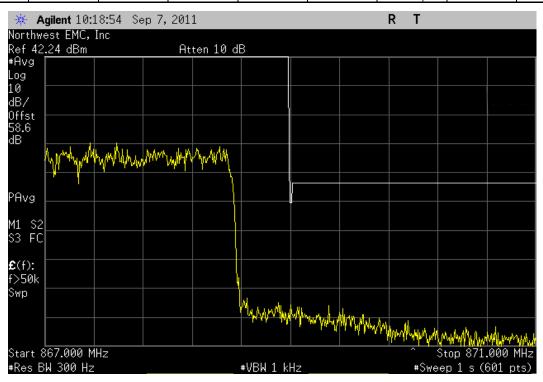





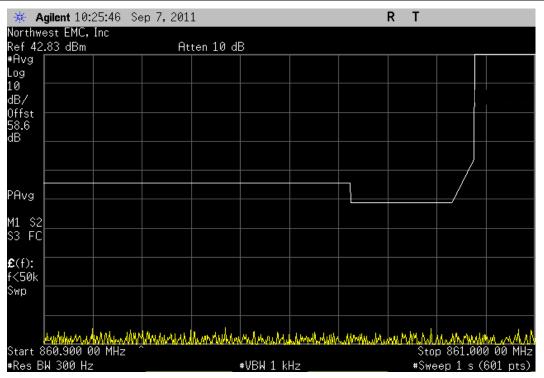

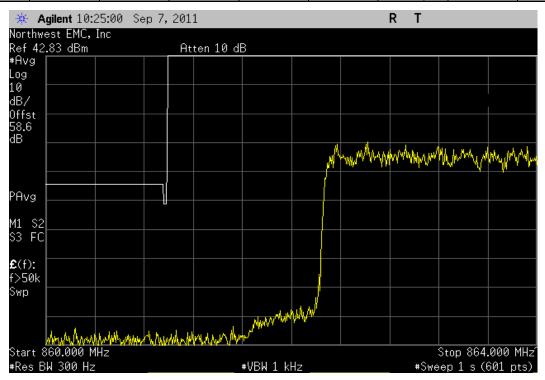




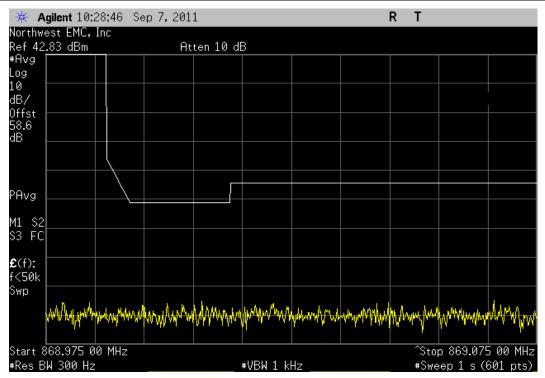


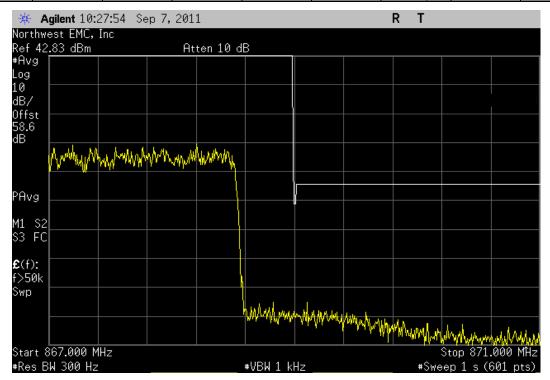




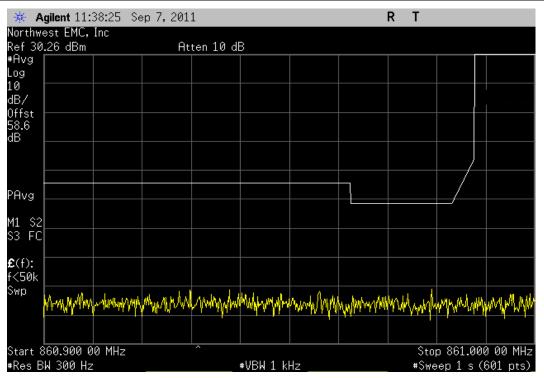


	CDMA, Antenna	a Port B, Single C	Carrier, 862.9 MH	z, Lower Band Ed	lge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

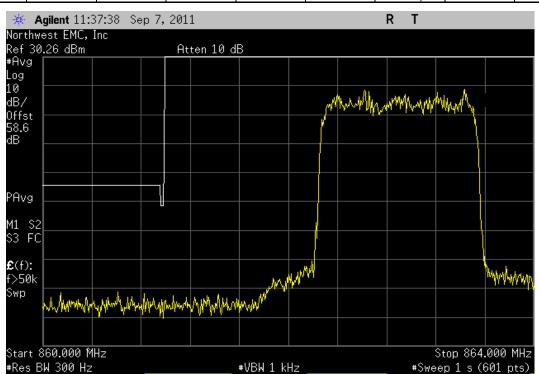




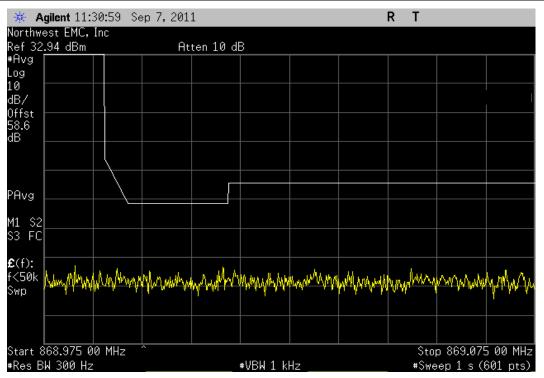


	CDMA, Antenn	a Port B, Single C	Carrier, 867.9 MH	z, Upper Band Ed	ge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

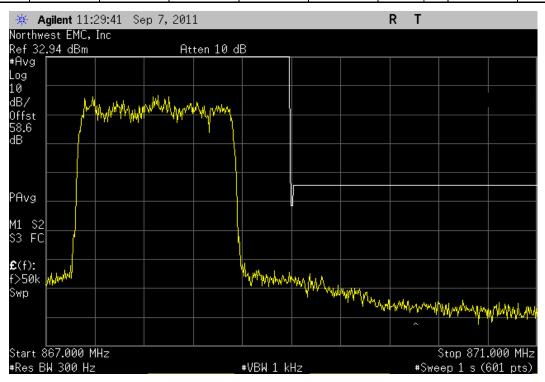





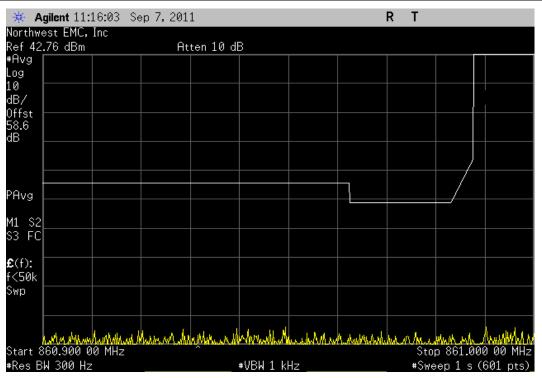


Value Limit Result

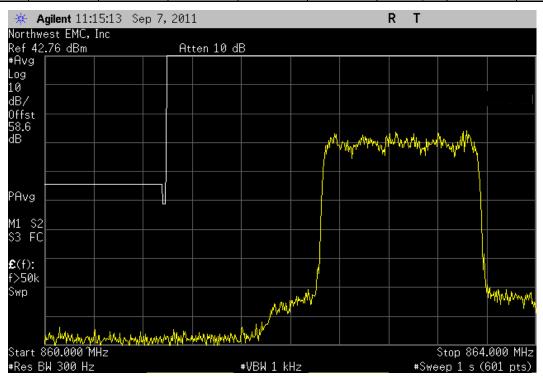





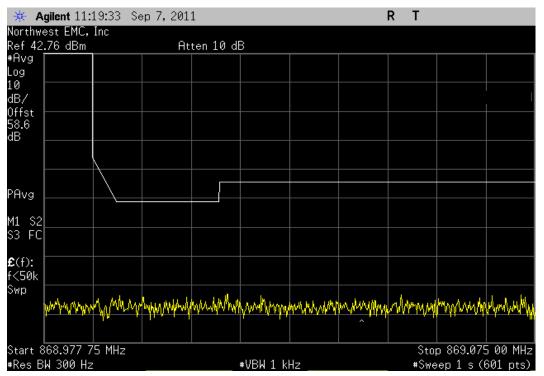


CDMA,	Antenna Port B,	Multi Carrier [2 F/	A], (862.9 MHz, 8	67.9 MHz), Uppe	Band Edge Zoon	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

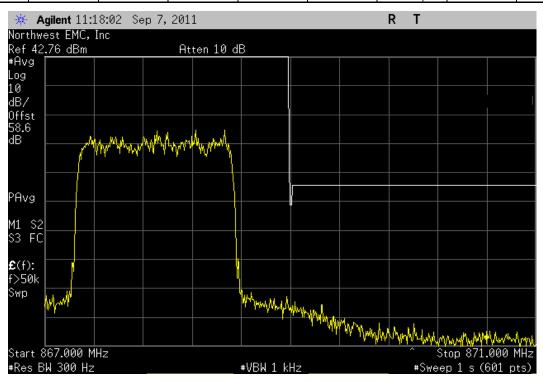




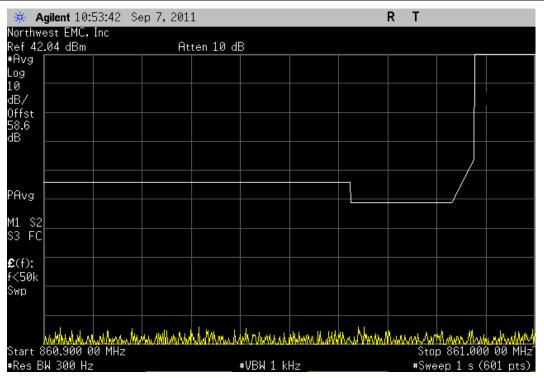


Value Limit Beaut	Value Limit Result
	value Lillik Result

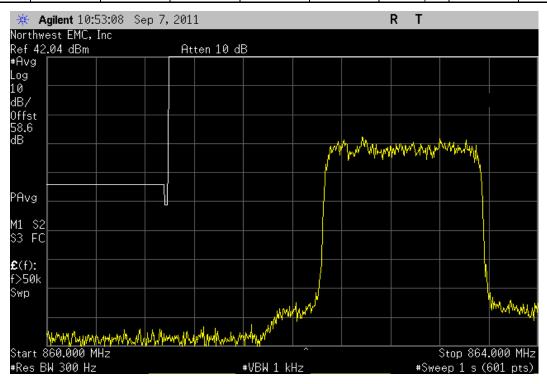




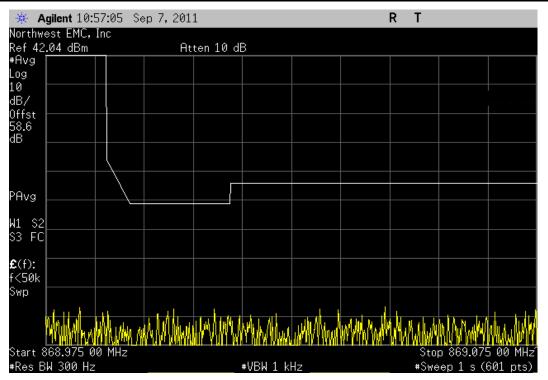


Value Limit Result	CDMA, Anter	ına Port B, Multi C	Carrier [3 FA], (86	2.9 MHz, 865.4 N	IHz, 867.9 MHz),	Upper Band Edge	e Zoomed Out
							5 "

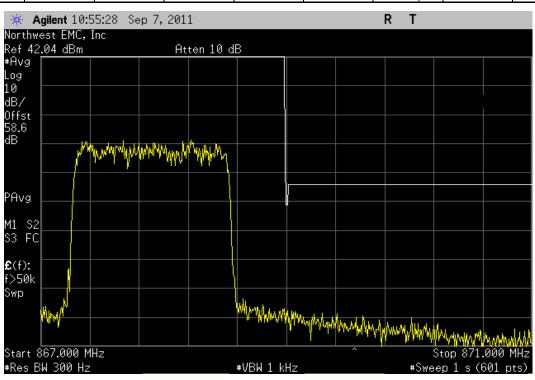





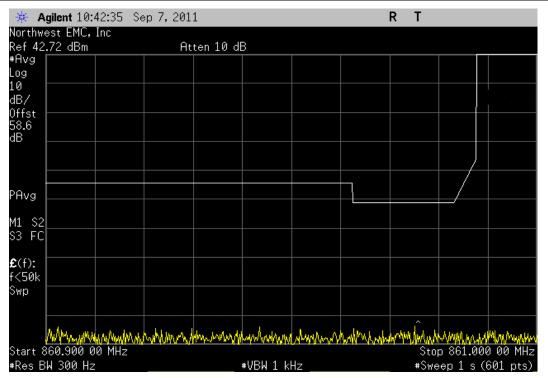

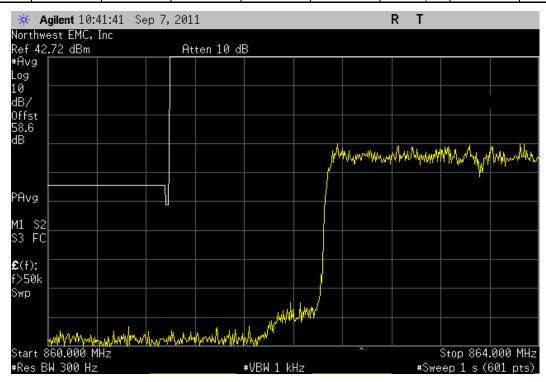




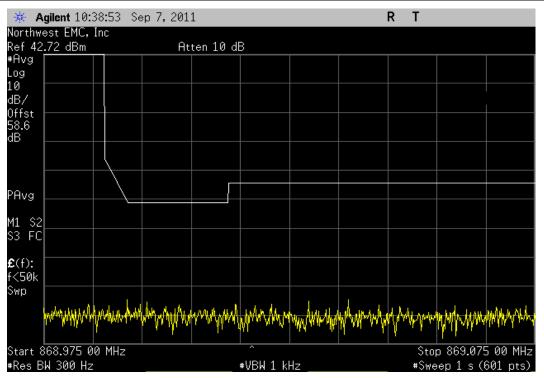


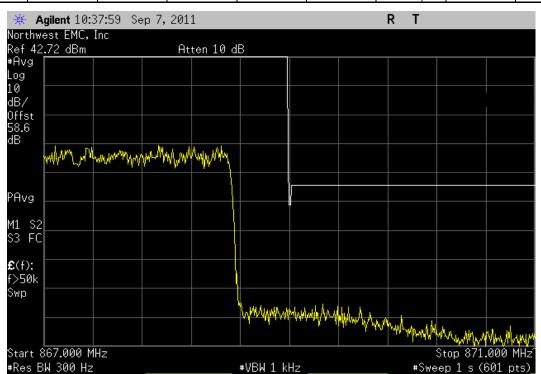




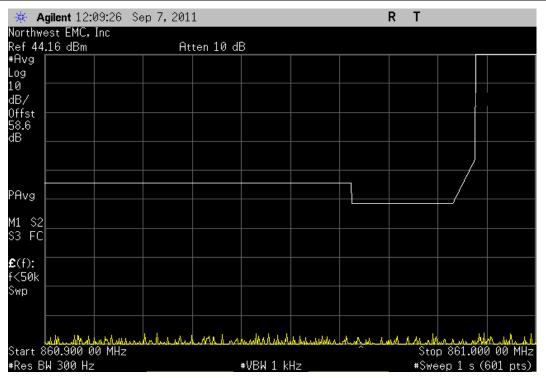


	EVDO, Antenna	a Port A, Single C	arrier, 862.9 MH:	z, Lower Band Ed	ge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

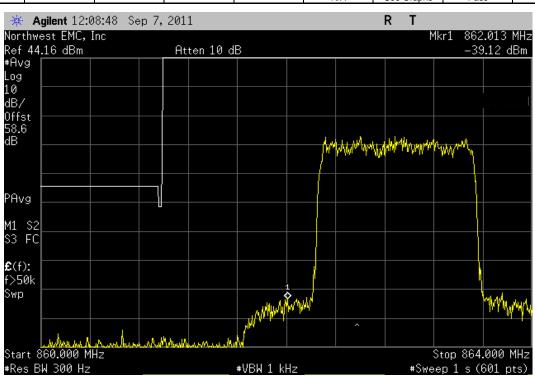




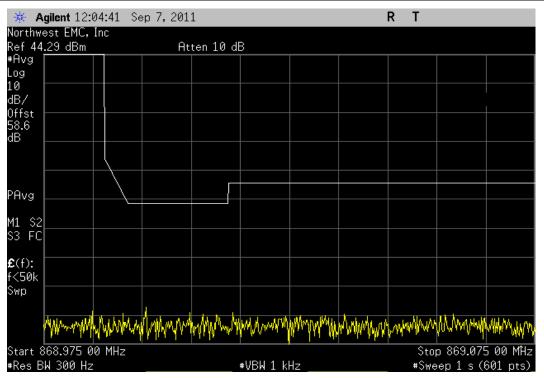


	EVDO, Antenna	a Port A, Single C	arrier, 867.9 MH	z, Upper Band Ed	ge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

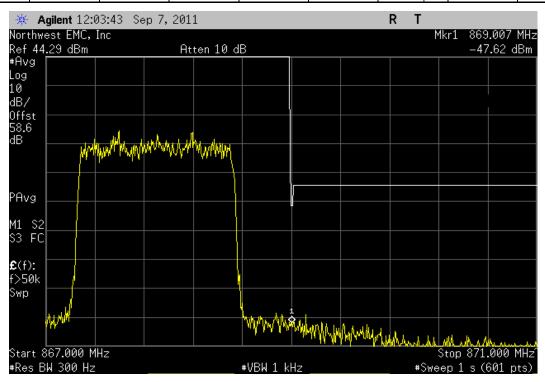




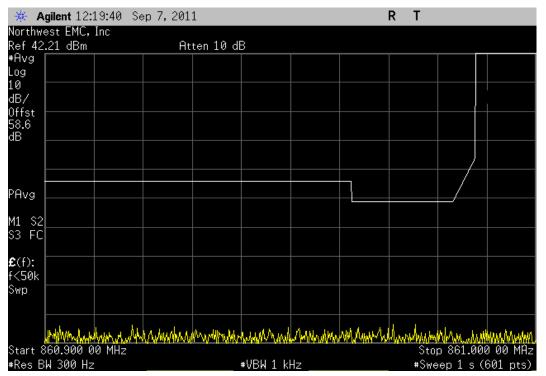


EVDO,	Antenna Port A,	Multi Carrier [2 FA	A], (862.9 MHz, 8	67.9 MHz), Lowei	Band Edge Zoon	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

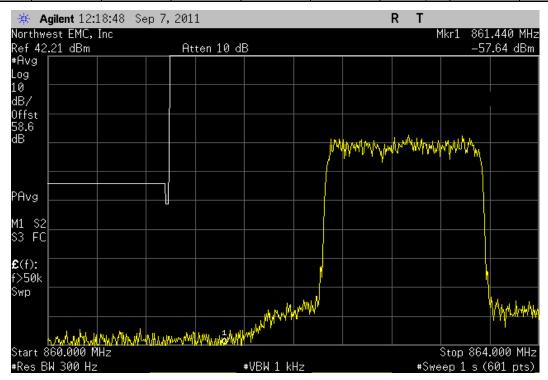





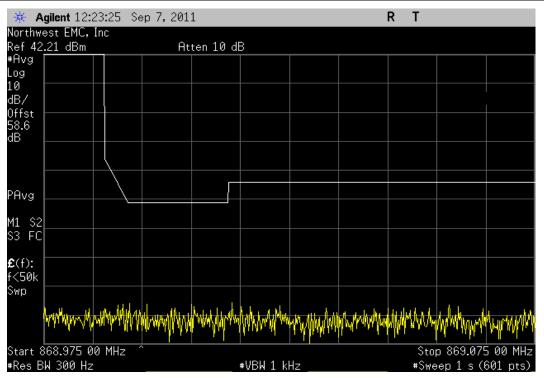


EVDO,	Antenna Port A,	Multi Carrier [2 F	A], (862.9 MHz, 8	67.9 MHz), Uppeı	Band Edge Zoon	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

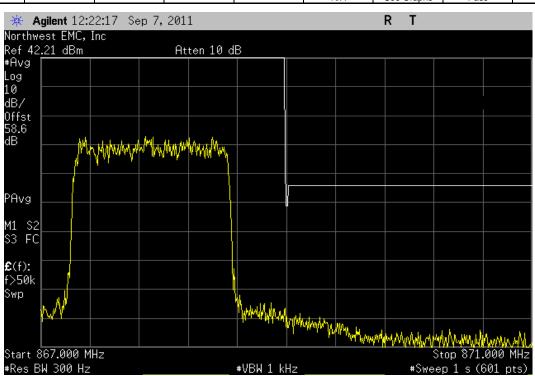




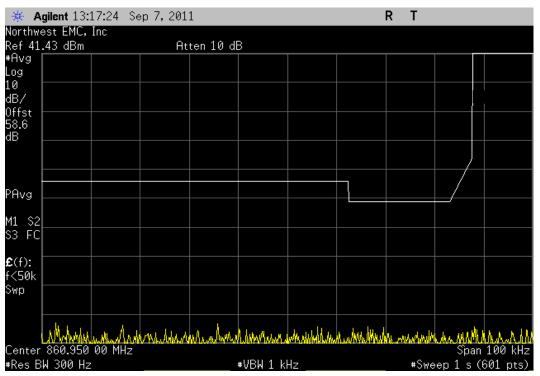


EVDO, Anten	ına Port A, Multi C	Carrier [3 FA], (86:	2.9 MHz, 865.4 N	IHz, 867.9 MHz),	Lower Band Edge	e Zoomed Out
				Value	Limit	Result
				N/A	See Graphs	Pass

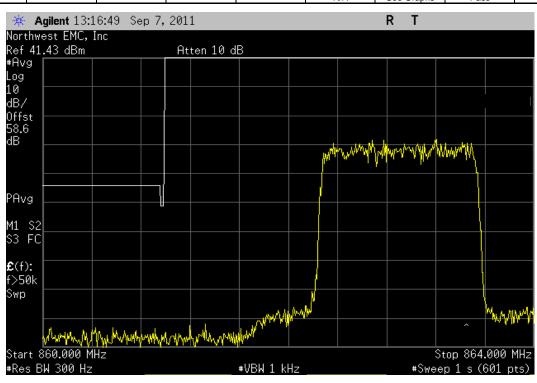




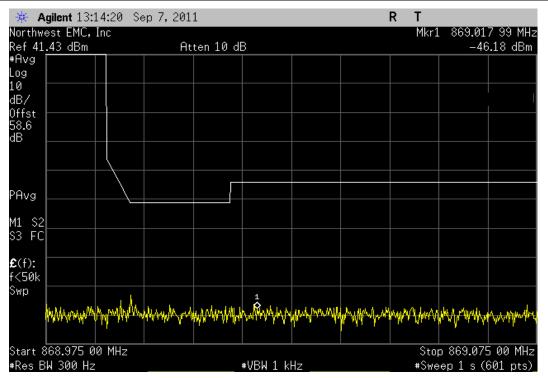

Value Limit Result

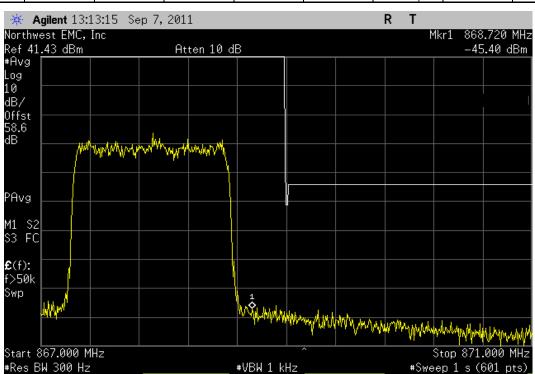




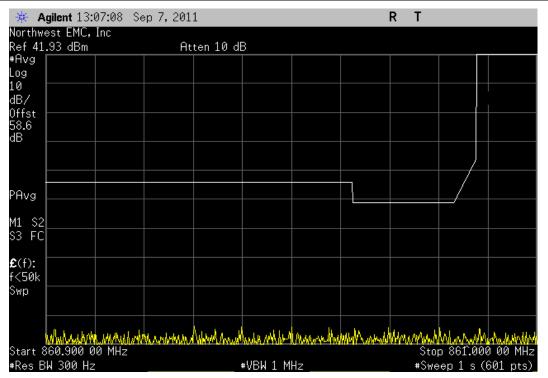


EVDO, Antenna Port A, Multi Carrier [5 FA], (862.9 MHz, 864.16 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz), Lower Band Edge Zoomed Out


Value Limit Result

N/A See Graphs Pass

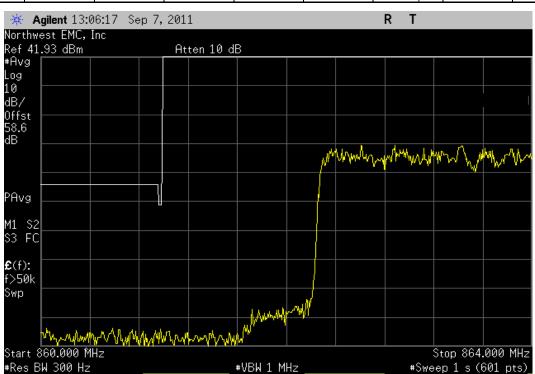




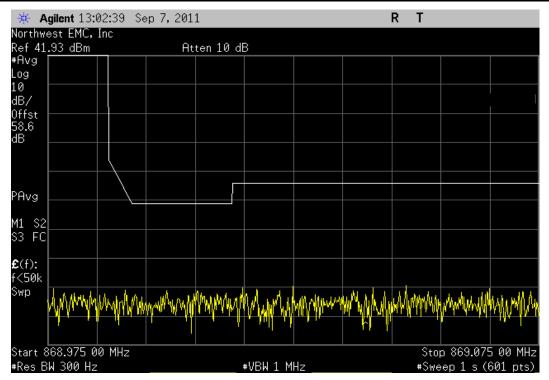


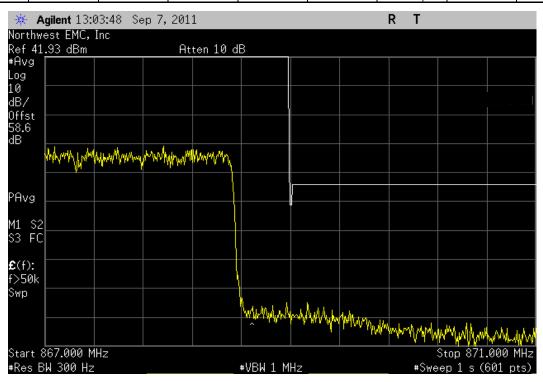




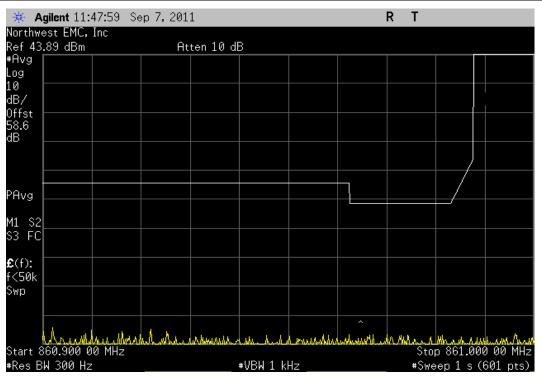



	EVDO, Antenna	a Port B, Single C	Carrier, 862.9 MH	z, Lower Band Ed	ge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

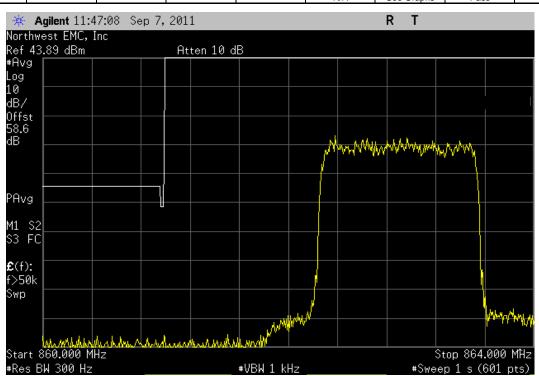


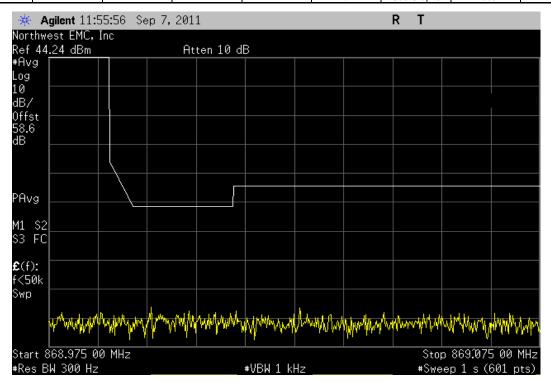


	EVDO, Antenna	a Port B, Single C	arrier, 867.9 MH	z, Upper Band Ed	ge Zoomed Out	
				Value	Limit	Result
				N/A	See Graphs	Pass

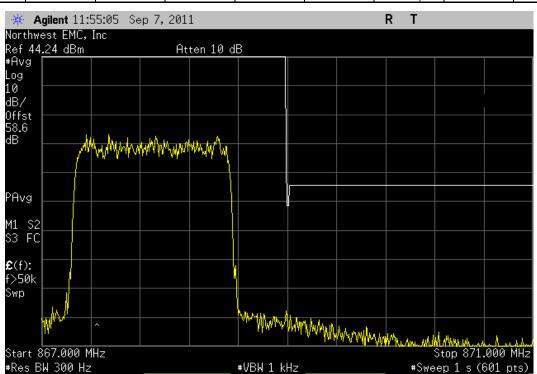




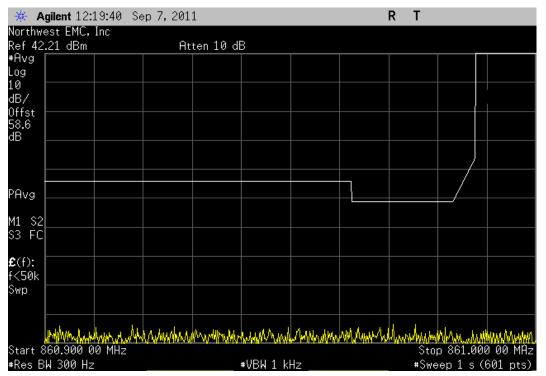


Value Limit Result	EVDO), Antenna Port B,	Multi Carrier [2 FA	A], (862.9 MHz, 86	67.9 MHz), Lower	Band Edge Zoon	ned Out
					Value	Limit	Result

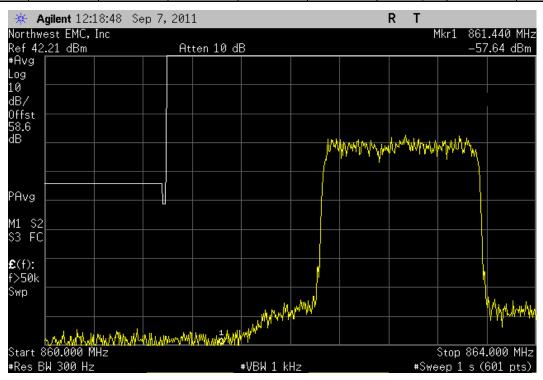





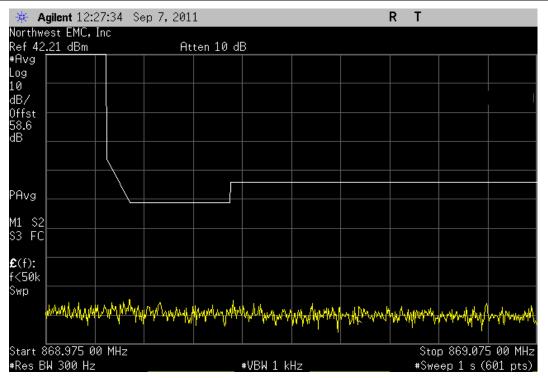


EVDO,	Antenna Port B,	Multi Carrier [2 F	A], (862.9 MHz, 8	67.9 MHz), Upper	Band Edge Zoon	ned Out
				Value	Limit	Result
				N/A	See Graphs	Pass

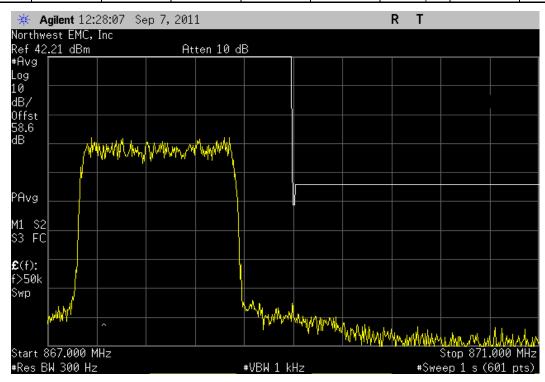




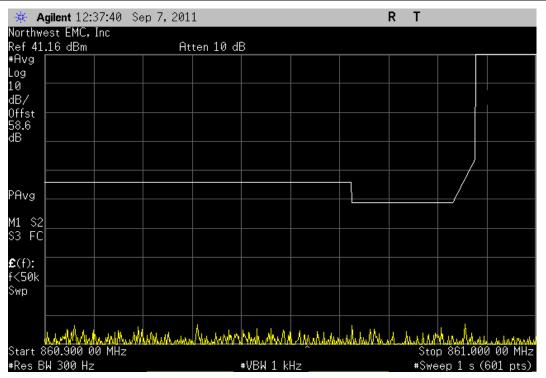


EVDO, Anten	na Port B, Multi C	Carrier [3 FA], (86:	2.9 MHz, 865.4 N	IHz, 867.9 MHz),	Lower Band Edge	Zoomed Out
				Value	Limit	Result
				N/A	See Graphs	Pass

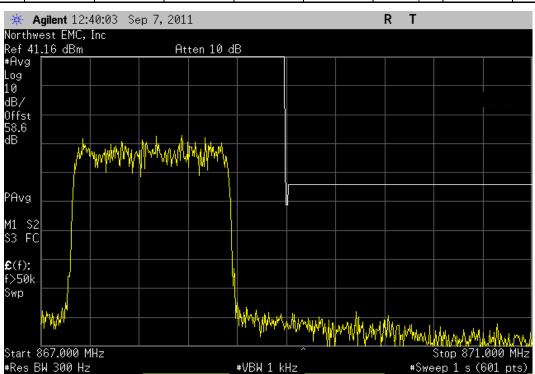




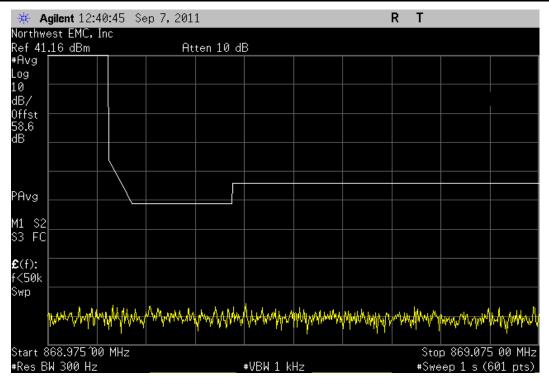


EVDO, Anten	na Port B, Multi C	arrier [3 FA], (862	2.9 MHz, 865.4 N	lHz, 867.9 MHz),	Upper Band Edge	Zoomed Out
				Value	Limit	Result
				N/A	See Graphs	Pass

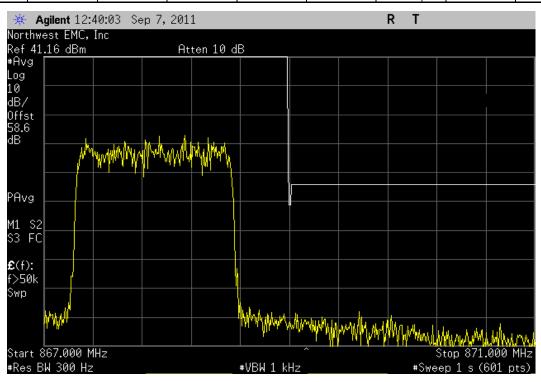





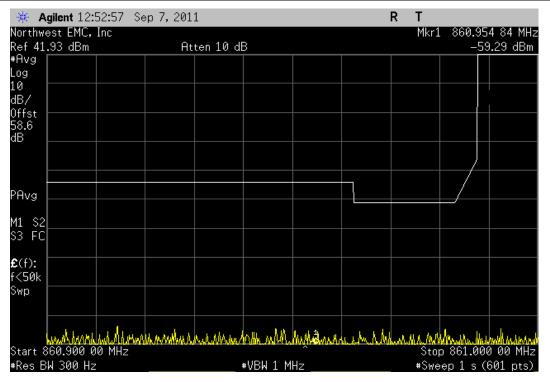

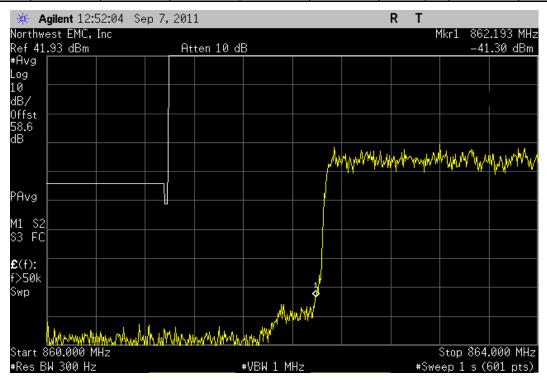



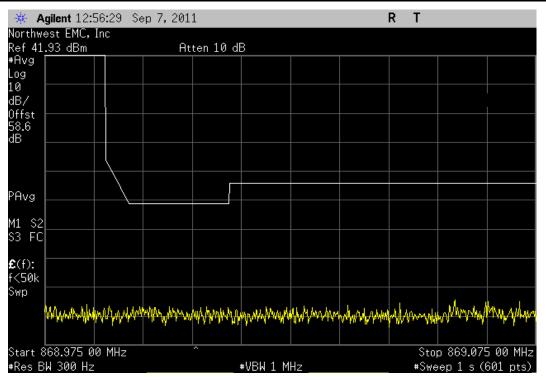

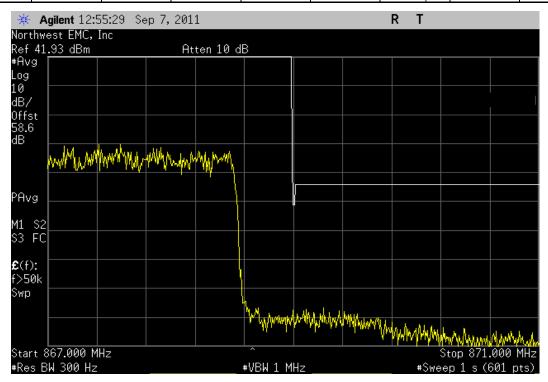



EMISSION MASK - LTE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4440A	AFG	5/16/2012	12
Signal Generator	Agilent	E8257D	TGU	1/26/2011	12
Directional Coupler 800MHz-2500MHz	Fairview Microwave	SMC4030	RGN	6/17/2011	24

CUSTOMER TEST SET

Description	Manufacturer	Model	Last Cal.	Interval
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Vector Signal Generator	Agilent	N5182	6/7/2010	24
KMW Cobra Reliability Analyzer	KMW Cormmunications	N/A	NCR	N/A
Power Meter	Agilent	E4419B	4/1/2010	24
Power Head	Agilent	E9300H	NCR	N/A
Power Head	Agilent	E9300H	NCR	N/A
DC Power Supply	Hewlett Packard	6574A	NCR	N/A
dB Directional Coupler (800-2500 M	Fairview Microwave	SMC4030	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	NCR	N/A
Fujitsu Laptop	Fujitsu	A6030	NCR	N/A
RRH220 Software	KMW Cormmunications	N/A	NCR	N/A


MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION

The emission mask defined by 90.691 was only measured with the EUT set to low and high transmit frequencies. At each channel, measurements were made at the highest output settings

A directional coupler and coaxial cable loss were compensated in the spectrum analyzer. Measureing 100kHz of spectrum with 10kHz resolution bandwidth and an average detector were used.





EUT: RRH2			Work Order:		
Serial Number: None		no.	Date: Temperature:	09/11/12	
Customer: KMW Attendees: Edwa			Humidity:		
Project: None	9		Barometric Pres.:	1016	
Tested by: John	nny Candelas	Power: Test Method	Job Site:	OC07	
90.691:2012		ANSI/TIA/EIA-603-C-	2004		
MENTS t had specific limits	that were provi	ded to them by Lucentd. It called for a 30kHz resolution bandwidth and a limit of	-69dBm at 861.35 MHz and -20dBm at 862 and 869 MH:	2.	
ATIONS FROM TEST	T STANDARD				
iguration #	1	for A. Coller			
		Signature	Value	Limit	Resul
A	4.414		value	Linix	Nesui
LTE 1	1.4M Low				
		Low Center	-80.28 -39.41	-69 -20	Pass Pass
		High	-36.92	-20	Pass
	Mid				
		Low Center	-85.98 -41.33	-69 -20	Pass Pass
		High	-36.07	-20	Pass
	High		07.7		<u> </u>
		Low Center	-87.7 -41.17	-69 -20	Pass Pass
		High	-27.63	-20	Pass
LTE 3					
	Low	Low	-77.87	-69	Pass
		Center	-40.41	-20	Pass
	Mid	High	-36.24	-20	Pass
	IVIIG	Low	-83.58	-69	Pass
		Center	-41.61	-20	Pass
	I limb	High	-34.3	-20	Pass
	High	Low	-85.51	-69	Pass
		Center	-40.25	-20	Pass
	- N	High	-28.89	-20	Pass
LTE 5	5M Low				
	LOW	Low	-77.69	-69	Pass
		Center	-40.07	-20	Pass
	Mid	High	-35.06	-20	Pass
	WIIG	Low	-79.59	-69	Pass
		Center	-40.67	-20	Pass
	High	High	-33.89	-20	Pass
	riigir	Low	-80.51	-69	Pass
		Center	-41.35	-20	Pass
В		High	-30.8	-20	Pass
LTE 1	1.4M				
	Low				
		Low Center	-80.12 -40.02	-69 -20	Pass Pass
		High	-40.02 -37.08	-20 -20	Pass
	Mid				
		Low Center	-85.4 -40.88	-69 -20	Pass Pass
		Center High	-40.88 -36.35	-20 -20	Pass
	High				
		Low	-87.29 -40.49	-69 -30	Pass
		Center High	-40.49 -27.22	-20 -20	Pass Pass
LTE 3					
	Low	Low	-78.86	-69	Pass
		Center	-76.66	-69 -20	Pass
		High	-35.25	-20	Pass
	Mid	Low	-84.97	-69	Pass
		Center	-84.97 -40.05	-69 -20	Pass
		High	-32.9	-20	Pass
	High	Low	-84.73	-69	Pass
		Center	-84.73 -41.44	-69 -20	Pass
		High	-29.25	-20	Pass
LTE 5					
	Low	Low	-79.15	-69	Pass
		Center	-40.39	-20	Pass
	h 4: 1	High	-33.99	-20	Pass
	Mid	Low	-80.75	-69	Pass
		Center	-40.06	-20	Pass
		High	-31.74	-20	Pass
	High	Low	90.26	-60	Dana
		Low Center	-80.36 -41.38	-69 -20	Pass Pass
			71.00		1 433

		н	igh	-32.21	-20	Pass
Multi-Carrier Port A						
	LTE 1.4M					
		Low				
			OW Contact	-75.02	-69	Pass
			enter igh	-40.38 -36.14	-20 -20	Pass
		Mid	ign	-36.14	-20	Pass
			OW	-83.85	-69	Pass
			enter	-40.77	-20	Pass
			igh	-34.72	-20	Pass
		High	91	02	20	7 000
			ow	-84.9	-69	Pass
			enter	-40.62	-20	Pass
			igh	-28.05	-20	Pass
	LTE 3M					
		Low				
			ow	-76.45	-69	Pass
			enter	-39.79	-20	Pass
		Н	igh	-33.64	-20	Pass
		Mid				_
			OW .	-76.29	-69	Pass
			enter	-39.78	-20	Pass
			igh	-32.89	-20	Pass
		High	ow	-77.46	-69	Pass
			enter	-40.04	-20	Pass
		H	idh	-30 25	-20	Pass
Multi-Carrier Port B		Н	igh	-30.25	-20	Pass
Multi-Carrier Port B	LTE 1.4M	Н	ign	-30.25	-20	Pass
Multi-Carrier Port B		Low	ign —	-30.25	-20	Pass
Multi-Carrier Port B		Low	ow	-77.01	-69	Pass
Multi-Carrier Port B		Low Lo	ow enter	-77.01 -39.37	-69 -20	Pass Pass
Multi-Carrier Port B		Low C C H	ow	-77.01	-69	Pass
Multi-Carrier Port B		Low Lo C H	ow enter igh	-77.01 -39.37 -35.44	-69 -20 -20	Pass Pass Pass
Multi-Carrier Port B		Low C H Mid	ow enter igh	-77.01 -39.37 -35.44	-69 -20 -20	Pass Pass Pass
Multi-Carrier Port B		Low Le C H Mid Le C C	ow enter igh ow enter	-77.01 -39.37 -35.44 -84.17 -41.36	-69 -20 -20 -69 -20	Pass Pass Pass Pass
Multi-Carrier Port B		Low Low C C H Mid Loc C H H H	ow enter igh	-77.01 -39.37 -35.44	-69 -20 -20	Pass Pass Pass
Multi-Carrier Port B		Low Low C H Mid Loc C H High	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25	-69 -20 -20 -69 -20 -20	Pass Pass Pass Pass Pass
Multi-Carrier Port B		Low Le C H Mid Le C H High	ow enter igh onv enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25	-69 -20 -20 -69 -20 -20	Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B		Low LoC H Mid LoC H High	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37	-69 -20 -20 -69 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B		Low LoC H Mid LoC H High	ow enter igh onv enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25	-69 -20 -20 -69 -20 -20	Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low LoC H Mid LoC H High	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37	-69 -20 -20 -69 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Lic C H Mid Lic C H High Lic C H Low	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37	-69 -20 -20 -20 -20 -20 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Li C H Mid Li C C H High Li C C C C C C C C C C C C C C C C C C	ow enter igh ow enter igh ow enter igh ow ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32	-69 -20 -20 -69 -20 -20 -20 -20 -20 -29	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Line C C H Mid Line C C H High Line C C H Low Line C C H Line C C Line	ow enter igh ow enter igh ow enter igh ow ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32	-69 -20 -20 -20 -20 -20 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Li C H Mid Li C C H High Li C C H H Mid Li Mid Li Mid Li Mid	ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6	-69 -20 -20 -20 -20 -20 -20 -20 -20 -69 -20 -20 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Li C H Mid Li C C H High Low	ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6	-69 -20 -20 -69 -20 -20 -69 -20 -20 -20 -69 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Line Mid Line C H High Line C H Low Line C H Mid Line C H Lin Line C H	ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6 -78.64 -39.33	-69 -20 -20 -69 -20 -20 -69 -20 -20 -69 -20 -69 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Li C H Mid Li C C H High Low Li C C H Mid Li C C H Mid Li C C C C C C C C C C C C C C C C C C	ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6	-69 -20 -20 -69 -20 -20 -69 -20 -20 -20 -69 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Li C H Mid Li C C H High Low Low Low Low H High High H High	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6 -78.64 -39.33 -30.62	-69 -20 -20 -69 -20 -20 -69 -20 -20 -20 -69 -20 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Line Mid Line C H High Line C H Low Line C H Mid Line Line C H High Line Line C H Line C	ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6 -78.64 -39.33 -30.62 -78.99	-69 -20 -20 -69 -20 -20 -69 -20 -20 -69 -20 -69 -20 -69 -20 -69	Pass Pass Pass Pass Pass Pass Pass Pass
Multi-Carrier Port B	LTE 1.4M	Low Line Ch High Line Ch High Line Ch High Line Ch High Line Ch	ow enter igh ow enter igh	-77.01 -39.37 -35.44 -84.17 -41.36 -34.25 -84.24 -41.37 -29.32 -78.1 -39.59 -33.6 -78.64 -39.33 -30.62	-69 -20 -20 -69 -20 -20 -69 -20 -20 -20 -69 -20 -20 -20 -20	Pass Pass Pass Pass Pass Pass Pass Pass


PORT		PORT A			PORT B	
Measure point	LOW	CENTER	HIGH	LOW	CENTER	HIGH
Frequency	861.35	862	869	861.35	862	869
Spec	-72	-23	-23	-72	-23	-23
FILTER offset	5.3	53.3	56.4	5.3	53.3	56.4
ATTEN offset	10	10	10	10	10	10
TOTAL OFFSET	15.3	63.3	66.4	15.3	63.3	66.4


Modulation	Carrier FREQ 1	Carrier FREQ 2	POWER (dBm)		PORT A			PORT B	
Modulation	(MHz)	(MHz)	POWER (dBill)	861.35	862	869	861.35	862	869
	863		46	-80.28	-39.41	-36.92	-80.12	-40.02	-37.08
LTE 1.4MHz Single carrier	865.6		46	-85.98	-41.33	-36.07	-85.4	-40.88	-36.35
	868.3		46	-87.7	-41.17	-27.63	-87.29	-40.49	-27.22
	863.8		47	-77.87	-40.41	-36.24	-78.86	-39.55	-35.26
LTE 3MHz Single carrier	865.6		47	-83.58	-41.61	-34.3	-84.97	-40.05	-32.9
	867.5		47	-85.51	-40.25	-28.89	-84.73	-41.44	-29.25
	864.8		47	-77.69	-40.07	-35.06	-79.15	-40.39	-33.99
LTE 5MHz Single carrier	865.6		47	-79.59	-40.67	-33.89	-80.75	-40.06	-31.74
	866.5		47	-80.51	-41.35	-30.8	-80.36	-41.38	-32.21
	863	864.4	47	-75.02	-40.38	-36.14	-77.01	-39.37	-35.44
LTE 1.4MHz Multi carrier	864.9	866.3	47	-83.85	-40.77	-34.72	-84.17	-41.36	-34.25
	868.3	866.9	47	-84.9	-40.62	-28.05	-84.24	-41.37	-29.32
	863.8	866.8	47	-76.45	-39.79	-33.64	-78.1	-39.59	-33.6
LTE 3MHz Multi carrier	864.1	867.1	47	-76.29	-39.78	-32.89	-78.64	-39.33	-30.62
	864.5	867.5	47	-77.46	-40.04	-30.25	-78.99	-39.6	-31.54




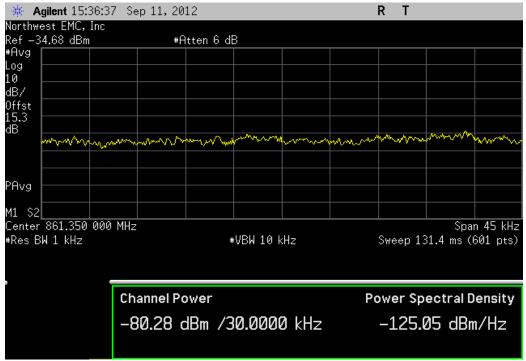


Value Limit Result

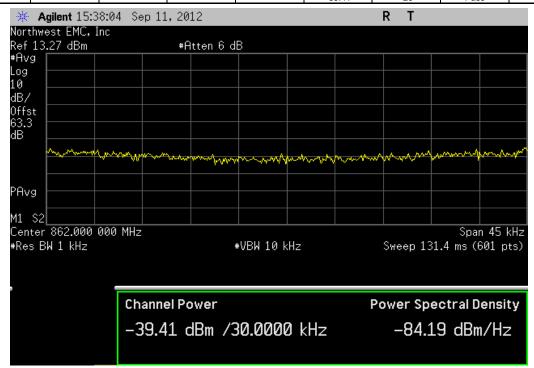





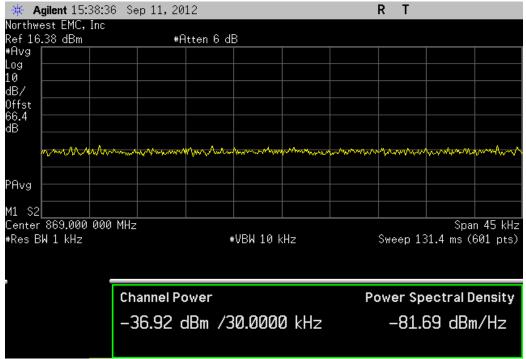


Value Limit Result
Value Limit Result

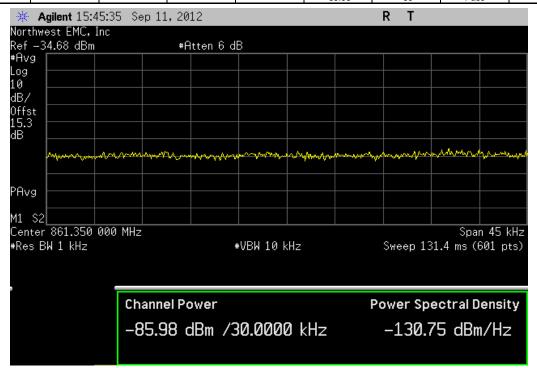





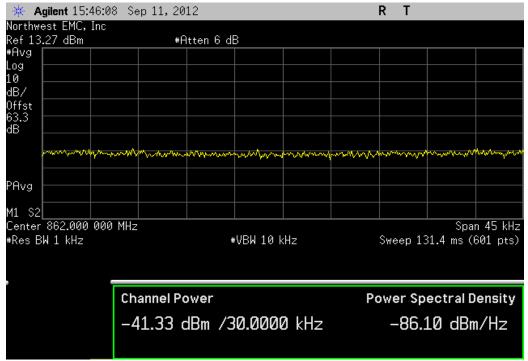


	Port A	A, LTE 1.4M, Mid,	High		
			Value	Limit	Result
			-36.07	-20	Pass

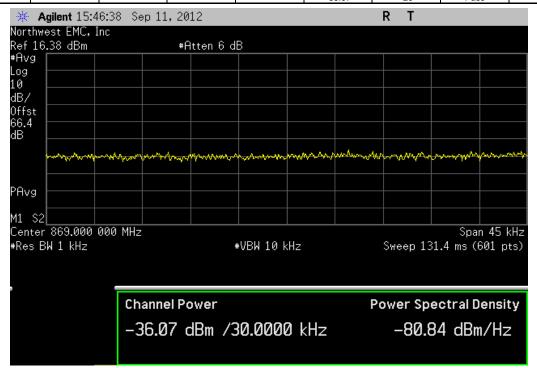





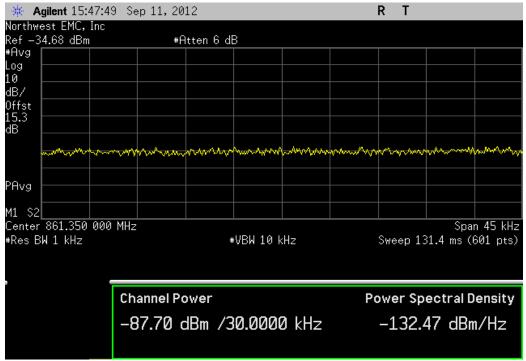


Value Limit Result
value Limit Result

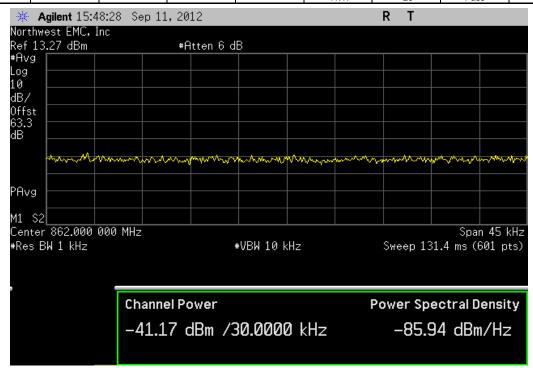





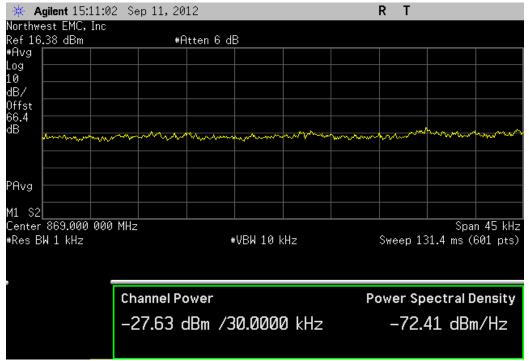


Value Limit Result
Value Limit Result

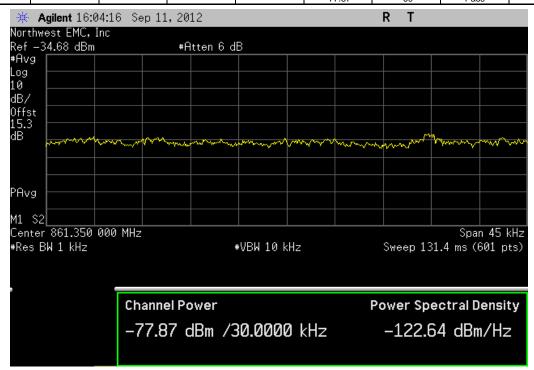





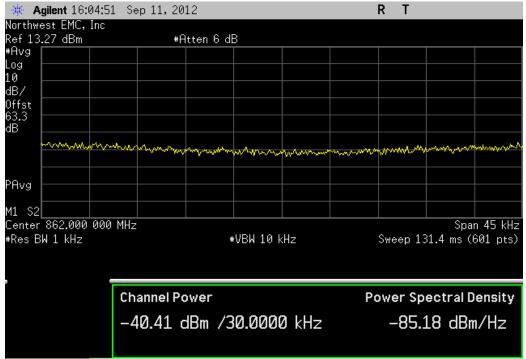


Value Limit Booult	Value Limit Result
	value Limit Result

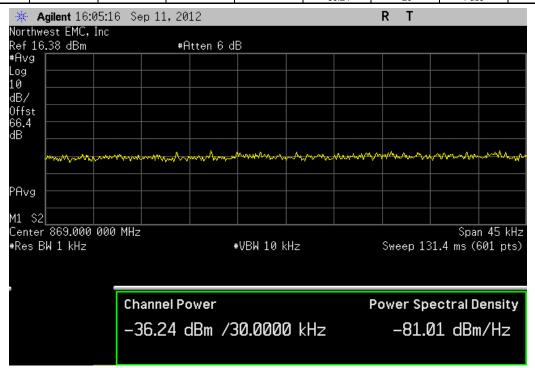





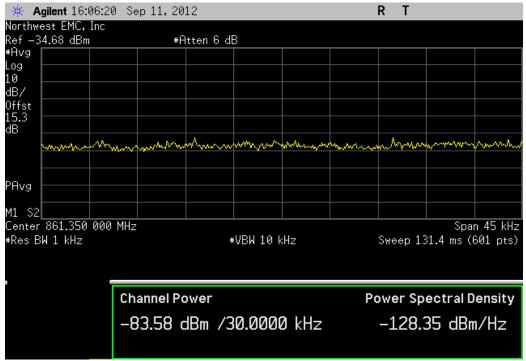


	Port /	A, LTE 3M, Mid, C	Center		
			Value	Limit	Result
			-41.61	-20	Pass

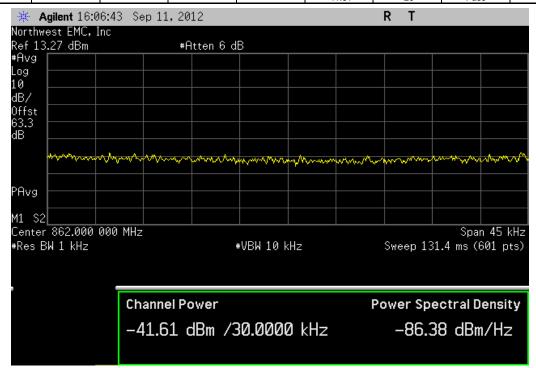





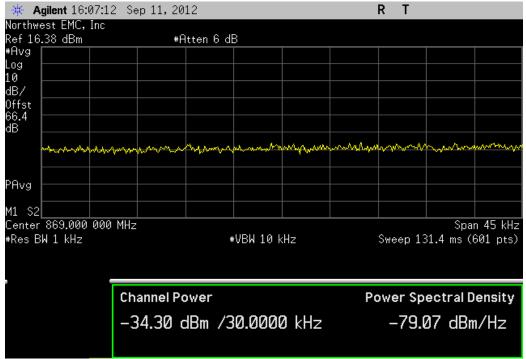


Value Limit Result		Port	A, LTE 3M, High,	Low	
Value Limit Result					Decel

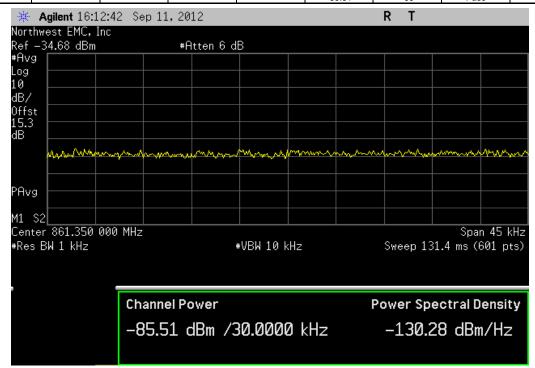





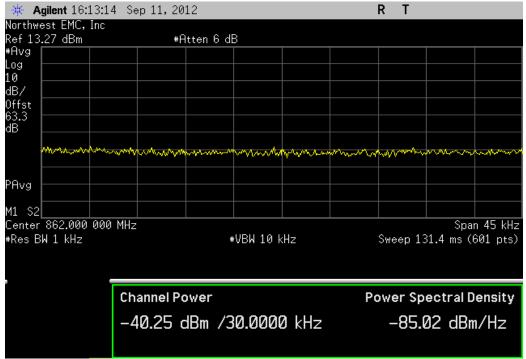


Value Limit Result		Port	A, LTE 3M, High,	High	
Value Limit Result					

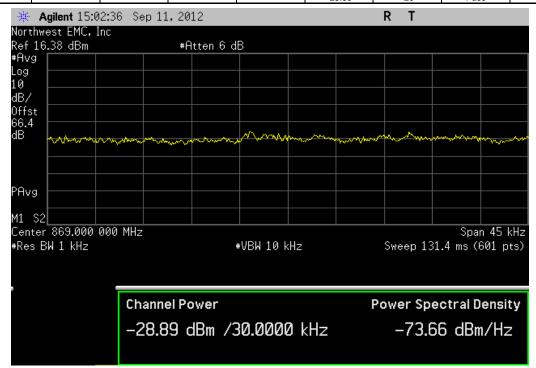





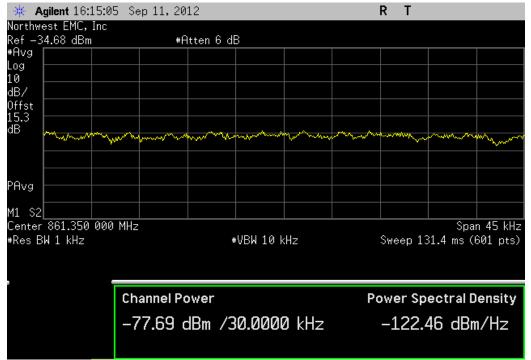


	Port A	A, LTE 5M, Low, C	Center		
			Value	Limit	Result
			-40.07	-20	Pass

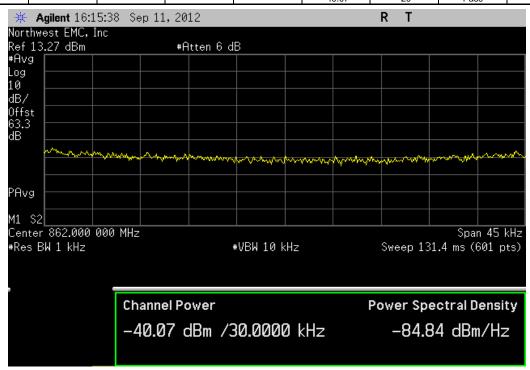





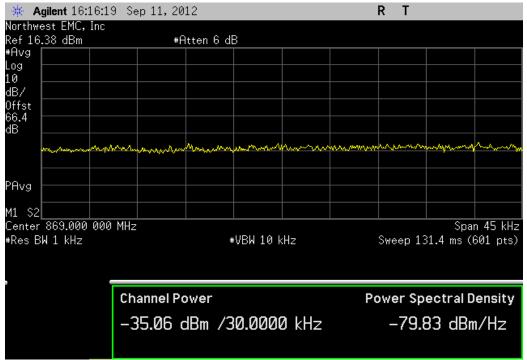


	Port	A, LTE 5M, Mid,	Low		
			Value	Limit	Result
			-79 59	-69	Pass

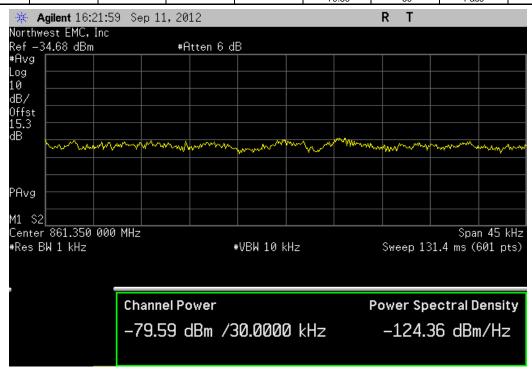





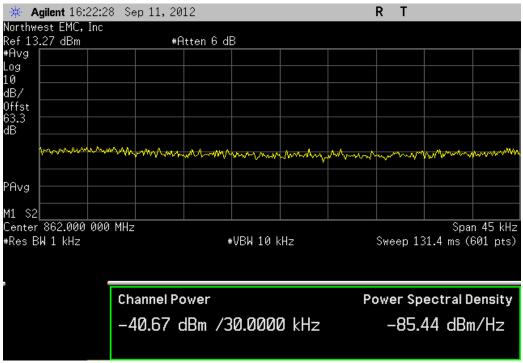


		Port	A, LTE 5M, Mid,	High		
				Value	Limit	Result
				-33.89	-20	Pass

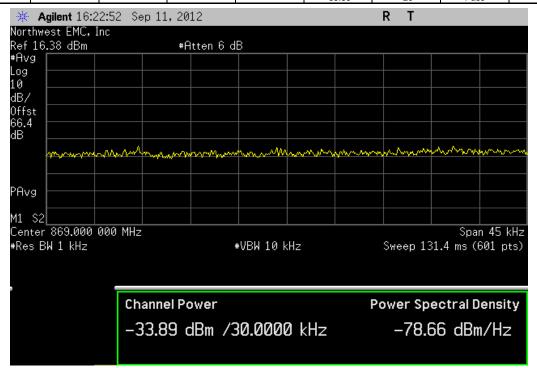





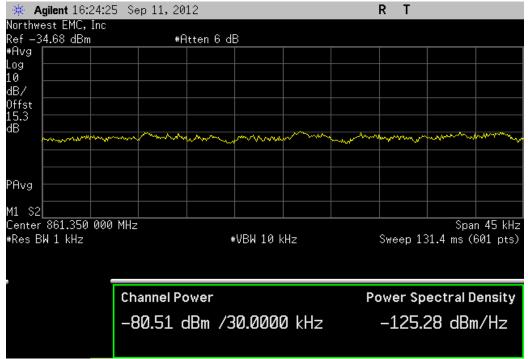


Value Limit Result
value Limit Result

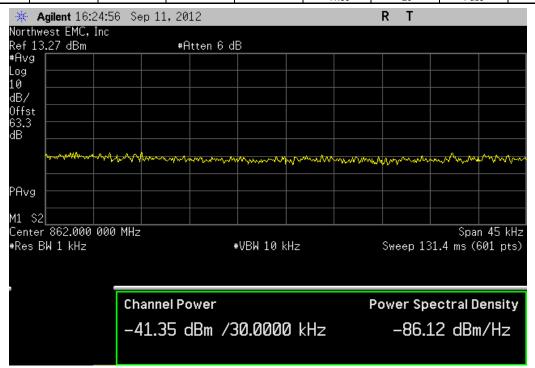





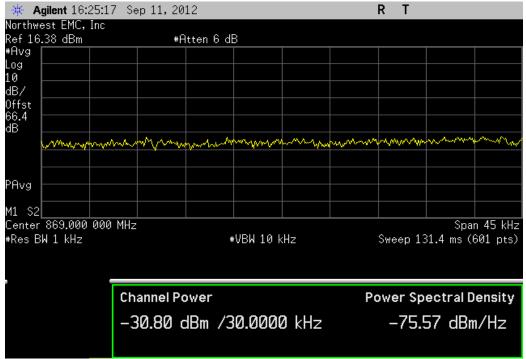


	Port I	B, LTE 1.4M, Low	, Low		
			Value	Limit	Result
			-80.12	-69	Pass

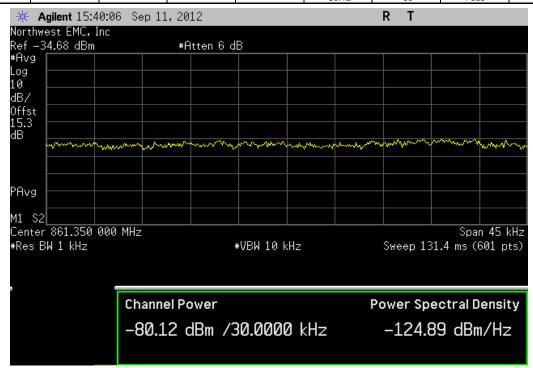





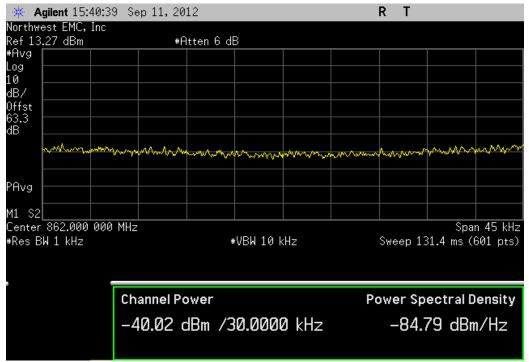


	Port I	3, LTE 1.4M, Low	High		
			Value	Limit	Result
			-37 08	-20	Pass

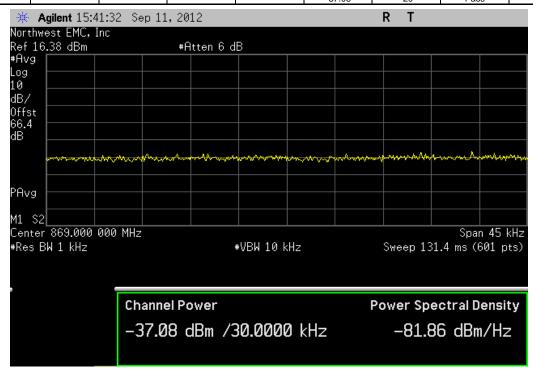





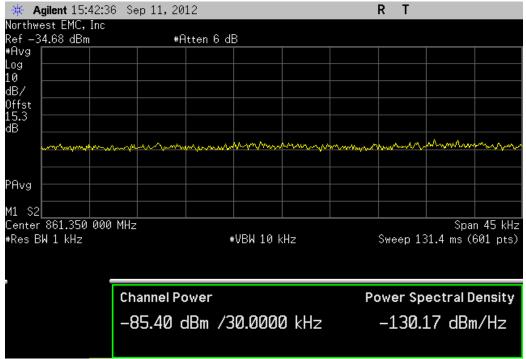


Value Limit Result

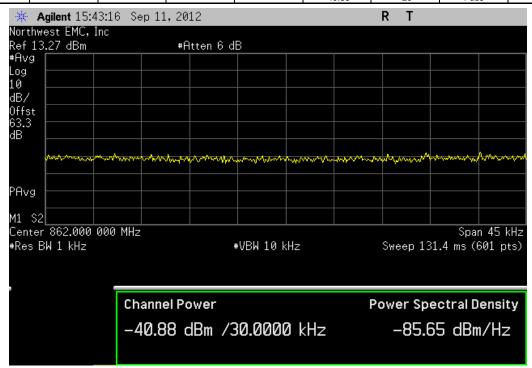





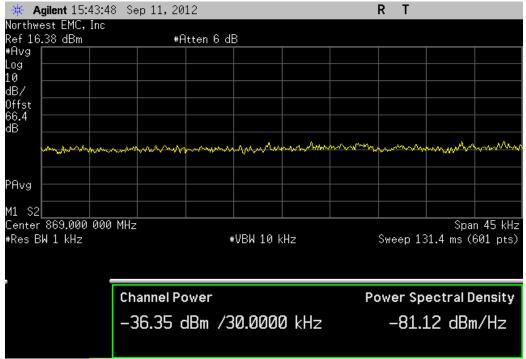


Value Limit Result		Port E	3, LTE 1.4M, High	, Low	
Value Limit Result					

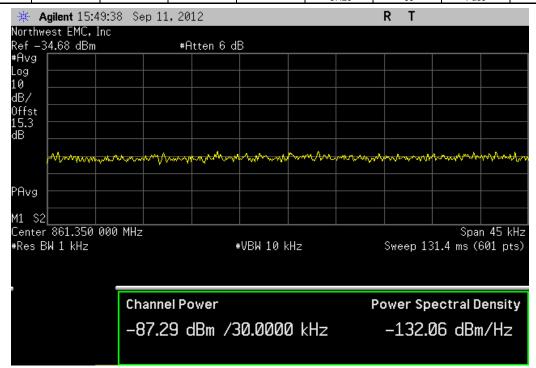





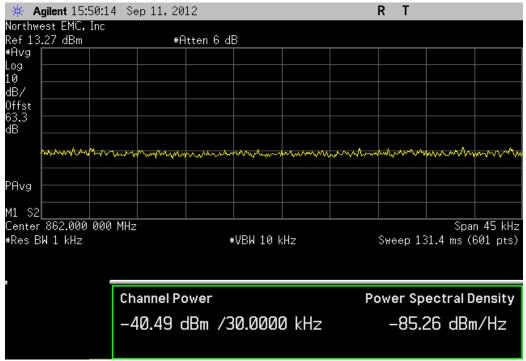


	Port E	3, LTE 1.4M, High	, High			
			Value	Limit	Result	
			-27.22	-20	Pass	

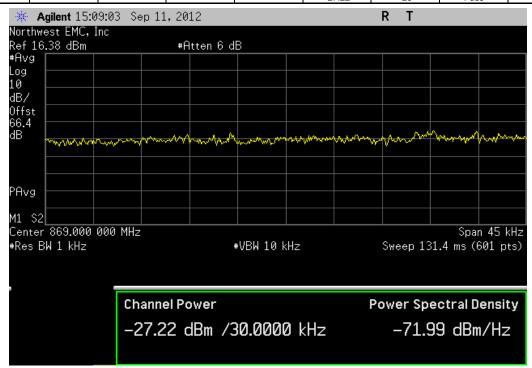





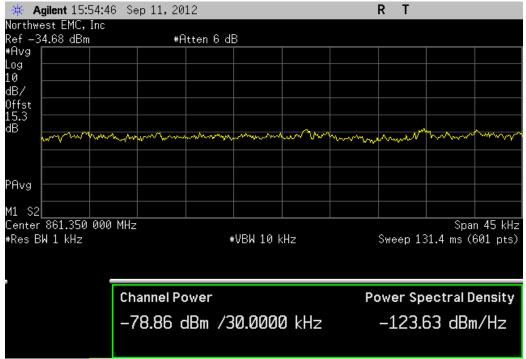


Value Limit Decut	Value Limit Result		Port E	3, LTE 3M, Low, 0	Center		
	value Limit Result				Value	Limit	Populé

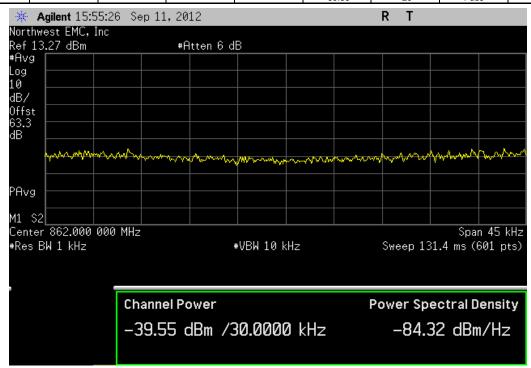





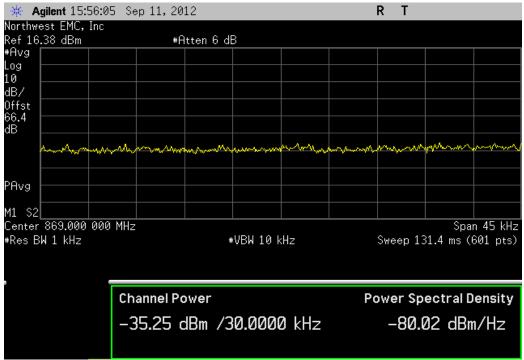


Value Limit Result
value Limit Result

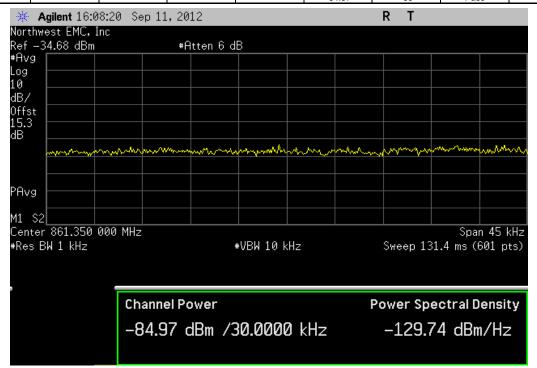





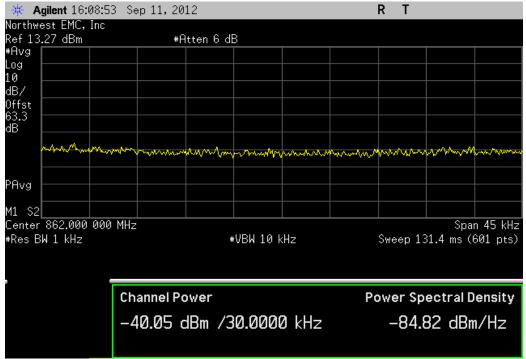


Value Limit Result		Port	B, LTE 3M, Mid,	High	
Value Limit Result					.

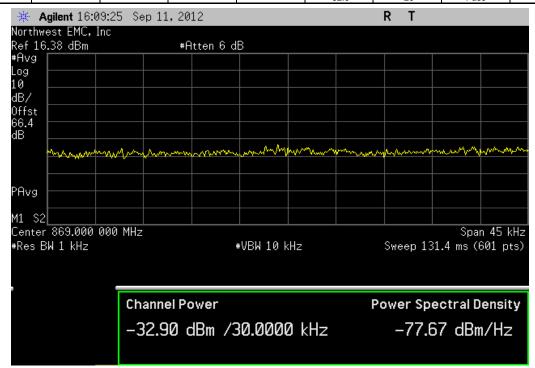





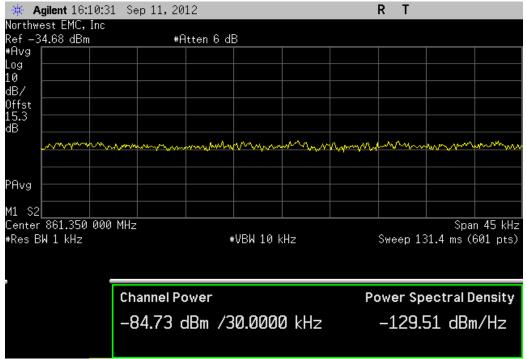


Value Limit Result
value Limit Result

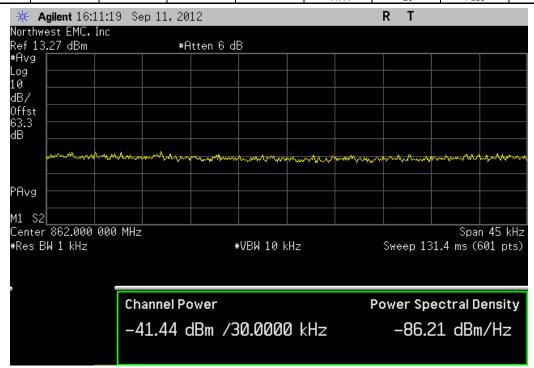





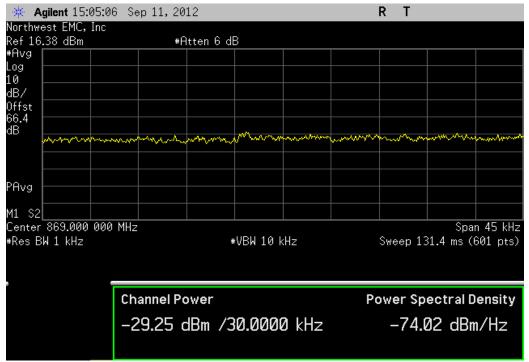


	Port	B, LTE 5M, Low,	Low		
			., .		
			Value	Limit	Result
			-79 15	-69	Pass

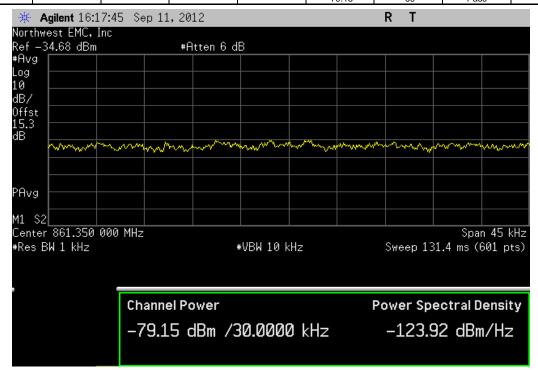





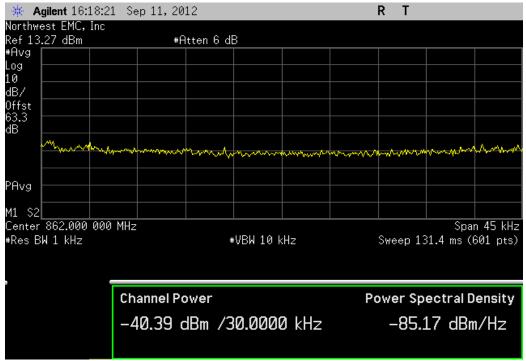


Value Limit Pesult	Value Limit Result		Port	B, LTE 5M, Low,	High		
					Value	Limit	Pocult

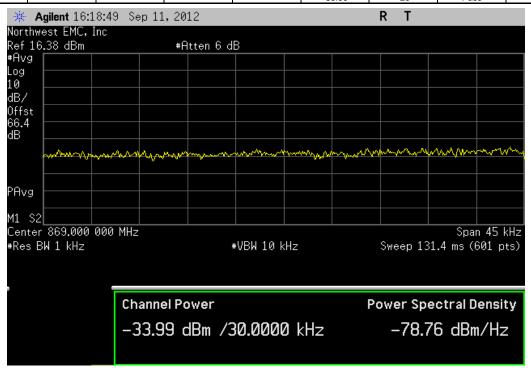





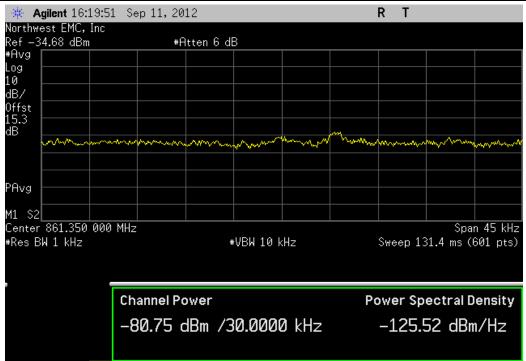


		Port I	B, LTE 5M, Mid, C	Center		
				Value	Limit	Result
				-40.06	-20	Pass

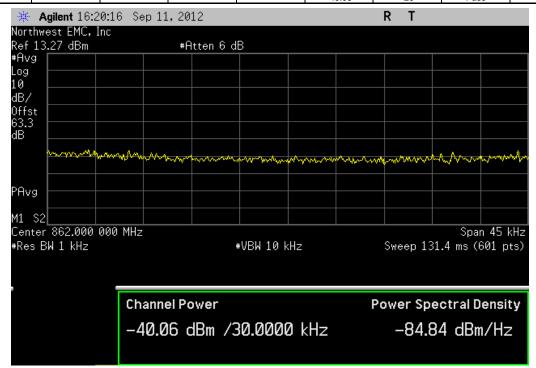





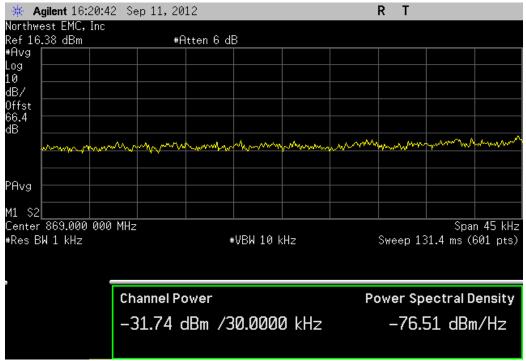


	Port	B, LTE 5M, High,	Low			
			Value	Limit	Result	
			-80.36	-69	Pass	

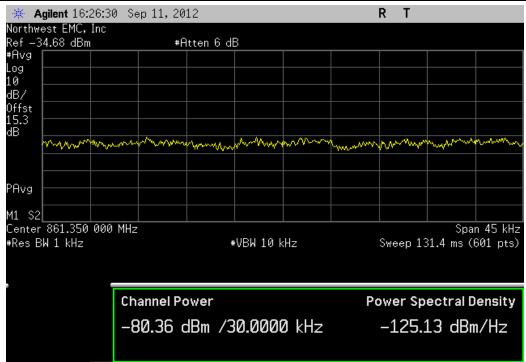





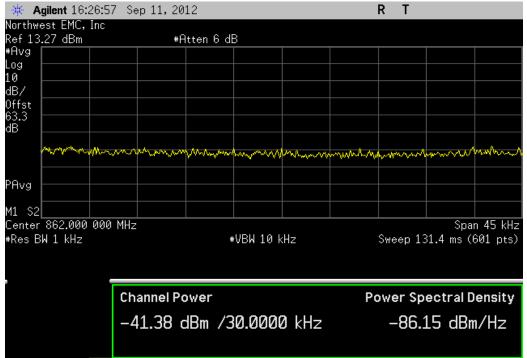


Value Limit Result		Port	B, LTE 5M, High,	High	
Value Limit Result					- ·

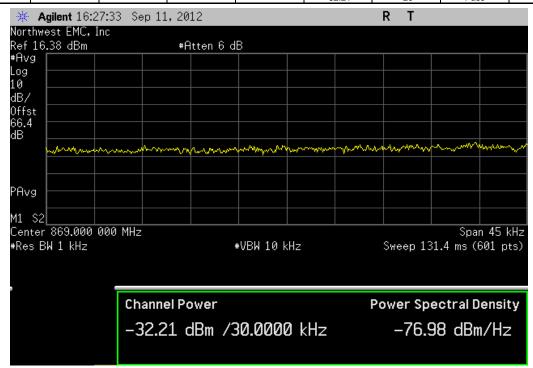





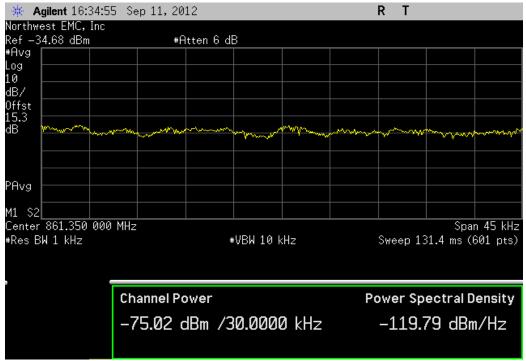


Value Limit Result		Multi-Carrier	Port A, LTE 1.4M	, Low, Center		
				Value	Limit	Result

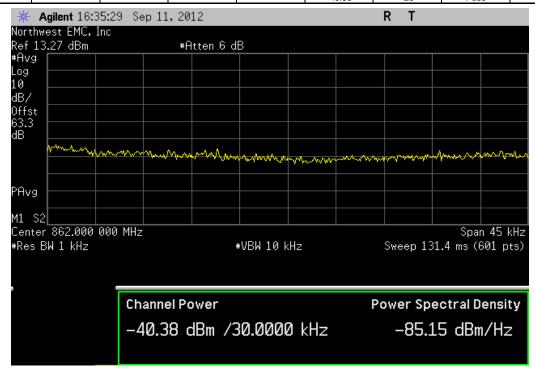





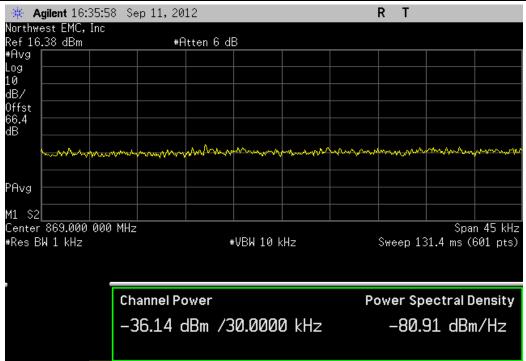


Value Limit Result

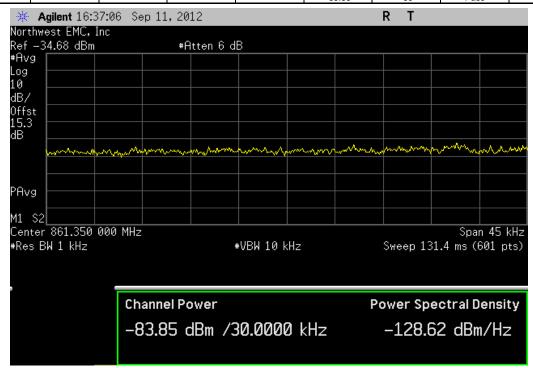





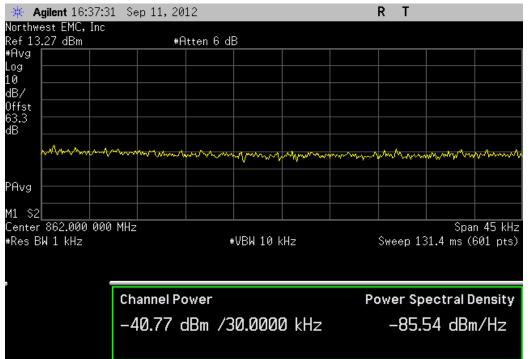


Value Limit Result		Multi-Carrie	r Port A, LTE 1.4I	M, Mid, High	
					Result

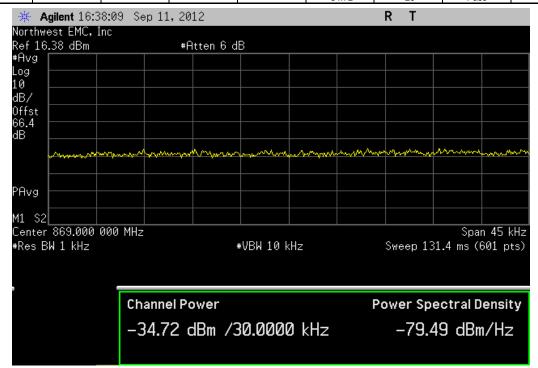





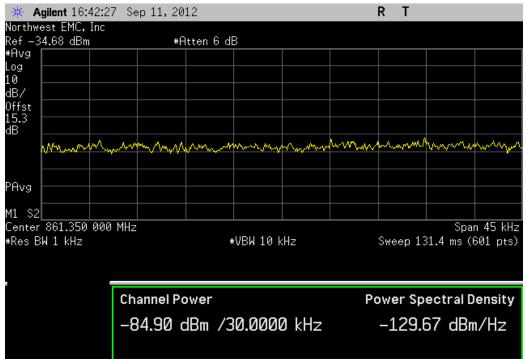


Value Limit Booult	Value Limit Result		Multi-Carrier I	Port A, LTE 1.4M	, High, Center	
					Value	Popult

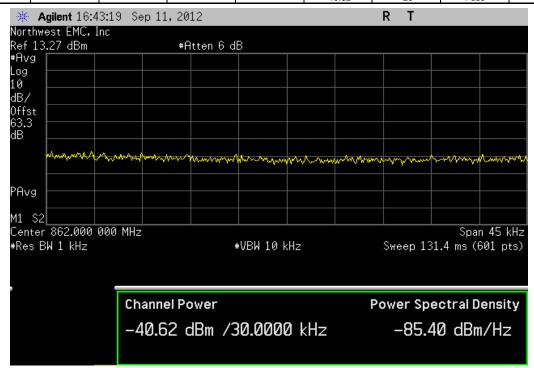





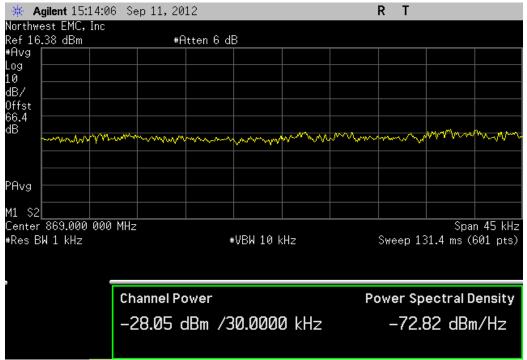



Value Limit Result		Multi-Carri	er Port A, LTE 3M	l, Low, Low		
				Walana	1 111	D 14

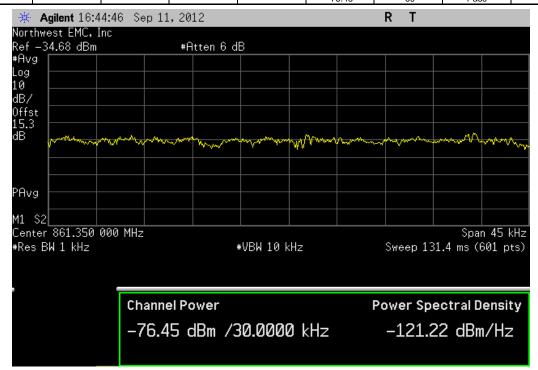




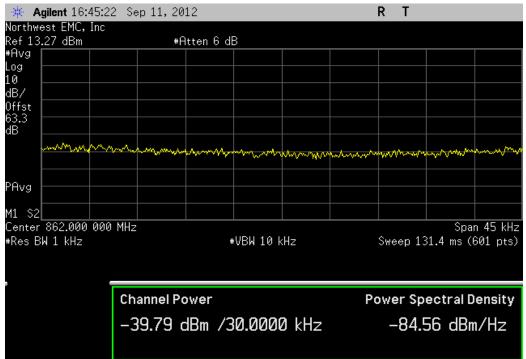


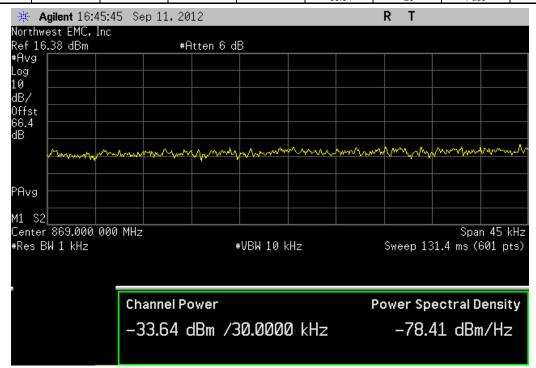





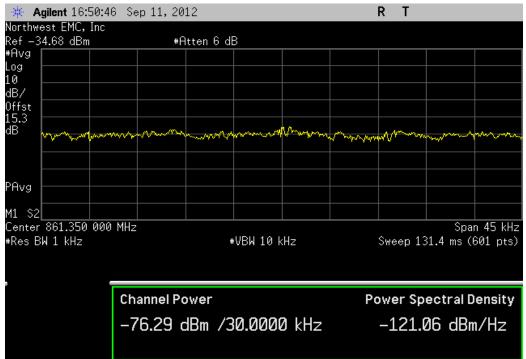


Value Limit Result		Multi-Carrie	r Port A, LTE 3M,	Mid, Center	
				Value	Danult

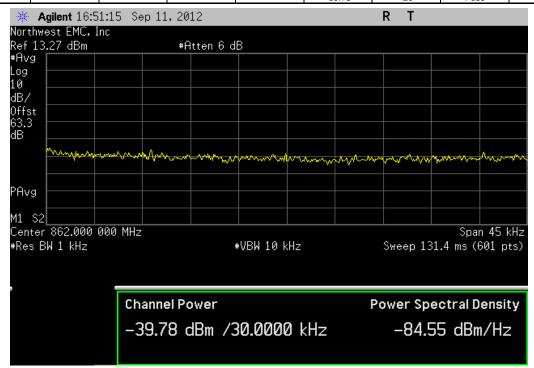





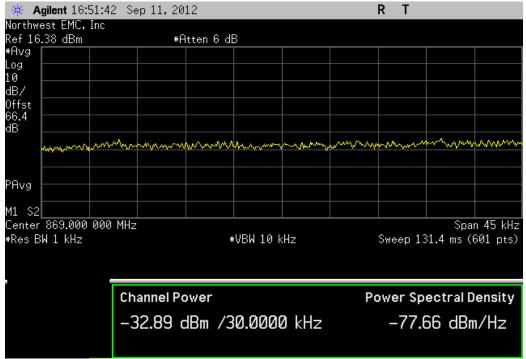


	Multi-Carrie	er Port A, LTE 3M	, High, Low		
			Value	Limit	Result
			-77 46	-69	Pass

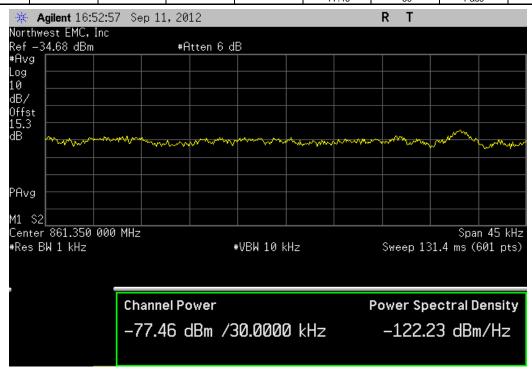





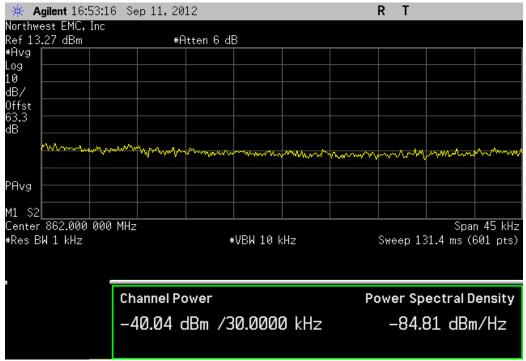


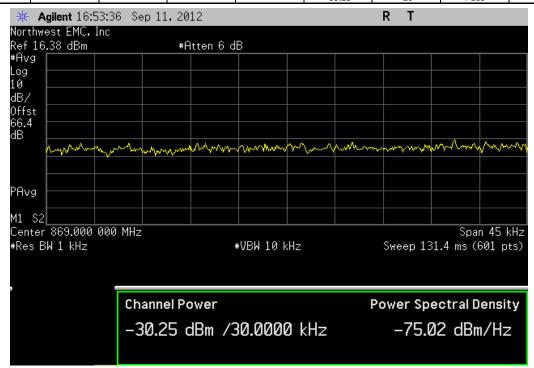








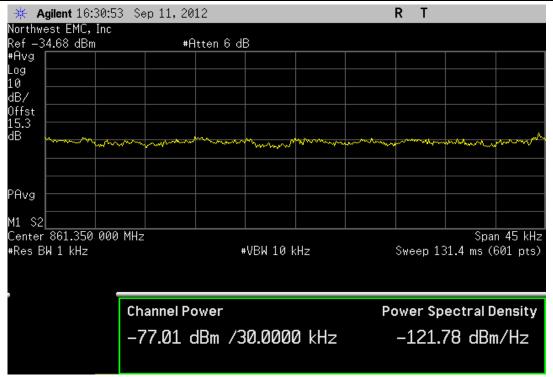




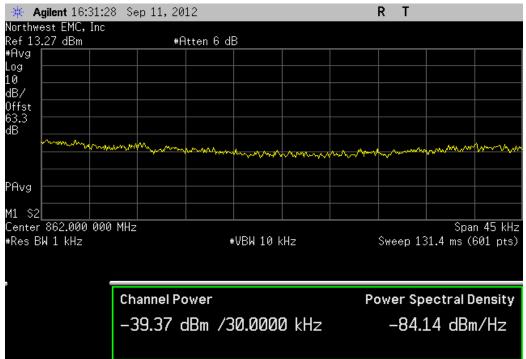


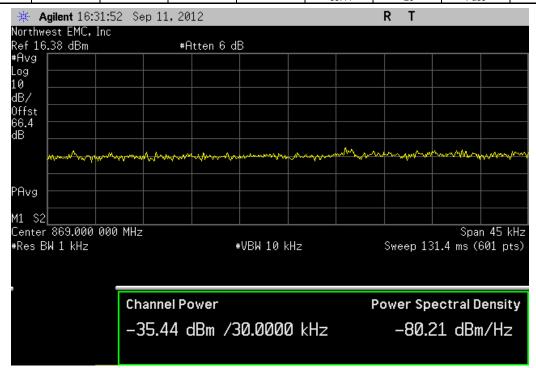





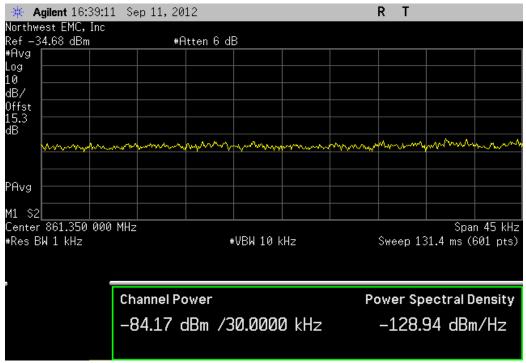



Value Limit Regult	Value Limit Result		Multi-Carrier	Port B, LTE 1.4M	l, Mid, Center	
	value Lillit Result				Value	Docult

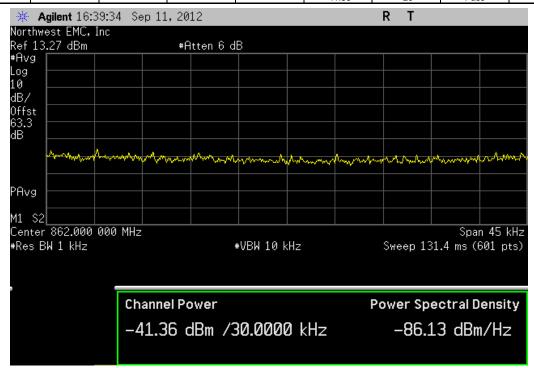





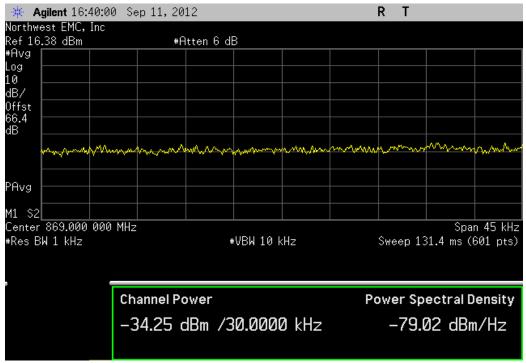


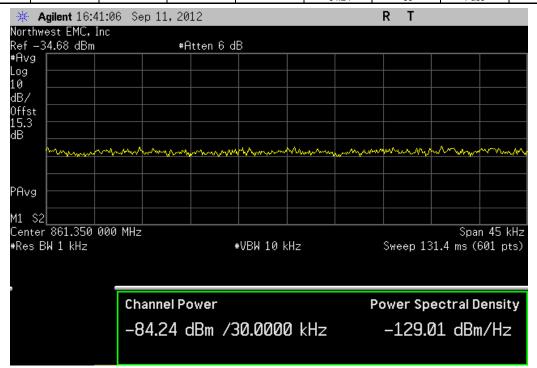




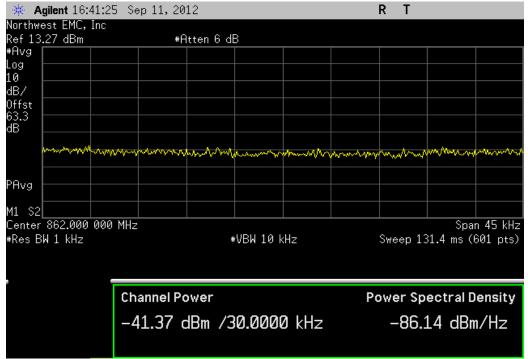


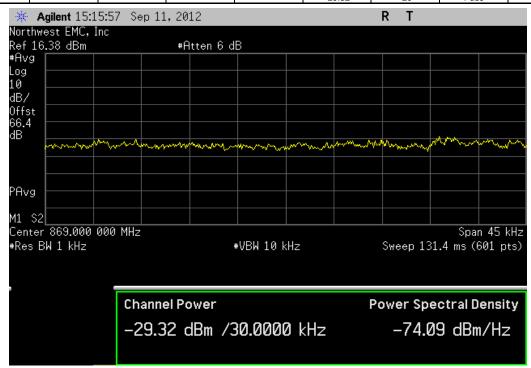





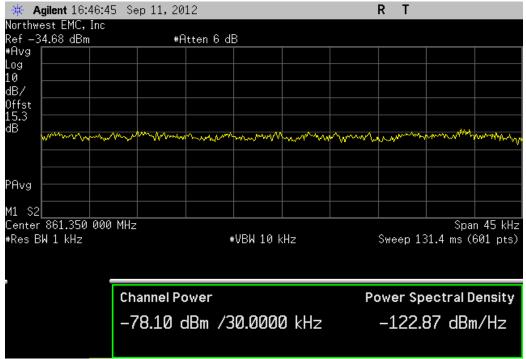



Value Limit Pacult	Value Limit Result		Multi-Carrier	Port B, LTE 3M,	Low, Center	
	Value Lillit Result				Value	Pacult

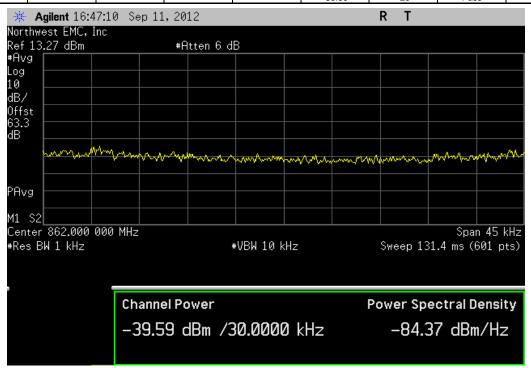





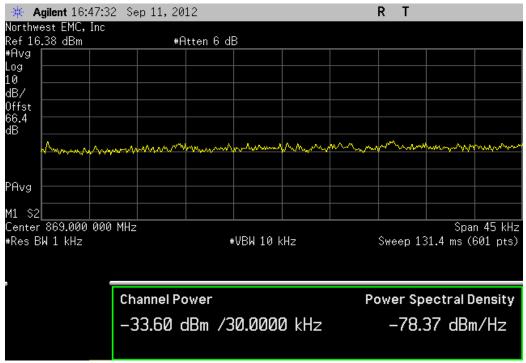


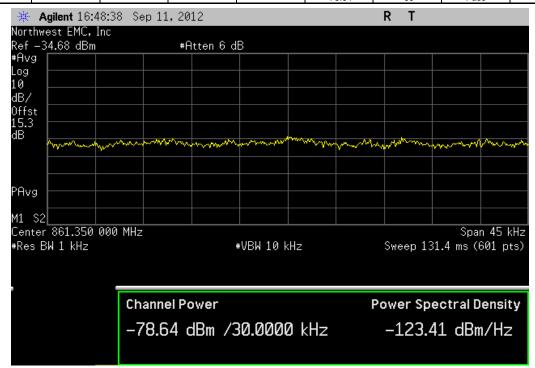





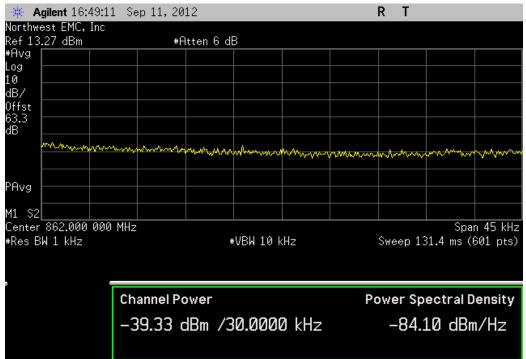

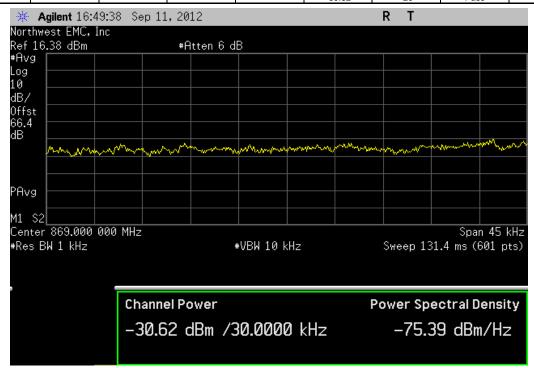





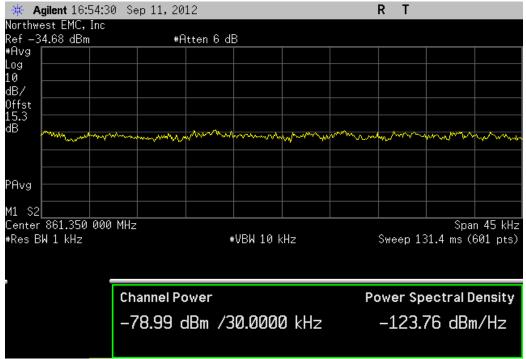

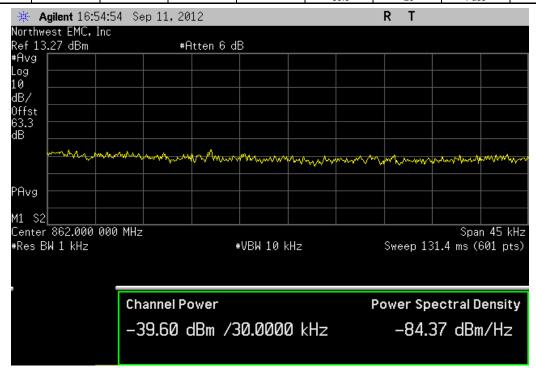





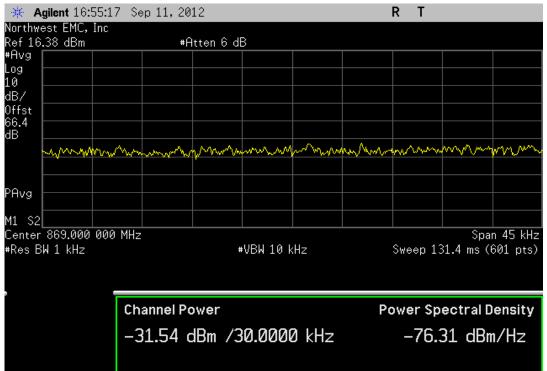

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
Signal Generator	Agilent	E8257D	TGU	1/26/2011	12
Power Sensor	Agilent	E4412A	SQE	4/21/2010	24
Power Meter	Hewlett Packard	E4418A	SPA	4/21/2010	24
Spectrum Analyzer	Agilent	E4440A	AFG	4/28/2011	12
DC Power Supply	Hewlett Packard	6574A	N/A	NCR	N/A
30 dB Directional Coupler (800-2500 MHz)	Fairview Microwave	SMC4030	N/A	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	N/A	NCR	N/A

CUSTOMER TEST SET				
Description	Manufacturer	Model	Last Cal.	Interval
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Vector Signal Generator	Agilent	N5182	6/7/2010	24
KMW Cobra Reliability Analyzer	KMW Cormmunications	N/A	NCR	N/A
Power Meter	Agilent	E4419B	4/1/2010	24
Power Head	Agilent	E9300H	NCR	N/A
Power Head	Agilent	E9300H	NCR	N/A
Fujitsu Laptop	Fujitsu	A6030	NCR	N/A
RRH220 Software	KMW Cormmunications	N/A	NCRA	N/A


MEASUREMENT UNCERTAINTY


A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION


The antenna port spurious emissions were measured at the RF output terminal of the UET with 60dB of external attenuation on the RF input of the spectrum analyzer. Analyzer plots were made for each modulation type. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.


EMC SPURIOUS	CONDUCTED EMISSIONS - CDMA/	EVDO-A/LTE		XMit 20° PsaTx 201
EUT: 800MHz i-DEN RRH Serial Number: U311210059		Work Order:	KMWC0027 07/20/11	
Customer: KMW Communications		Temperature:	22.86°C	
Attendees: Joshua Jang Project: None		Humidity: Barometric Pres.:		
Tested by: Jaemi Suh ST SPECIFICATIONS	Power: 48 VDC TEST METHOD	Job Site:	OC11	
3 90.691:2011	ANSI/TIA/EIA-603-C-2004			
MMENTS				
ne.				
/IATIONS FROM TEST STANDARD				
figuration #	angle.			
nfiguration # 1 Signature	0			
	Frequency Range	Value	Limit	Resul
MA Single Carrier				
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-67.77 dBc -64.12 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
Mid Channel	30 MHz - 1 GHz	-67.3 dBc	≤ -13 dBc	Pass
Mid Channel High Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-63.19 dBc -68.84 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	1 GHz - 12.5 GHz	-64.26 dBc	≤ -13 dBc	Pass
MA Multi Carrier [2FA] Low Channel	30 MHz - 1 GHz	-64.36 dBc	≤ -13 dBc	Pass
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-64.36 dBc -60.38 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	30 MHz - 1 GHz	-64.93 dBc	≤ -13 dBc	Pass
High Channel //A Multi Carrier [3FA]	1 GHz - 12.5 GHz	-61.35 dBc	≤ -13 dBc	Pass
Low Channel	30 MHz - 1 GHz	-62.65 dBc	≤ -13 dBc	Pass
Low Channel	1 GHz - 12.5 GHz	-58.54 dBc	≤ -13 dBc	Pass
Mid Channel Mid Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-63.22 dBc -59.15 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	30 MHz - 1 GHz	-62.55 dBc	≤ -13 dBc	Pass
High Channel MA Multi Carrier [5FA]	1 GHz - 12.5 GHz	-58.92 dBc	≤ -13 dBc	Pass
All Channels	30 MHz - 1 GHz	-61.35 dBc	≤ -13 dBc	Pass
All Channels OO Single Carrier	1 GHz - 12.5 GHz	-57.18 dBc	≤ -13 dBc	Pass
Low Channel	30 MHz - 1 GHz	-66.76 dBc	≤ -13 dBc	Pass
Low Channel	1 GHz - 12.5 GHz	-62.02 dBc	≤ -13 dBc	Pass
Mid Channel Mid Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-66.39 dBc -62.46 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	30 MHz - 1 GHz	-67.08 dBc	≤ -13 dBc	Pass
High Channel DO Multi Carrier [2FA]	1 GHz - 12.5 GHz	-63.43 dBc	≤ -13 dBc	Pass
Low Channel	30 MHz - 1 GHz	-64.22 dBc	≤ -13 dBc	Pass
Low Channel	1 GHz - 12.5 GHz	-60.54 dBc	≤ -13 dBc	Pass
High Channel High Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-65.02 dBc -61.02 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
DO Multi Carrier [3FA]		22.27.18		
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-63.87 dBc -60.2 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
Mid Channel	30 MHz - 1 GHz	-63 dBc	≤ -13 dBc	Pass
Mid Channel High Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-58.44 dBc -61.45 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	1 GHz - 12.5 GHz	-57.66 dBc	≤ -13 dBc	Pass
OO Multi Carrier [5FA] All Channels	30 MHz - 1 GHz	-60.69 dBc	≤ -13 dBc	Pass
All Channels	1 GHz - 12.5 GHz	-56.76 dBc	≤ -13 dBc ≤ -13 dBc	Pass
1.4 MHz Single Carrier		22.24.15		
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-66.61 dBc -62.68 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
Mid Channel	30 MHz - 1 GHz	-67.59 dBc	≤ -13 dBc	Pass
Mid Channel High Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-63.9 dBc -67.03 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	1 GHz - 12.5 GHz	-63.35 dBc	≤ -13 dBc ≤ -13 dBc	Pass
: 3 MHz Single Carrier	30 MHz - 1 GHz	-63.15 dBc	≤ -13 dBc	Pass
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-59.72 dBc	≤ -13 dBc	Pass Pass
Mid Channel	30 MHz - 1 GHz	-63.52 dBc	≤ -13 dBc	Pass
Mid Channel High Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-59.54 dBc -64.47 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	1 GHz - 12.5 GHz	-60.22 dBc	≤ -13 dBc	Pass
5 MHz Single Carrier Low Channel	30 MHz - 1 GHz	-60.38 dBc	≤ -13 dBc	Pass
Low Channel	1 GHz - 12.5 GHz	-57.43 dBc	≤ -13 dBc	Pass
Mid Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-62.12 dBc	≤ -13 dBc	Pass Pass
Mid Channel High Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-58.44 dBc -61.83 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	1 GHz - 12.5 GHz	-57.25 dBc	≤ -13 dBc	Pass
1.4 MHz Multi Carrier [2FA] Low Channel	30 MHz - 1 GHz	-65.11 dBc	≤ -13 dBc	Pass
Low Channel	1 GHz - 12.5 GHz	-61.01 dBc	≤ -13 dBc	Pass
Mid Channel Mid Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-64.75 dBc -60.9 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High Channel	30 MHz - 1 GHz	-63.81 dBc	≤ -13 dBc	Pass
High Channel	1 GHz - 12.5 GHz	-60.12 dBc	≤ -13 dBc	Pass
Low(2) Channel Low(2) Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-64.55 dBc -60.54 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
Mid(2) Channel	30 MHz - 1 GHz	-63.81 dBc	≤ -13 dBc	Pass
Mid(2) Channel High(2) Channel	1 GHz - 12.5 GHz 30 MHz - 1 GHz	-59.17 dBc -65.19 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
High(2) Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-61.07 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
3 MHz Multi Carrier [2FA]				
Low Channel Low Channel	30 MHz - 1 GHz 1 GHz - 12.5 GHz	-60.67 dBc -56.79 dBc	≤ -13 dBc ≤ -13 dBc	Pass Pass
Mid Channel	30 MHz - 1 GHz	-61.18 dBc	≤ -13 dBc	Pass
Mid Channel	1 GHz - 12.5 GHz	-56.28 dBc	≤ -13 dBc	Pass
High Channel	30 MHz - 1 GHz	-61.15 dBc	≤ -13 dBc	Pass




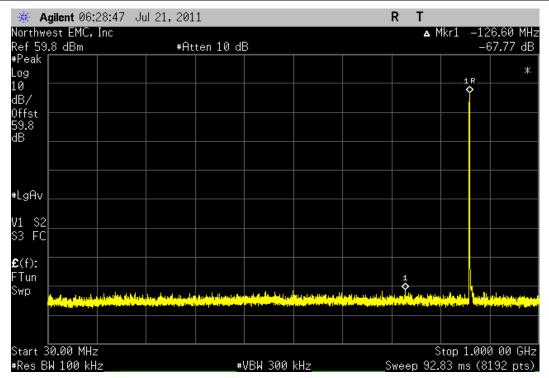


CDMA Sin	gle Carrier, Low Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-64.12 dBc	≤ -13 dBc	Pass

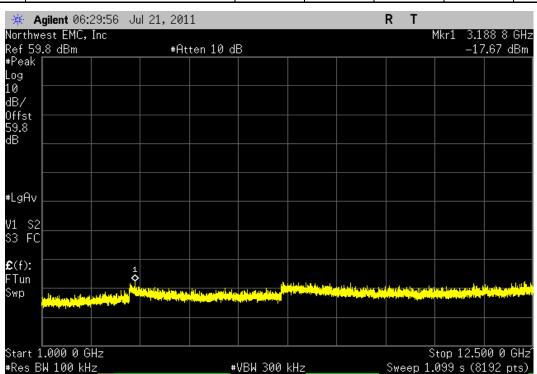





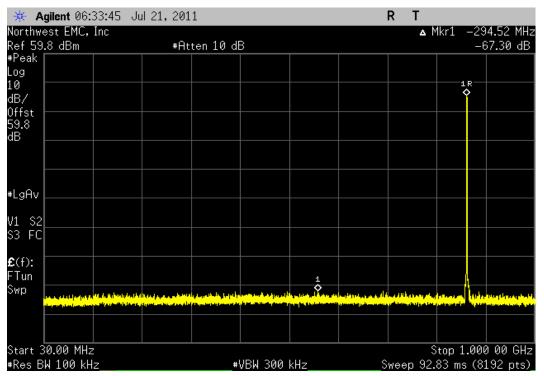


CDMA Single Carrier, Mid Channel						
Frequency						
Range	Value	Limit	Result			
1 GHz - 12.5 GHz	-63.19 dBc	≤ -13 dBc	Pass			

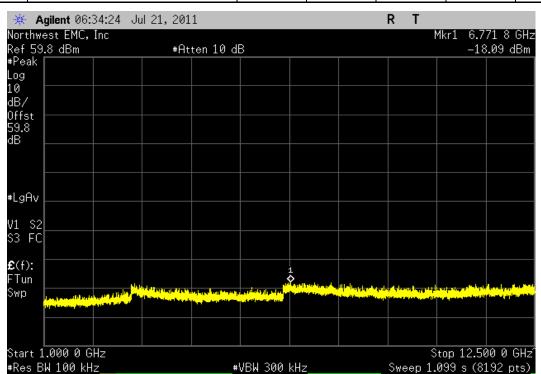





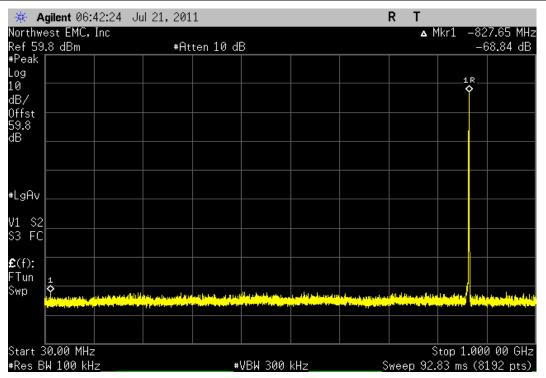


CDMA Sin	gle Carrier, High Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-64.26 dBc	≤ -13 dBc	Pass

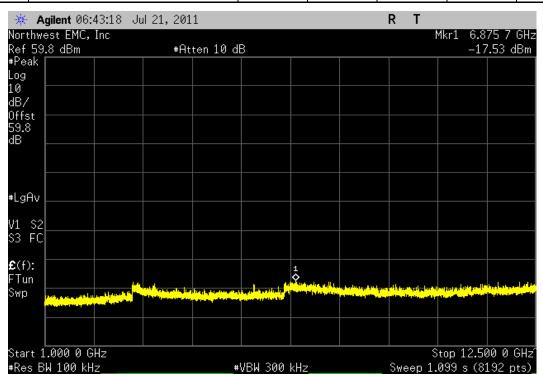





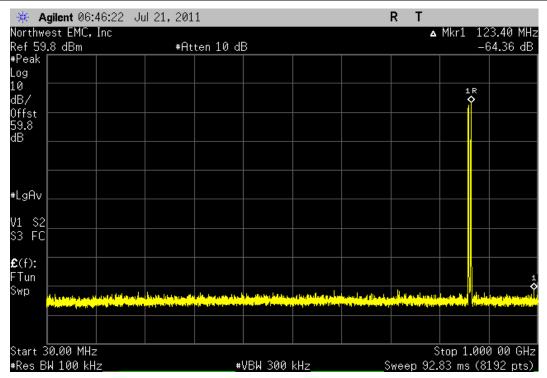


CDMA Multi	Carrier [2FA], Low Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-60.38 dBc	≤ -13 dBc	Pass

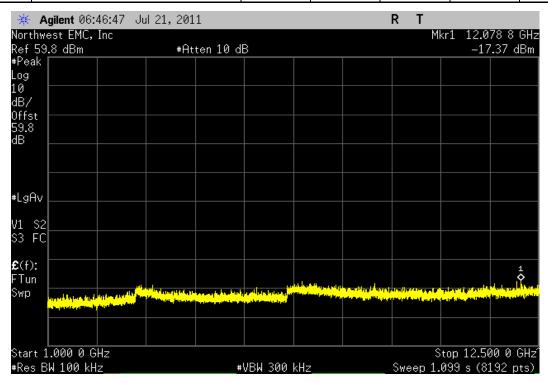





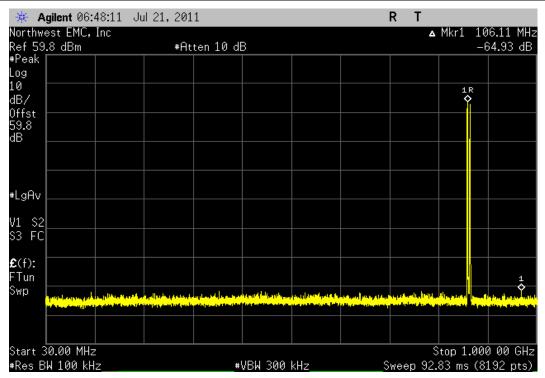


CDMA M	lulti Carrier [2FA], H	igh Channel		
Frequency				
Range		Value	Limit	Result
1 GHz - 12.5 GHz		-61.35 dBc	≤ -13 dBc	Pass

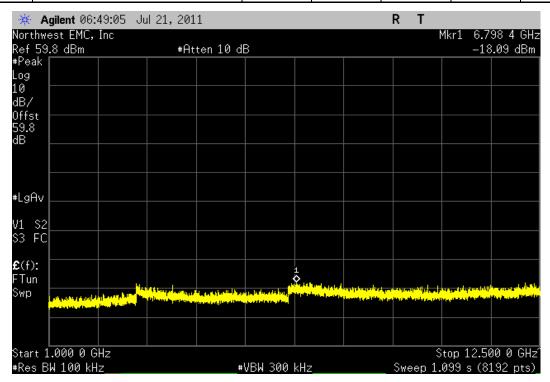





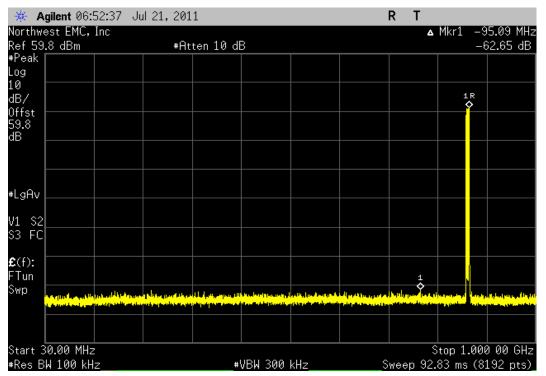


CDMA Multi Carrier [3FA], Low Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-58.54 dBc	≤ -13 dBc	Pass	

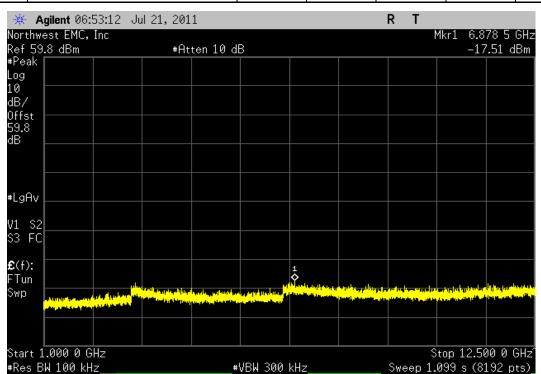





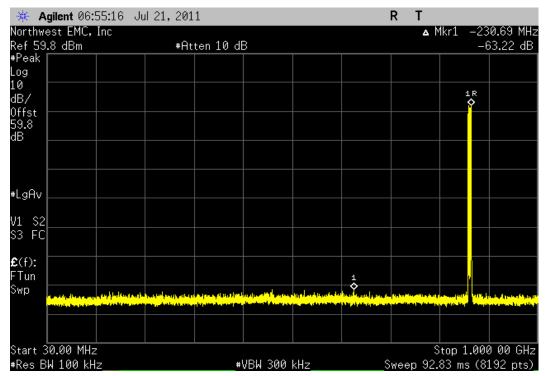


CDMA Multi	Carrier [3FA], Mid Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-59.15 dBc	≤ -13 dBc	Pass

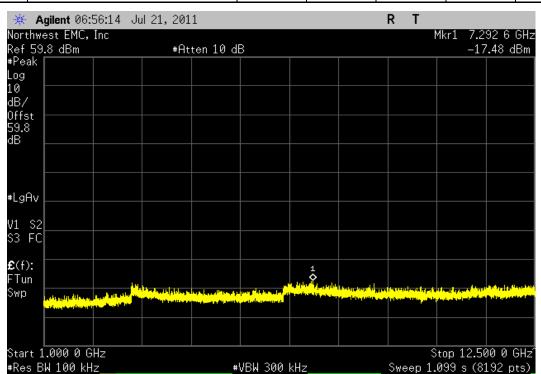





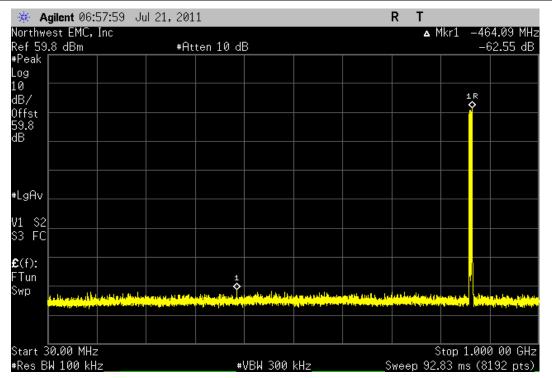


CDMA Multi (Carrier [3FA], High Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-58.92 dBc	≤ -13 dBc	Pass

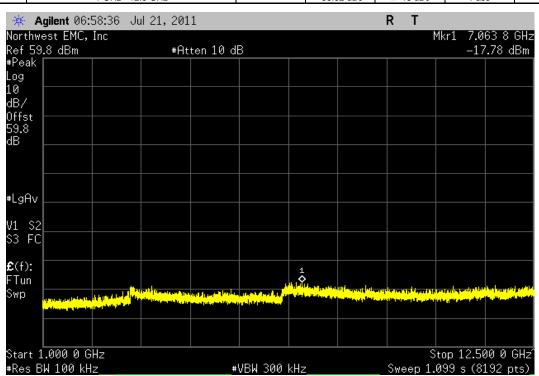





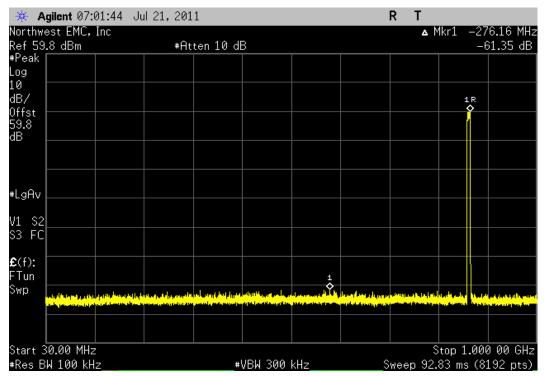


CDMA Multi Carrier [5FA], All Channels				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-57.18 dBc	≤ -13 dBc	Pass	

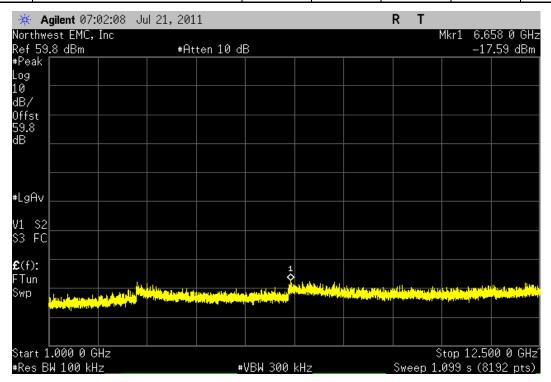





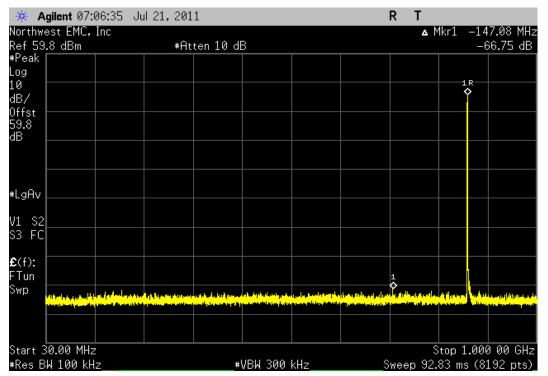


EVDO Single Carrier, Low Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-62.02 dBc	≤ -13 dBc	Pass	

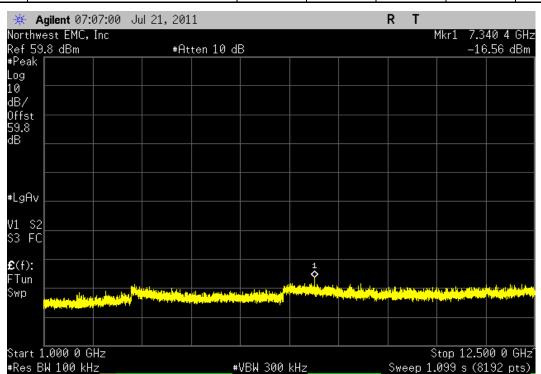




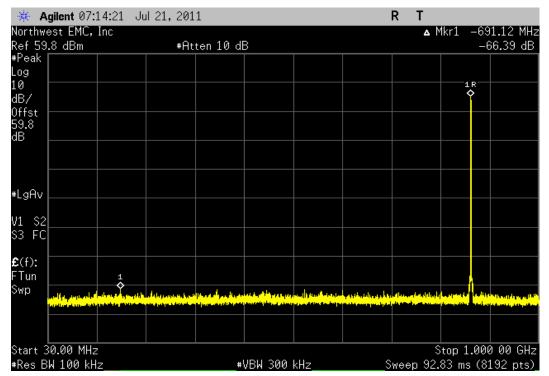


EVDO Single Carrier, Mid Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-62.46 dBc	≤ -13 dBc	Pass	

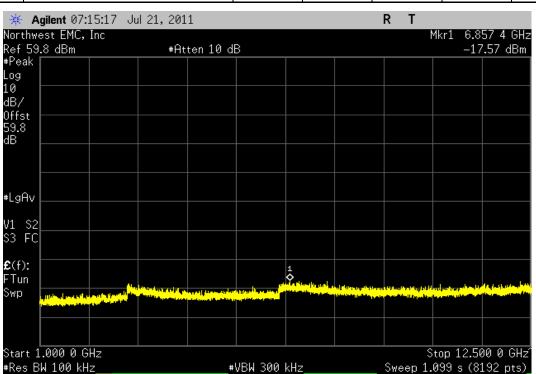





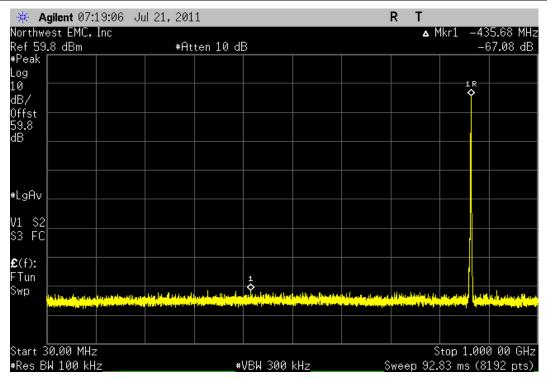


EVDO Sin	gle Carrier, High Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-63.43 dBc	≤ -13 dBc	Pass

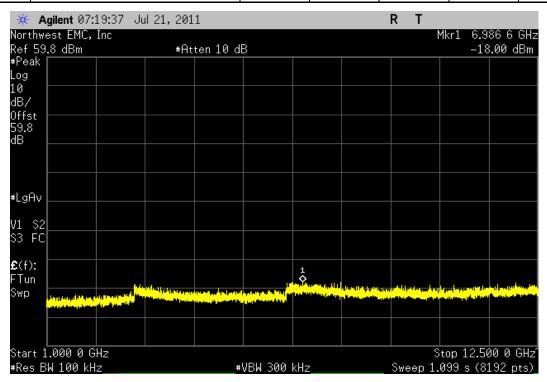





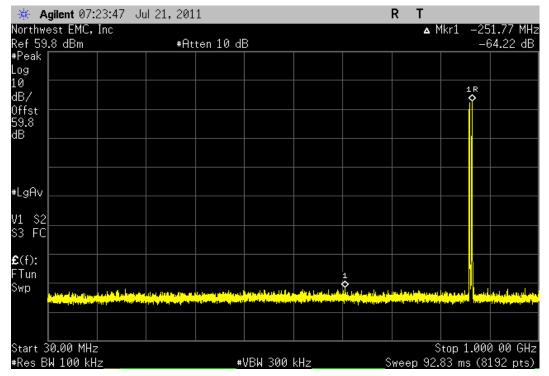


EVDO Multi Carrier [2FA], Low Channel					
	Frequency				
	Range		Value	Limit	Result
	1 GHz - 12.5 GHz		-60.54 dBc	≤ -13 dBc	Pass

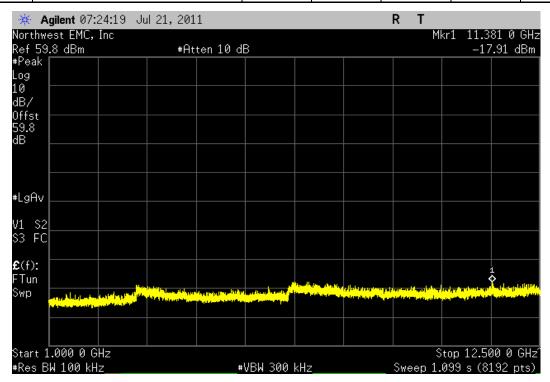





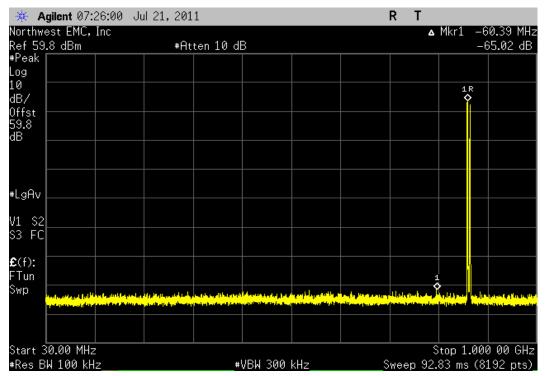


EVDO Multi Carrier [2FA], High Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-61.02 dBc	≤ -13 dBc	Pass	

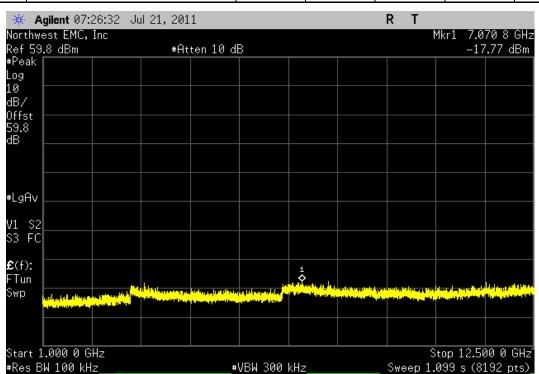





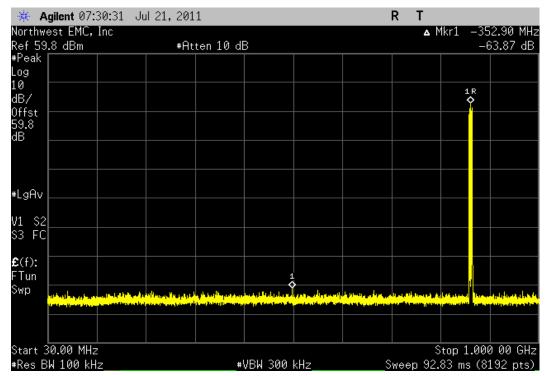


EVDO Multi Carrier [3FA], Low Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-60.2 dBc	≤ -13 dBc	Pass	

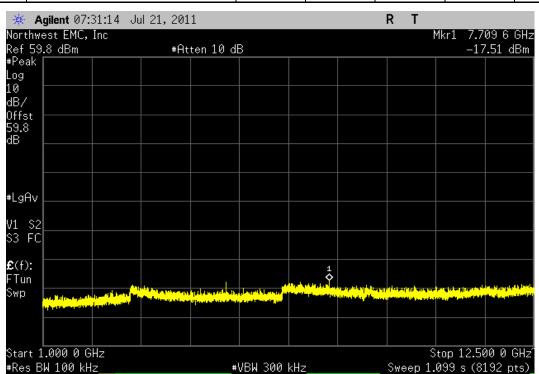





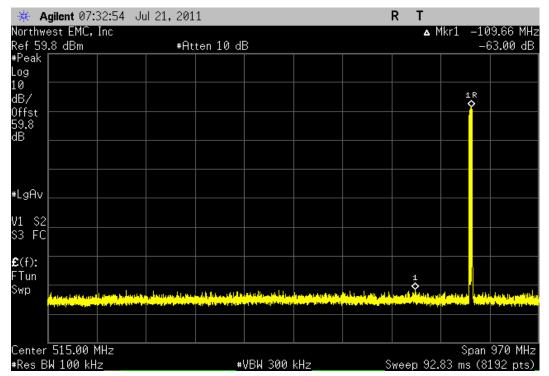


EVDO N	lulti Carrier [3FA], N	lid Channel		
Frequency				
Range		Value	Limit	Result
1 GHz - 12.5 GHz		-58.44 dBc	≤ -13 dBc	Pass

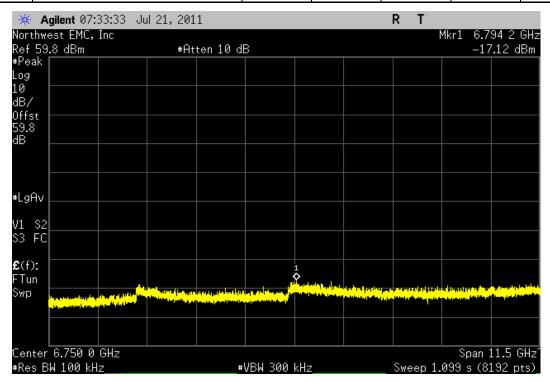





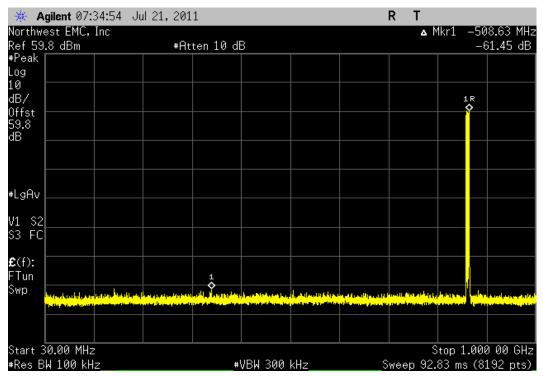


EVDO M	ulti Carrier [3FA], H	igh Channel		
Frequency				
Range		Value	Limit	Result
1 GHz - 12.5 GHz		-57.66 dBc	≤ -13 dBc	Pass

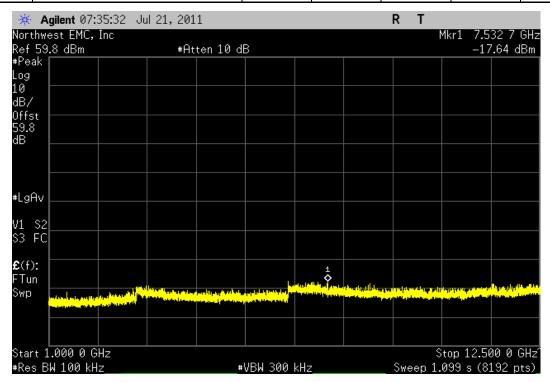




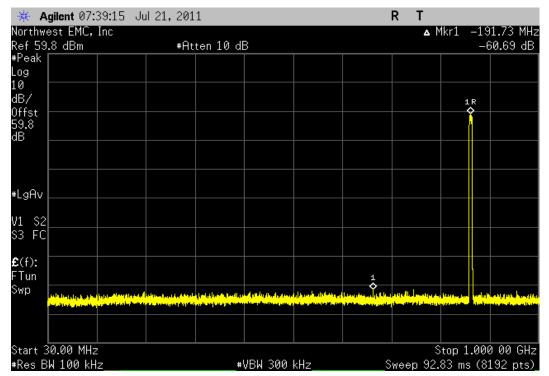


EVDO Multi Carrier [5FA], All Channels				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-56.76 dBc	≤ -13 dBc	Pass	

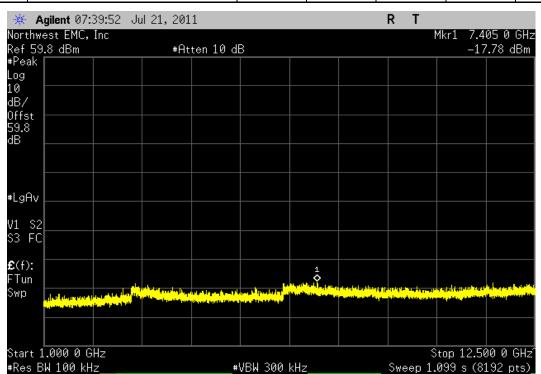




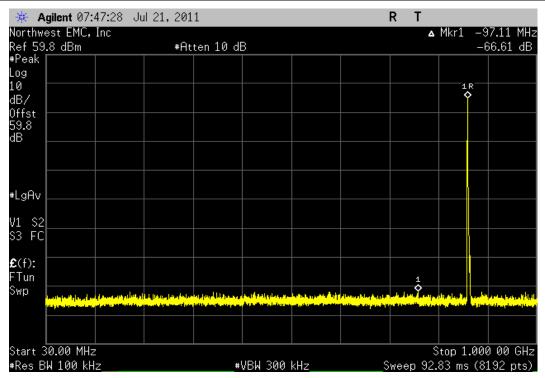


LTE 1.4 MHz S	Single Carrier, Low Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-62.68 dBc	≤ -13 dBc	Pass

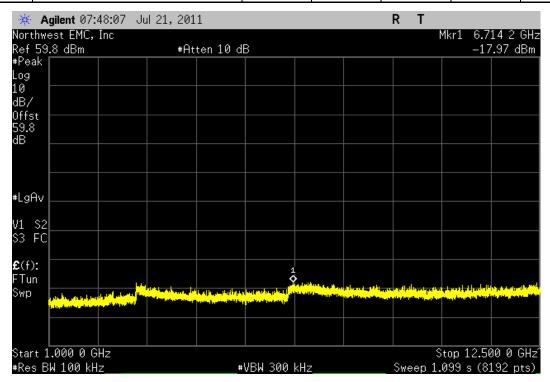




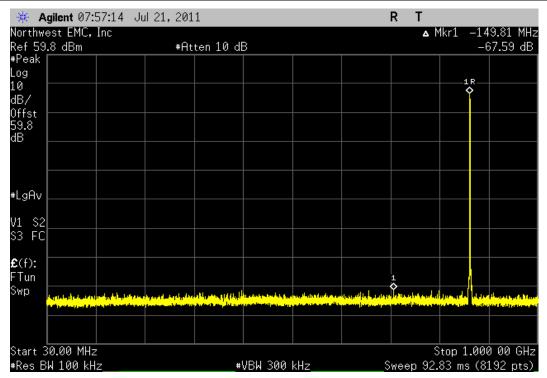


LTE 1.4 MHz Single Carrier, Mid Channel				
Frequency				
Range		Value	Limit	Result
1 GHz - 12.5 GH	Z	-63.9 dBc	≤ -13 dBc	Pass

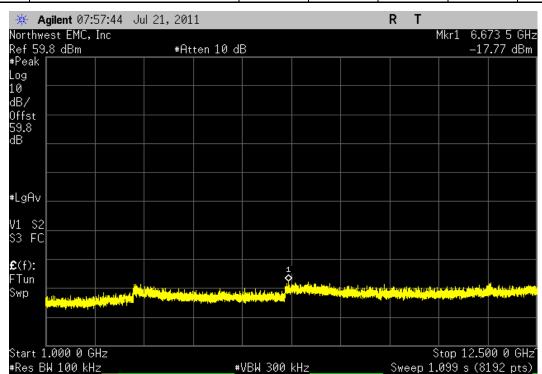





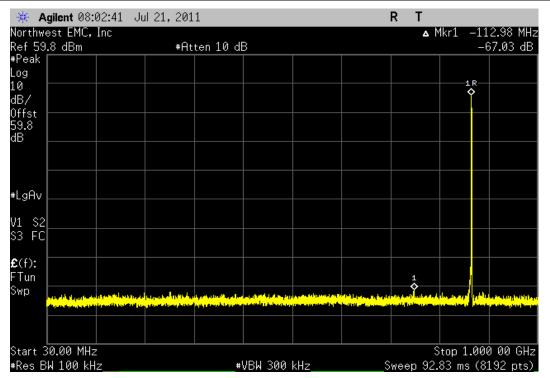


LTE 1.4 M	Hz Single Carrier, H	High Channel		
Frequency				
Range		Value	Limit	Result
1 GHz - 12.5 GHz		-63.35 dBc	≤ -13 dBc	Pass

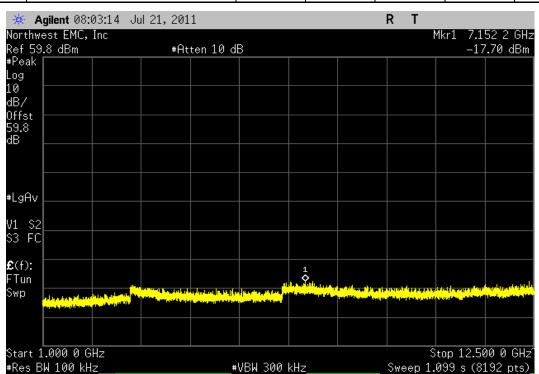




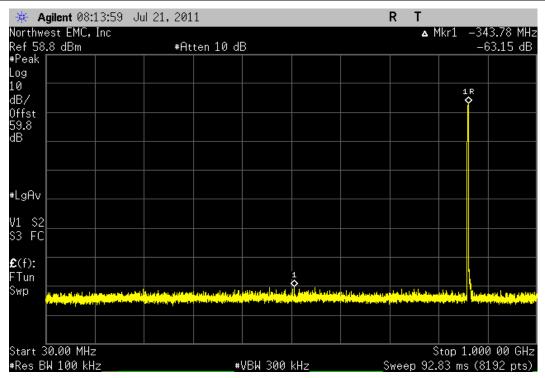


	LTE 3 M	Hz Single Carrier, L	ow Channel		
	Frequency				
	Range		Value	Limit	Result
1	1 GHz - 12.5 GHz		-59.72 dBc	≤ -13 dBc	Pass

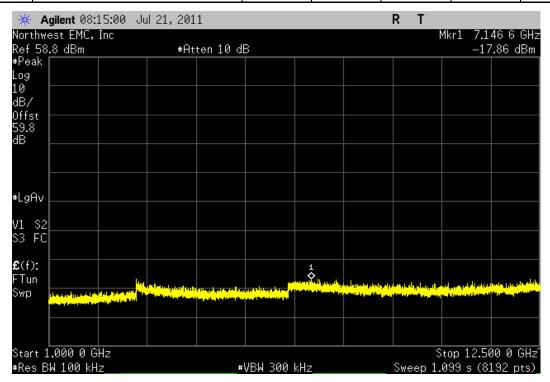





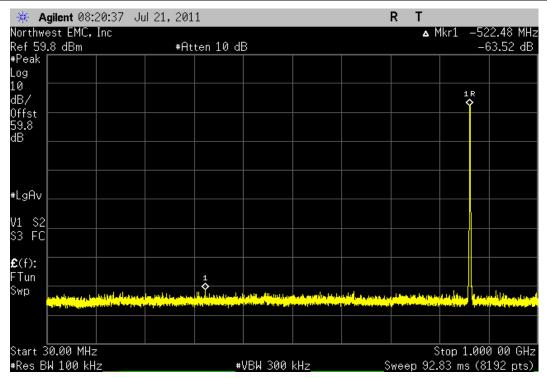


LTE 3 MHz :	Single Carrier, Mid Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-59.54 dBc	≤ -13 dBc	Pass

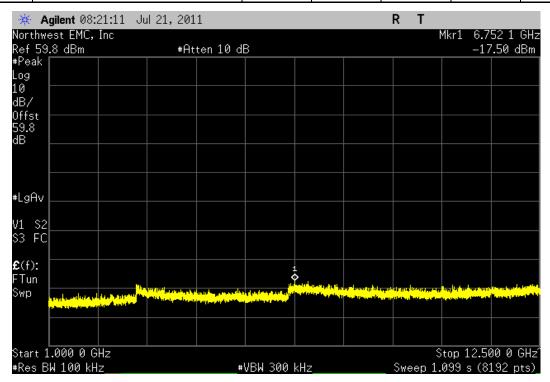




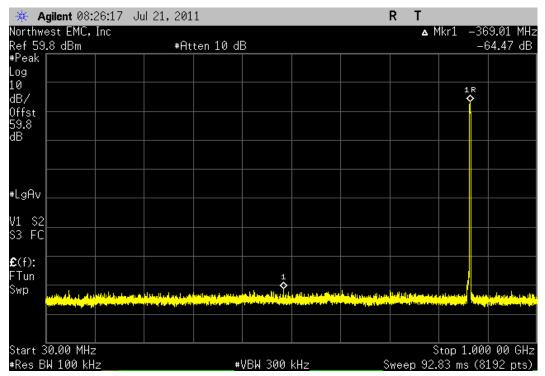


LTE 3 MHz S	Single Carrier, High Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-60.22 dBc	≤ -13 dBc	Pass

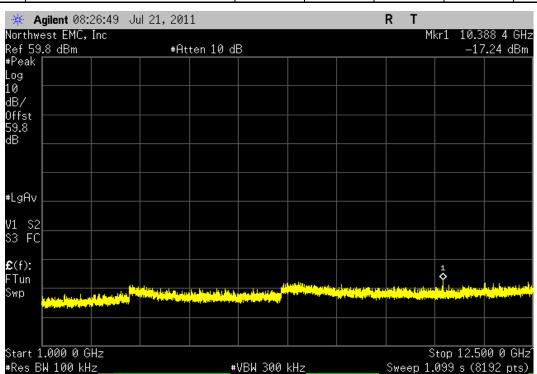




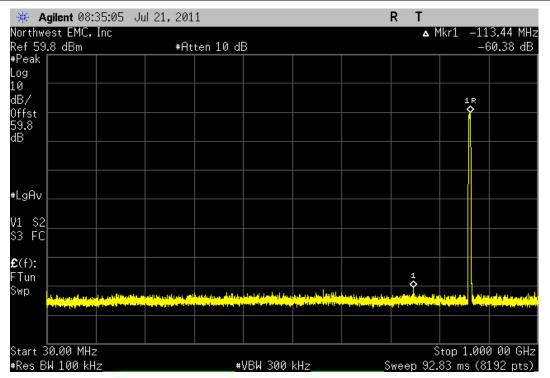


LTE 5 MHz S	Single Carrier, Low Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-57.43 dBc	≤ -13 dBc	Pass

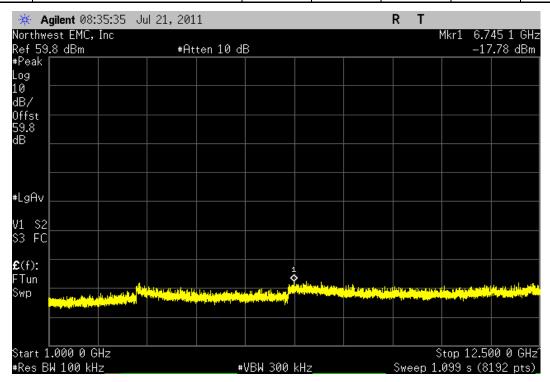





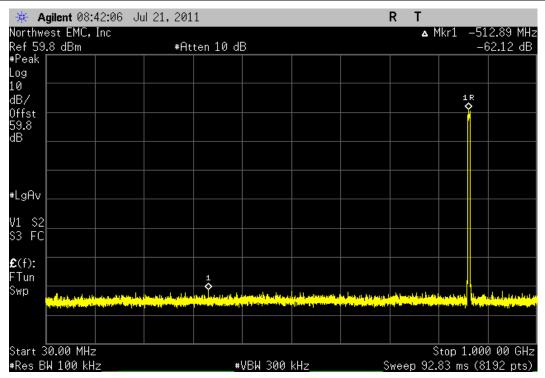


LTE 5 MHz Single Carrier, Mid Channel				
Frequency				
Range	Value	Limit	Result	
1 GHz - 12.5 GHz	-58.44 dBc	≤ -13 dBc	Pass	

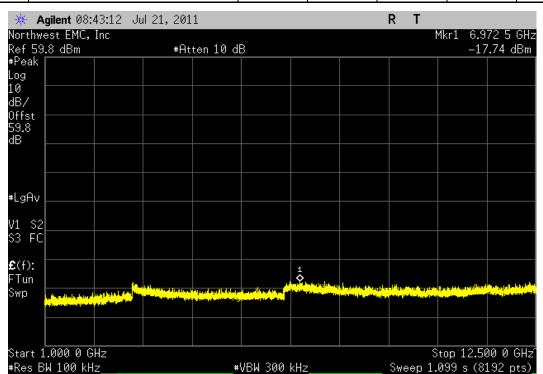





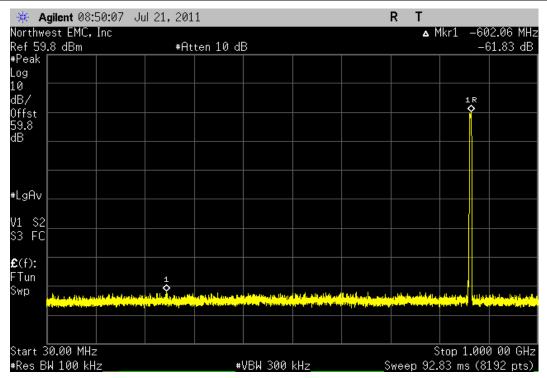


LTE 5 MHz S	Single Carrier, High Channel		
Frequency			
Range	Value	Limit	Result
1 GHz - 12.5 GHz	-57.25 dBc	≤ -13 dBc	Pass

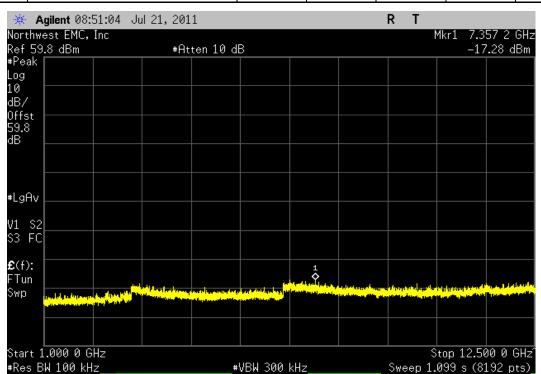




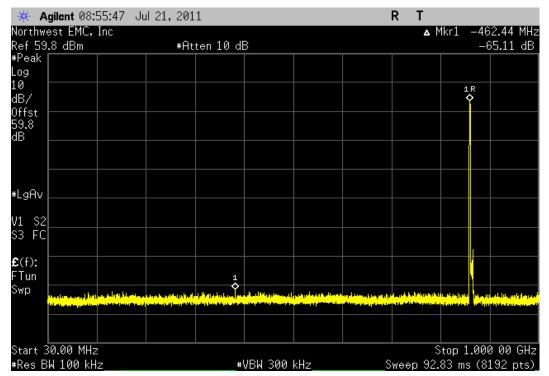


LTE 1.4 MHz Multi Carrier [2FA], Low Channel					
Frequency					
Range Value Limit Result					
1 GHz - 12.5 GHz	-61.01 dBc	≤ -13 dBc	Pass		

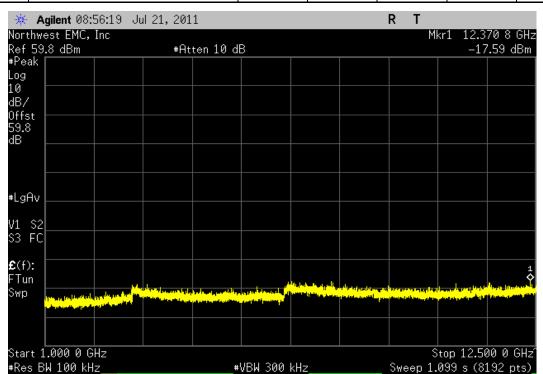





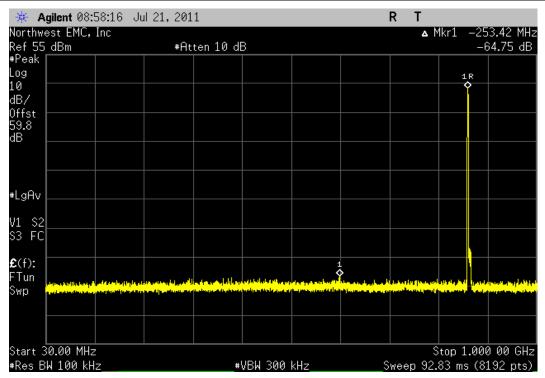


LTE 1.4 MHz Multi Carrier [2FA], Mid Channel					
Frequency					
Range	Value	Limit	Result		
1 GHz - 12.5 GHz	-60.9 dBc	≤ -13 dBc	Pass		

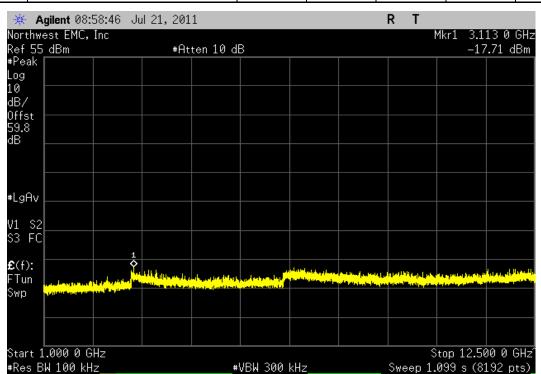





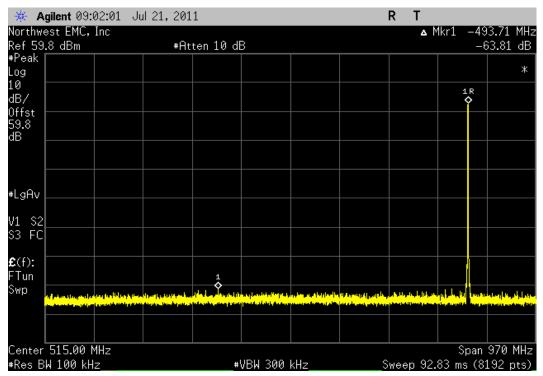


LTE 1.4 MHz Multi Carrier [2FA], High Channel					
Frequency					
Range	Value	Limit	Result		
1 GHz - 12.5 GHz	-60.12 dBc	≤ -13 dBc	Pass		

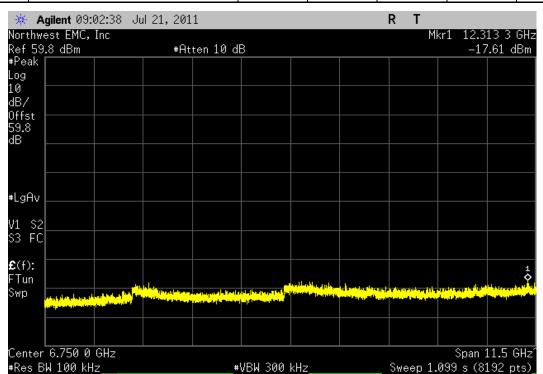





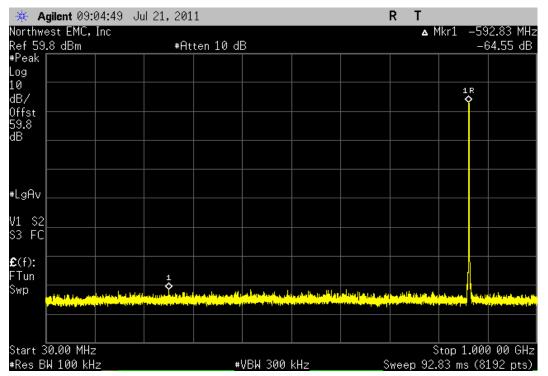


LTE 1.4 MHz Multi Carrier [2FA], Low(2) Channel					
Frequency					
Range	Value	Limit	Result		
1 GHz - 12.5 GHz	-60.54 dBc	≤ -13 dBc	Pass		

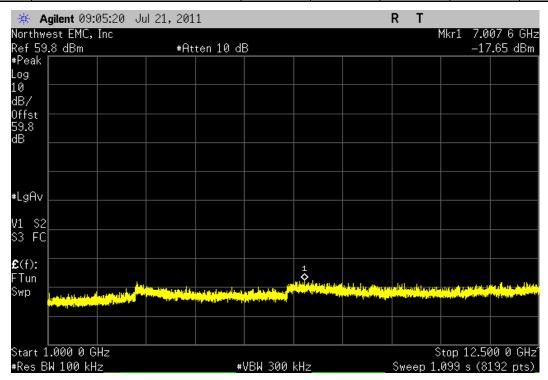





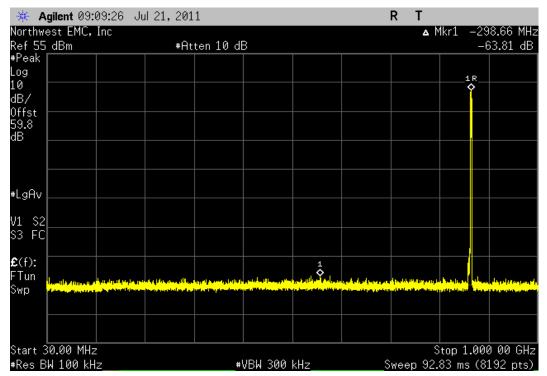


LTE 1.4 MHz Multi Carrier [2FA], Mid(2) Channel					
Frequency					
Range	Value	Limit	Result		
1 GHz - 12.5 GHz	-59.17 dBc	≤ -13 dBc	Pass		

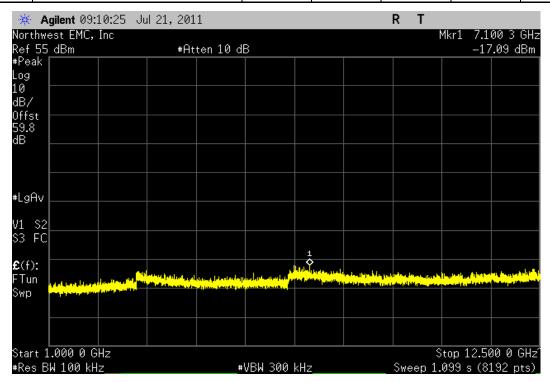





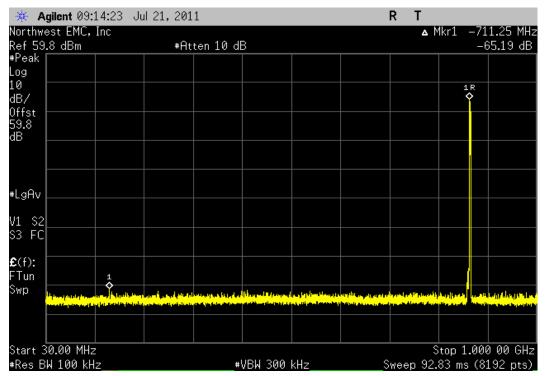


LTE 1.4 MHz Multi Carrier [2FA], High(2) Channel					
Frequency					
Range Value Limit Result					
1 GHz - 12.5 GHz	-61.07 dBc	≤ -13 dBc	Pass		

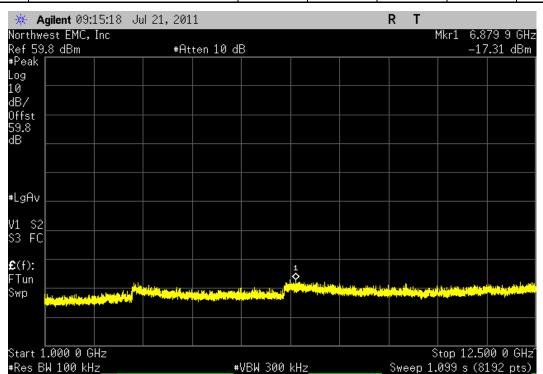




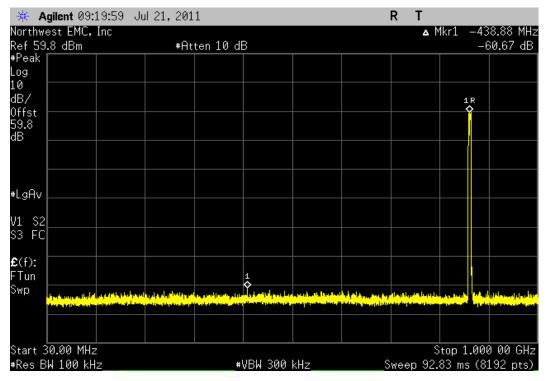


LTE 3 MHz Multi Carrier [2FA], Low Channel					
Frequency					
Range Value Limit					
1 GHz - 12.5 GHz	-56.79 dBc	≤ -13 dBc	Pass		

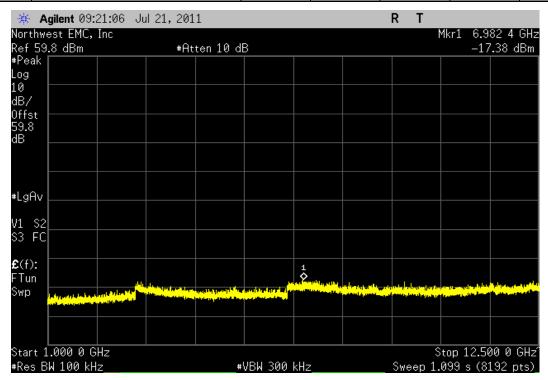





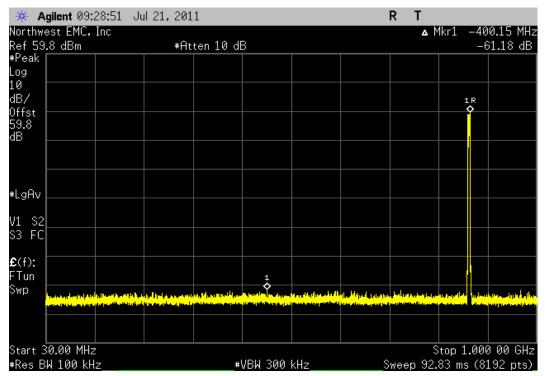


	LTE 3 MHz Multi Carrier [2FA], Mid Channel					
Frequency						
Range			Value	Limit	Result	
	1 GHz - 12.5 GHz		-56.28 dBc	≤ -13 dBc	Pass	

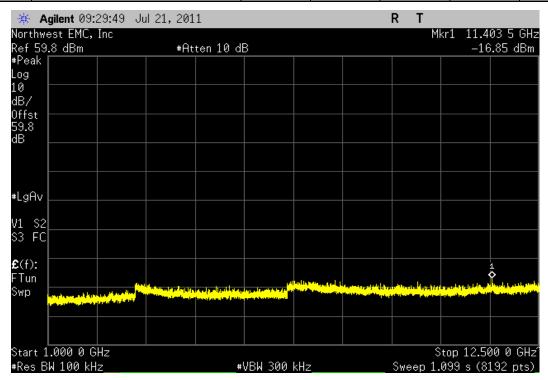



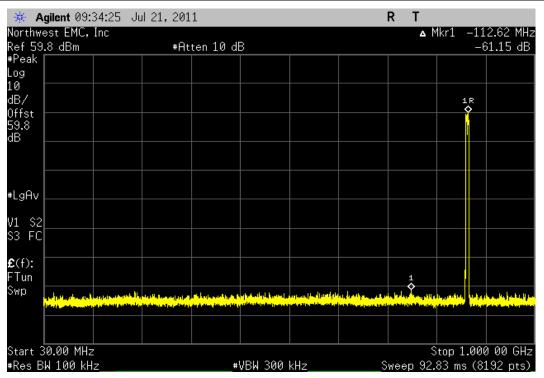

LTE 3 MHz Multi Carrier [2FA], High Channel					
Frequency					
Range	Value	Limit	Result		
1 GHz - 12.5 GHz	-56.95 dBc	≤ -13 dBc	Pass		

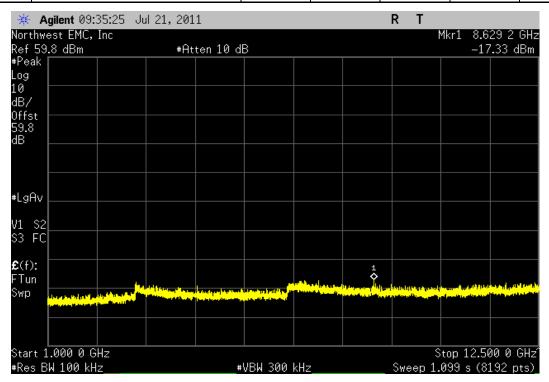

Spurious Radiated Emissions - CDMA/EVDO-A/LTE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test resulting was perioritied using the inducely of updation and comparations, provided them report. The inductional and/or the original administration provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes ite such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION
CDMA. Single Carrier - 862.9 MHz, 865.4 MHz, 867.9 MHz
CDMA. Multi Carrier (2FA) - (862.9 MHz, 867.9 MHz)
CDMA. Multi Carrier (3FA) - (862.9 MHz, 865.4 MHz, 867.9 MHz)
CDMA. Multi Carrier (5FA) - (862.9 MHz, 864.15 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz)
EVDO. Single Carrier - 862.9 MHz, 865.4 MHz, 867.9 MHz
EVDO. Multi Carrier (2FA) - (862.9 MHz, 867.9 MHz)
EVDO. Multi Carrier (3FA) - (862.9 MHz, 865.4 MHz, 867.9 MHz)
EVDO. Multi Carrier (5FA) - (862.9 MHz, 864.15 MHz, 865.4 MHz, 866.65 MHz, 867.9 MHz)
LTE 1.4 MHz. Single Carrier 863 MHz, 865.6 MHz, 868.3 MHz
LTE 3 MHz. Single Carrier - 863.8 MHz, 865.6 MHz, 867.5 MHz
LTE 5 MHz. Single Carrier - 864.8 MHz, 865.6 MHz, 866.5 MHz
LTE 1.4 MHz. Multi Carrier (2FA) - (863 MHz, 864 MHz)
LTE 1.4 MHz. Multi Carrier (2FA) - (864.9 MHz, 866.3MHz)
LTE 1.4 MHz. Multi Carrier (2FA) - (866.9 MHz, 868.3 MHz)
LTE 3 MHz. Multi Carrier (2FA) - (863.8 MHz, 866.8 MHz)
LTE 3 MHz. Multi Carrier (2FA) - (864.1 MHz, 867.1 MHz)
LTE 3 MHz. Multi Carrier (2FA) - (864.5 MHz, 867.5 MHz)

POWER SETTINGS INVESTIGATED 48 VDC

AXIS INVESTIGATED

X Axis, Y- Axis, Z-Axis

WORST CASE AXIS

CONFIGURATIONS INVESTIGATED

FREQUENCY RANGE INVESTIGATED							
Start Frequency	30 MHz	Stop Frequency	12400 MHz				

CLOCKS AND OSCILLATORS

See Modes of Operation

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	11/17/2010	12 mo
Antenna, Horn	ETS	3160-07	AHR	NCR	0 mo
OC 10 Cables	N/A	12-18GHz RE Cables	OCO	6/24/2011	12 mo
.5-1GHz Notch Filter	K&L Microwave	3TNF-500/1000-N/N	HFR	11/30/2010	24 mo
Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	6/24/2011	12 mo
Antenna, Horn	ETS	3117	AHQ	4/19/2011	24 mo
OC10 Cables	N/A	1-8GHz RE Cables	OCJ	6/10/2011	12 mo
Antenna, Biconilog	EMCO	3142	AXB	3/28/2011	12 mo
OC10 Cables	N/A	10kHz-1GHz RE Cables	OCH	6/24/2011	12 mo
Pre-Amplifier	Miteq	AM-1064-9079	AOO	6/28/2011	12 mo
Spectrum Analyzer	Agilent	E4446A	AAY	1/11/2011	12 mo
DC Power Supply	Hewlett Packard	6574A	N/A	NCR	N/A
30 dB Directional Coupler (800-2500 MHz)	Fairview Microwave	SMC4030	N/A	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	N/A	NCR	N/A

CUSTOMER TEST SET				
Description	Manufacturer	Model	Last Cal.	Interval
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Vector Signal Generator	Agilent	N5182	6/7/2010	24
KMW Cobra Reliability Analyzer	KMW Cormmunications	N/A	NCR	N/A
Power Meter	Agilent	E4419B	4/1/2010	24
Power Head	Agilent	E9300H	NCR	N/A
Power Head	Agilent	E9300H	NCR	N/A
Fujitsu Laptop	Fujitsu	A6030	NCR	N/A
DDLI220 Coffware	VMM/ Cormmunications	NI/A	NCDA	NI/A

MEASUREMENT BANDWIDTHS						
Frequenc	y Range	Peak Data	Quasi-Peak Data	Average Data		
(MH	z)	(kHz)	(kHz)	(kHz)		
0.01 -	0.15	1.0	0.2	0.2		
0.15 -	30.0	10.0	9.0	9.0		
30.0 -	1000	100.0	120.0	120.0		
Above	1000	1000.0	N/A	1000.0		
easurements were made using the IF bandwidths and detectors, specified. No video filter was used, except in the case of the ECC Average Measurements						

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurement is less than +/- 2 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION

The antenna ports were terminated in 50 ohms. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is place on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a ½ wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal ½ wave dipole antenna is determined for each radiated spurious emission.

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
MultiMeter	Fluke	79 III	MMD	1/26/2011	24
Power Sensor	Agilent	E4412A	SQE	4/21/2010	24
Power Sensor	Hewlett Packard	8481	SQP	6/7/2010	24
Power Meter	Hewlett Packard	E4418A	SPA	4/21/2010	24
Chamber, Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPHS-32-3.5-SCT/AC	TBE	6/8/2010	24
Spectrum Analyzer	Agilent	E4446A	AAY	1/11/2011	12
DC Power Supply	Hewlett Packard	6574A	N/A	NCR	N/A
30 dB Directional Coupler (800-2500 MHz)	Fairview Microwave	SMC4030	N/A	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	N/A	NCR	N/A

CUSTOMER TEST SET				
Description	Manufacturer	Model	Last Cal.	Interval
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Signal Analyzer	Agilent	N9020a	6/20/2011	24
MXA Vector Signal Generator	Agilent	N5182	6/7/2010	24
KMW Cobra Reliability Analyzer	KMW Cormmunications	N/A	NCR	N/A
Power Meter	Agilent	E4419B	4/1/2010	24
Power Head	Agilent	E9300H	NCR	N/A
Power Head	Agilent	E9300H	NCR	N/A
DC Power Supply	Hewlett Packard	6574A	NCR	N/A
30 dB Directional Coupler (800-2500 MHz)	Fairview Microwave	SMC4030	NCR	N/A
50 Ohm Termination	Fairview Microwave	ST6NL-150	NCR	N/A
Fujitsu Laptop	Fujitsu	A6030	NCR	N/A
RRH220 Software	KMW Cormmunications	N/A	NCRA	N/A

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty for radiated emissions measurements is less than +/- 4 dB, and for conducted emissions measurements is less than +/- 2.7 dB. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for measurement uncertainty are available upon request.

TEST DESCRIPTION

Variation of Supply Voltage

The primary supply voltage was varied from 85% to 115% of nominal

Variation of Ambient Temperature

Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50 ° C) and at 10 °C intervals.

A direct connect measurement was made between the EUT's antenna cable and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT. Measurements were made at the mid channel of each band to determine frequency stability. If the frequency variation is less than 100 ppm, the EUT will meet the requirement of 15.407(g), that the emissions are maintained within the band of operation.

NORTHWEST EMC		FREQU	ENCY STA	BILITY		XMit 2010.07.29
EUT:	800MHz i-DEN RRH				Work Order:	KMWC0027
Serial Number:	U311210059				Date:	07/21/11
Customer:	KMW Communications				Temperature:	22.86°C
Attendees:	Joshua Jang				Humidity:	52%
Project:	None				Barometric Pres.:	1012.2
Tested by:	Jaemi Suh		Power:	48 VDC	Job Site:	OC13
TEST SPECIFICATION	ONS			TEST METHOD		
FCC 90.213:2011				ANSI/TIA/EIA-603-C-2004		
COMMENTS						
Transmitting CW si	•					
DEVIATIONS FROM	M TEST STANDARD					
Configuration #	1	Signature	Just			

Low Channel, 5150 MHz - 5250 MHz Band
Frequency Stability with Variation of DC Voltage (Ambient Temperature = 20°C)

Voltage (VDC)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Tolerance (ppm)	Specification (ppm)
55.2 (115%)	865.400000	865.400228	0.26	1.5
52.8 (110%)	865.400000	865.400222	0.26	1.5
50.4 (105%)	865.400000	865.400222	0.26	1.5
48 (100%)	865.400000	865.400222	0.26	1.5
45.6 (95%)	865.400000	865.400218	0.25	1.5
43.2 (90%)	865.400000	865.400233	0.27	1.5
40.8 (85%)	865 400000	865 400222	0.26	1.5

Frequency Stability with Variation of Ambient Temperature (Primary Supply = 48 VDC)

Temp (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Tolerance (ppm)	Specification (ppm)
50	865.400000	865.400228	0.26	1.5
40	865.400000	865.400232	0.27	1.5
30	865.400000	865.400223	0.26	1.5
20	865.400000	865.400222	0.26	1.5
10	865.400000	865.400222	0.26	1.5
0	865.400000	865.400227	0.26	1.5
-10	865.400000	865.400232	0.27	1.5
-20	865.400000	865.400222	0.26	1.5
-30	865.400000	865.400228	0.26	1.5