



FCC 47 CFR PART 15 SUBPART C

for

SBM-U-BW, WBUW

Model: SLP-B211BWUXWW, WBUW

Brand: SAMSUNG, WiSilica

Test Report Number:

C180509Z10-RP1-2

Issued Date: June 1, 2018

Issued for

TCL Technoly Electronics (Huizhou) Co., Ltd.

**Section 37, Zhongkai High-tech development Zone Huizhou City Guangdor
Province China 516006.**

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 1, 2018	Initial Issue	ALL	Amzula Chen



TABLE OF CONTENTS

1 TEST CERTIFICATION	4
2 TEST RESULT SUMMARY	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY.....	7
4.1. DESCRIPTION OF TEST MODES	7
5 SETUP OF EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF SUPPORT UNITS	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST	8
6 FACILITIES AND ACCREDITATIONS	11
6.1. FACILITIES.....	11
6.2. ACCREDITATIONS.....	11
6.3. MEASUREMENT UNCERTAINTY	11
7 FCC PART 15.247 REQUIREMENTS	12
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT	12
7.2. SPURIOUS EMISSIONS MEASUREMENT	16
7.3. 6dB BANDWIDTH MEASUREMENT	51
7.4. ANTENNA GAIN	59
7.5. PEAK OUTPUT POWER.....	60
7.6. BAND EDGES MEASUREMENT	62
7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT	79



1 TEST CERTIFICATION

Product	SBM-U-BW, WBUW
Model	SLP-B211BWUXWW, WBUW
Brand	SAMSUNG, WiSilica
Tested	May 9~May 31, 2018
Applicant	TCL Technoly Electronics (Huizhou) Co., Ltd. Section 37, Zhongkai High-tech development Zone Huizhou City Guangdong Province China 516006.
Manufacturer	TCL Technoly Electronics (Huizhou) Co., Ltd. Section 37, Zhongkai High-tech development Zone Huizhou City Guangdong Province China 516006.

APPLICABLE STANDARDS

Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	SBM-U-BW, WBUW									
Model Number	SLP-B211BWUXWW, WBUW									
Brand	SAMSUNG, WiSilica									
Discrepancy	They are identical to each other except for model name, product name and brand. <table border="1"><thead><tr><th>Model Name</th><th>Product Name</th><th>Brand</th></tr></thead><tbody><tr><td>SLP-B211BWUXWW</td><td>SBM-U-BW</td><td>SAMSUNG</td></tr><tr><td>WBUW</td><td>WBUW</td><td>WiSilica</td></tr></tbody></table>	Model Name	Product Name	Brand	SLP-B211BWUXWW	SBM-U-BW	SAMSUNG	WBUW	WBUW	WiSilica
Model Name	Product Name	Brand								
SLP-B211BWUXWW	SBM-U-BW	SAMSUNG								
WBUW	WBUW	WiSilica								
Identify Number	C180509Z10-RP1-2									
Received Date	May 9 ,2018									
Power Supply	DC power supplied by Notebook									
Transmit Power	IEEE 802.11b mode: 16.25dBm IEEE 802.11g mode: 22.29dBm IEEE 802.11n HT20 MHz mode: 22.46Bm IEEE 802.11n HT40 MHz mode: 22.32Bm									
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)									
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65Mbps with fall back rates of 65/58.5/52/39/26/19.5/13/6.5Mbps IEEE 802.11n HT40: 135Mbps with fall back rates of 135/121.5/108/81/54/40.5/27/13.5Mbps									
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels									
Antenna Specification	Internal Antenna with 2.0dBi gain (Max)									
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz									
Temperature Range	-20°C ~ +50°C									
Hardware Version	2.1									
Software Version	2.1.64									

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: ZVA-IOT-S-SBM-U-B filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Used the “EngineerMode”software to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: Continuously Transmitting	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	Thinkpad S2	SL10K92342	DoC	LENOVO	N/A	Unshielded 1.00m (AC Cable) Shielded 1.80m (DC Cable)
2	mobile phone	MN3Q2CH/A	FCGV204CHFM 2	DoC	Apple	N/A	N/A

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



5.3. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	01/27/2018	01/26/2019
LISN	EMCO	3825/2	8901-1459	01/27/2018	01/26/2019
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
Amplifier	EMEC	EM330	060661	01/27/2018	01/26/2019
High Noise Amplifier	Agilent	8449B	3008A01838	01/27/2018	01/26/2019
Loop Antenna	COM-POWER	AL-130	121044	01/30/2018	01/29/2019
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	01/27/2018	01/26/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	01/24/2018	01/23/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Antenna Conducted Spurious Emission					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

6dB Bandwidth					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019



Antenna Gain					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Peak Output Power					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	01/27/2018	01/26/2019
Power Sensor	Anritsu	MA2411B	1126150	01/27/2018	01/26/2019

Band edges					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Peak Power Spectral Density					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI (C-4815,R-4320,T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

7.1.3. TEST SETUP

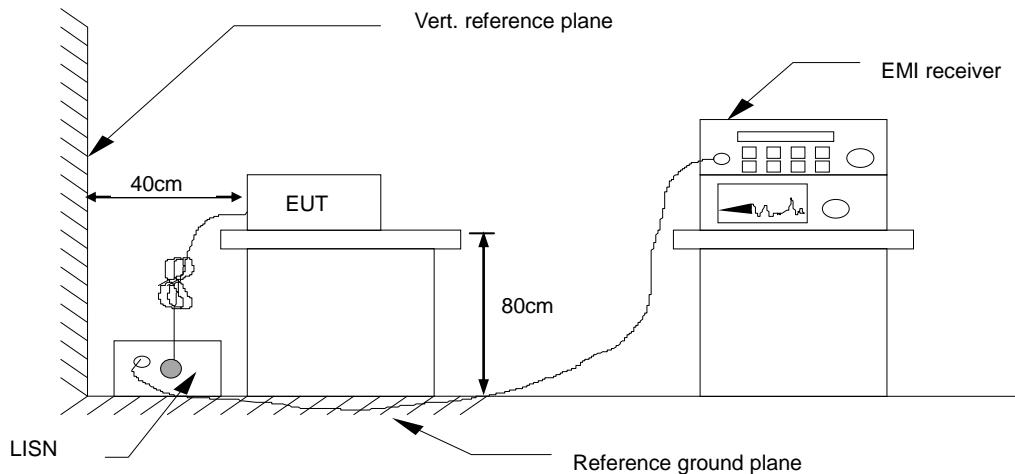

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.4. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss

Result = Quasi-peak Reading/ Average Reading + Factor


Limit = Limit stated in standard

Margin = Result (dBuV) – Limit (dBuV)



7.1.5. TEST RESULTS

Model No.	SLP-B211BWUXWW	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Evan Ai	Line	L1
Test Date	May 10, 2018	Test Voltage	AC 120V/60Hz

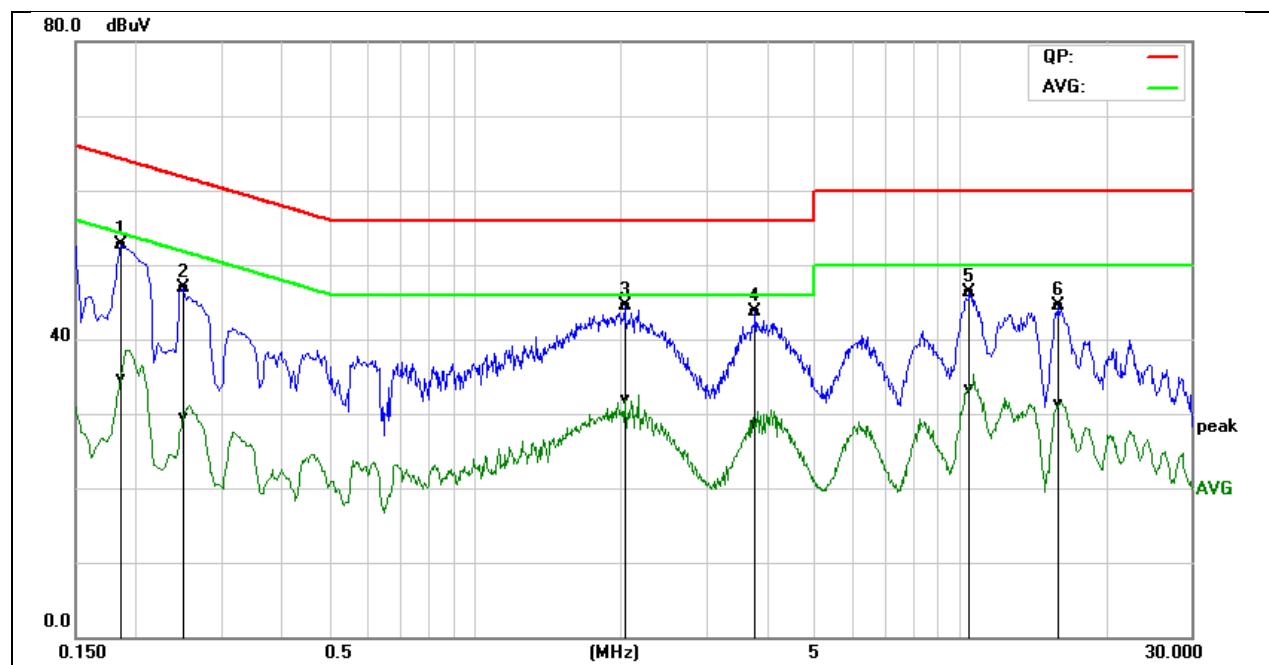


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1860	33.17	15.14	19.63	52.80	34.77	64.21	54.21	-11.41	-19.44	Pass
0.2500	27.32	9.80	19.62	46.94	29.42	61.75	51.76	-14.81	-22.34	Pass
2.0380	24.70	12.21	19.72	44.42	31.93	56.00	46.00	-11.58	-14.07	Pass
3.7980	23.98	8.86	19.73	43.71	28.59	56.00	46.00	-12.29	-17.41	Pass
10.5020	26.07	13.12	20.14	46.21	33.26	60.00	50.00	-13.79	-16.74	Pass
16.0419	24.41	11.19	20.07	44.48	31.26	60.00	50.00	-15.52	-18.74	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	SLP-B211BWUXWW	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Evan Ai	Line	L2
Test Date	May 10, 2018	Test Voltage	AC 120V/60Hz

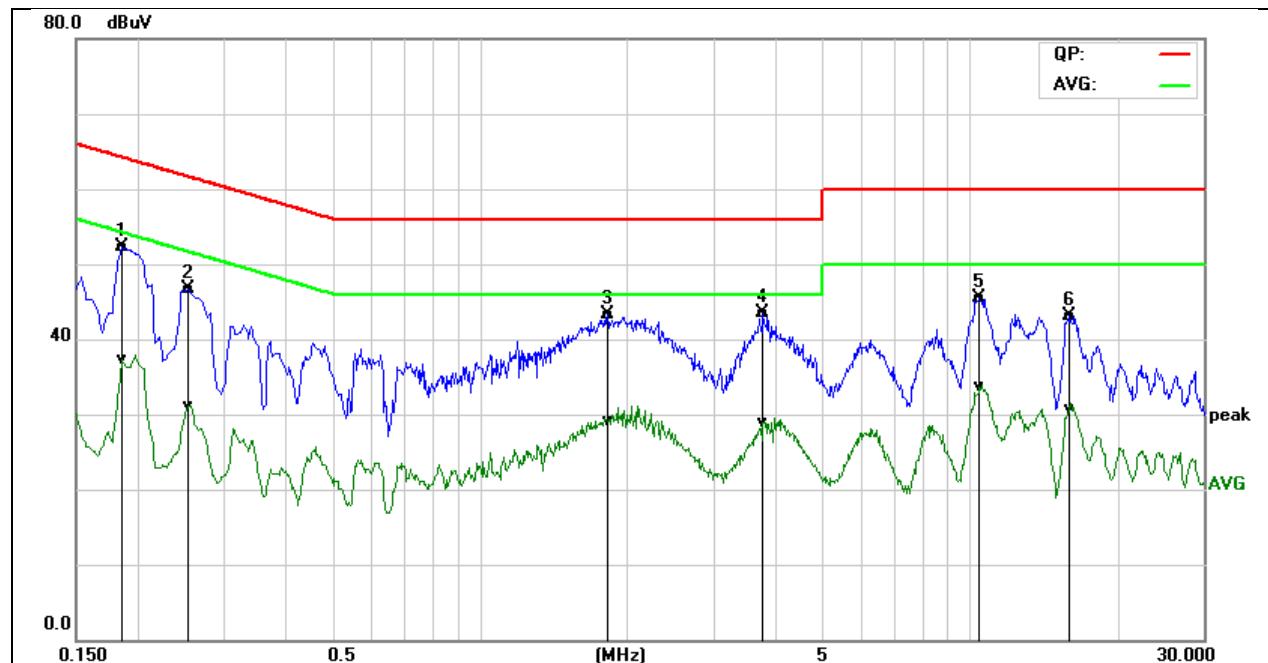

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1860	32.71	17.75	19.53	52.24	37.28	64.21	54.21	-11.97	-16.93	Pass
0.2540	27.09	11.62	19.54	46.63	31.16	61.62	51.63	-14.99	-20.47	Pass
1.8220	23.53	9.41	19.69	43.22	29.10	56.00	46.00	-12.78	-16.90	Pass
3.7940	23.76	9.12	19.79	43.55	28.91	56.00	46.00	-12.45	-17.09	Pass
10.4860	25.44	13.56	20.14	45.58	33.70	60.00	50.00	-14.42	-16.30	Pass
16.0540	23.05	10.68	20.05	43.10	30.73	60.00	50.00	-16.90	-19.27	Pass

REMARKS: L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b) (3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

7.2.1.3. TEST RESULTS


Test Plot



IEEE 802.11b mode

CH Low (10MHz ~26.5GHz)

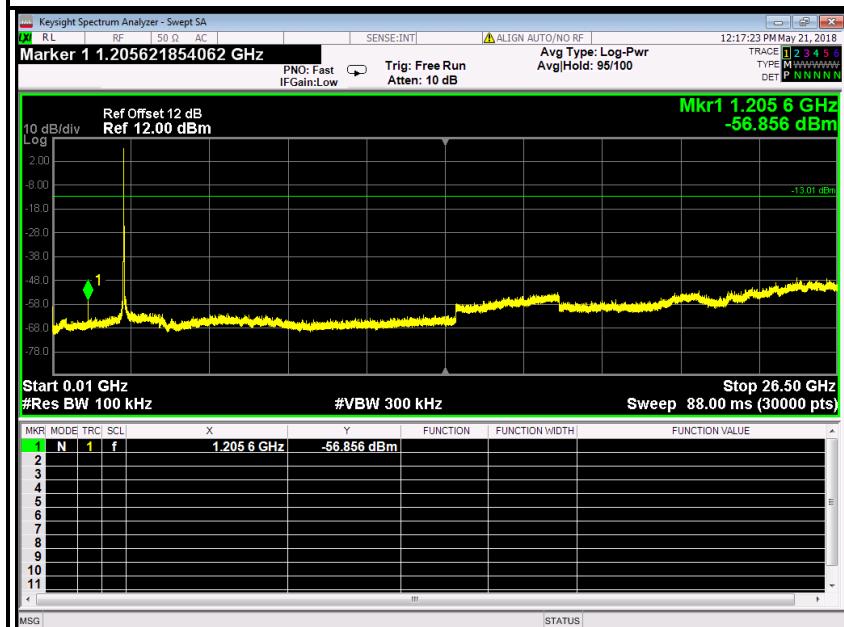


CH Low (2.31GHz ~2.43GHz)

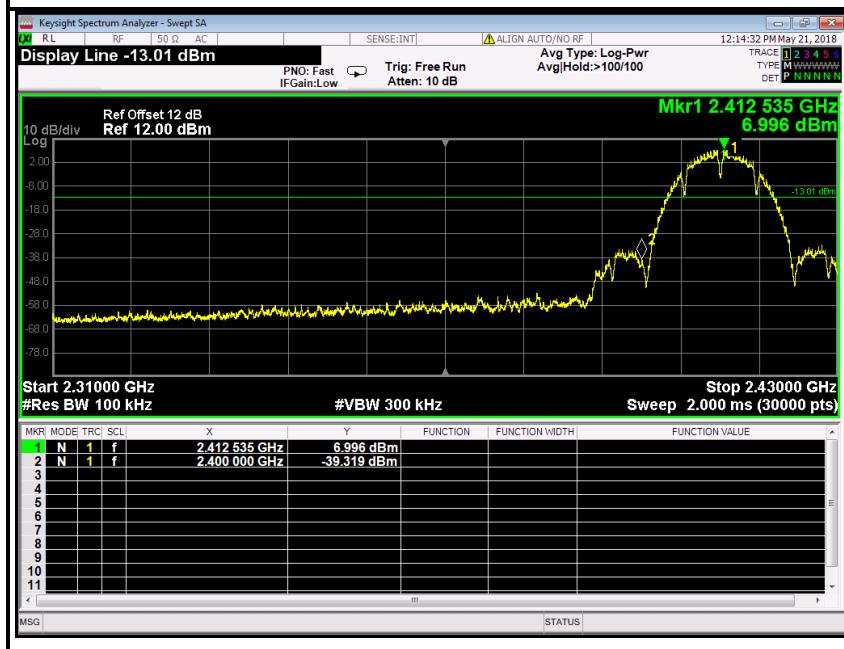

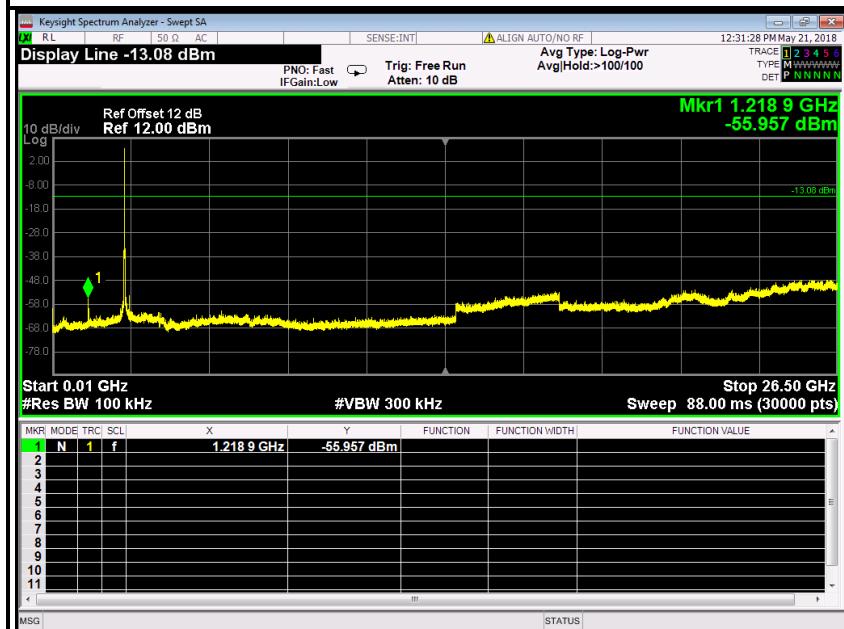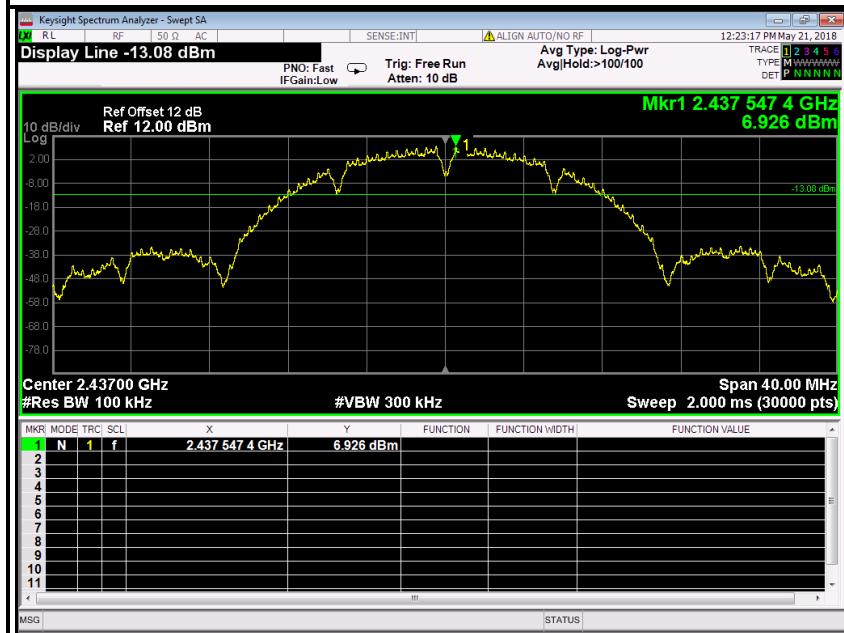**CH Mid (10MHz ~26.5GHz)****CH Mid**






CH High (10MHz ~26.5GHz)

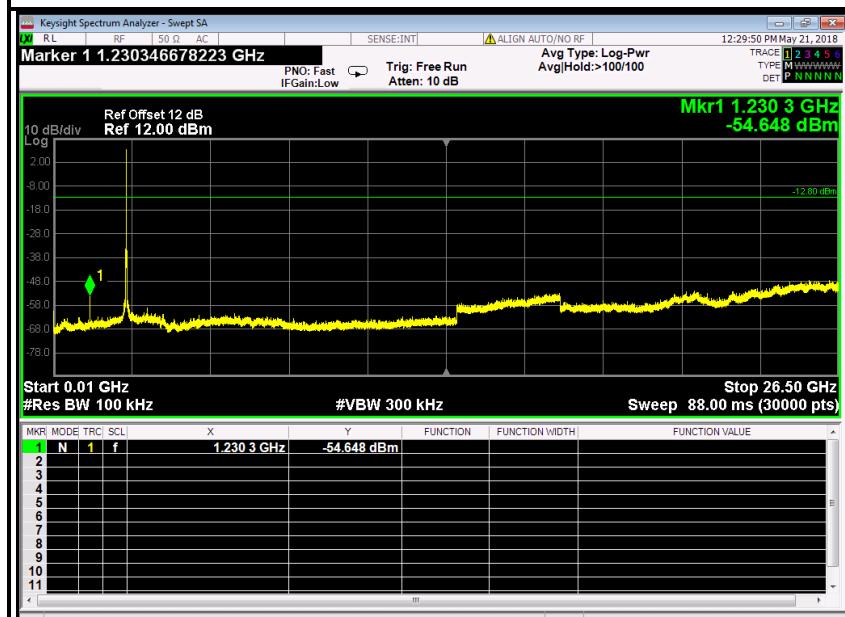




CH High (2.45GHz ~2.5GHz)


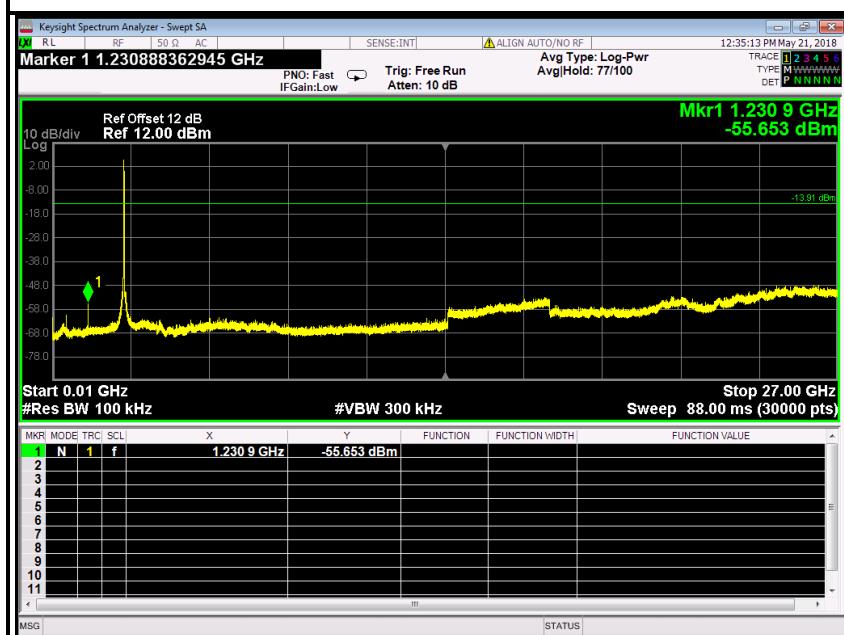



**IEEE 802.11g mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.43GHz)**

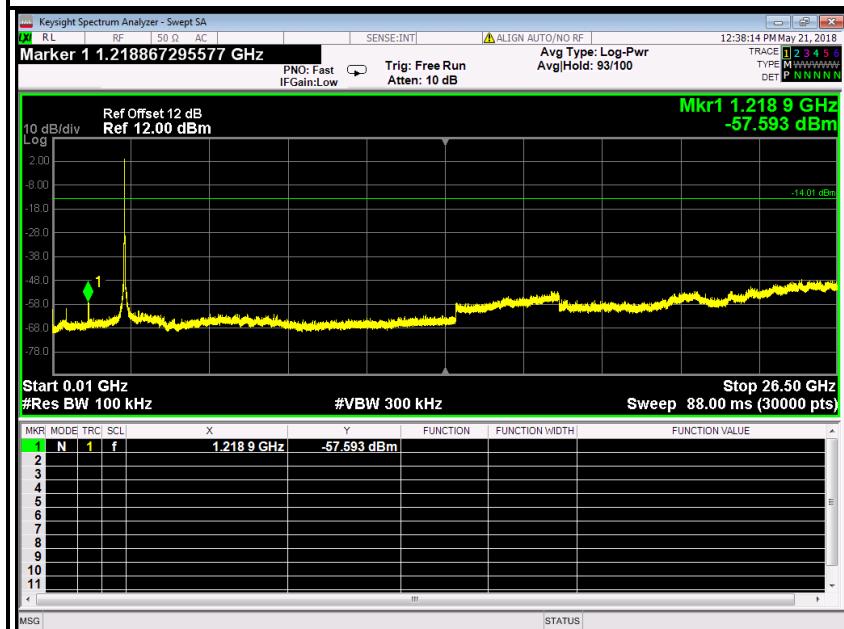
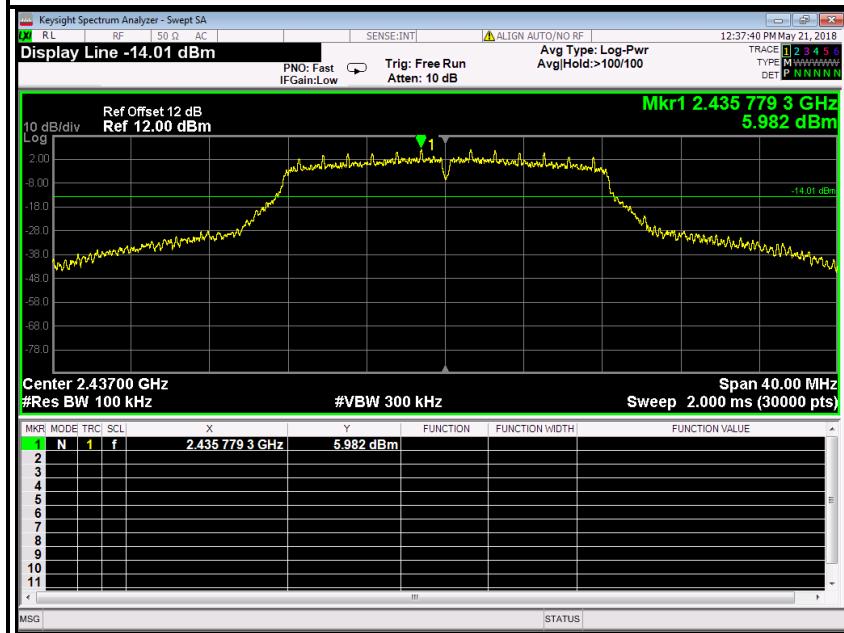
**CH Mid (10MHz ~26.5GHz)****CH Mid**


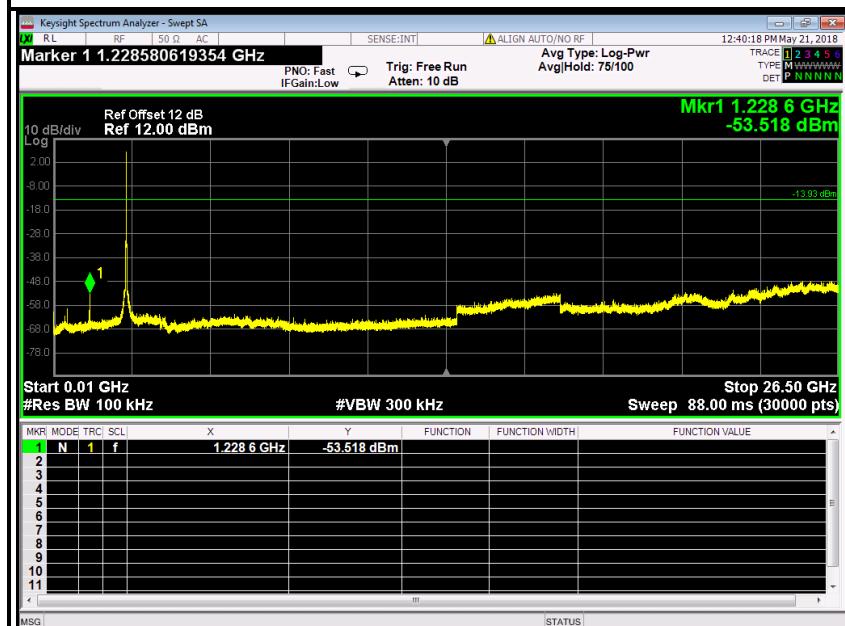
**CH High (10MHz ~26.5GHz)****CH High (2.45GHz ~2.5GHz)**

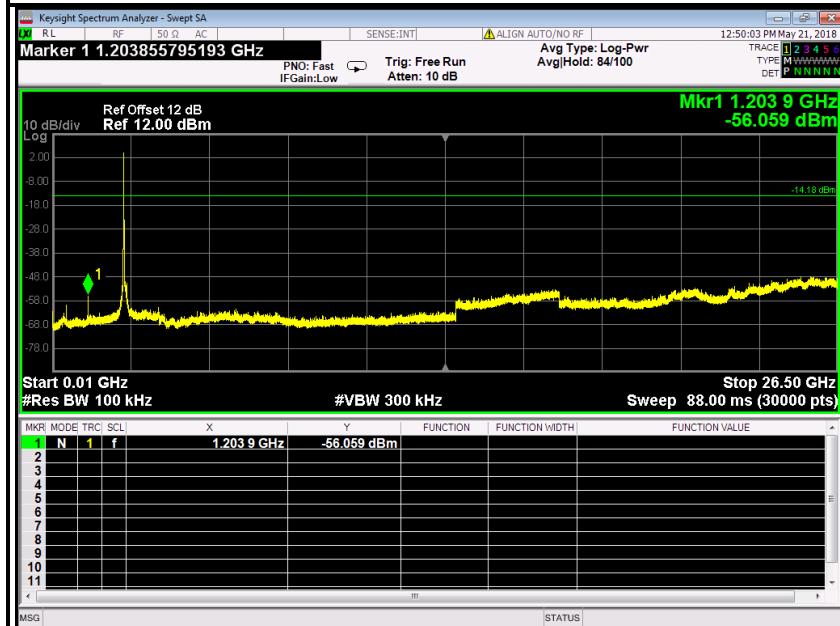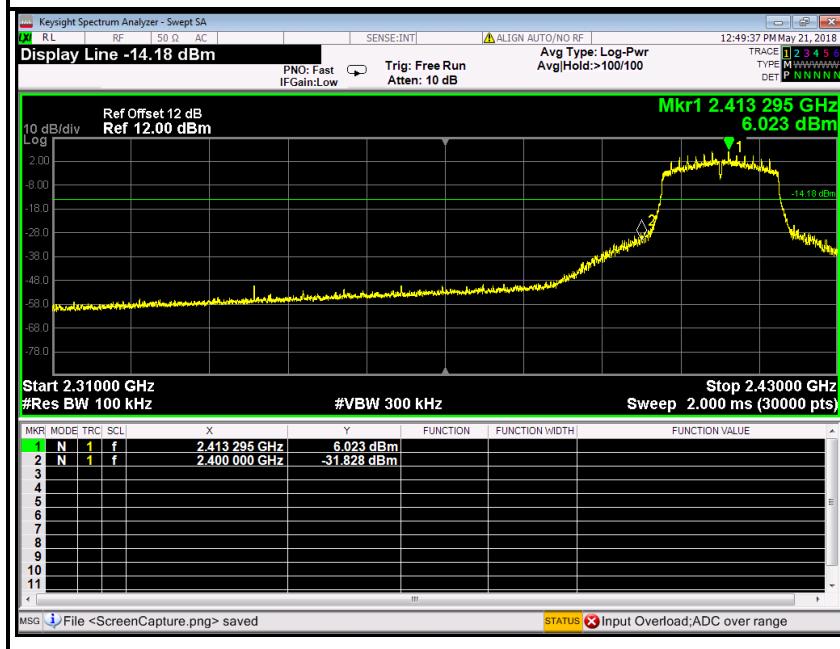
**IEEE 802.11n HT20 MHz mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.43GHz)**

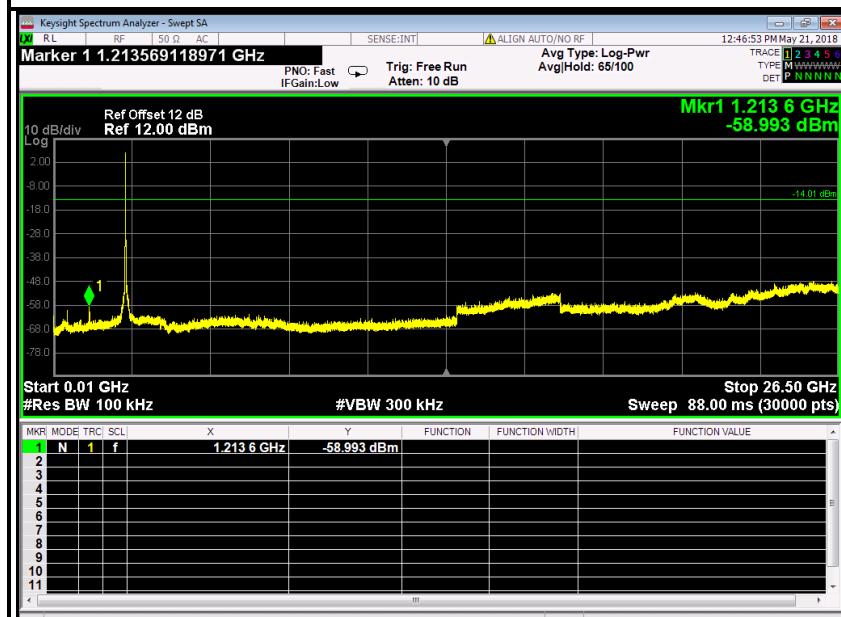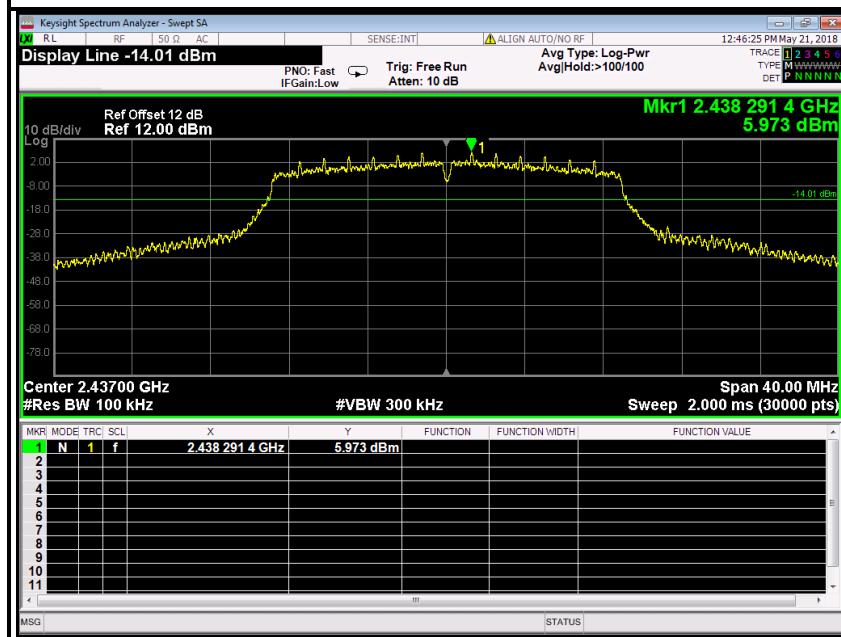**CH Mid (10MHz ~26.5GHz)****CH Mid**

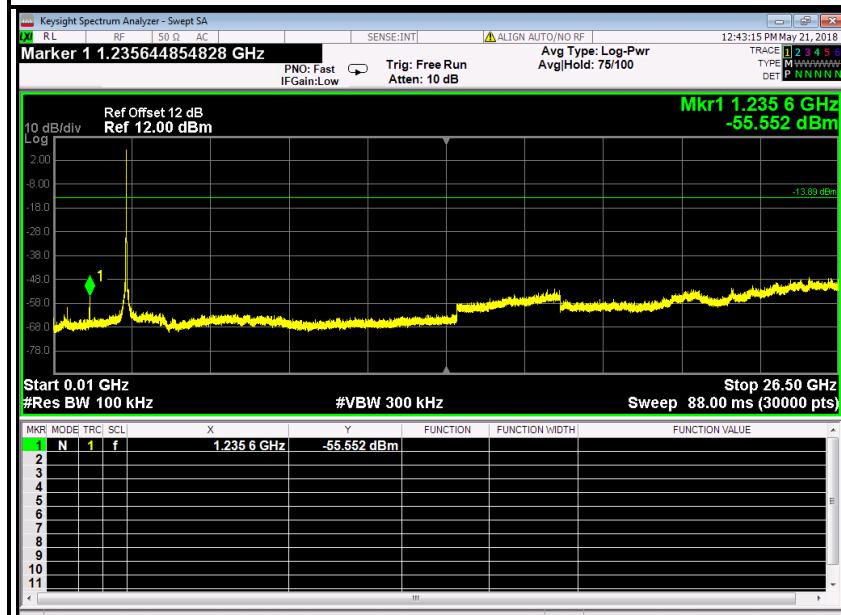**CH High (10MHz ~26.5GHz)****CH High (2.45GHz ~2.5GHz)**

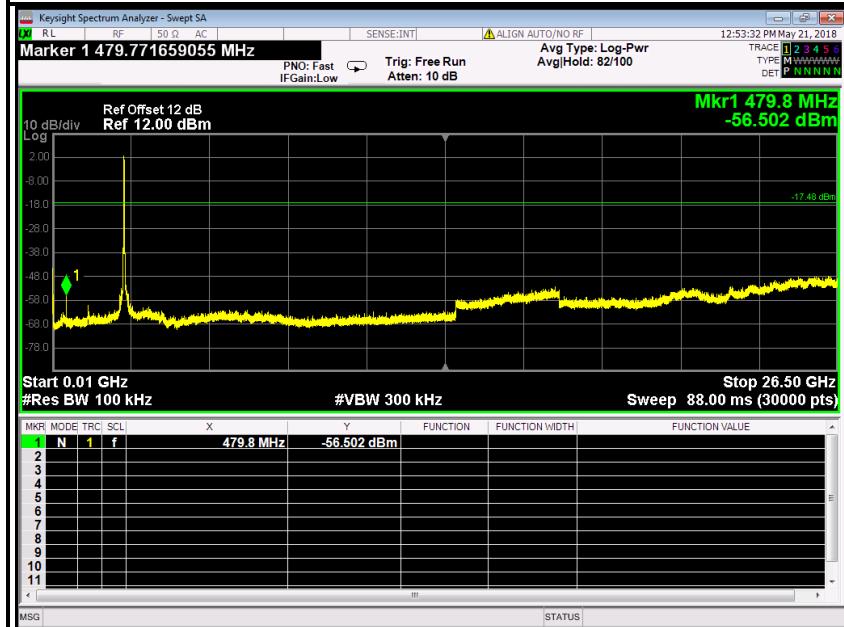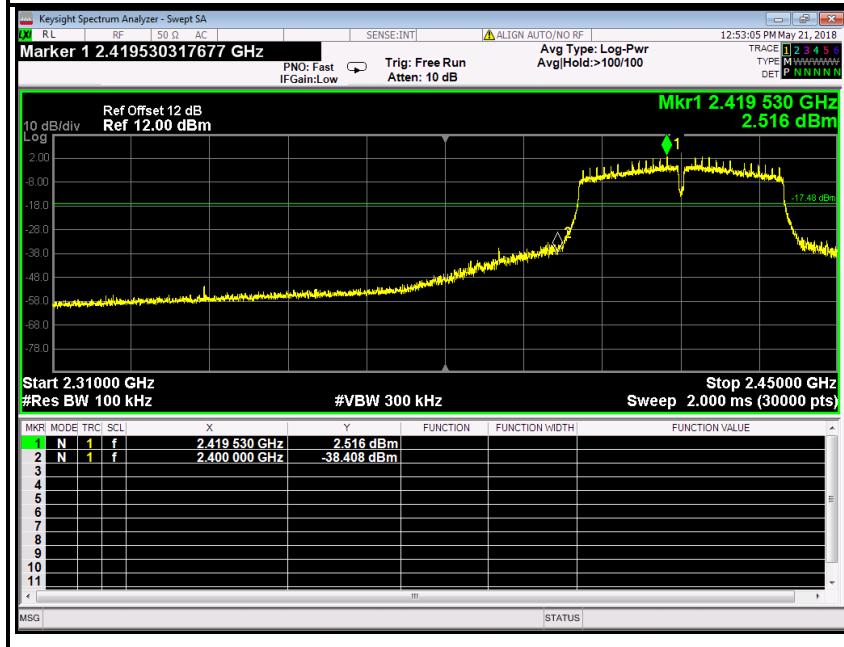**IEEE 802.11n HT40 MHz mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.45GHz)**

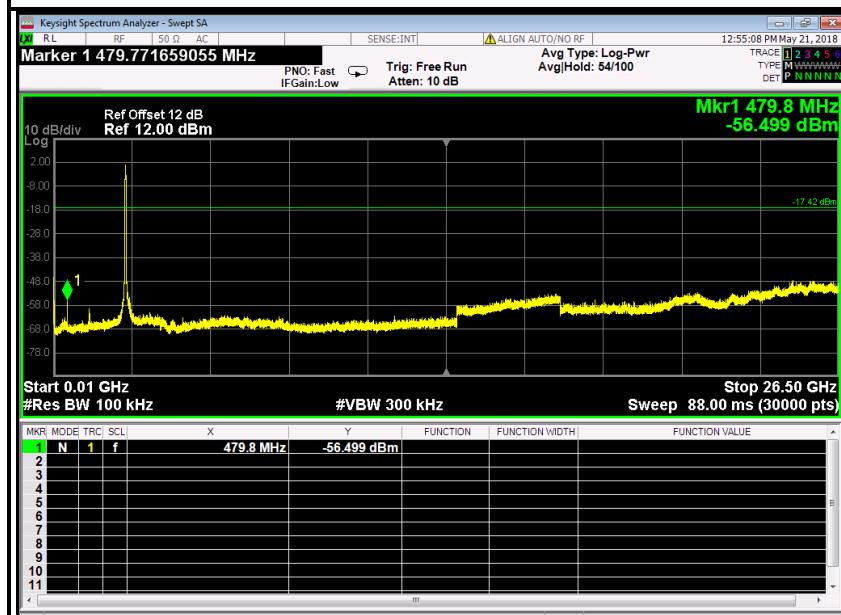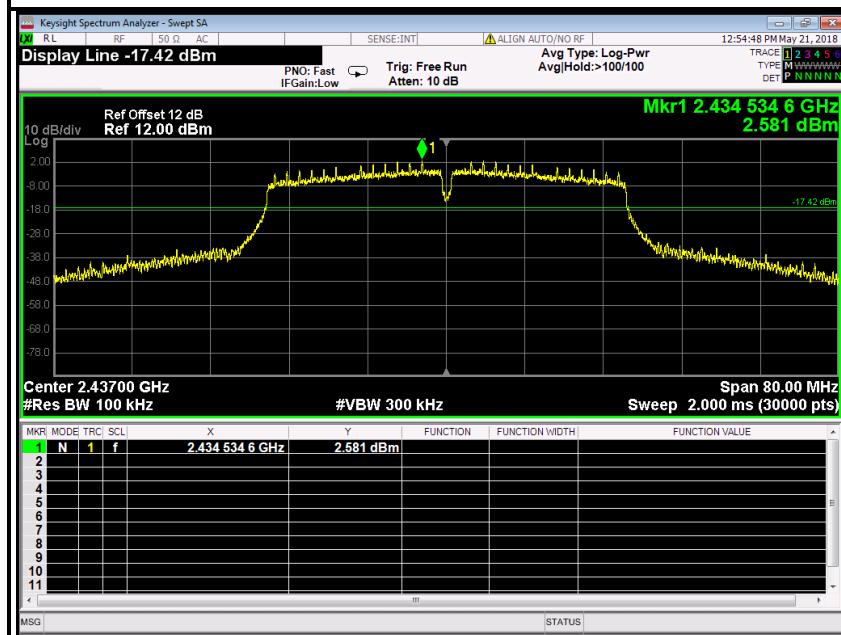**CH Mid (10MHz ~26.5GHz)****CH Mid**

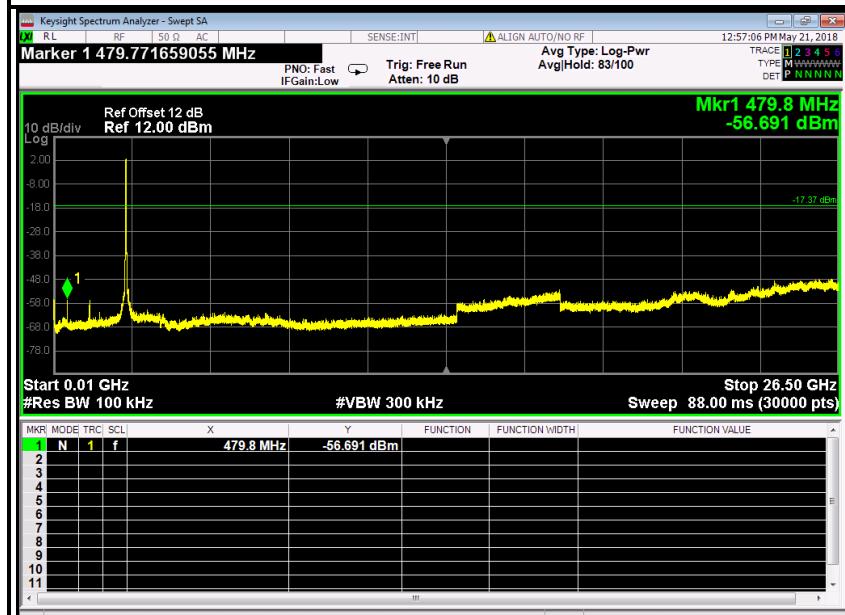**CH High (10MHz ~26.5GHz)****CH High (2.43GHz ~2.5GHz)**



7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB μ V/m) = 20 log Emission level (μ V/m).



7.2.2.2. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.2.2.3. TEST PROCEDURE (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


7.2.2.4. TEST SETUP

Below 30MHz

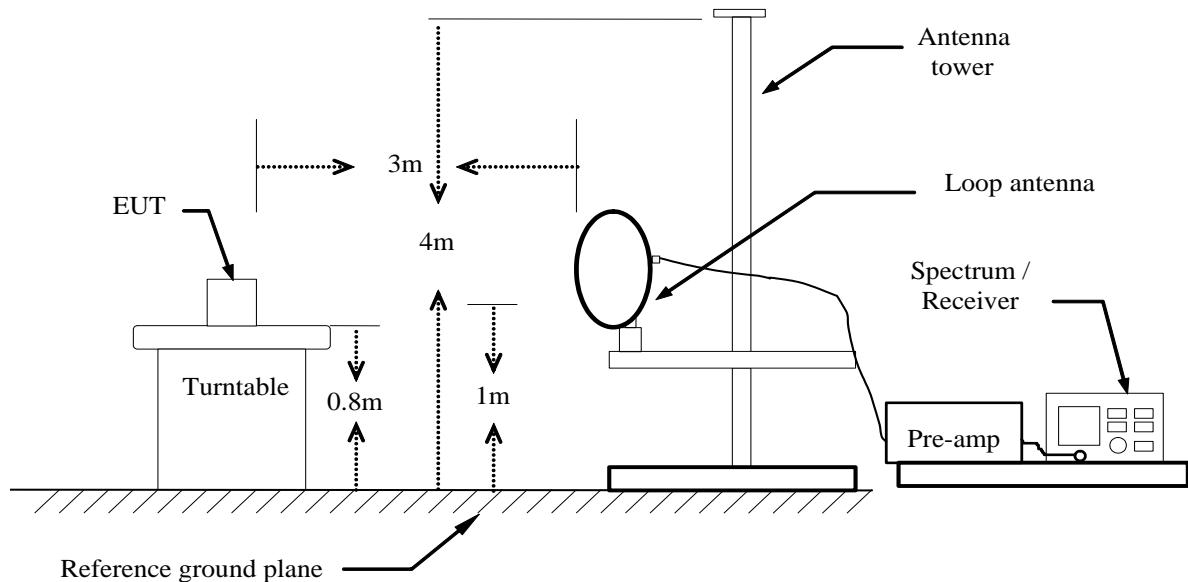

Below 1 GHz

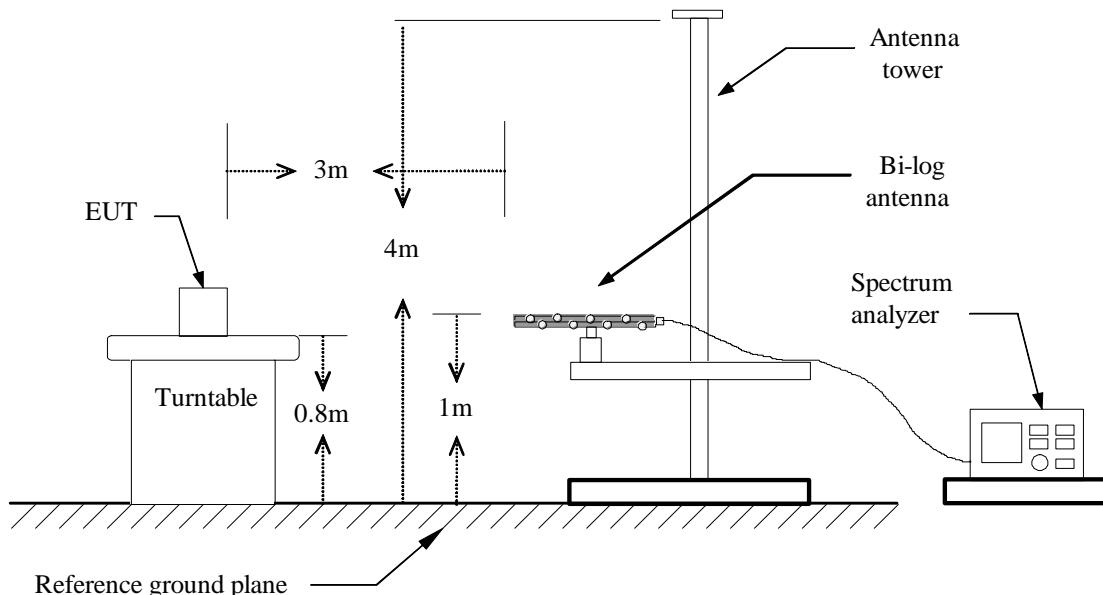

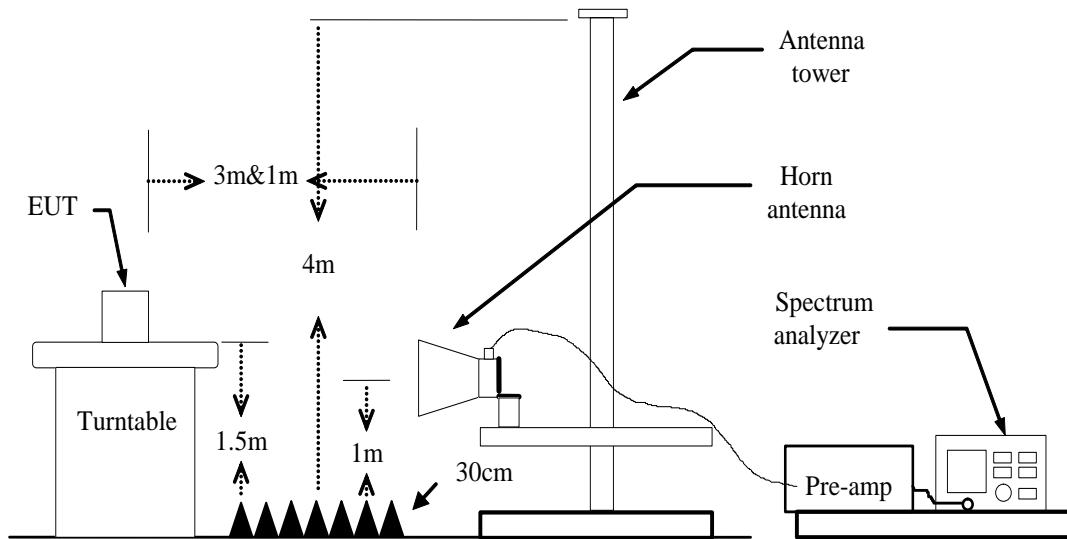Above 1 GHz

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.5. DATA SAMPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.2.6. TEST RESULTS

Below 1 GHz

Test Mode: TX / IEEE 802.11b(CH Low)

Tested by: Fadie Zhong

Ambient temperature: 24°C Relative humidity: 52% RH

Date: May 13, 2018

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
192.9600	52.24	-22.82	29.42	43.50	-14.08	V	QP
245.3400	48.57	-21.28	27.29	46.00	-18.71	V	QP
386.9600	45.62	-16.44	29.18	46.00	-16.82	V	QP
485.9000	39.40	-14.36	25.04	46.00	-20.96	V	QP
572.2300	44.42	-13.04	31.38	46.00	-14.62	V	QP
722.5800	38.32	-11.79	26.53	46.00	-19.47	V	QP
<hr/>							
192.9600	51.67	-22.82	28.85	43.50	-14.65	H	QP
263.7700	46.49	-20.13	26.36	46.00	-19.64	H	QP
412.1800	40.42	-15.57	24.85	46.00	-21.15	H	QP
486.8700	42.44	-14.36	28.08	46.00	-17.92	H	QP
579.9900	48.61	-13.11	35.50	46.00	-10.50	H	QP
721.6100	43.93	-11.82	32.11	46.00	-13.89	H	QP

Notes:


1. No emission found between lowest internal used/generated frequency to 30MHz.
2. Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)

Remark:


1. Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.
4. Frequency (MHz). = Emission frequency in MHz
Reading (dB μ V/m) = Receiver reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Measured (dB μ V/m) – Limits (dB μ V/m)
Antenna Pol e (H/V) = Current carrying line of reading



Vertical

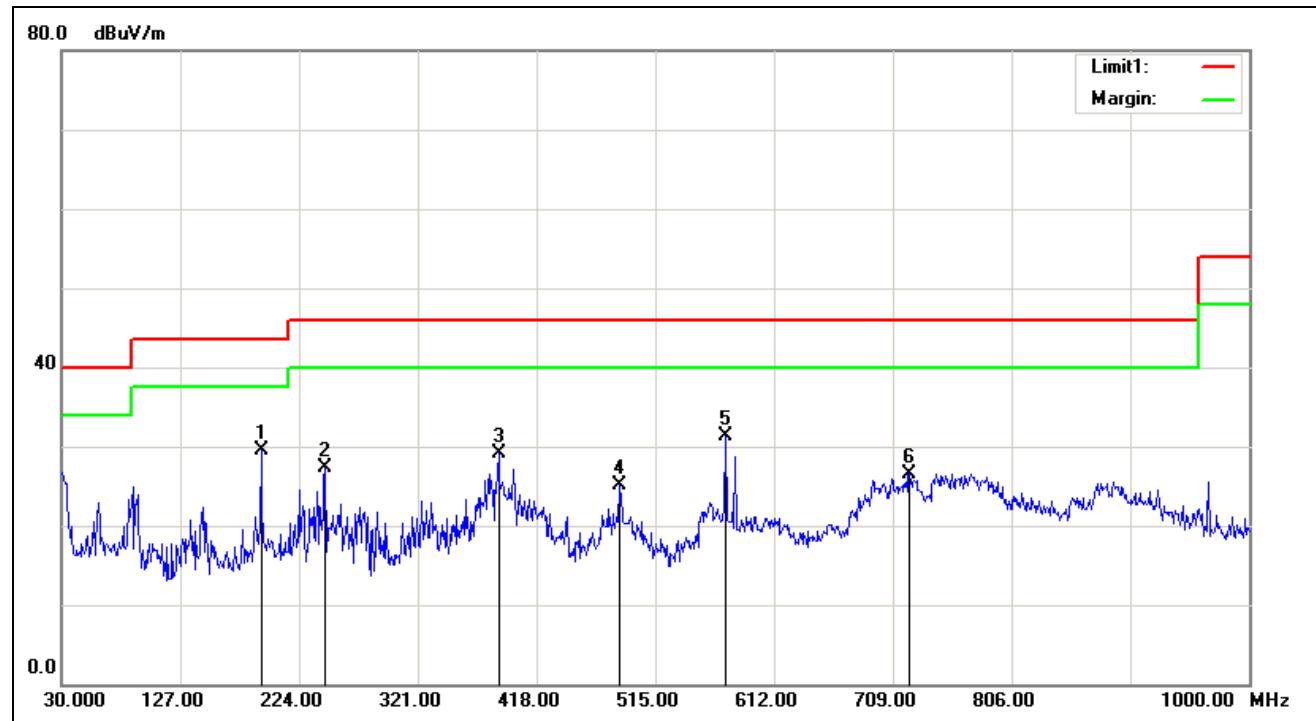

Horizontal

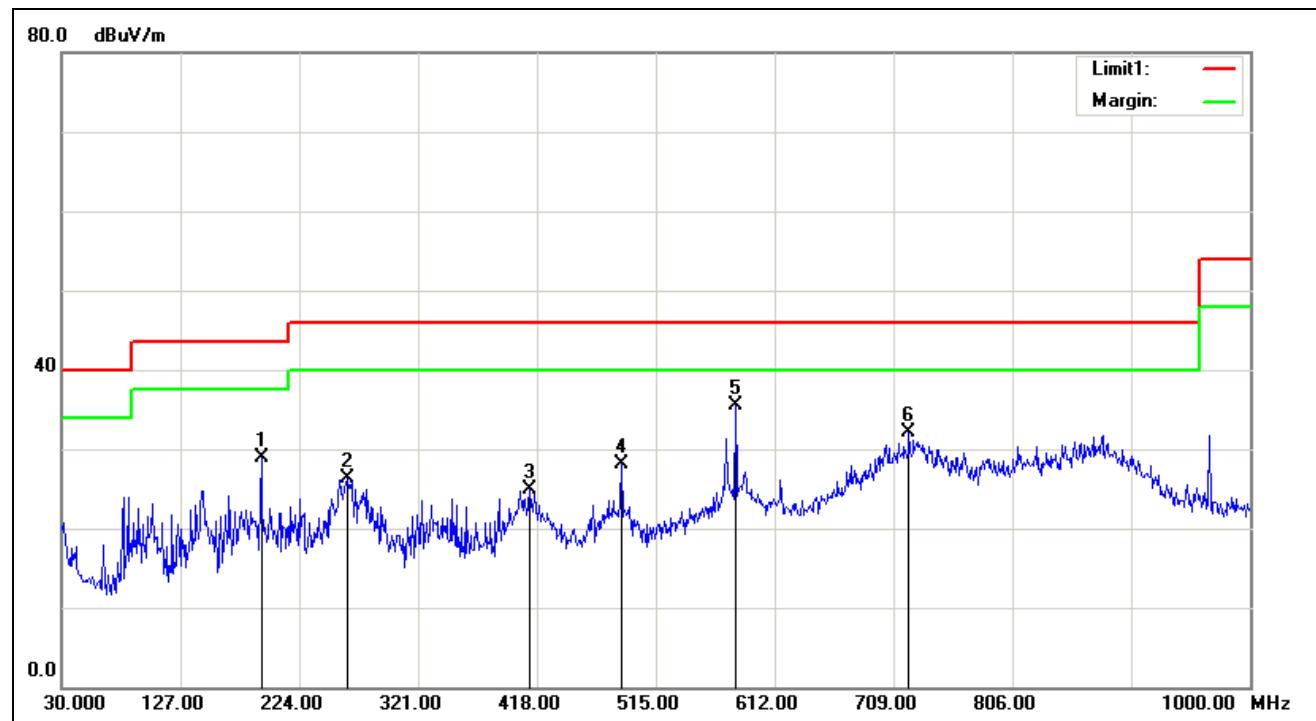

**Above 1 GHz****Test Mode: TX / IEEE 802.11b(CH Low)****Tested by: Fadé Zhong****Ambient temperature: 24°C Relative humidity: 52% RH****Date: May 17, 2018**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1594.000	48.72	-6.71	42.01	74.00	-31.99	V	peak
2638.000	45.16	-2.01	43.15	74.00	-30.85	V	peak
4042.000	42.54	1.74	44.28	74.00	-29.72	V	peak
4834.000	46.70	4.44	51.14	74.00	-22.86	V	peak
4915.000	47.34	4.70	52.04	74.00	-21.96	V	peak
8092.000	41.19	9.60	50.79	74.00	-23.21	V	peak
<hr/>							
2251.000	45.25	-3.62	41.63	74.00	-32.37	H	Peak
2638.000	45.23	-2.01	43.22	74.00	-30.78	H	Peak
4834.000	47.44	4.44	51.88	74.00	-22.12	H	Peak
5680.000	41.51	5.95	47.46	74.00	-26.54	H	Peak
6787.000	41.39	7.35	48.74	74.00	-25.26	H	peak
7786.000	40.93	9.23	50.16	74.00	-23.84	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH Mid)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.000	47.70	-5.01	42.69	74.00	-31.31	V	Peak
2638.000	45.92	-2.01	43.91	74.00	-30.09	V	Peak
4870.000	51.27	4.56	55.83	74.00	-18.17	V	Peak
4870.000	47.49	4.56	52.05	54.00	-1.95	V	AVG
5878.000	41.59	6.03	47.62	74.00	-26.38	V	Peak
7021.000	41.54	7.74	49.28	74.00	-24.72	V	Peak
8029.000	41.17	9.63	50.80	74.00	-23.20	V	Peak
<hr/>							
2647.000	45.22	-2.00	43.22	74.00	-30.78	H	Peak
3349.000	43.72	-0.77	42.95	74.00	-31.05	H	Peak
3979.000	42.49	1.50	43.99	74.00	-30.01	H	Peak
4879.000	48.47	4.59	53.06	74.00	-20.94	H	Peak
4879.000	46.67	4.59	51.26	54.00	-2.74	H	AVG
6661.000	41.35	7.15	48.50	74.00	-25.50	H	Peak
7975.000	40.75	9.60	50.35	74.00	-23.65	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH High)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1900.000	55.02	-5.63	49.39	74.00	-24.61	V	Peak
2602.000	46.18	-2.08	44.10	74.00	-29.90	V	Peak
4123.000	42.13	2.02	44.15	74.00	-29.85	V	Peak
4924.000	47.54	4.73	52.27	74.00	-21.73	V	Peak
6643.000	41.39	7.12	48.51	74.00	-25.49	V	Peak
8011.000	41.59	9.64	51.23	74.00	-22.77	V	Peak
<hr/>							
2647.000	45.60	-2.00	43.60	74.00	-30.40	H	Peak
4159.000	42.83	2.15	44.98	74.00	-29.02	H	Peak
4924.000	43.31	4.73	48.04	74.00	-25.96	H	Peak
6076.000	41.02	6.20	47.22	74.00	-26.78	H	Peak
6751.000	41.31	7.30	48.61	74.00	-25.39	H	Peak
7687.000	41.73	9.04	50.77	74.00	-23.23	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode: TX / IEEE 802.11g(CH Low)****Tested by: Fadé Zhong****Ambient temperature: 24°C****Relative humidity: 52% RH****Date: May 17, 2018**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.000	50.55	-5.06	45.49	74.00	-28.51	V	Peak
2647.000	44.88	-2.00	42.88	74.00	-31.12	V	Peak
4402.000	42.27	3.01	45.28	74.00	-28.72	V	Peak
4816.000	48.70	4.38	53.08	74.00	-20.92	V	Peak
4816.000	46.86	4.38	51.24	54.00	-2.76	V	AVG
6346.000	41.51	6.64	48.15	74.00	-25.85	V	Peak
7147.000	41.18	7.99	49.17	74.00	-24.83	V	Peak
<hr/>							
2611.000	45.59	-2.06	43.53	74.00	-30.47	H	Peak
4330.000	43.38	2.75	46.13	74.00	-27.87	H	Peak
4825.000	44.44	4.41	48.85	74.00	-25.15	H	Peak
6355.000	41.34	6.66	48.00	74.00	-26.00	H	Peak
7714.000	41.01	9.09	50.10	74.00	-23.90	H	Peak
8074.000	41.20	9.61	50.81	74.00	-23.19	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g (CH Mid)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1909.000	50.36	-5.58	44.78	74.00	-29.22	V	Peak
2602.000	45.13	-2.08	43.05	74.00	-30.95	V	Peak
4312.000	42.21	2.69	44.90	74.00	-29.10	V	Peak
4870.000	45.03	4.56	49.59	74.00	-24.41	V	Peak
6850.000	41.54	7.46	49.00	74.00	-25.00	V	Peak
8425.000	41.32	9.42	50.74	74.00	-23.26	V	Peak
2845.000	44.97	-1.64	43.33	74.00	-30.67	H	Peak
3934.000	43.21	1.31	44.52	74.00	-29.48	H	Peak
4879.000	43.87	4.59	48.46	74.00	-25.54	H	Peak
5590.000	41.64	5.91	47.55	74.00	-26.45	H	Peak
6337.000	41.07	6.63	47.70	74.00	-26.30	H	Peak
6904.000	41.31	7.54	48.85	74.00	-25.15	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g (CH High)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.000	48.03	-6.38	41.65	74.00	-32.35	V	Peak
2620.000	44.74	-2.04	42.70	74.00	-31.30	V	Peak
4825.000	47.23	4.41	51.64	74.00	-22.36	V	Peak
5950.000	41.58	6.06	47.64	74.00	-26.36	V	Peak
7039.000	41.43	7.78	49.21	74.00	-24.79	V	Peak
7795.000	41.55	9.25	50.80	74.00	-23.20	V	Peak
2818.000	44.37	-1.69	42.68	74.00	-31.32	H	Peak
3718.000	43.76	0.40	44.16	74.00	-29.84	H	Peak
4204.000	43.62	2.31	45.93	74.00	-28.07	H	Peak
4870.000	48.57	4.56	53.13	74.00	-20.87	H	Peak
4870.000	47.00	4.56	51.56	54.00	-2.44	H	AVG
6472.000	42.08	6.84	48.92	74.00	-25.08	H	Peak
8038.000	40.79	9.63	50.42	74.00	-23.58	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Low)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.000	48.75	-6.38	42.37	74.00	-31.63	V	Peak
2611.000	44.87	-2.06	42.81	74.00	-31.19	V	Peak
3817.000	43.02	0.82	43.84	74.00	-30.16	V	Peak
4825.000	47.86	4.41	52.27	74.00	-21.73	V	Peak
5878.000	41.81	6.03	47.84	74.00	-26.16	V	Peak
7651.000	40.26	8.97	49.23	74.00	-24.77	V	Peak
<hr/>							
1594.000	49.62	-6.71	42.91	74.00	-31.09	H	Peak
2818.000	44.79	-1.69	43.10	74.00	-30.90	H	Peak
4105.000	42.87	1.96	44.83	74.00	-29.17	H	Peak
4825.000	43.79	4.41	48.20	74.00	-25.80	H	Peak
5221.000	42.75	5.37	48.12	74.00	-25.88	H	Peak
6805.000	41.57	7.38	48.95	74.00	-25.05	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Mid)**Tested by:** Fade Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1594.000	49.29	-6.71	42.58	74.00	-31.42	V	Peak
2512.000	45.56	-2.24	43.32	74.00	-30.68	V	Peak
4249.000	42.19	2.47	44.66	74.00	-29.34	V	Peak
4879.000	46.03	4.59	50.62	74.00	-23.38	V	Peak
7327.000	40.26	8.34	48.60	74.00	-25.40	V	Peak
8092.000	40.90	9.60	50.50	74.00	-23.50	V	Peak
<hr/>							
2170.000	45.25	-4.07	41.18	74.00	-32.82	H	Peak
2809.000	44.40	-1.70	42.70	74.00	-31.30	H	Peak
4870.000	46.29	4.56	50.85	74.00	-23.15	H	Peak
5500.000	41.09	5.87	46.96	74.00	-27.04	H	Peak
6733.000	41.14	7.27	48.41	74.00	-25.59	H	Peak
8425.000	41.39	9.42	50.81	74.00	-23.19	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / EEE 802.11n HT20 MHz (CH High)**Tested by:** Fade Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1711.000	53.91	-6.46	47.45	74.00	-26.55	V	Peak
2836.000	44.38	-1.66	42.72	74.00	-31.28	V	Peak
4204.000	42.31	2.31	44.62	74.00	-29.38	V	Peak
4924.000	47.44	4.73	52.17	74.00	-21.83	V	Peak
6328.000	41.76	6.61	48.37	74.00	-25.63	V	Peak
7696.000	41.03	9.06	50.09	74.00	-23.91	V	Peak
<hr/>							
1729.000	47.19	-6.42	40.77	74.00	-33.23	H	Peak
2638.000	45.45	-2.01	43.44	74.00	-30.56	H	Peak
3799.000	44.02	0.74	44.76	74.00	-29.24	H	Peak
4924.000	43.83	4.73	48.56	74.00	-25.44	H	Peak
6292.000	41.26	6.55	47.81	74.00	-26.19	H	Peak
7930.000	41.25	9.51	50.76	74.00	-23.24	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz (CH Low)**Tested by:** Fadé Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1603.000	47.08	-6.69	40.39	74.00	-33.61	V	Peak
2638.000	44.43	-2.01	42.42	74.00	-31.58	V	Peak
4267.000	41.77	2.53	44.30	74.00	-29.70	V	Peak
4852.000	48.32	4.50	52.82	74.00	-21.18	V	Peak
4852.000	46.95	4.50	51.45	54.00	-2.55	V	AVG
6391.000	41.23	6.71	47.94	74.00	-26.06	V	Peak
8371.000	40.91	9.45	50.36	74.00	-23.64	V	Peak
<hr/>							
2503.000	45.64	-2.25	43.39	74.00	-30.61	H	Peak
3844.000	43.21	0.93	44.14	74.00	-29.86	H	Peak
4843.000	44.69	4.47	49.16	74.00	-24.84	H	Peak
5698.000	41.24	5.95	47.19	74.00	-26.81	H	Peak
7327.000	41.07	8.34	49.41	74.00	-24.59	H	Peak
7768.000	41.31	9.20	50.51	74.00	-23.49	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz (CH Mid)**Tested by:** Fade Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1909.000	49.26	-5.58	43.68	74.00	-30.32	V	Peak
2809.000	44.96	-1.70	43.26	74.00	-30.74	V	Peak
3763.000	42.79	0.59	43.38	74.00	-30.62	V	Peak
4879.000	44.94	4.59	49.53	74.00	-24.47	V	Peak
6706.000	40.95	7.22	48.17	74.00	-25.83	V	Peak
7867.000	40.42	9.39	49.81	74.00	-24.19	V	Peak
<hr/>							
2566.000	45.00	-2.14	42.86	74.00	-31.14	H	Peak
3754.000	42.79	0.55	43.34	74.00	-30.66	H	Peak
4861.000	43.03	4.53	47.56	74.00	-26.44	H	Peak
5662.000	41.35	5.94	47.29	74.00	-26.71	H	Peak
6364.000	41.27	6.67	47.94	74.00	-26.06	H	Peak
8119.000	41.19	9.58	50.77	74.00	-23.23	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / EEE 802.11n HT40 MHz (CH High)**Tested by:** Fade Zhong**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** May 17, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2647.000	45.37	-2.00	43.37	74.00	-30.63	V	Peak
4186.000	42.02	2.24	44.26	74.00	-29.74	V	Peak
4915.000	46.64	4.70	51.34	74.00	-22.66	V	Peak
5923.000	41.24	6.05	47.29	74.00	-26.71	V	Peak
7309.000	40.50	8.30	48.80	74.00	-25.20	V	Peak
7930.000	40.85	9.51	50.36	74.00	-23.64	V	Peak
2512.000	45.12	-2.24	42.88	74.00	-31.12	H	Peak
3061.000	44.26	-1.26	43.00	74.00	-31.00	H	Peak
4330.000	42.87	2.75	45.62	74.00	-28.38	H	Peak
4906.000	43.78	4.67	48.45	74.00	-25.55	H	Peak
6778.000	40.86	7.34	48.20	74.00	-25.80	H	Peak
8101.000	41.21	9.59	50.80	74.00	-23.20	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS


According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST PROCEDURES (please refer to measurement standard)

8.2 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., $RBW = 100$ kHz, $VBW \geq 3$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3.3. TEST SETUP





7.3.4. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	10050	>500	PASS
Mid	2437	10050		PASS
High	2462	9581		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15140	>500	PASS
Mid	2437	15140		PASS
High	2462	15140		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15140	>500	PASS
Mid	2437	15140		PASS
High	2462	15140		PASS

Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35100	>500	PASS
Mid	2437	35110		PASS
High	2452	35110		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

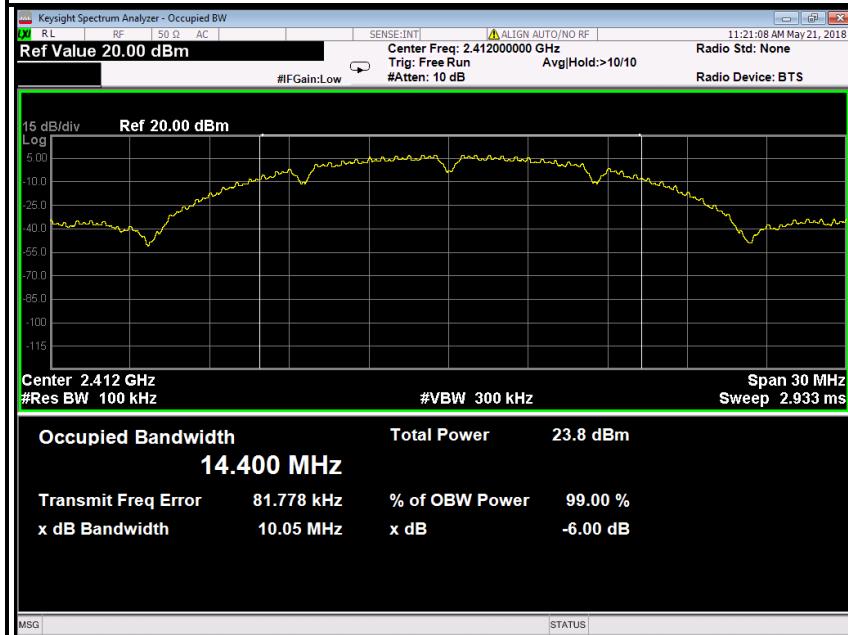


6dB Bandwidth (CH Mid)

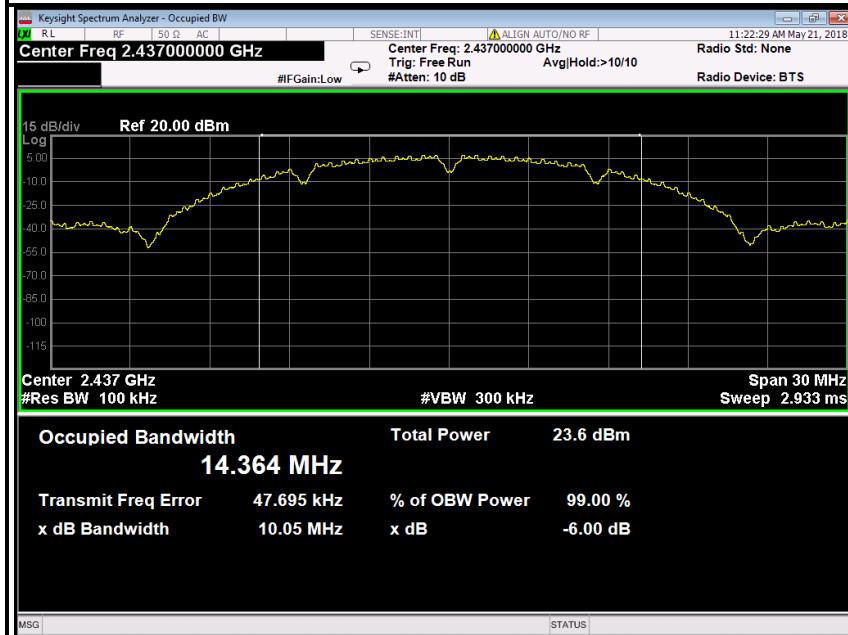




6dB Bandwidth (CH High)

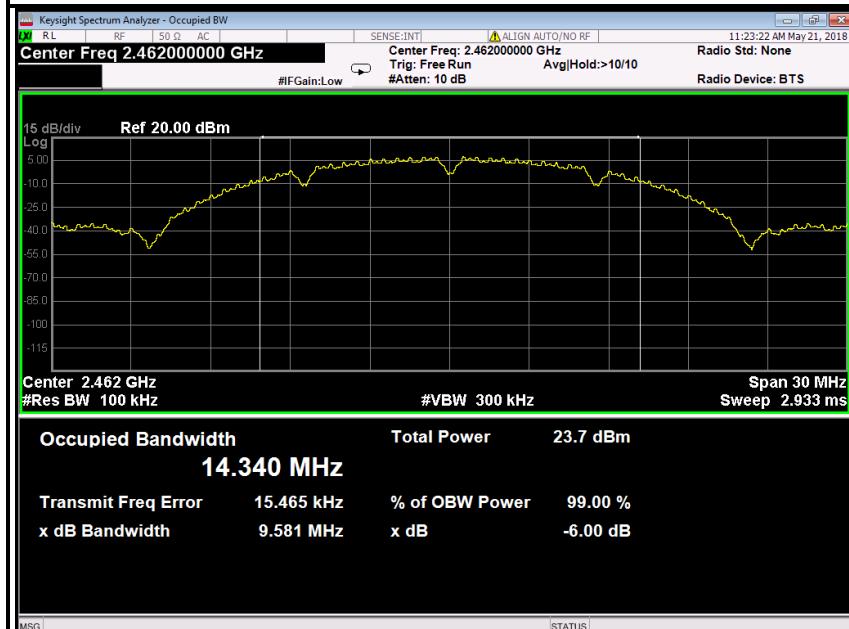


IEEE 802.11g mode

6dB Bandwidth (CH Low)

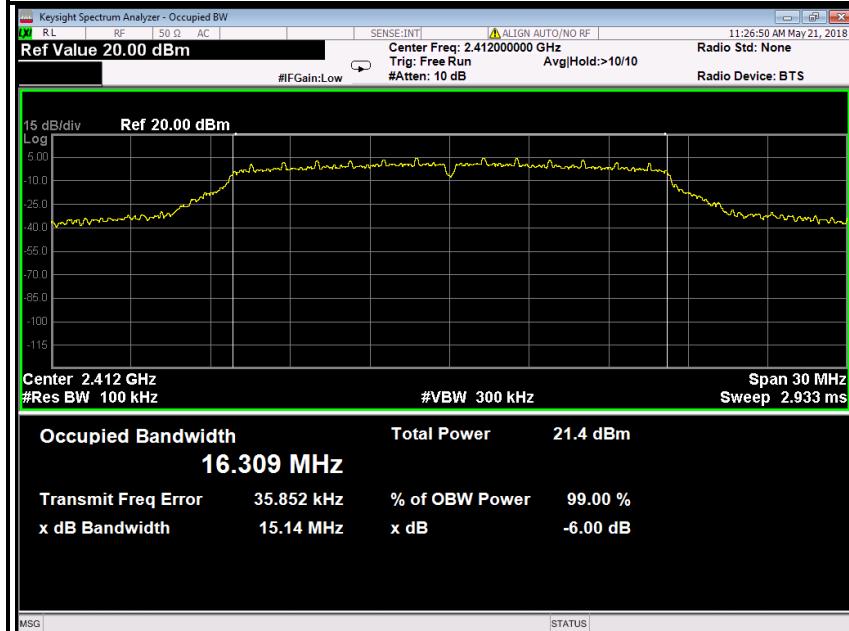






6dB Bandwidth (CH Mid)

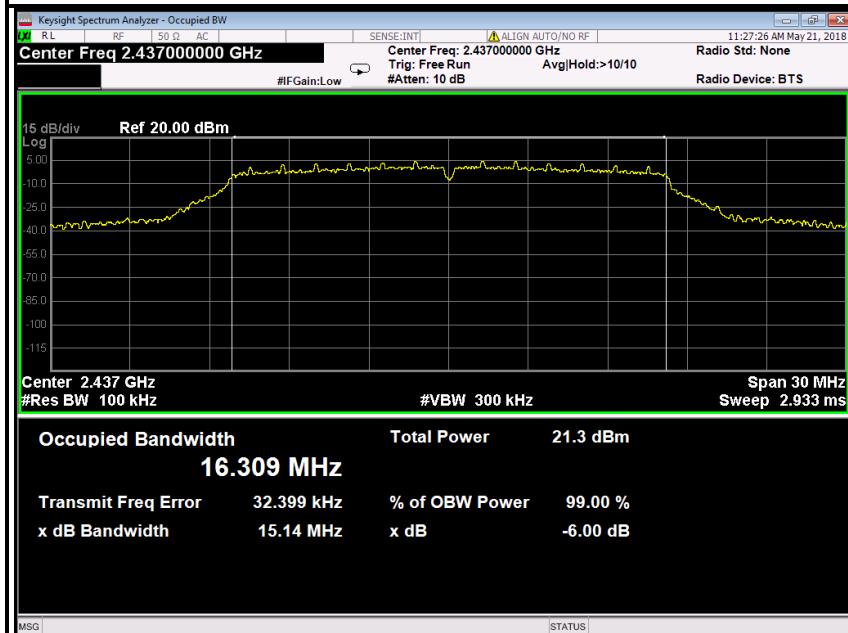


6dB Bandwidth (CH High)

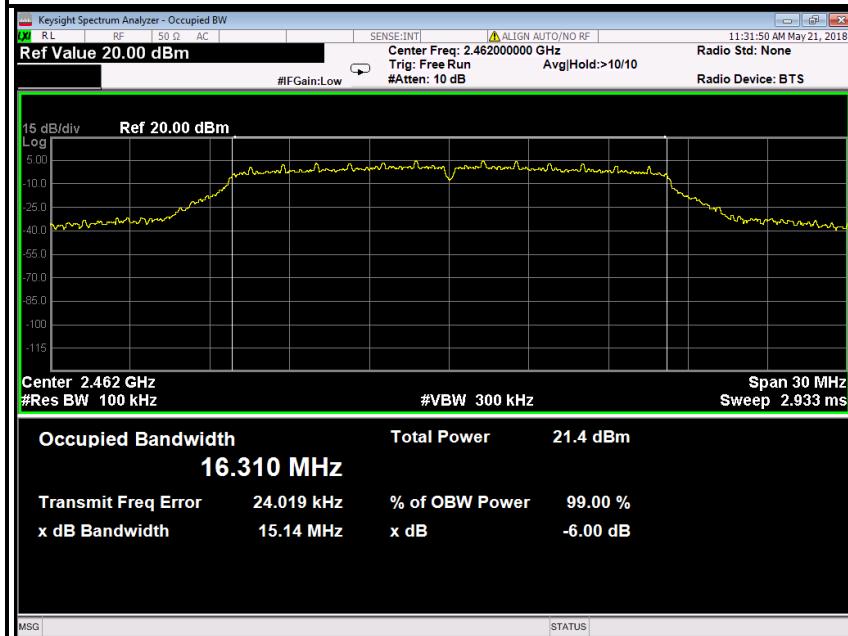

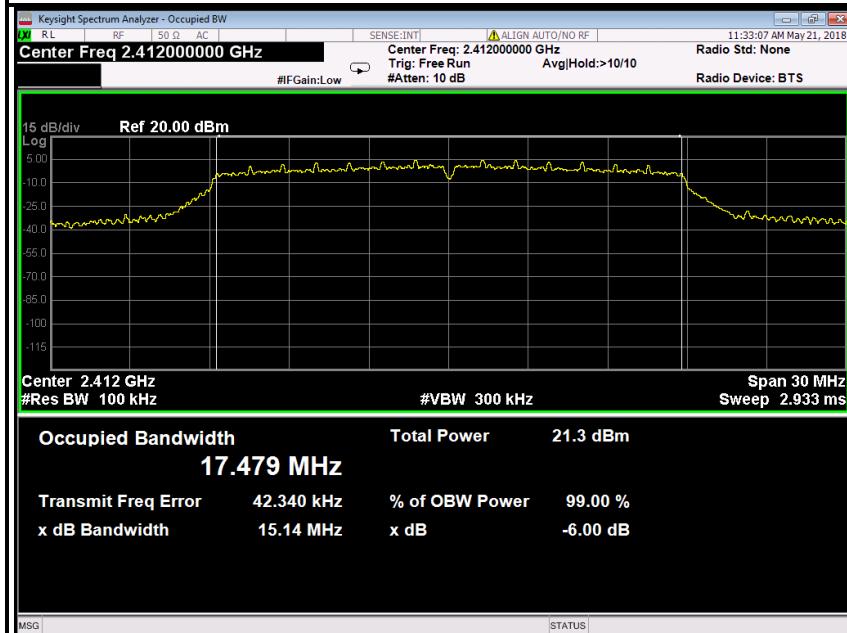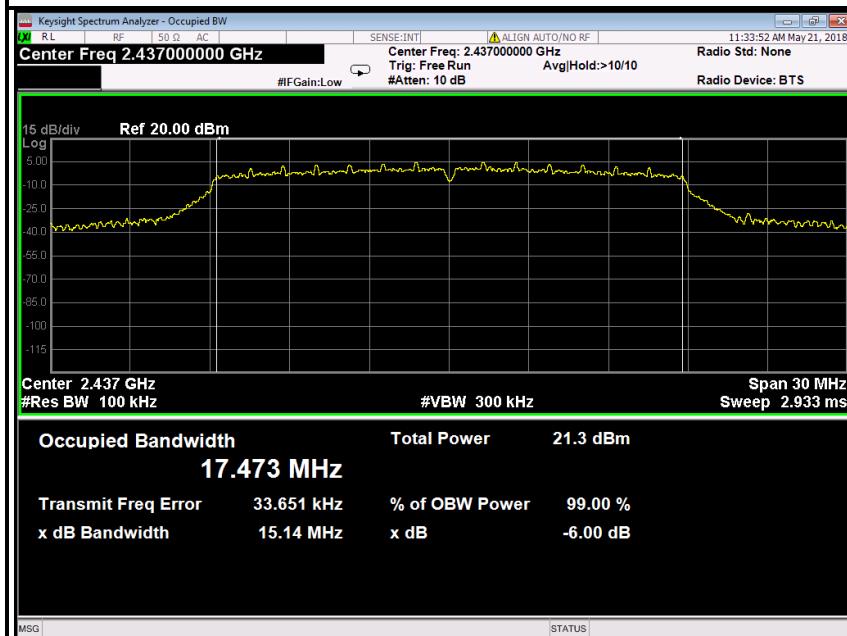**IEEE 802.11n HT20 MHz mode****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**




6dB Bandwidth (CH High)

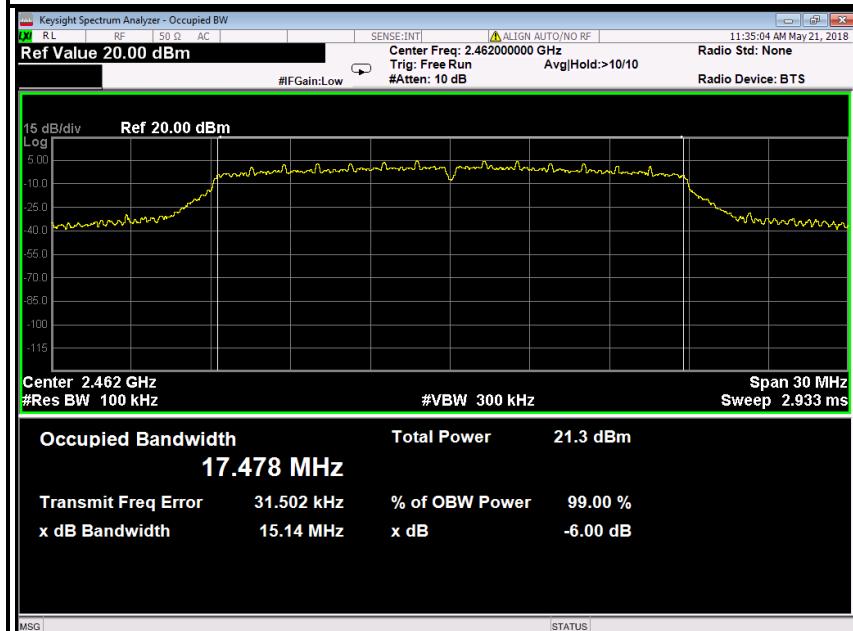


IEEE 802.11n HT40 MHz mode

6dB Bandwidth (CH Low)

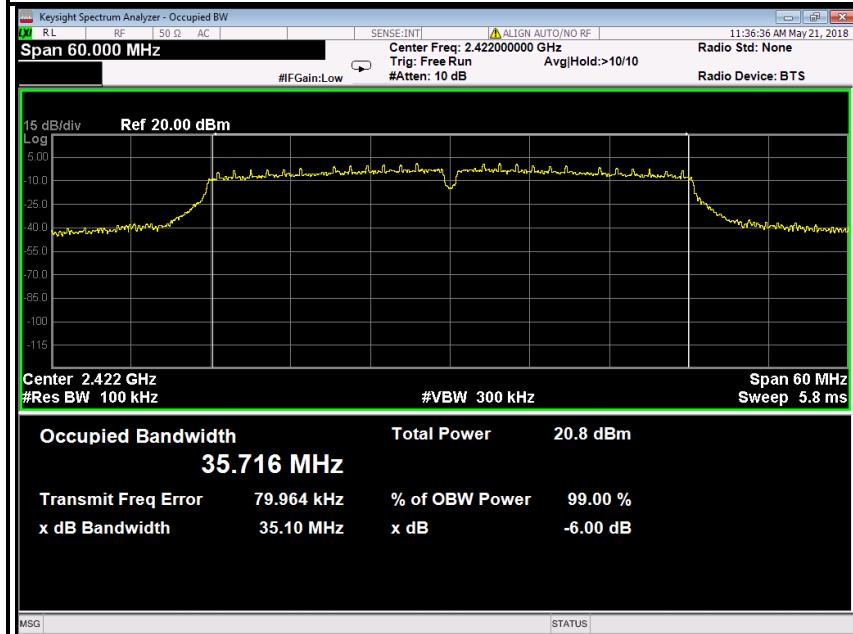




6dB Bandwidth (CH Mid)

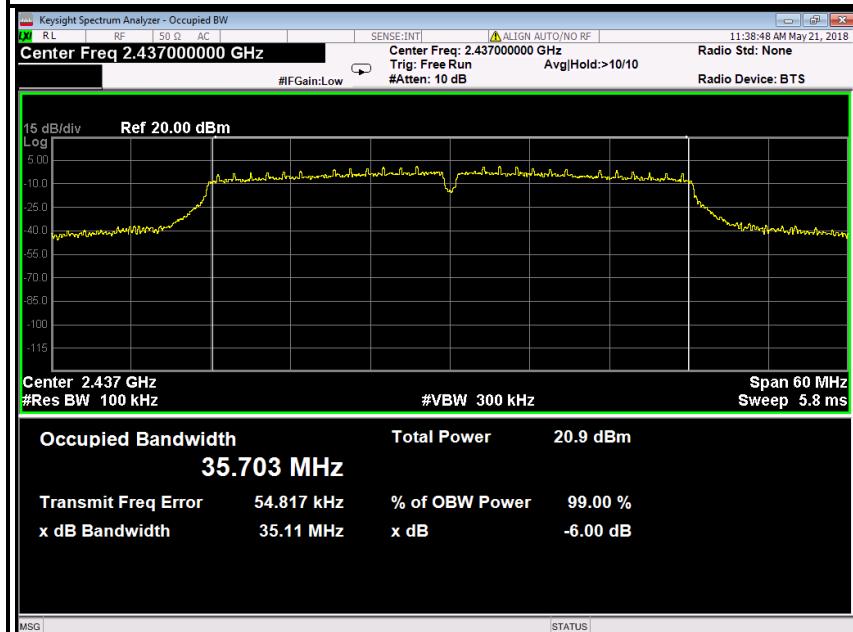

6dB Bandwidth (CH High)

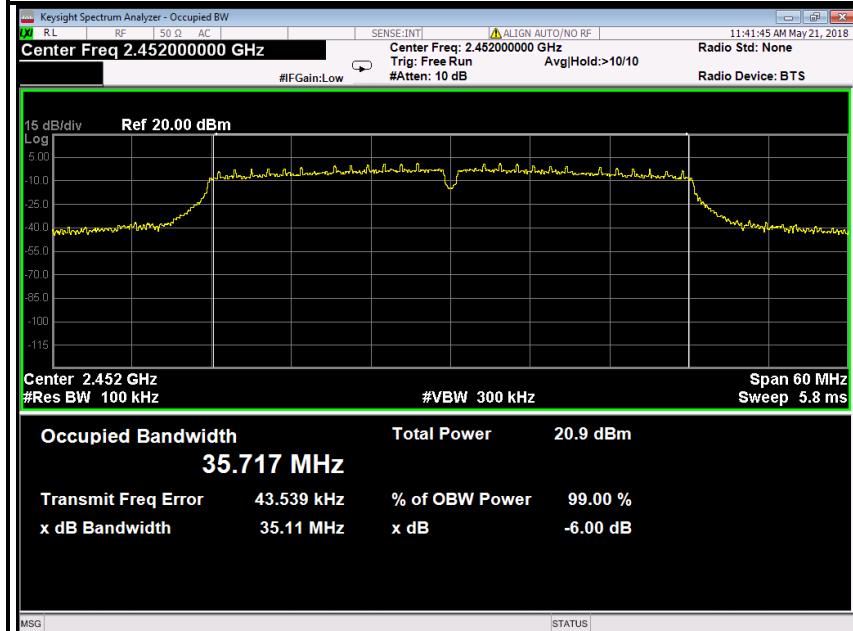



7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

IEEE 802.11b

T _{nom}	V _{nom}	Lowest channel 2412MHz	Middle channel 2437MHz	Highest channel 2462MHz
Conducted power [dBm/MHz] Measured with DSSS modulation		4.79	4.67	4.64
Radiated power [dBm/MHz] Measured with DSSS modulation		6.58	6.43	6.51
Gain [dBi] Calculated		1.79	1.76	1.87
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)			



7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST PROCEDURES (please refer to measurement standard)

9.1.1 $RBW \geq DTS \text{ bandwidth}$


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the $DTS \text{ bandwidth}$.

- a) Set the $RBW \geq DTS \text{ bandwidth}$.
- b) Set $VBW \geq 3 \text{ RBW}$.
- c) Set span $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.5.3. TEST SETUP

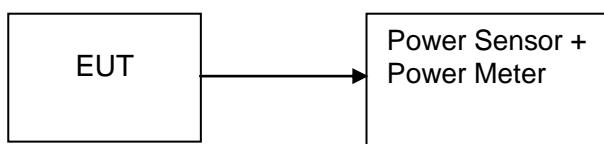



7.5.4. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	16.25	0.04217	Peak	1	PASS
Mid	2437	16.13	0.04102			PASS
High	2462	16.10	0.04074			PASS
Low	2412	14.45	0.02786	AVG	1	PASS
Mid	2437	14.40	0.02754			PASS
High	2462	14.31	0.02698			PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	21.43	0.13900	Peak	1	PASS
Mid	2437	21.72	0.14859			PASS
High	2462	22.29	0.16943			PASS
Low	2412	14.38	0.02742	AVG	1	PASS
Mid	2437	14.13	0.02588			PASS
High	2462	14.23	0.02649			PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	22.24	0.16749	Peak	1	PASS
Mid	2437	22.46	0.17620			PASS
High	2462	22.13	0.16331			PASS
Low	2412	14.17	0.02612	AVG	1	PASS
Mid	2437	14.17	0.02612			PASS
High	2462	13.76	0.02377			PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2422	22.32	0.17061	Peak	1	PASS
Mid	2437	22.28	0.16904			PASS
High	2452	21.97	0.15740			PASS
Low	2422	14.17	0.02612	AVG	1	PASS
Mid	2437	14.10	0.02570			PASS
High	2452	14.12	0.02582			PASS

7.6. BAND EDGES MEASUREMENT


7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO / Detector=PEAK
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.6.3. TEST SETUP

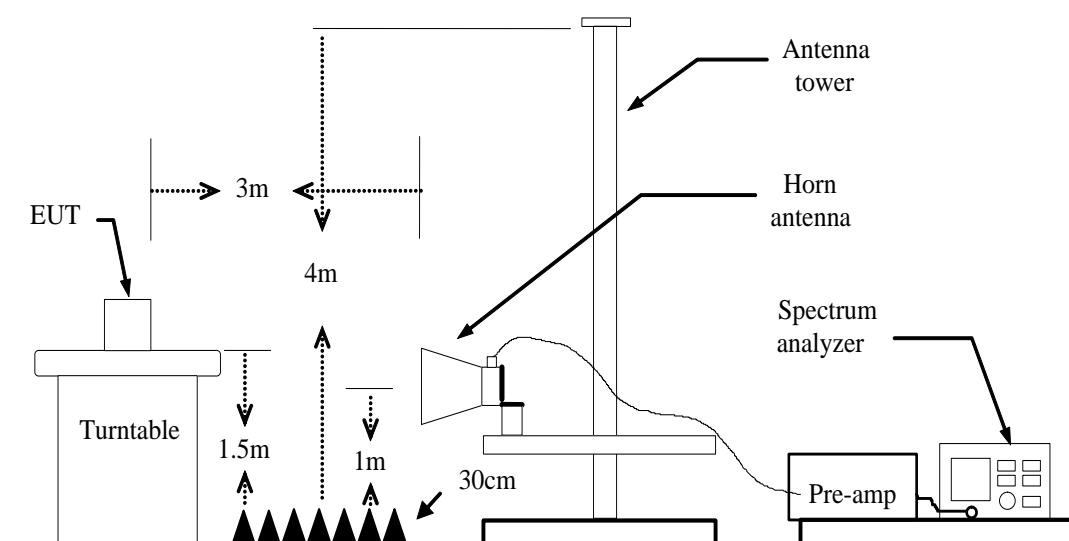




7.6.4. TEST RESULTS


Test Plot

IEEE 802.11b mode


Band Edges (CH Low)

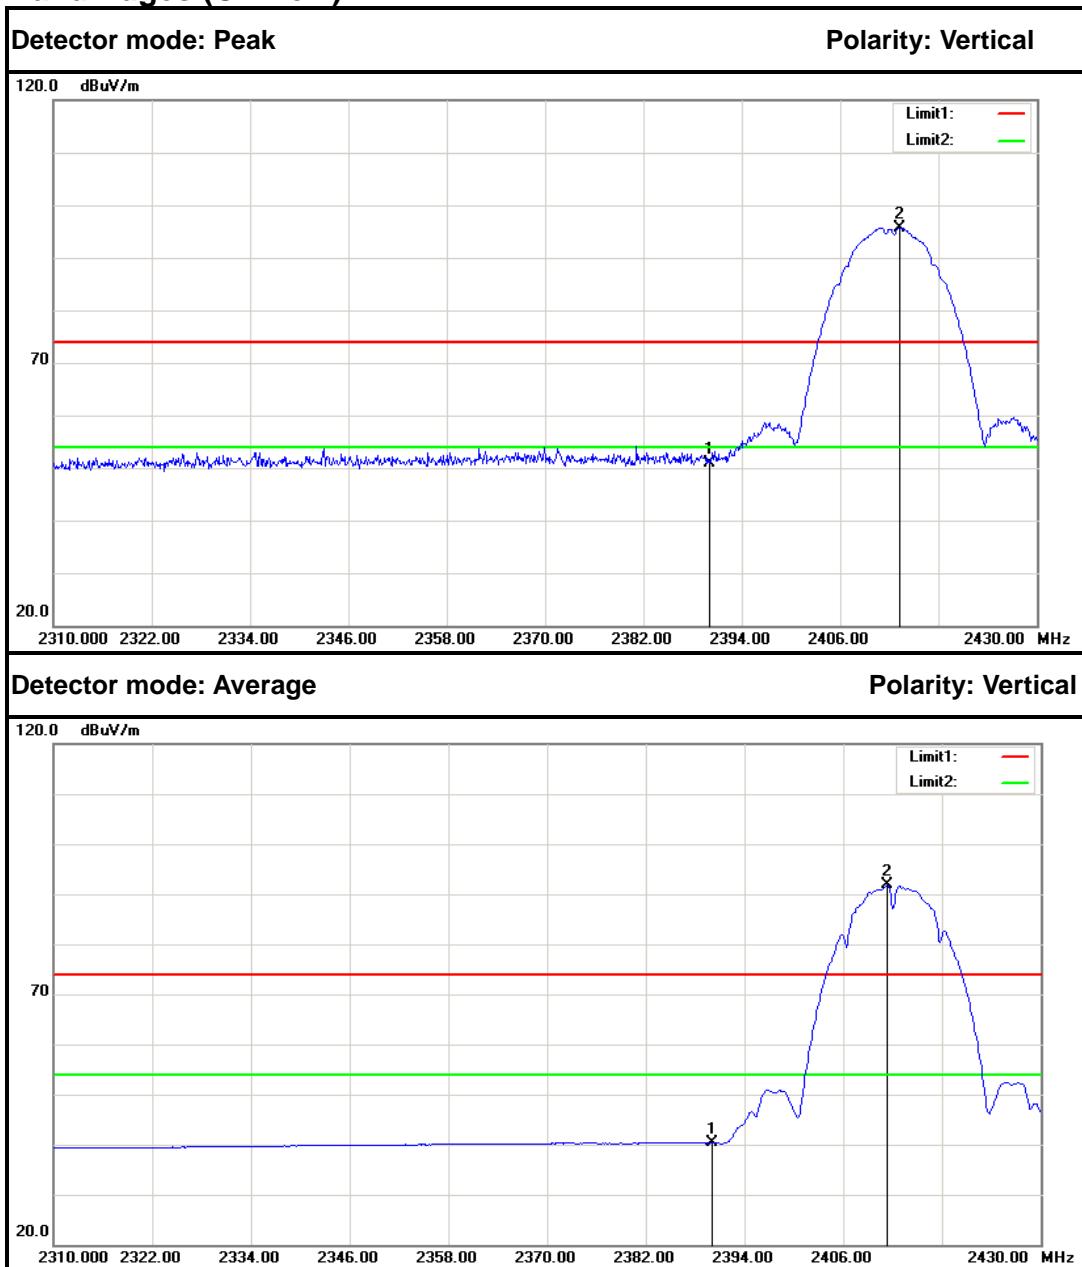


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	53.79	-2.86	50.93	74.00	-23.07	Peak	Vertical
2.	2413.320	98.40	-2.73	95.67	---	---	Peak	Vertical
1.	2390.000	43.16	-2.86	40.30	54.00	-13.70	Average	Vertical
2.	2411.400	94.62	-2.75	91.87	---	---	Average	Vertical

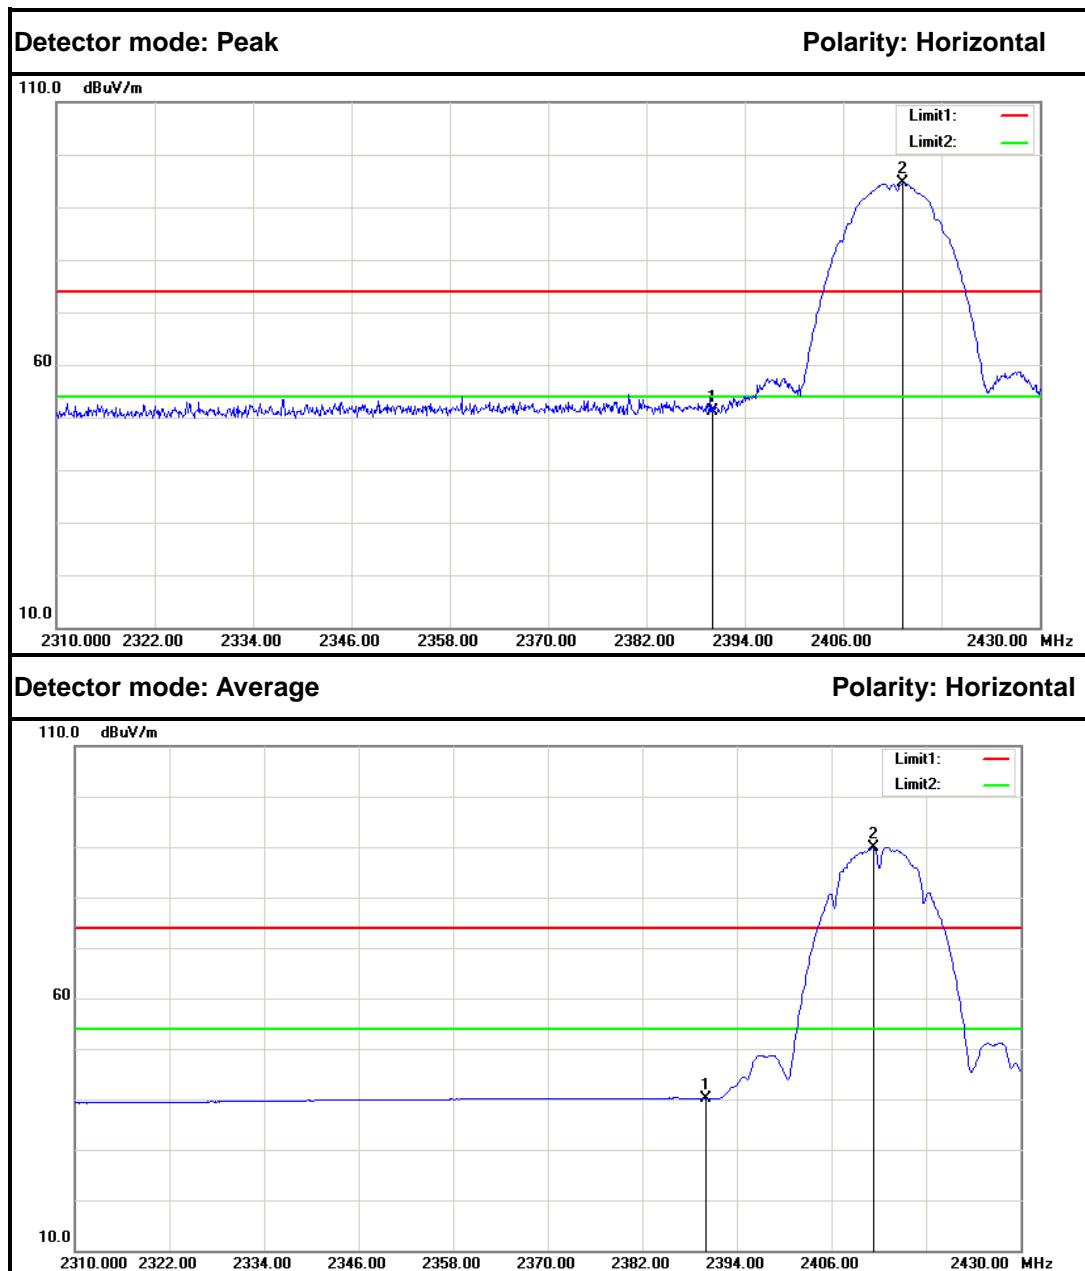


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	54.06	-2.86	51.20	74.00	-22.80	Peak	Horizontal
2.	2413.200	97.31	-2.74	94.57	---	---	Peak	Horizontal
1.	2390.000	42.98	-2.86	40.12	54.00	-13.88	Average	Horizontal
2.	2411.280	92.69	-2.75	89.94	---	---	Average	Horizontal

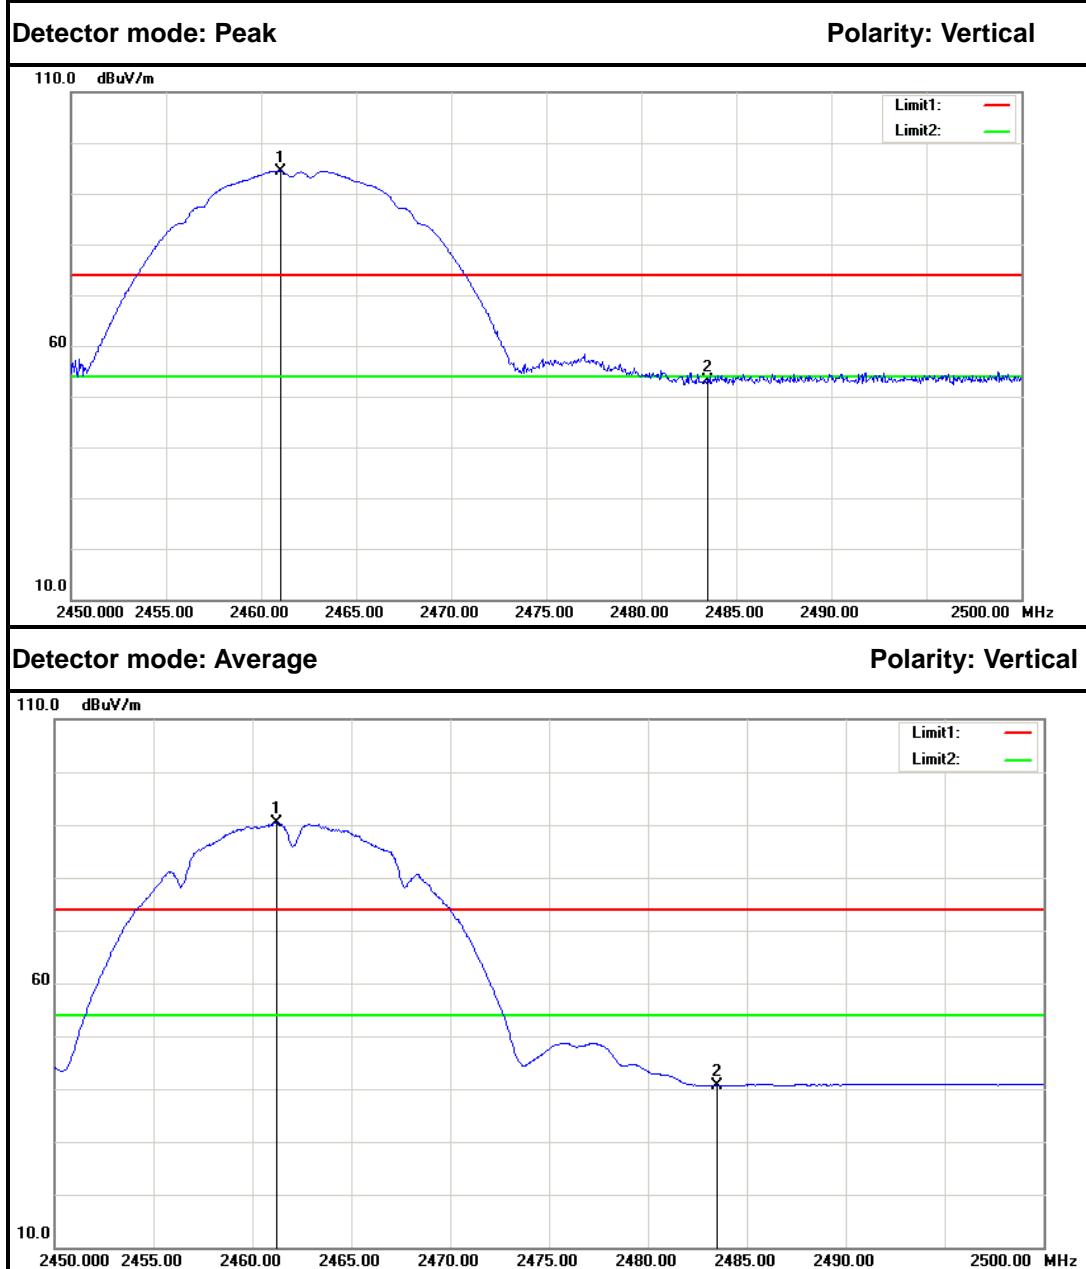**Band Edges (CH High)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.000	96.92	-2.47	94.45	---	---	Peak	Vertical
2.	2483.500	55.57	-2.35	53.22	74.00	-20.78	Peak	Vertical
1.	2461.250	92.94	-2.47	90.47	---	---	Average	Vertical
2.	2483.500	43.02	-2.35	40.67	54.00	-13.33	Average	Vertical

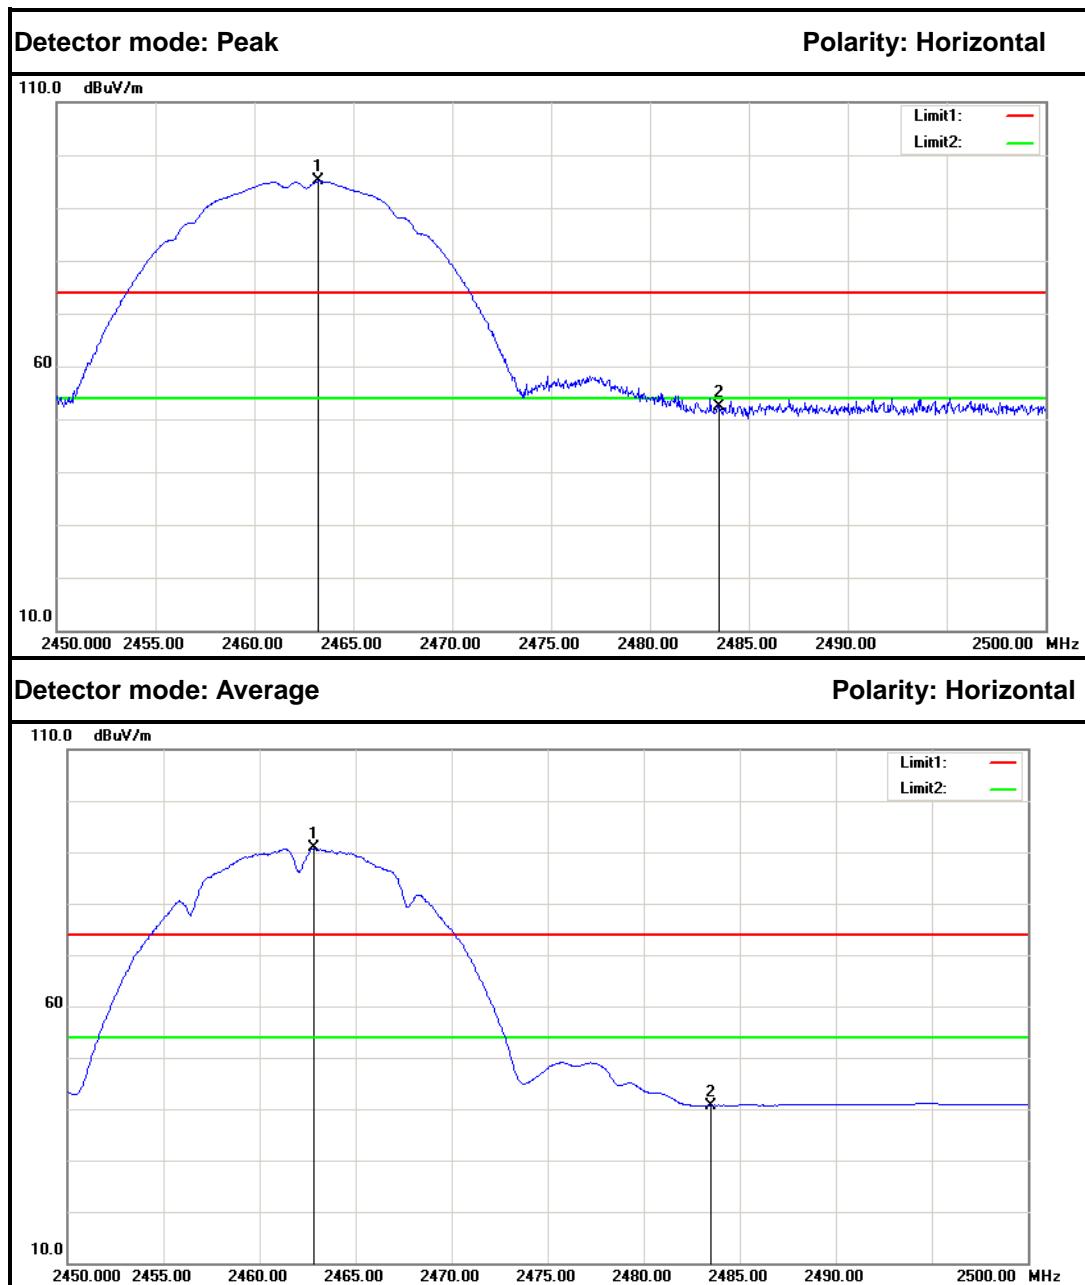

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.250	97.48	-2.46	95.02	---	---	Peak	Horizontal
2.	2483.500	54.75	-2.35	52.40	74.00	-21.60	Peak	Horizontal
1.	2462.850	93.32	-2.46	90.86	---	---	Average	Horizontal
2.	2483.500	43.08	-2.35	40.73	54.00	-13.27	Average	Horizontal

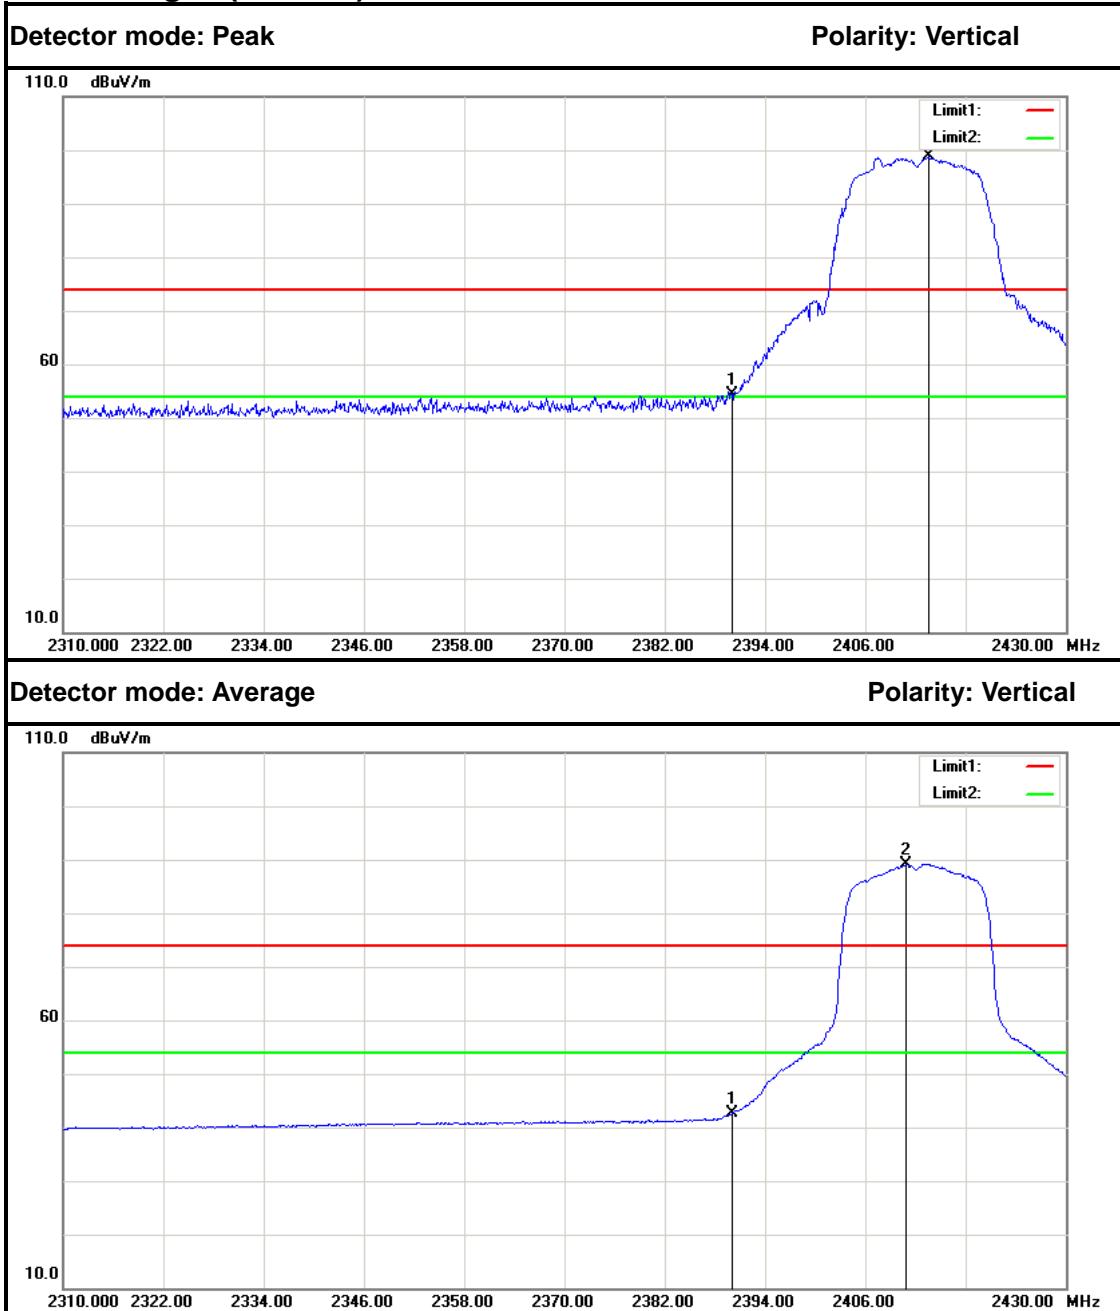**IEEE 802.11g mode
Band Edges (CH Low)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.12	-2.86	54.26	74.00	-19.74	Peak	Vertical
2.	2413.560	101.62	-2.73	98.89	---	---	Peak	Vertical
1.	2390.000	45.57	-2.86	42.71	54.00	-11.29	Average	Vertical
2.	2410.800	91.97	-2.75	89.22	---	---	Average	Vertical

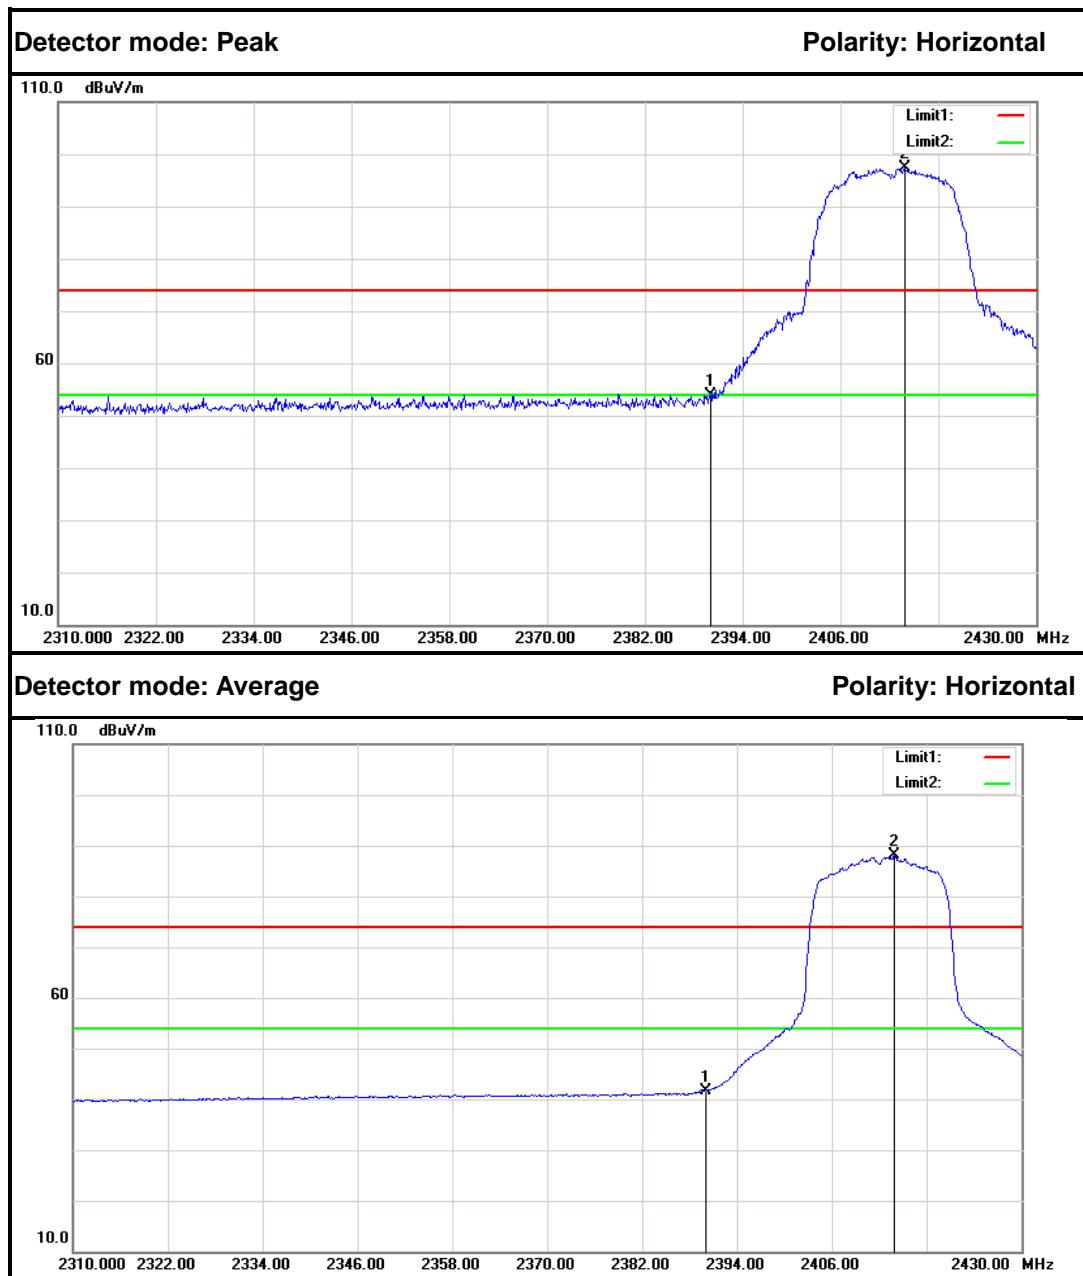


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	56.80	-2.86	53.94	74.00	-20.06	Peak	Horizontal
2.	2413.920	100.14	-2.73	97.41	---	---	Peak	Horizontal
1.	2390.000	44.61	-2.86	41.75	54.00	-12.25	Average	Horizontal
2.	2413.920	90.78	-2.73	88.05	---	---	Average	Horizontal



Band Edges (CH High)

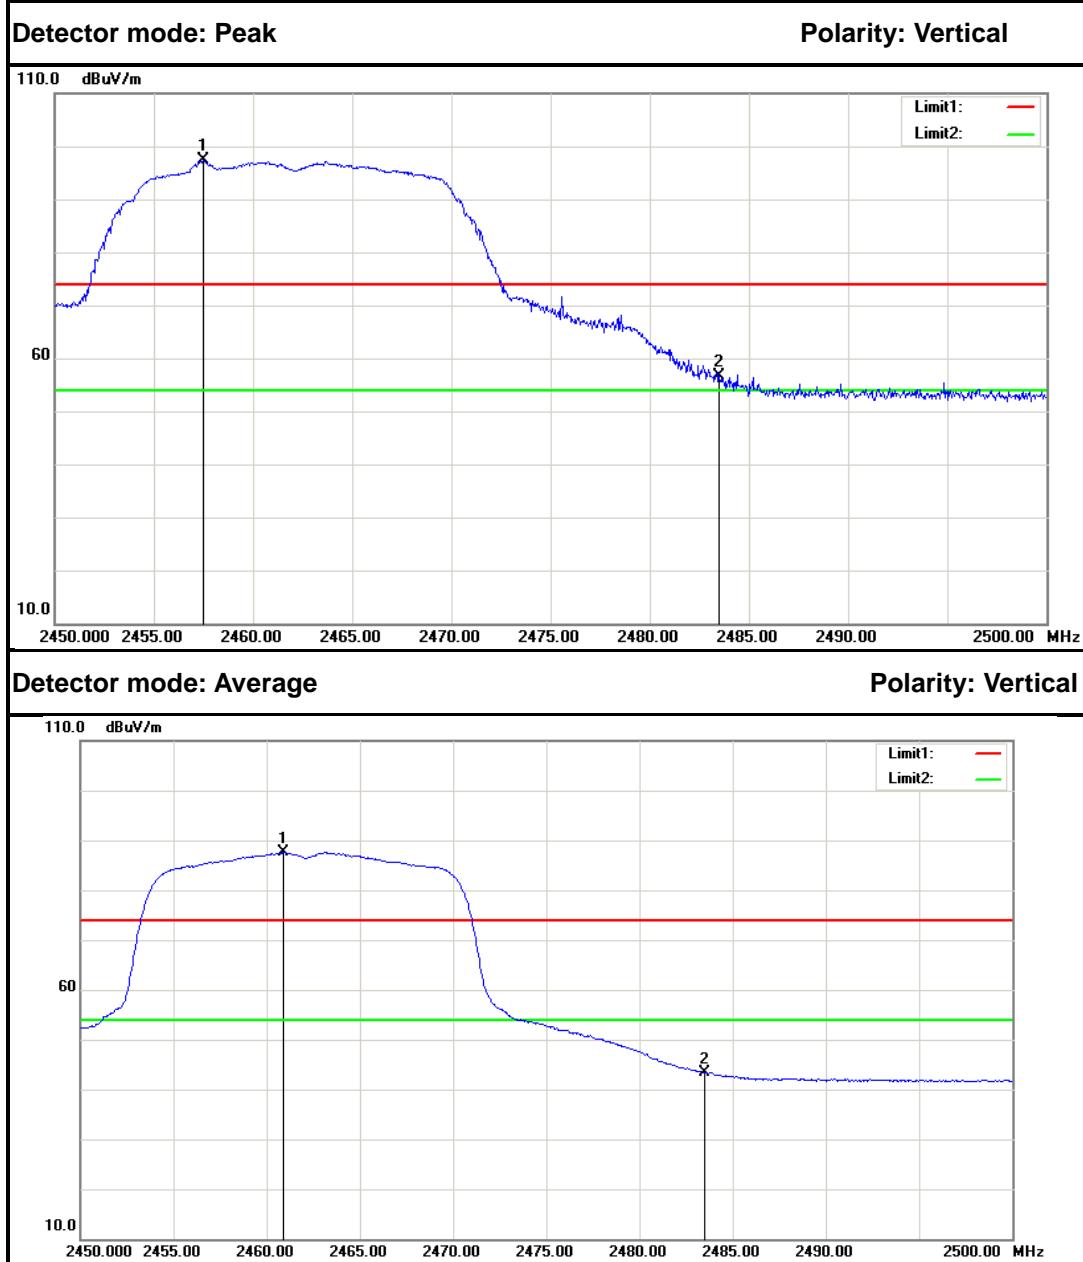

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2457.500	99.75	-2.49	97.26	---	---	Peak	Vertical
2.	2483.500	58.89	-2.35	56.54	74.00	-17.46	Peak	Vertical
1.	2460.900	90.03	-2.47	87.56	---	---	Average	Vertical
2.	2483.500	45.62	-2.35	43.27	54.00	-10.73	Average	Vertical

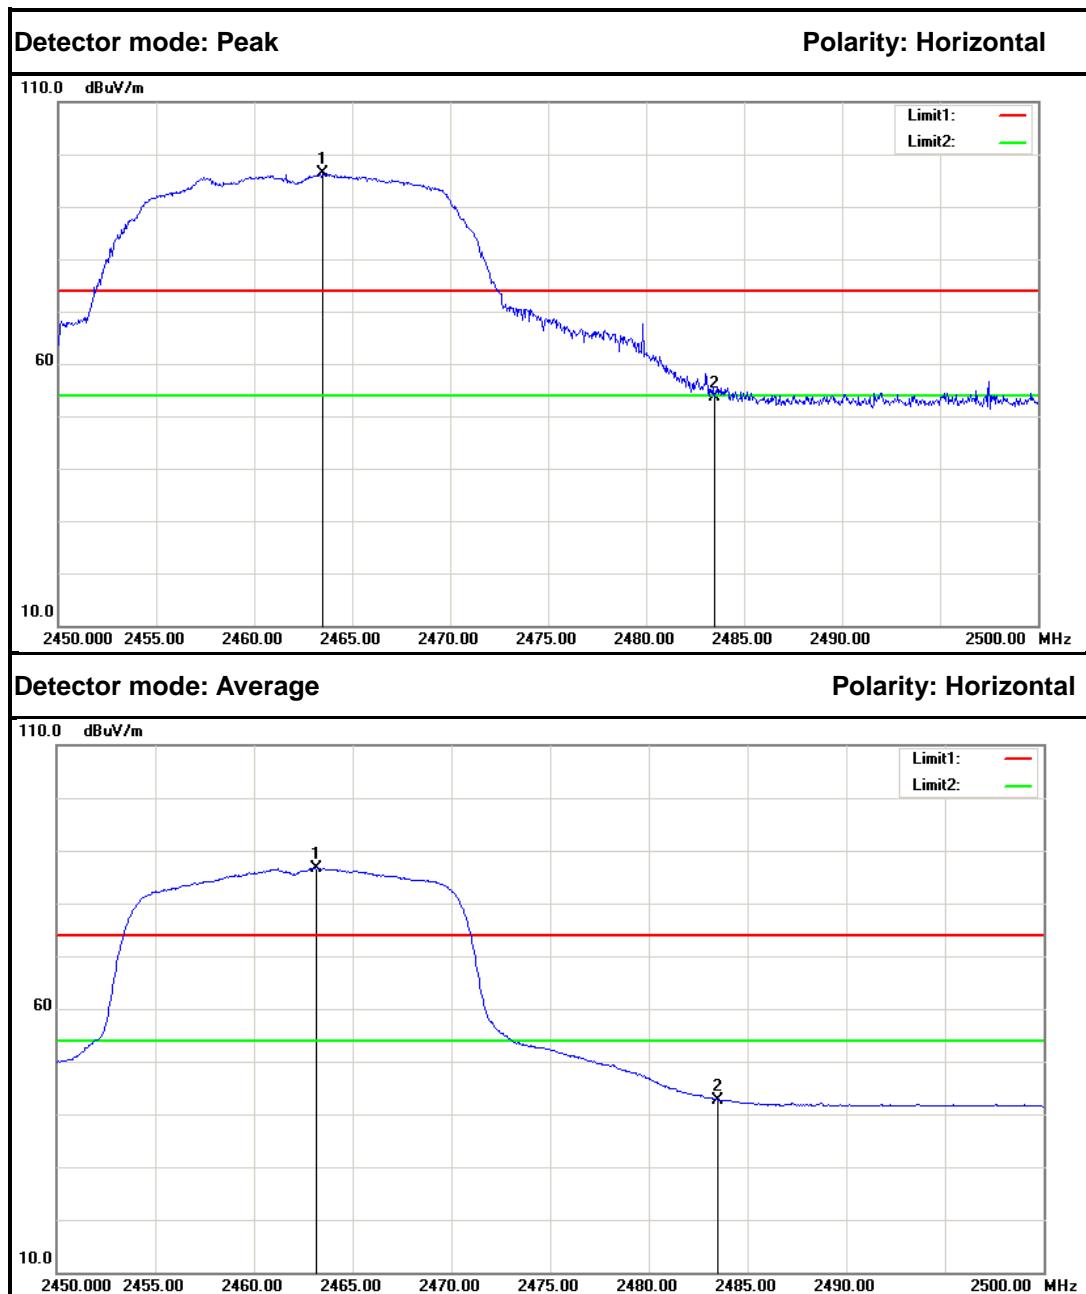


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.500	98.79	-2.46	96.33	---	---	Peak	Horizontal
2.	2483.500	56.10	-2.35	53.75	74.00	-20.25	Peak	Horizontal
1.	2463.150	89.21	-2.46	86.75	---	---	Average	Horizontal
2.	2483.500	45.06	-2.35	42.71	54.00	-11.29	Average	Horizontal



**IEEE 802.11n HT20 MHz mode
Band Edges (CH Low)**


Detector mode: Peak

Polarity: Vertical

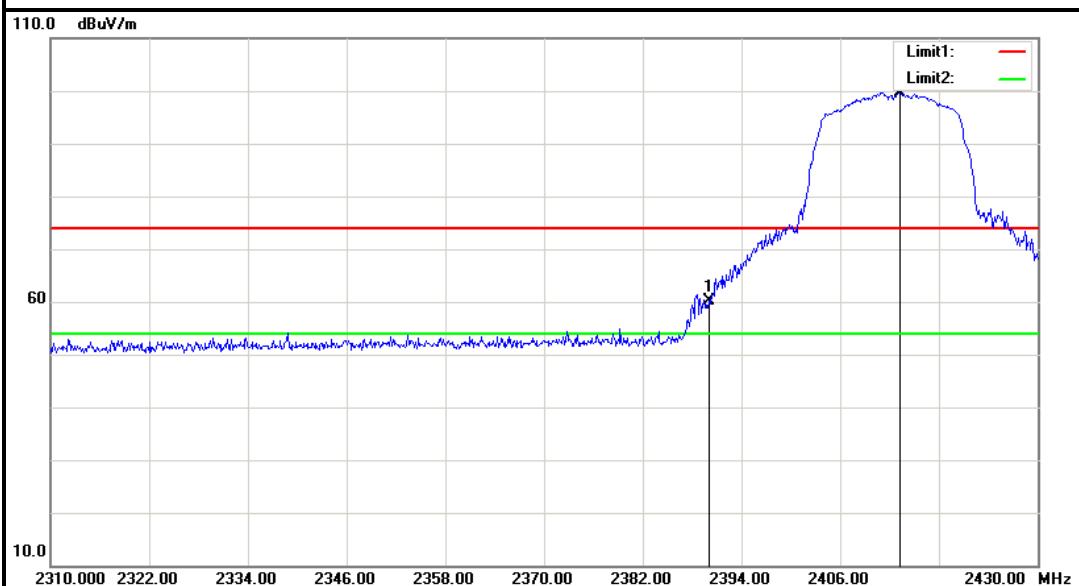


Detector mode: Average


Polarity: Vertical

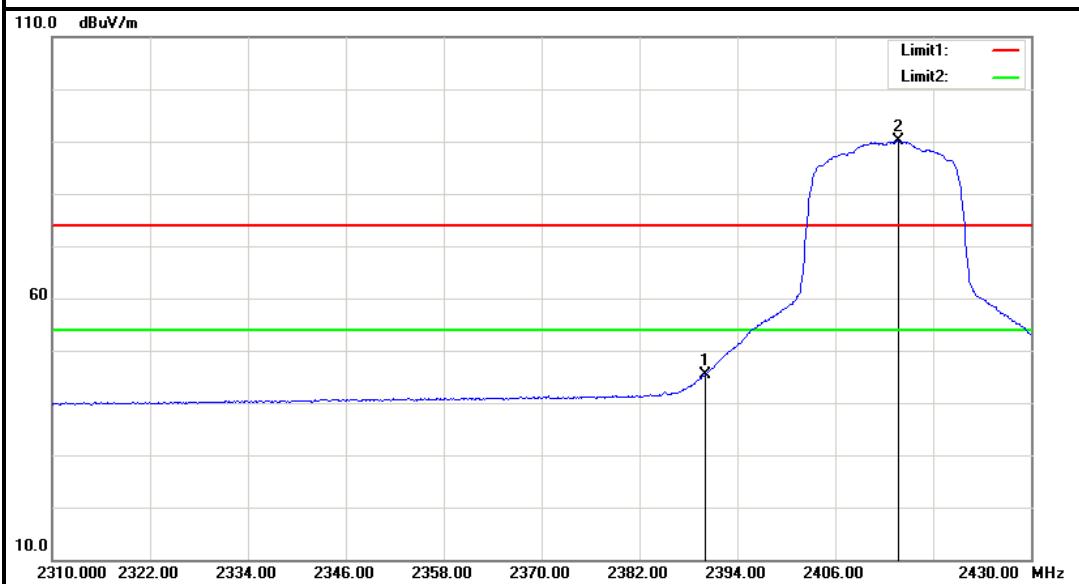


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	62.94	-2.86	60.08	74.00	-13.92	Peak	Vertical
2.	2413.320	102.32	-2.73	99.59	---	---	Peak	Vertical
1.	2390.000	48.20	-2.86	45.34	54.00	-8.66	Average	Vertical
2.	2413.680	92.87	-2.73	90.14	---	---	Average	Vertical

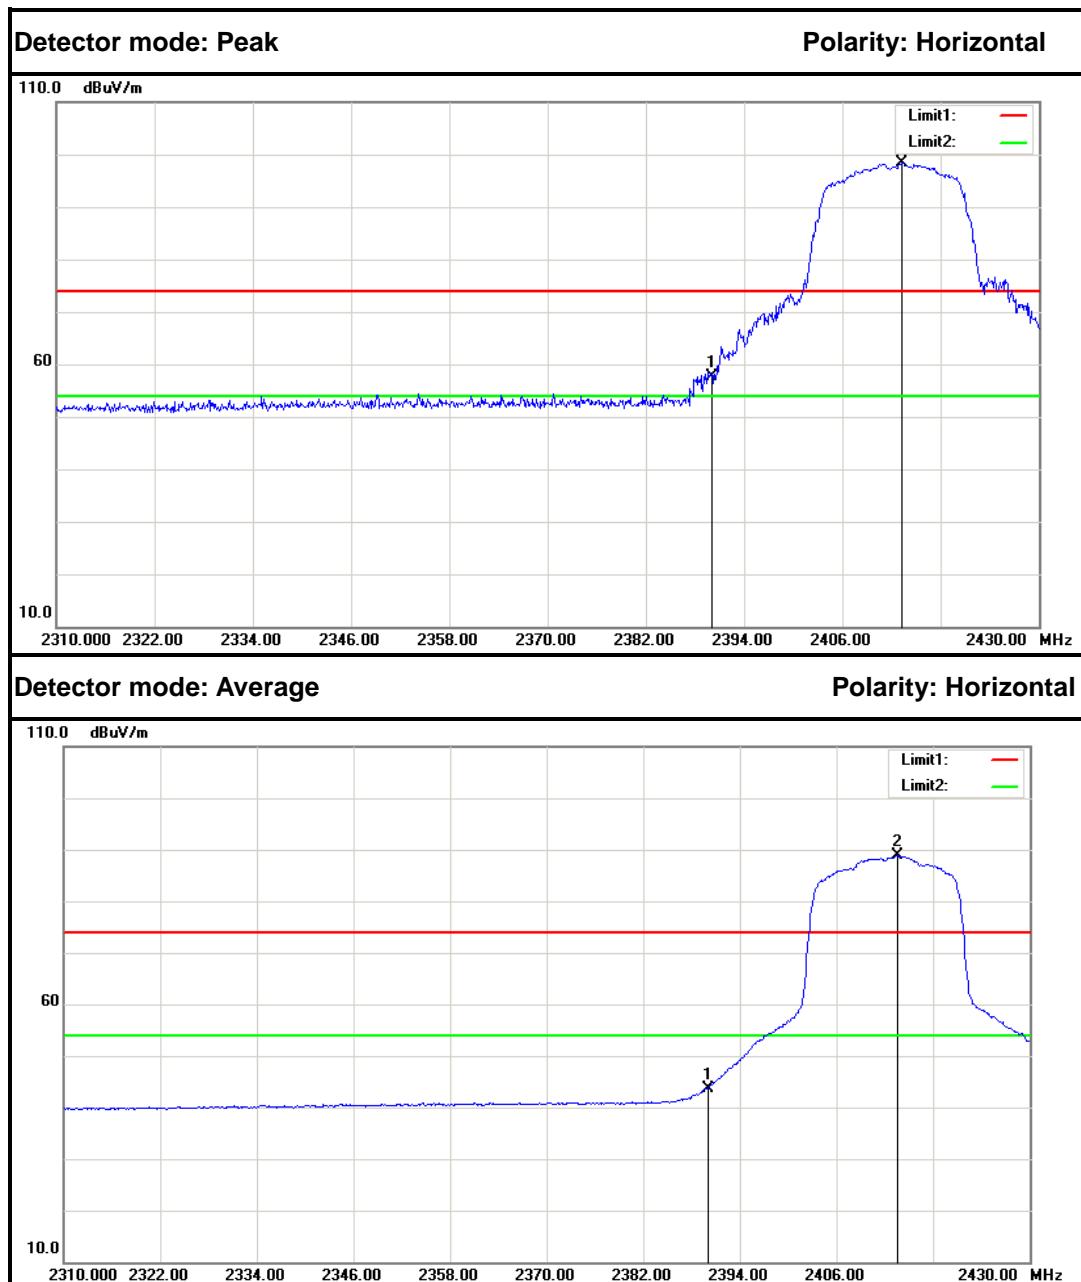

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	60.41	-2.86	57.55	74.00	-16.45	Peak	Horizontal
2.	2413.200	101.09	-2.74	98.35	---	---	Peak	Horizontal
1.	2390.000	46.60	-2.86	43.74	54.00	-10.26	Average	Horizontal
2.	2413.560	91.56	-2.73	88.83	---	---	Average	Horizontal

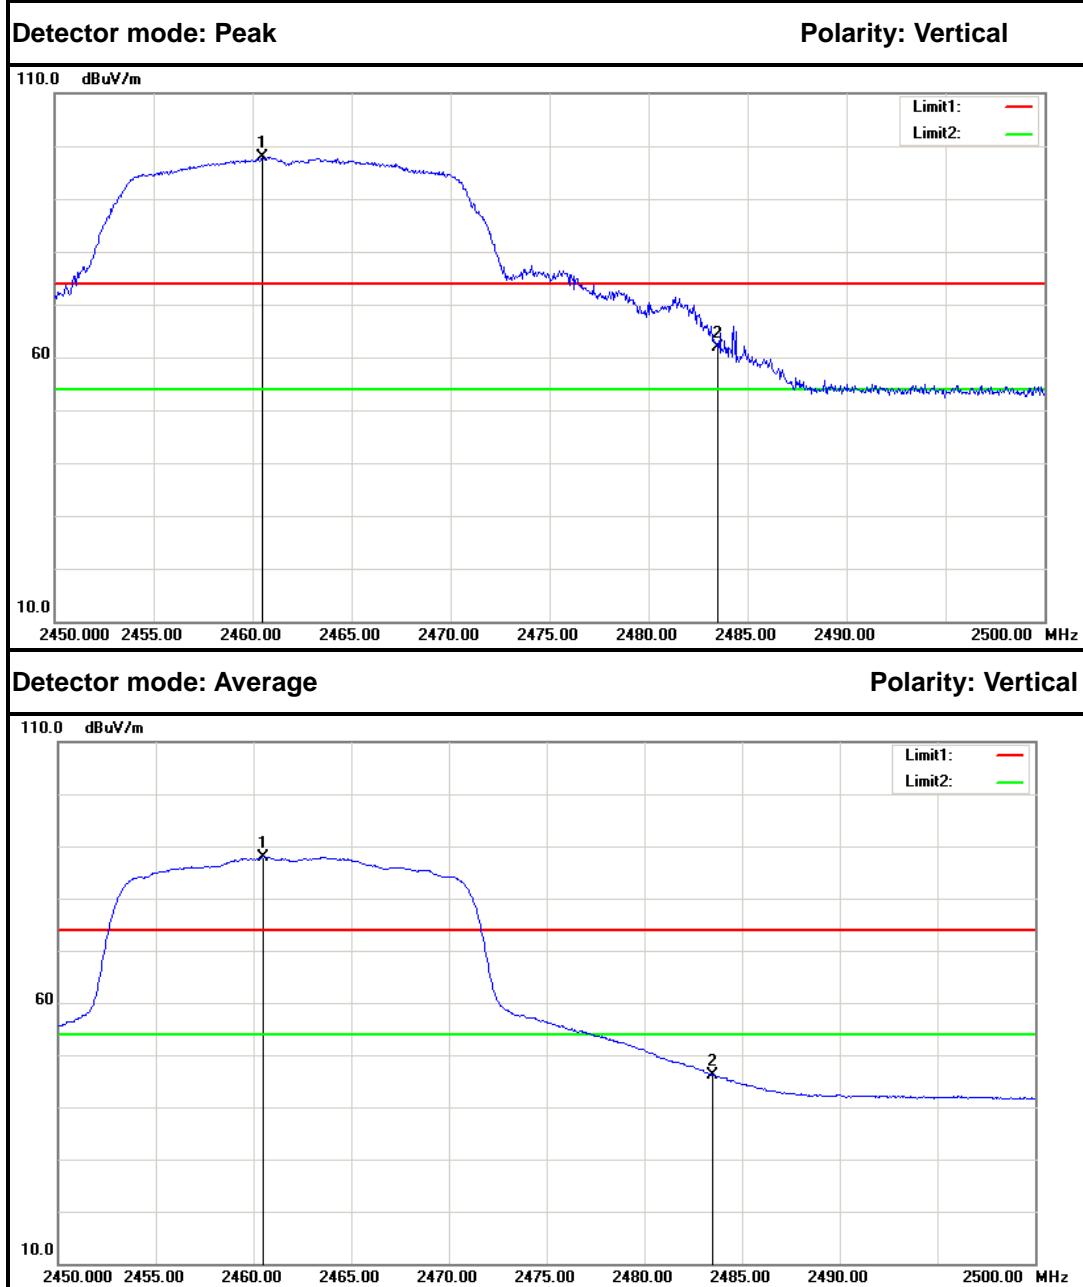**Band Edges (CH High)**

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.500	100.37	-2.48	97.89	---	---	Peak	Vertical
2.	2483.500	64.13	-2.35	61.78	74.00	-12.22	Peak	Vertical
1.	2460.500	90.48	-2.48	88.00	---	---	Average	Vertical
2.	2483.500	48.49	-2.35	46.14	54.00	-7.86	Average	Vertical

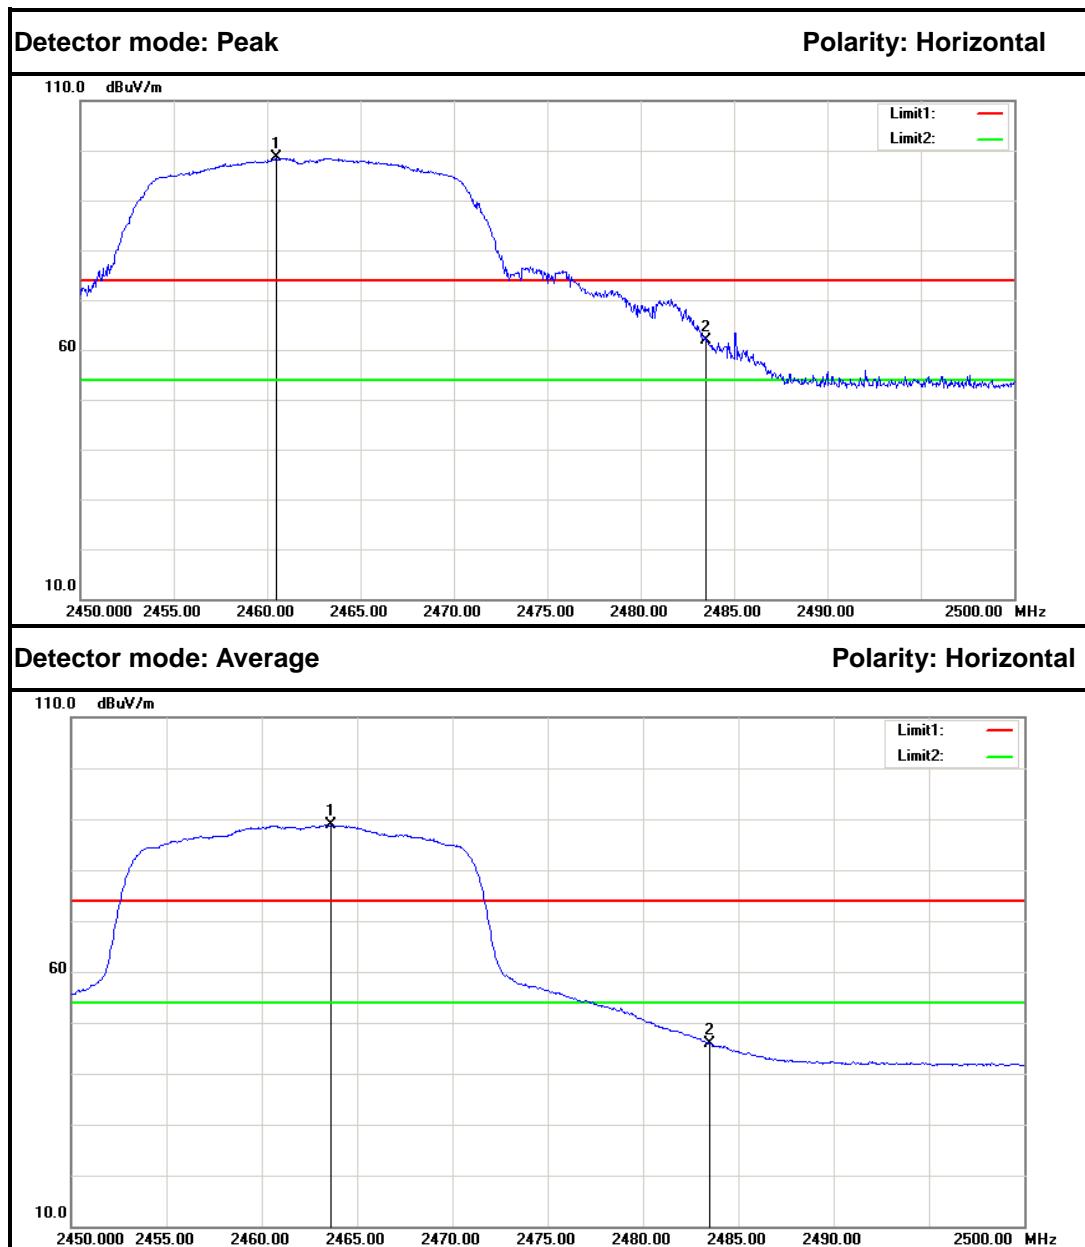


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.500	101.07	-2.48	98.59	---	---	Peak	Horizontal
2.	2483.500	64.23	-2.35	61.88	74.00	-12.12	Peak	Horizontal
1.	2463.600	91.30	-2.46	88.84	---	---	Average	Horizontal
2.	2483.500	48.32	-2.35	45.97	54.00	-8.03	Average	Horizontal



**IEEE 802.11n HT40 MHz mode
Band Edges (CH Low)**


Detector mode: Peak

Polarity: Vertical

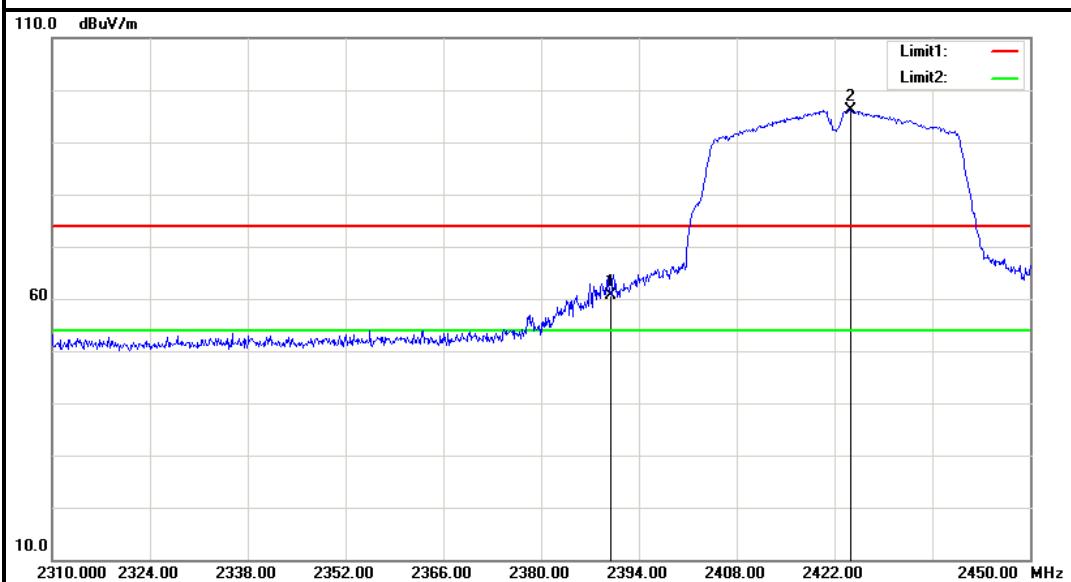


Detector mode: Average



Polarity: Vertical

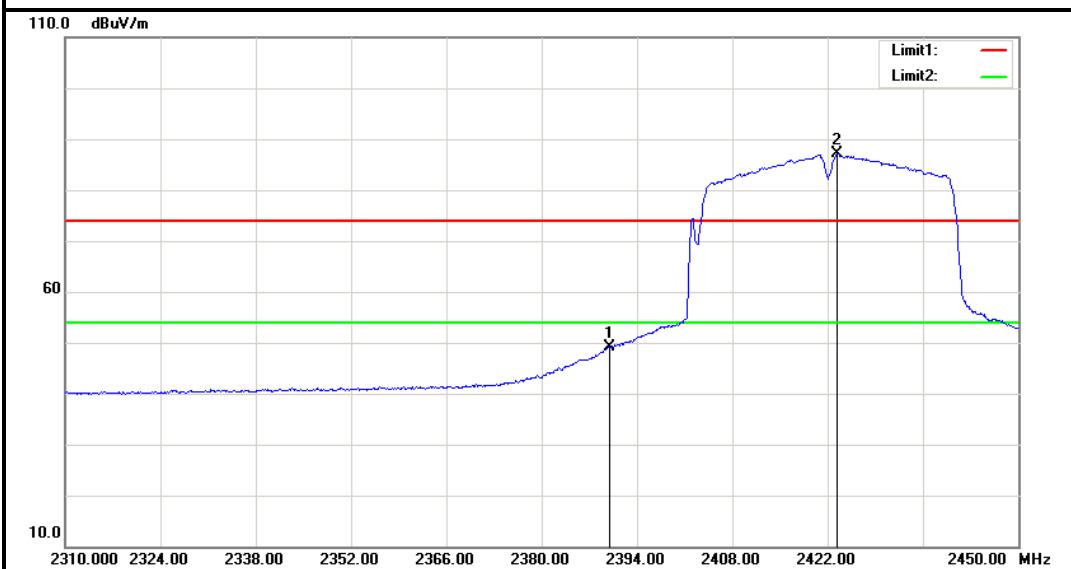


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	63.44	-2.86	60.58	74.00	-13.42	Peak	Vertical
2.	2424.240	98.84	-2.68	96.16	---	---	Peak	Vertical
1.	2390.000	51.91	-2.86	49.05	54.00	-4.95	Average	Vertical
2.	2423.400	89.80	-2.68	87.12	---	---	Average	Vertical

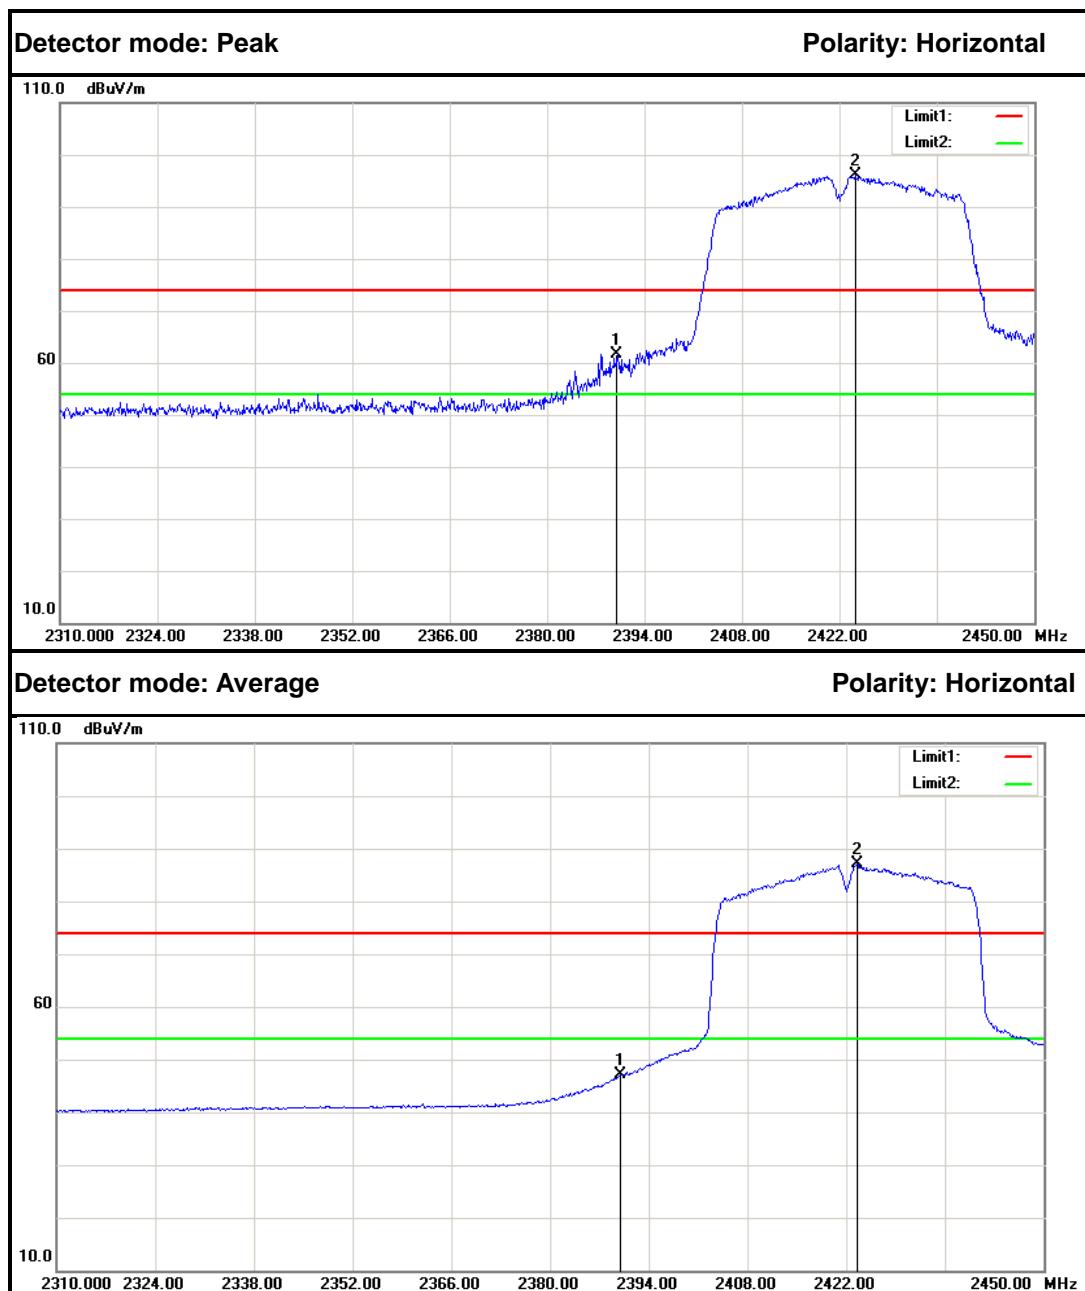

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	64.60	-2.86	61.74	74.00	-12.26	Peak	Horizontal
2.	2424.240	98.79	-2.68	96.11	---	---	Peak	Horizontal
1.	2390.000	49.94	-2.86	47.08	54.00	-6.92	Average	Horizontal
2.	2423.540	89.71	-2.68	87.03	---	---	Average	Horizontal

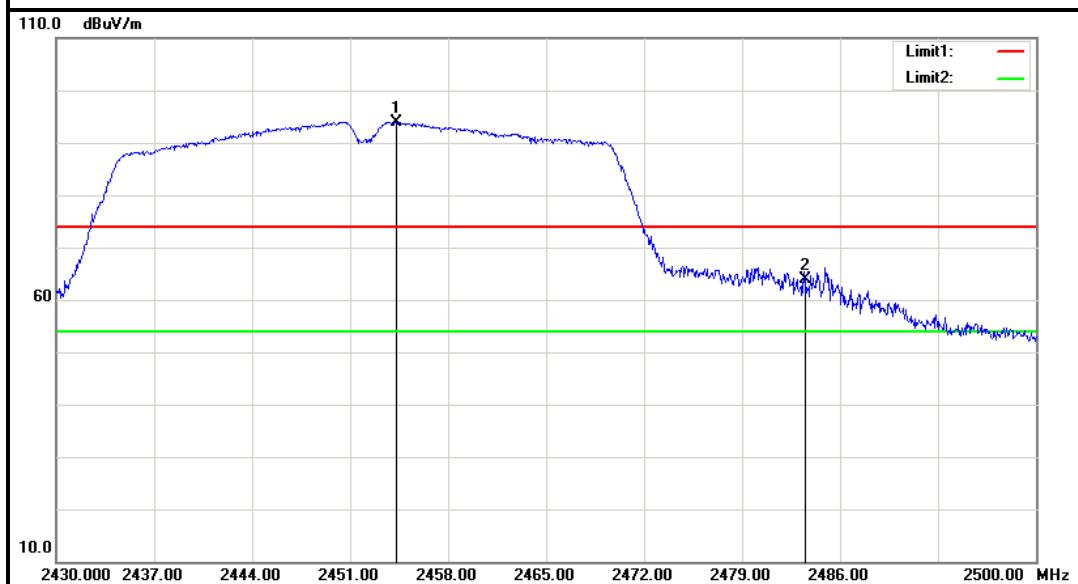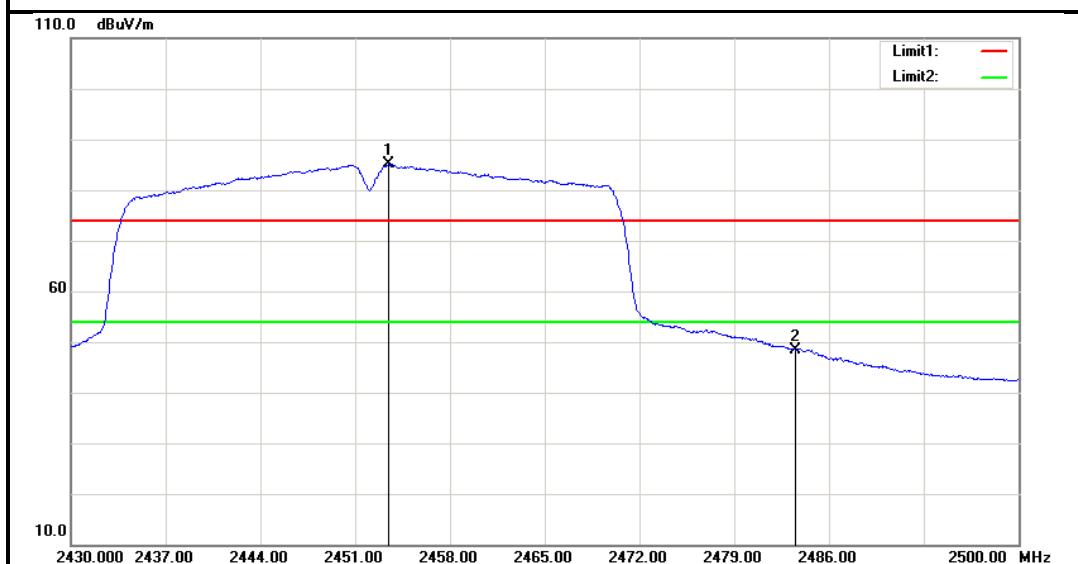**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2454.290	96.51	-2.51	94.00	---	---	Peak	Vertical
2.	2483.500	66.21	-2.35	63.86	74.00	-10.14	Peak	Vertical
1.	2453.450	87.53	-2.52	85.01	---	---	Average	Vertical
2.	2483.500	50.81	-2.35	48.46	54.00	-5.54	Average	Vertical

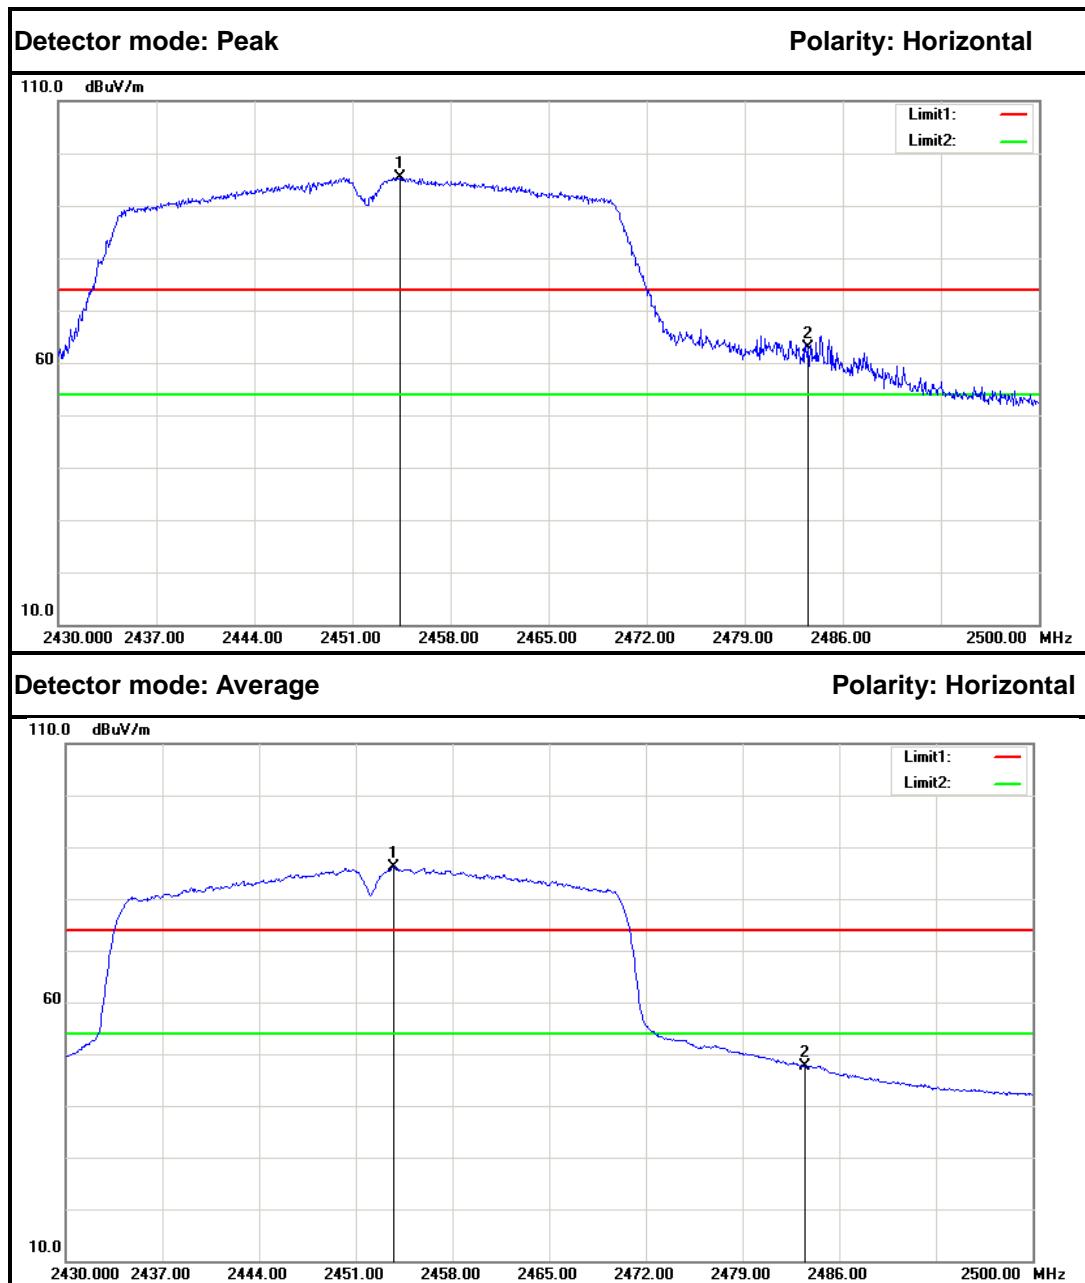

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2454.430	97.85	-2.51	95.34	---	---	Peak	Horizontal
2.	2483.500	65.26	-2.35	62.91	74.00	-11.09	Peak	Horizontal
1.	2453.730	88.73	-2.51	86.22	---	---	Average	Horizontal
2.	2483.500	50.10	-2.35	47.75	54.00	-6.25	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.7.2. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.3. TEST SETUP





7.7.4. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	6.229	8	PASS
Mid	2437	6.263		PASS
High	2462	6.277		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-3.559	8	PASS
Mid	2437	-2.864		PASS
High	2462	-2.602		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-2.992	8	PASS
Mid	2437	-3.806		PASS
High	2462	-3.508		PASS

Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-7.286	8	PASS
Mid	2437	-6.819		PASS
High	2452	-6.576		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

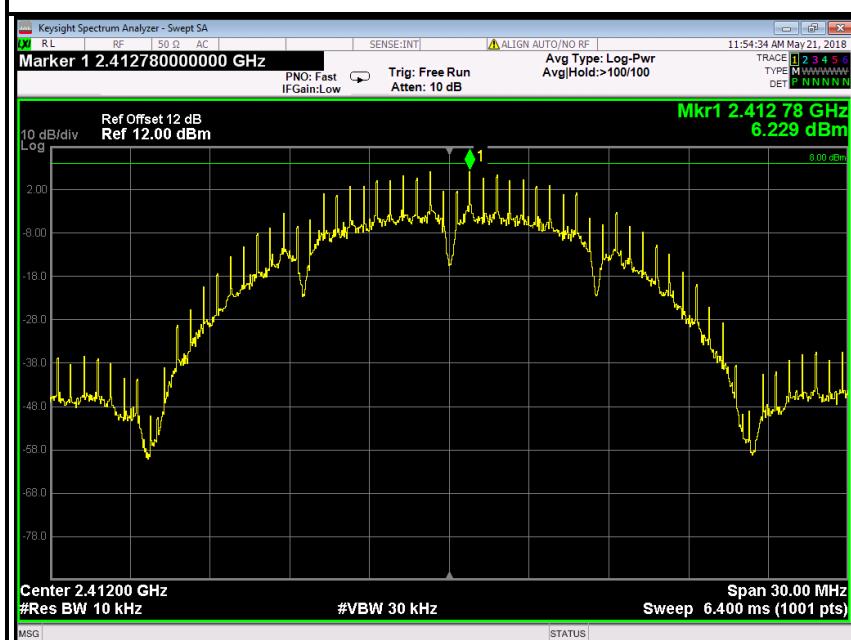


PPSD (CH Mid)

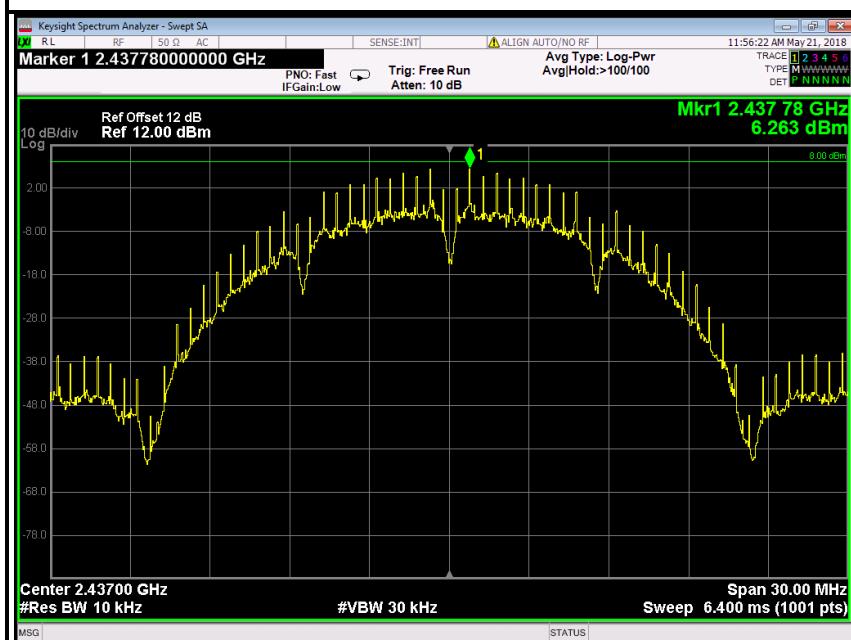




PPSD (CH High)

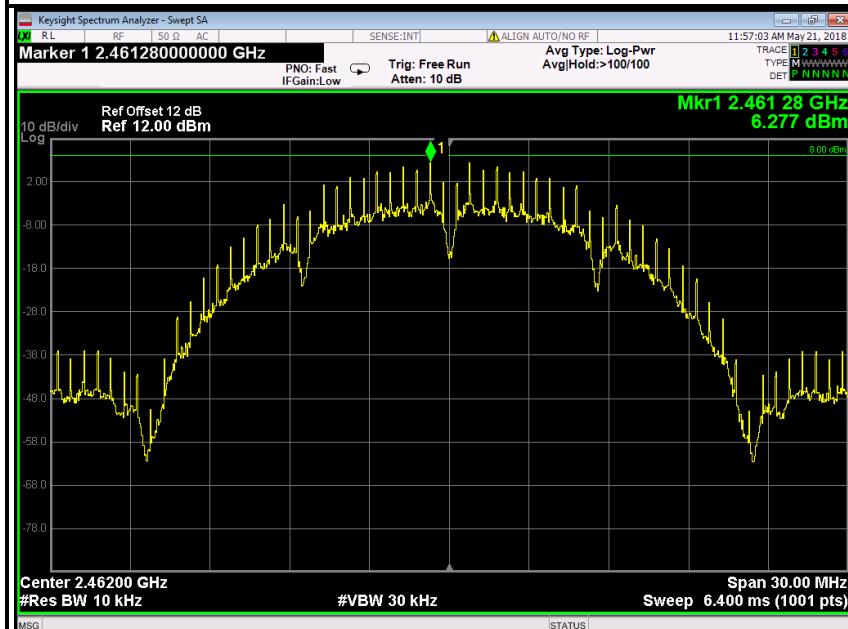


IEEE 802.11g mode

PPSD (CH Low)

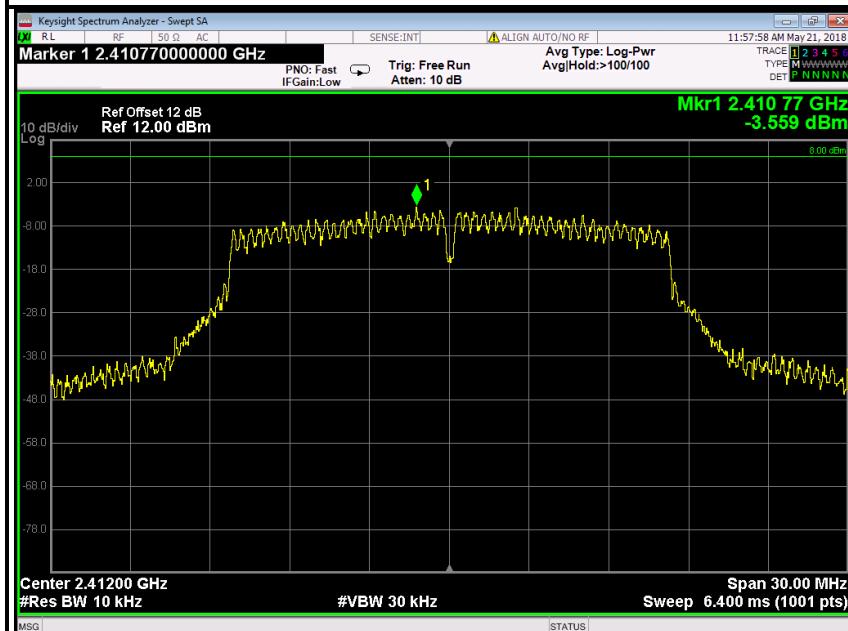




PPSD (CH Mid)

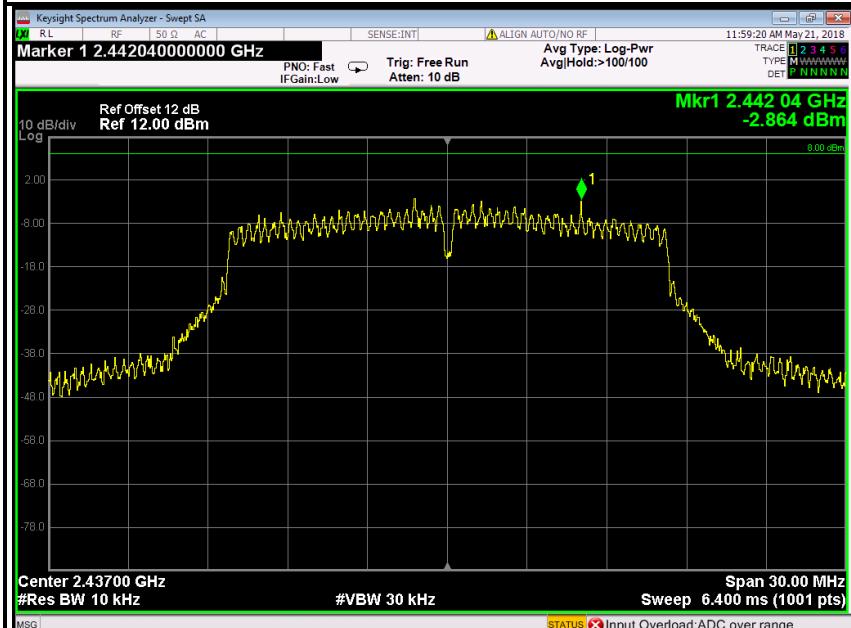


PPSD (CH High)

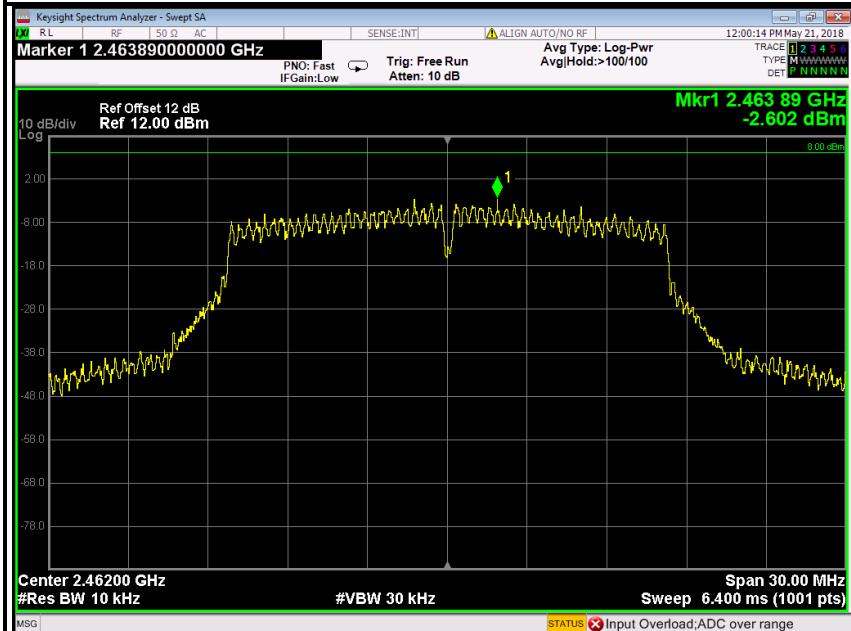




IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

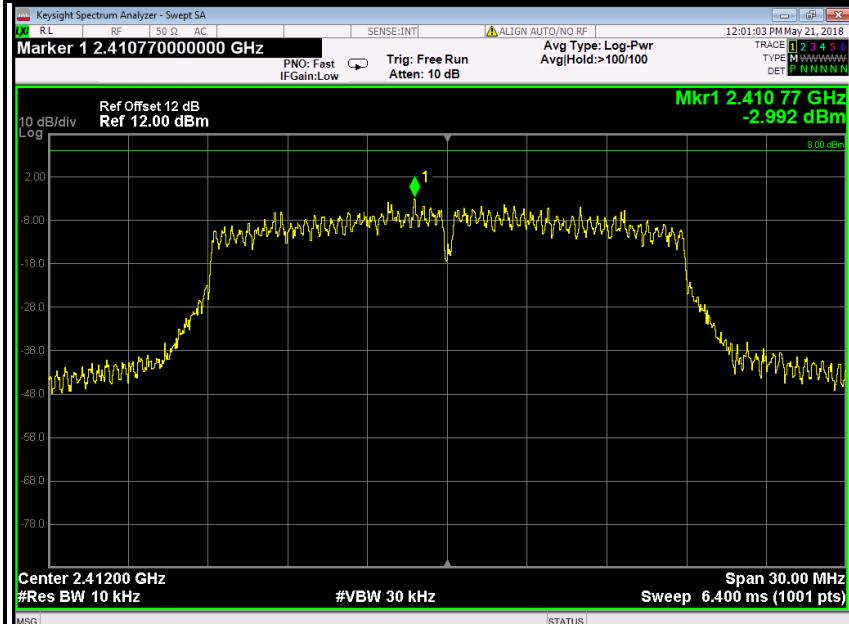

PPSD (CH Mid)

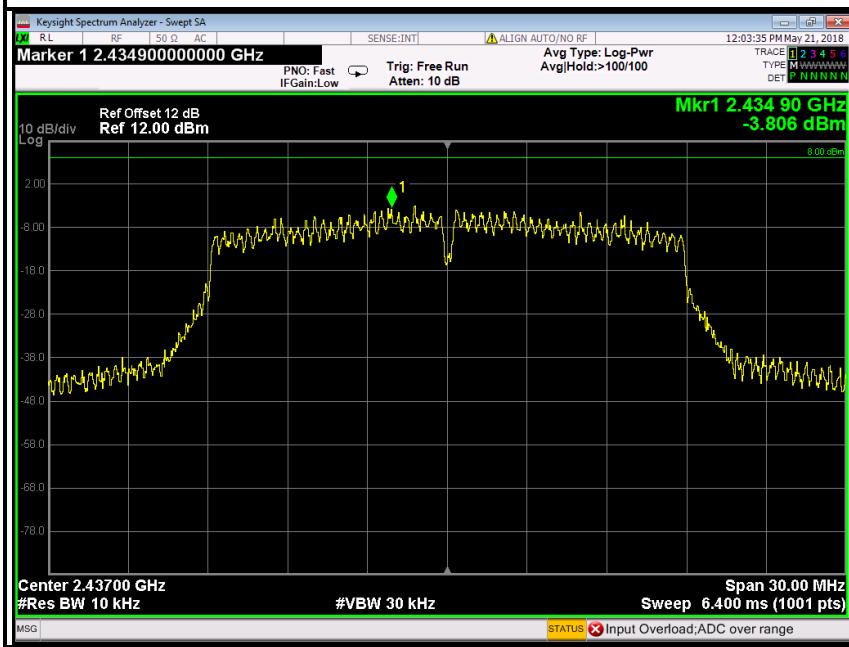

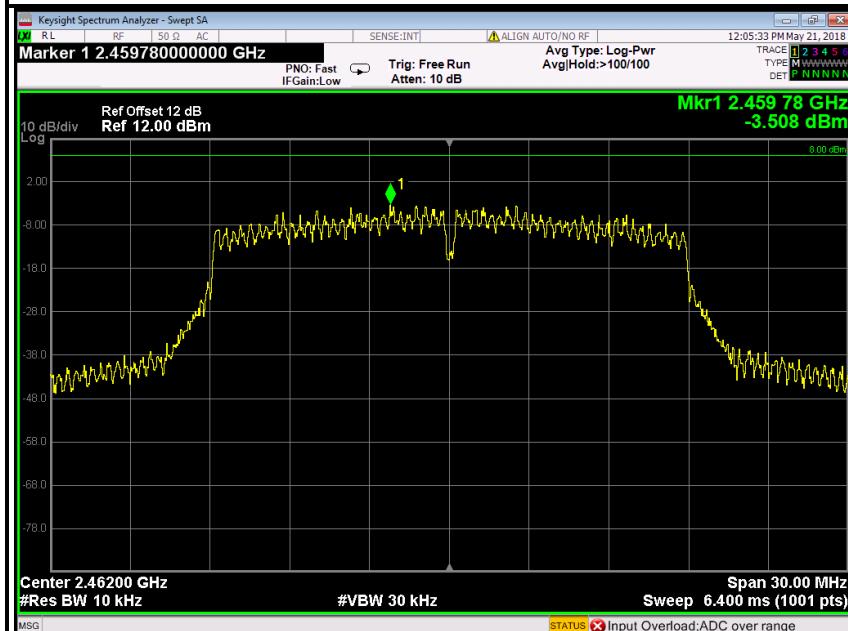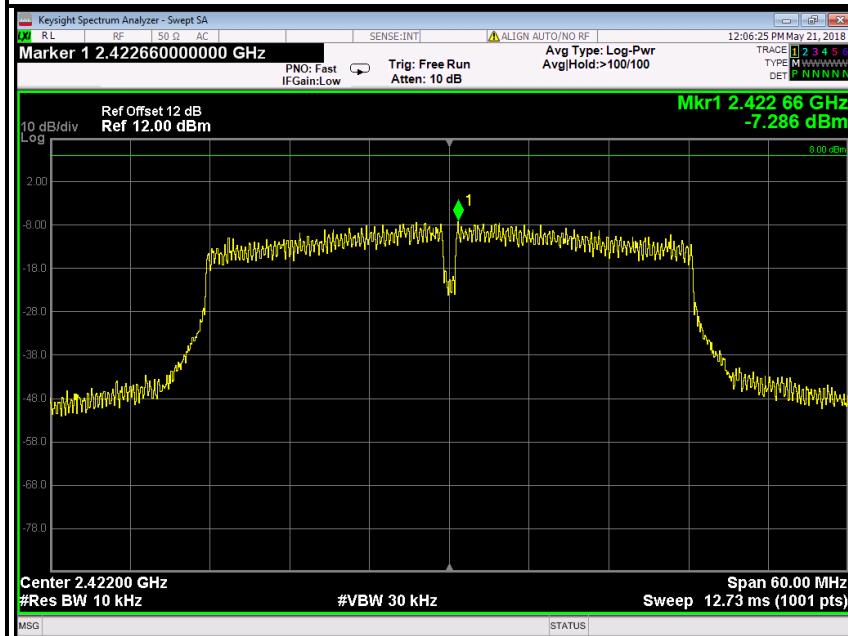**PPSD (CH High)****IEEE 802.11n HT40 MHz mode****PPSD (CH Low)**



PPSD (CH Mid)



PPSD (CH High)

