



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Emporia Telecom USA Inc.

321 E. Glen Ave, Ridgewood, NJ, United States

FCC ID: ZVP-V33I

| | |
|---|--|
| Report Type: Original Report | Product Type: GSM Mobile Phone |
| Test Engineer: <u>Tiger Ye</u> | |
| Report Number: <u>RSZ111018003-00b</u> | |
| Report Date: <u>2012-04-12</u> | |
| Reviewed By: <u>Merry Zhao</u> <u>EMC Engineer</u> | |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EUT EXERCISE SOFTWARE | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| LOCAL SUPPORT EQUIPMENT LIST AND DETAILS | 6 |
| EXTERNAL I/O CABLE..... | 6 |
| CONFIGURATION OF TEST SETUP | 7 |
| BLOCK DIAGRAM OF TEST SETUP | 7 |
| SUMMARY OF TEST RESULTS..... | 8 |
| FCC §15.247 (I) AND §2.1093 – RF EXPOSURE | 9 |
| APPLICABLE STANDARD | 9 |
| RESULT: | 10 |
| FCC §15.203 - ANTENNA REQUIREMENT..... | 11 |
| APPLICABLE STANDARD | 11 |
| ANTENNA CONNECTOR CONSTRUCTION | 11 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 12 |
| APPLICABLE STANDARD | 12 |
| MEASUREMENT UNCERTAINTY | 12 |
| EUT SETUP..... | 12 |
| EMI TEST RECEIVER SETUP..... | 13 |
| TEST PROCEDURE | 13 |
| TEST EQUIPMENT LIST AND DETAILS..... | 13 |
| TEST RESULTS SUMMARY | 13 |
| TEST DATA | 13 |
| FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS..... | 16 |
| APPLICABLE STANDARD | 16 |
| MEASUREMENT UNCERTAINTY | 16 |
| EUT SETUP | 16 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 17 |
| TEST PROCEDURE | 17 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 17 |
| TEST RESULTS SUMMARY | 18 |
| TEST DATA | 18 |
| FCC §15.247(a) (1) - CHANNEL SEPARATION TEST | 23 |
| APPLICABLE STANDARD | 23 |
| TEST EQUIPMENT LIST AND DETAILS..... | 23 |
| TEST PROCEDURE | 23 |
| TEST DATA | 23 |

| | |
|---|-----------|
| FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING..... | 26 |
| APPLICABLE STANDARD | 26 |
| TEST PROCEDURE | 26 |
| TEST EQUIPMENT LIST AND DETAILS..... | 26 |
| TEST DATA | 26 |
| FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST..... | 29 |
| APPLICABLE STANDARD | 29 |
| TEST PROCEDURE | 29 |
| TEST EQUIPMENT LIST AND DETAILS..... | 29 |
| TEST DATA | 29 |
| FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)..... | 31 |
| APPLICABLE STANDARD | 31 |
| TEST PROCEDURE | 31 |
| TEST EQUIPMENT LIST AND DETAILS..... | 31 |
| TEST DATA | 31 |
| FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT | 37 |
| APPLICABLE STANDARD | 37 |
| TEST PROCEDURE | 37 |
| TEST EQUIPMENT LIST AND DETAILS..... | 37 |
| TEST DATA | 37 |
| FCC §15.247(d) - BAND EDGES TESTING | 40 |
| APPLICABLE STANDARD | 40 |
| TEST PROCEDURE | 40 |
| TEST EQUIPMENT LIST AND DETAILS..... | 40 |
| TEST DATA | 41 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Emporia Telecom USA Inc.*'s product, model number: *V33i* (FCC ID: *ZVP-V33I*) (the "EUT") in this report was a *GSM Mobile Phone*, which was measured approximately:

11.9 cm (L) x 6.0 cm (W) x 1.8 cm (H), rated input voltage: DC 3.7V battery or DC 5.0V from adapter for charging.

Adapter Information:

Model: RL-V170-US

Input: 100-240V~50/60 Hz. 0.15A

Output: DC 5.0V 0.55A

Frequency Range:

Cellular Band: 824-849 MHz (Tx), 869-894 MHz (Rx)

PCS Band: 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)

Bluetooth: 2402-2480 MHz (Tx/ Rx)

Modulation Mode: GMSK (Cellular/PCS); GFSK (Bluetooth)

Transmitter Output Power:

Cellular Band: 32.09 dBm (Conducted)

PCS Band: 30.17 dBm (Conducted)

Bluetooth: -1.07 dBm (Conducted)

** All measurement and test data in this report was gathered from production sample serial number: 1110049 (Assigned by BACL, Shenzhen). The EUT was received on 2011-10-18.*

Objective

This report is prepared on behalf of *Emporia Telecom USA Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of EUT with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with FCC Part 22H&24E PCE with FCC ID: *ZVP-V33I*.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by CMU200.

EUT Exercise Software

No exercise software.

Equipment Modifications

No modification was made to the EUT tested.


Local Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-----------------------------------|--------|---------------|
| R & S | Universal Radio CommutationTester | CMU200 | 109038 |


External I/O Cable

| Cable Description | Length (m) | From Port | To |
|--------------------------------------|------------|-----------|---------|
| Unshielded Detachable DC Power Cable | 1.0 | EUT | Adapter |

Configuration of Test Setup

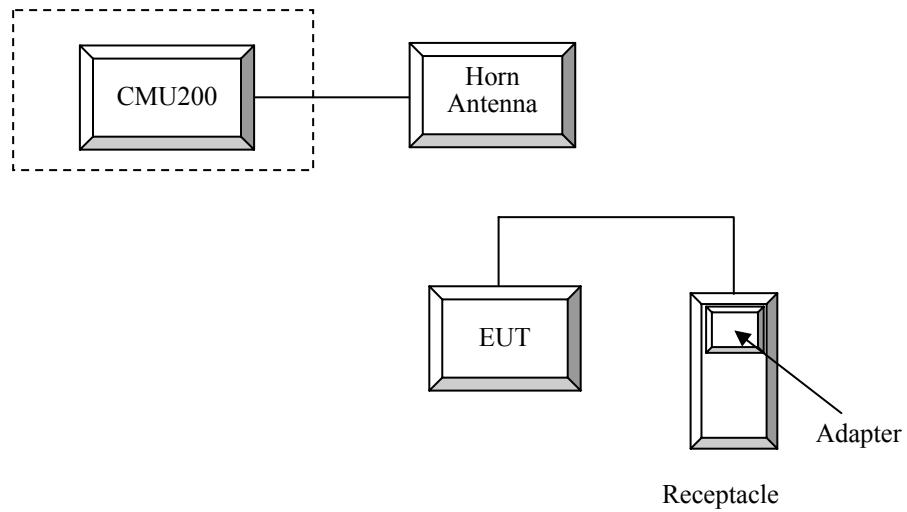

Block Diagram of Test Setup

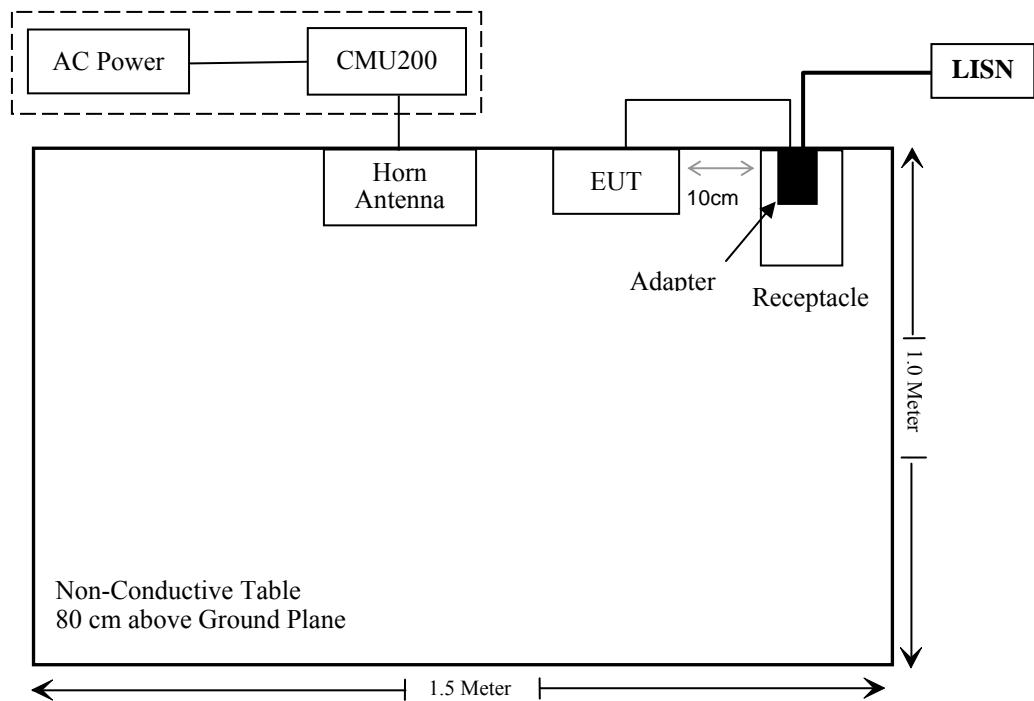

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------|----------------------------------|------------|
| §15.247 (i), §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Radiated Emissions | Compliance |
| §15.247 (a)(1) | 20 dB Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation Test | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band Edges | Compliance |

FCC §15.247 (I) AND §2.1093 – RF EXPOSURE

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

| | Individual Transmitter | Simultaneous Transmission |
|-----------------------|---|---|
| Licensed Transmitters | <u>Routine evaluation required</u> | <u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none"> ○ when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <u>Licensed & Unlicensed</u> <ul style="list-style-type: none"> ○ when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas ○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <u>SAR required:</u> <u>Licensed & Unlicensed</u> <p>antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p> |
| Jaw, Mouth and Nose | <u>Flat phantom SAR required</u> <ul style="list-style-type: none"> ○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues ○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations | When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance. |

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

- 1) GSM can transmit simultaneously with Bluetooth.
- 2) The distance between BT and GSM antenna is $6.8\text{ cm} > 5\text{ cm}$. The max output power of Bluetooth antenna is $(-1.07\text{ dBm}) 0.782\text{ mW} < 2P_{\text{Ref}}(24\text{ mW})$. According to KDB648474, stand-alone SAR is not required for BT antenna.
- 3) When the sum of the 1-g SAR is $<1.6\text{W/kg}$ for GSM and Bluetooth, the simultaneous SAR is not required.
- 4) P_{Ref} is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d)(5).

Result:

The stand-alone SAR evaluation of Bluetooth antenna and simultaneous SAR evaluation for Bluetooth with GSM antenna can be exempted.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an integrated antenna arrangement for bluetooth, which was permanently attached and the gain was 1.04 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB($k=2$, 95% level of confidence).

EUT Setup

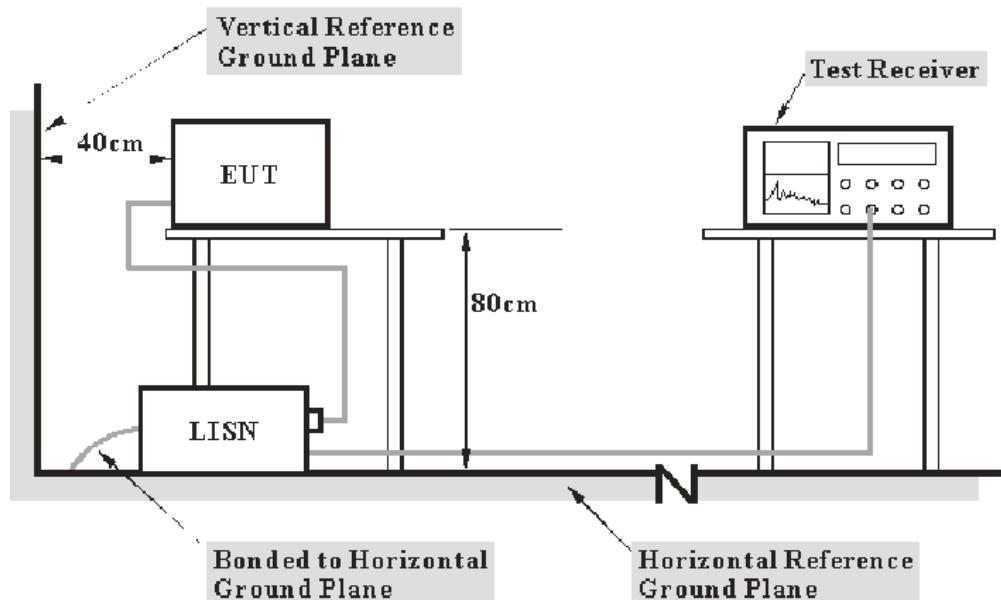

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| <u>Frequency Range</u> | <u>IF B/W</u> |
|-------------------------------|----------------------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 830245/006 | 2011-03-03 | 2012-03-02 |
| Rohde & Schwarz | L.I.S.N. | ESH2-Z5 | 892107/021 | 2011-03-09 | 2012-03-08 |
| Rohde & Schwarz | Pulse limiter | ESH3Z2 | DE25985 | 2011-07-08 | 2012-07-07 |

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 Section 15.207, with the worst margin reading of:

18.91 dB at 2.155 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

* The testing was performed by Tiger Ye on 2012-02-09.


Test Mode: Transmitting

AC 120V/60 Hz, Line

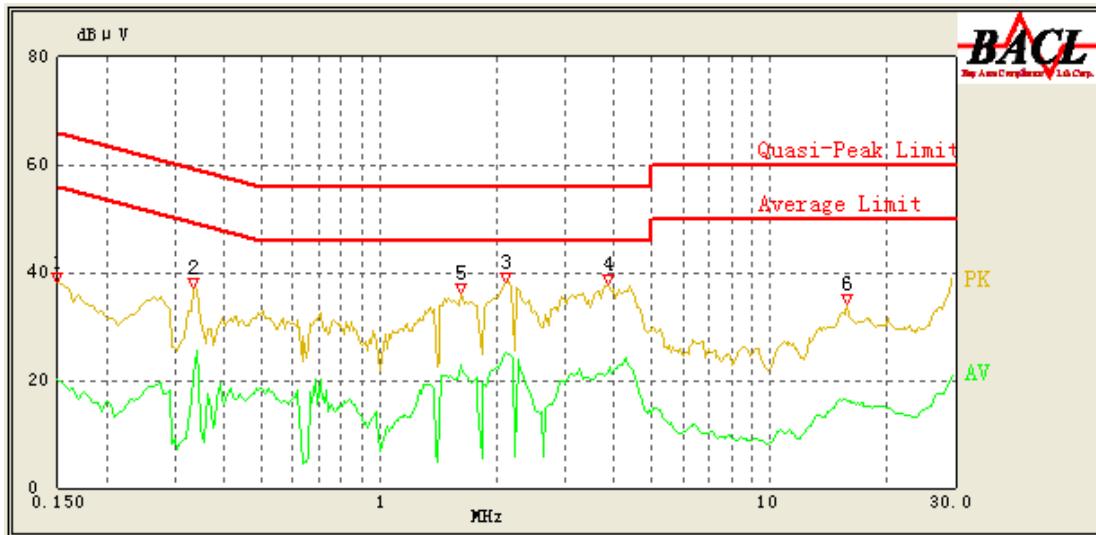

| Frequency (MHz) | Corrected Amplitude (dB μ V) | Correction Factor (dB) | Limit (dB μ V) | Margin (dB) | Detector (PK/ QP/Ave.) |
|-----------------|----------------------------------|------------------------|--------------------|-------------|------------------------|
| 2.105 | 25.08 | 9.97 | 46.00 | 20.92 | Ave. |
| 2.110 | 33.20 | 9.97 | 56.00 | 22.80 | QP |
| 1.620 | 22.78 | 9.97 | 46.00 | 23.22 | Ave. |
| 3.890 | 22.43 | 9.97 | 46.00 | 23.57 | Ave. |
| 3.870 | 35.63 | 9.97 | 56.00 | 20.37 | QP |
| 1.620 | 29.55 | 9.97 | 56.00 | 26.45 | QP |
| 0.335 | 34.68 | 9.96 | 60.71 | 26.03 | QP |
| 0.335 | 25.77 | 9.96 | 50.71 | 24.94 | Ave. |
| 0.150 | 33.30 | 9.96 | 66.00 | 32.70 | QP |
| 15.750 | 16.33 | 10.05 | 50.00 | 33.67 | Ave. |
| 15.810 | 25.21 | 10.05 | 60.00 | 34.79 | QP |
| 0.150 | 20.22 | 9.96 | 56.00 | 35.78 | Ave. |

AC 120V/60 Hz, Neutral

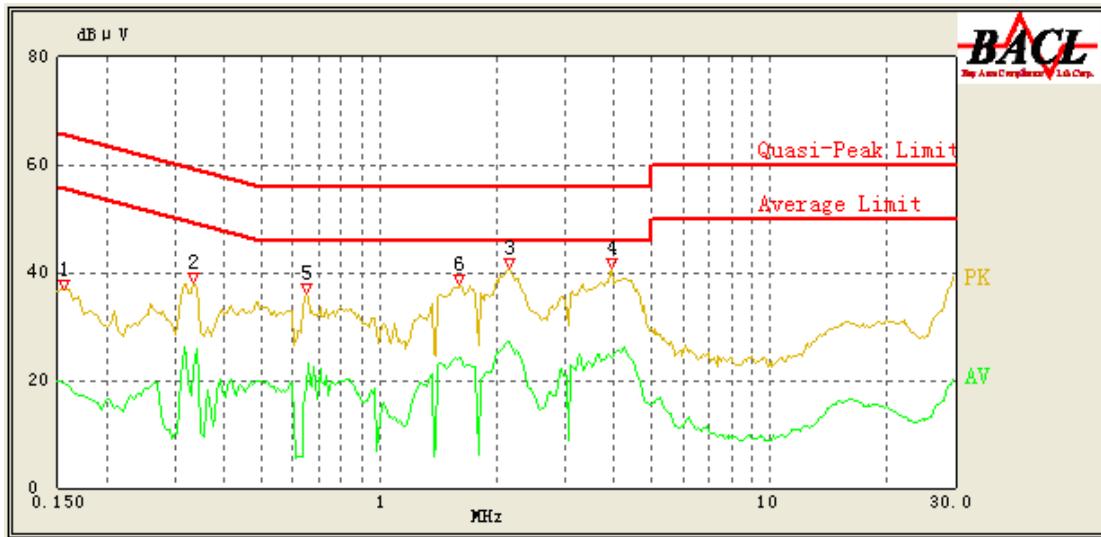

| Frequency (MHz) | Corrected Amplitude (dB μ V) | Correction Factor (dB) | Limit (dB μ V) | Margin (dB) | Detector (PK/ QP/Ave.) |
|-----------------|----------------------------------|------------------------|--------------------|-------------|------------------------|
| 2.155 | 27.09 | 9.97 | 46.00 | 18.91 | Ave. |
| 2.160 | 36.09 | 9.97 | 56.00 | 19.91 | QP |
| 3.945 | 24.19 | 9.97 | 46.00 | 21.81 | Ave. |
| 1.615 | 24.07 | 9.97 | 46.00 | 21.93 | Ave. |
| 1.610 | 32.65 | 9.97 | 56.00 | 23.35 | QP |
| 0.650 | 30.69 | 9.97 | 56.00 | 25.31 | QP |
| 0.650 | 19.00 | 9.97 | 46.00 | 27.00 | Ave. |
| 0.335 | 33.64 | 9.96 | 60.71 | 27.07 | QP |
| 0.335 | 21.92 | 9.96 | 50.71 | 28.79 | Ave. |
| 3.925 | 27.21 | 9.97 | 56.00 | 28.79 | QP |
| 0.155 | 31.95 | 9.96 | 65.86 | 33.91 | QP |
| 0.155 | 19.52 | 9.96 | 55.86 | 36.34 | Ave. |

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB($k=2$, 95% level of confidence).

EUT Setup

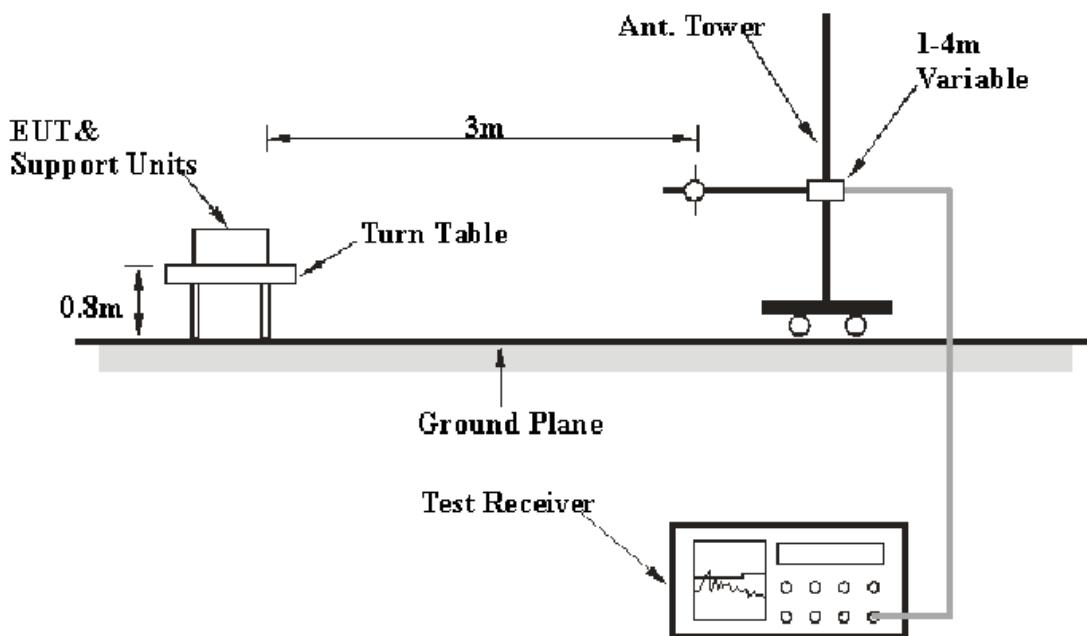

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | Detector |
|------------------------|------------|------------------|-----------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | QP |
| 1000 MHz – 25 GHz | 1 MHz | 3 MHz | PK |
| 1000 MHz – 25 GHz | 1 MHz | 10 Hz | Ave. |

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|-------------------|----------|---------------|------------------|----------------------|
| HP | Amplifier | HP8447D | 2944A09795 | 2011-08-02 | 2012-08-01 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-1 | 2011-07-05 | 2012-07-04 |
| Mini-Circuits | Amplifier | ZVA-213+ | T-E27H | 2011-03-08 | 2012-03-07 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052604 | 2011-05-05 | 2012-05-04 |
| Rohde & Schwarz | Signal Analyzer | FSIQ 26 | 609358 | 2011-07-08 | 2012-07-07 |
| The electro-Mechanics Co. | Horn Antenna | 3116 | 9510-2270 | 2011-05-05 | 2012-05-04 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

9.61 dB at 4882 MHz in the **Vertical** polarization in middle channel

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9kPa |

The testing was performed by Tiger Ye on 2012-02-09.

30MHz-25 GHz:

| Indicated | | Detector (PK/Ave.) | Table Angle Degree | Test Antenna | | Correction Factor | | | FCC Part 15.247/15.209/15.205 | | | |
|----------------------------------|---------------------------------|-----------------------|--------------------------|---------------|----------------|--------------------------|-----------------------|--------------------------|---------------------------------|-------------------------|----------------|----------|
| Frequency (MHz) | S.A. Reading (dB μ V) | | | Height (m) | Polar (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comment |
| Low Channel (2402 MHz) | | | | | | | | | | | | |
| 2402 | 87.65 | PK | 150 | 1.5 | H | 30.5 | 3.03 | 26.83 | 94.35 | / | / | Fund. |
| 2402 | 65.46 | Ave. | 150 | 1.5 | H | 30.5 | 3.03 | 26.83 | 72.16 | / | / | Fund. |
| 2402 | 86.98 | PK | 240 | 2 | V | 30.5 | 3.03 | 26.83 | 93.68 | / | / | Fund. |
| 2402 | 65.13 | Ave. | 240 | 2 | V | 30.5 | 3.03 | 26.83 | 71.83 | / | / | Fund. |
| 4804 | 51.45 | PK | 310 | 1.6 | V | 35.2 | 4.28 | 26.73 | 64.2 | 74 | 9.8 | harmonic |
| 4804 | 49.84 | PK | 250 | 2.1 | H | 36.3 | 4.28 | 26.73 | 63.69 | 74 | 10.31 | harmonic |
| 4804 | 30.26 | Ave. | 310 | 1.6 | V | 35.2 | 4.28 | 26.73 | 43.01 | 54 | 10.99 | harmonic |
| 4804 | 28.03 | Ave. | 250 | 2.1 | H | 36.3 | 4.28 | 26.73 | 41.88 | 54 | 12.12 | harmonic |
| 2380.3 | 33.19 | Ave. | 75 | 1.9 | V | 30.5 | 2.98 | 26.83 | 39.84 | 54 | 14.16 | spurious |
| 2389.1 | 31.26 | Ave. | 120 | 1.2 | H | 30.4 | 2.98 | 26.83 | 37.81 | 54 | 16.19 | spurious |
| 2375.4 | 30.19 | Ave. | 160 | 1.5 | H | 30.5 | 2.98 | 26.83 | 36.84 | 54 | 17.16 | spurious |
| 3644.2 | 23.48 | Ave. | 160 | 1.5 | H | 33 | 3.79 | 26.88 | 33.39 | 54 | 20.61 | spurious |
| 2380.3 | 45.72 | PK | 75 | 1.9 | V | 30.5 | 2.98 | 26.83 | 52.37 | 74 | 21.63 | spurious |
| 4185.6 | 21.96 | Ave. | 250 | 1.2 | V | 33.2 | 3.95 | 26.87 | 32.24 | 52.16 | 19.92 | spurious |
| 2389.1 | 43.34 | PK | 120 | 1.2 | H | 30.4 | 2.98 | 26.83 | 49.89 | 74 | 24.11 | spurious |
| 2375.4 | 42.67 | PK | 160 | 1.5 | H | 30.5 | 2.98 | 26.83 | 49.32 | 74 | 24.68 | spurious |
| 3644.2 | 39.16 | PK | 160 | 1.5 | H | 33 | 3.79 | 26.88 | 49.07 | 74 | 24.93 | spurious |
| 4185.6 | 38.49 | PK | 250 | 1.2 | V | 33.2 | 3.95 | 26.87 | 48.77 | 74.35 | 25.58 | spurious |
| Middle Channel (2441 MHz) | | | | | | | | | | | | |
| 2441 | 89.33 | PK | 150 | 1.5 | H | 30.6 | 3.11 | 26.83 | 96.21 | / | / | Fund. |
| 2441 | 67.28 | Ave. | 150 | 1.5 | H | 30.6 | 3.11 | 26.83 | 74.16 | / | / | Fund. |
| 2441 | 87.64 | PK | 260 | 1.2 | V | 30.6 | 3.11 | 26.83 | 94.52 | / | / | Fund. |
| 2441 | 65.83 | Ave. | 260 | 1.2 | V | 30.6 | 3.11 | 26.83 | 72.71 | / | / | Fund. |
| 4882 | 51.37 | PK | 180 | 1.8 | V | 35.4 | 4.37 | 26.75 | 64.39 | 74 | 9.61 | harmonic |
| 4882 | 49.37 | PK | 170 | 1.2 | H | 36.6 | 4.37 | 26.75 | 63.59 | 74 | 10.41 | harmonic |
| 4882 | 30.33 | Ave. | 180 | 1.8 | V | 35.4 | 4.37 | 26.75 | 43.35 | 54 | 10.65 | harmonic |
| 4882 | 27.89 | Ave. | 170 | 1.2 | H | 36.6 | 4.37 | 26.75 | 42.11 | 54 | 11.89 | harmonic |
| 2923 | 22.57 | Ave. | 190 | 1.3 | H | 31.9 | 3.34 | 26.83 | 30.98 | 54.16 | 23.18 | spurious |
| 2974 | 21.56 | Ave. | 240 | 1.7 | V | 31 | 3.37 | 26.83 | 29.1 | 54.16 | 25.06 | spurious |
| 2923 | 38.76 | PK | 190 | 1.3 | H | 31.9 | 3.34 | 26.83 | 47.17 | 76.21 | 29.04 | spurious |
| 2974 | 37.49 | PK | 240 | 1.7 | V | 31 | 3.37 | 26.83 | 45.03 | 76.21 | 31.18 | spurious |


| Indicated | | Detector (PK/Ave.) | Table Angle Degree | Test Antenna | | Correction Factor | | | FCC Part 15.247/15.209/15.205 | | | |
|--------------------------------|---------------------------------|-----------------------|--------------------------|---------------|----------------|--------------------------|-----------------------|--------------------------|---------------------------------|-------------------------|----------------|----------|
| Frequency (MHz) | S.A. Reading (dB μ V) | | | Height (m) | Polar (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Comment |
| High Channel (2480 MHz) | | | | | | | | | | | | |
| 2480 | 88.92 | PK | 230 | 2.1 | H | 30.6 | 3.11 | 26.81 | 95.82 | / | / | Fund. |
| 2480 | 66.03 | Ave. | 230 | 2.1 | H | 30.6 | 3.11 | 26.81 | 72.93 | / | / | Fund. |
| 2480 | 89.79 | PK | 150 | 1.5 | V | 30.6 | 3.11 | 26.81 | 96.69 | / | / | Fund. |
| 2480 | 67.11 | Ave. | 150 | 1.5 | V | 30.6 | 3.11 | 26.81 | 74.01 | / | / | Fund. |
| 4960 | 50.12 | PK | 170 | 2.4 | H | 36.6 | 4.37 | 26.75 | 64.34 | 74 | 9.66 | harmonic |
| 4960 | 29.76 | Ave. | 170 | 2.4 | H | 36.6 | 4.37 | 26.75 | 43.98 | 54 | 10.02 | harmonic |
| 4960 | 50.34 | PK | 180 | 1.6 | V | 35.4 | 4.37 | 26.75 | 63.36 | 74 | 10.64 | harmonic |
| 4960 | 29.55 | Ave. | 180 | 1.6 | V | 35.4 | 4.37 | 26.75 | 42.57 | 54 | 11.43 | harmonic |
| 2483.6 | 32.98 | Ave. | 190 | 1.5 | H | 30.6 | 3.11 | 26.83 | 39.86 | 54 | 14.14 | spurious |
| 2479.3 | 31.92 | Ave. | 360 | 1.2 | V | 30.6 | 3.11 | 26.83 | 38.8 | 54 | 15.20 | spurious |
| 2475.9 | 31.59 | Ave. | 230 | 1.1 | V | 30.6 | 3.11 | 26.83 | 38.47 | 54 | 15.53 | spurious |
| 3688.4 | 23.09 | Ave. | 150 | 1.8 | H | 33 | 3.79 | 26.88 | 33 | 54 | 21.00 | spurious |
| 3651.2 | 22.59 | Ave. | 130 | 1.4 | V | 32 | 3.79 | 26.88 | 31.5 | 54 | 22.50 | spurious |
| 2479.3 | 44.61 | PK | 360 | 1.2 | V | 30.6 | 3.11 | 26.83 | 51.49 | 74 | 22.51 | spurious |
| 2483.6 | 44.39 | PK | 190 | 1.9 | H | 30.6 | 3.11 | 26.83 | 51.27 | 74 | 22.73 | spurious |
| 2475.9 | 44.29 | PK | 230 | 1.1 | V | 30.6 | 3.11 | 26.83 | 51.17 | 74 | 22.83 | spurious |
| 3688.4 | 39.61 | PK | 150 | 1.8 | H | 33 | 3.79 | 26.88 | 49.52 | 74 | 24.48 | spurious |
| 3651.2 | 38.46 | PK | 130 | 1.4 | V | 32 | 3.79 | 26.88 | 47.37 | 74 | 26.63 | spurious |

Note: For the frequency 30 MHz to 1GHz, the emission data which is 20 dB below the limit is not recorded.


Spurious Emissions at Antenna Terminal


Please refer to the following plots:

Low Channel

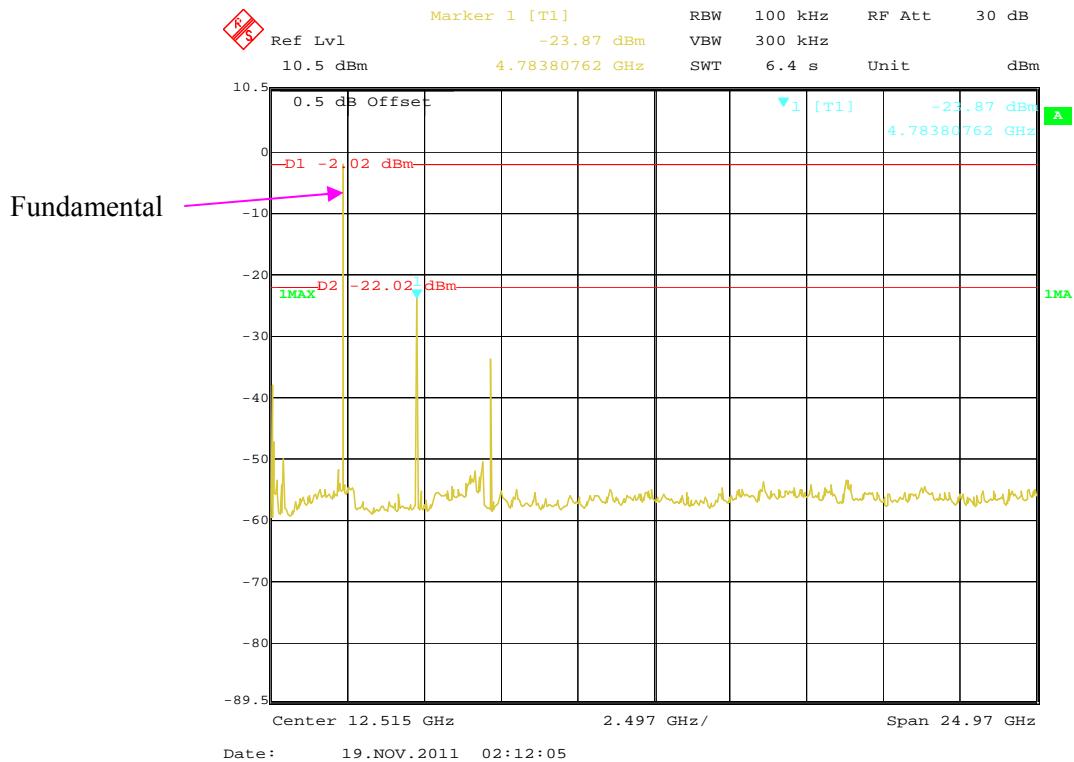

Middle Channel

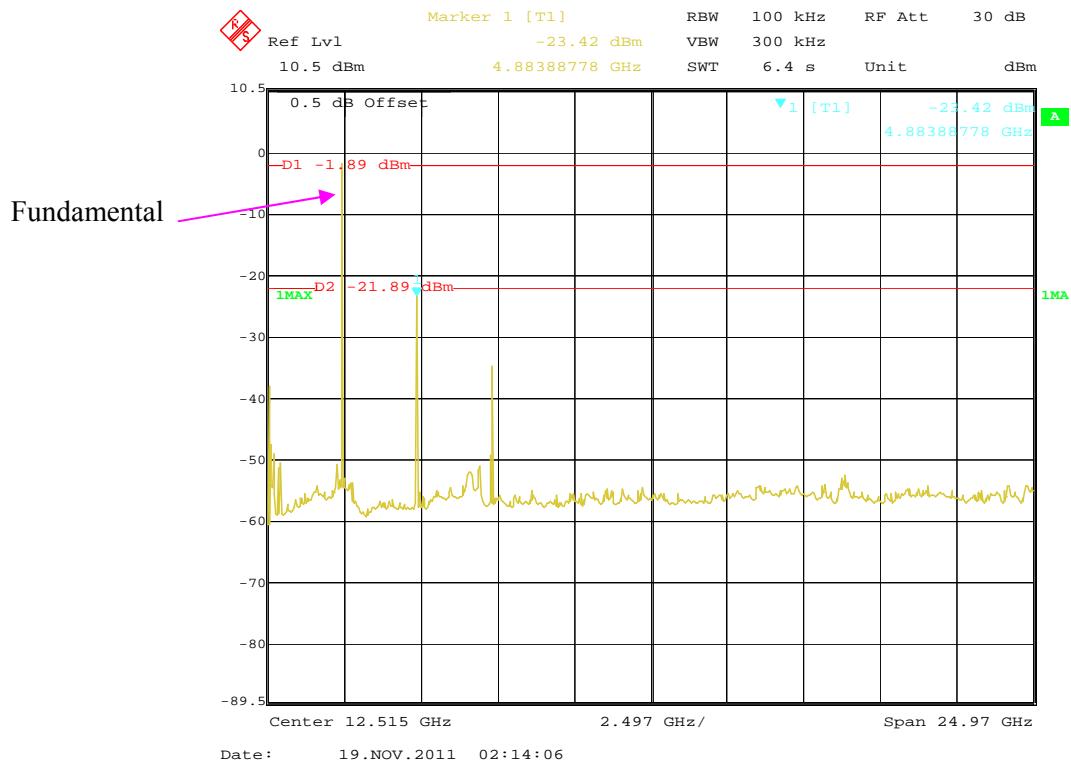

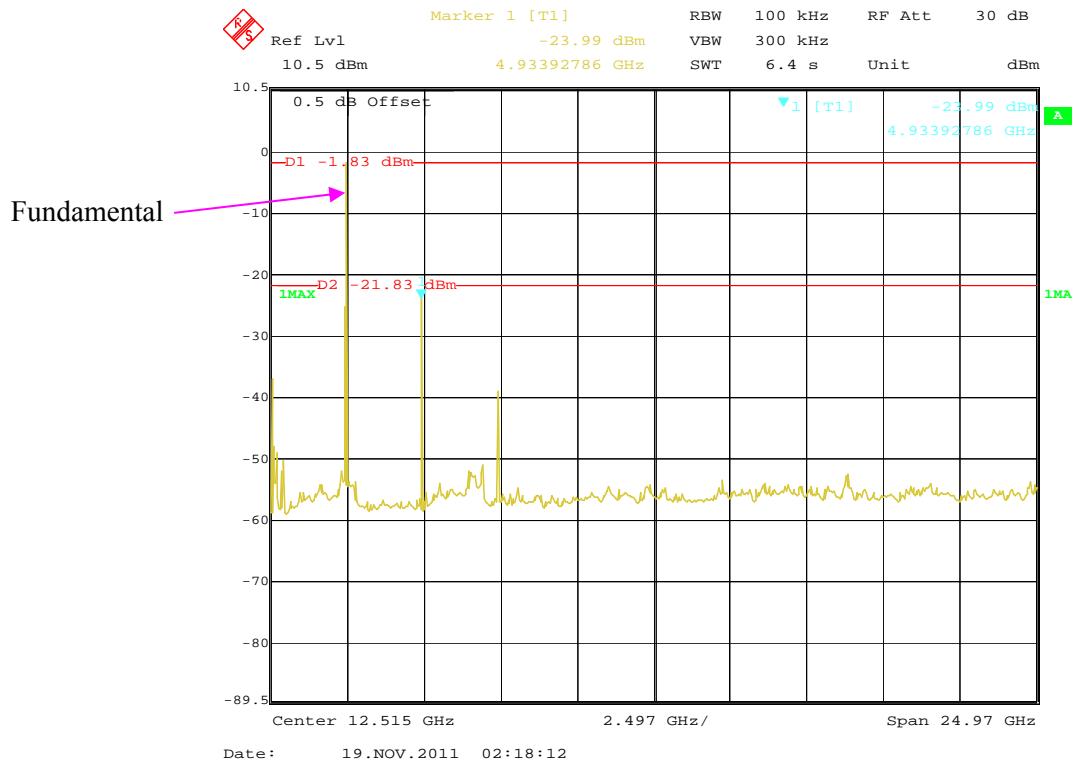High Channel

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions


| | |
|--------------------|----------|
| Temperature: | 24 °C |
| Relative Humidity: | 50% |
| ATM Pressure: | 100.9kPa |

* The testing was performed by Tiger Ye on 2012-02-10.


Test Result: Compliance. Please refer to following tables and plots.

Test Mode: Transmitting


| Channel | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
|----------|-----------------|--------------------------|-------------|--------|
| Low | 2402 | 1.004 | 0.680 | Pass |
| Adjacent | 2403 | | | |
| Middle | 2441 | 1.004 | 0.677 | Pass |
| Adjacent | 2442 | | | |
| High | 2480 | 1.004 | 0.680 | Pass |
| Adjacent | 2479 | | | |

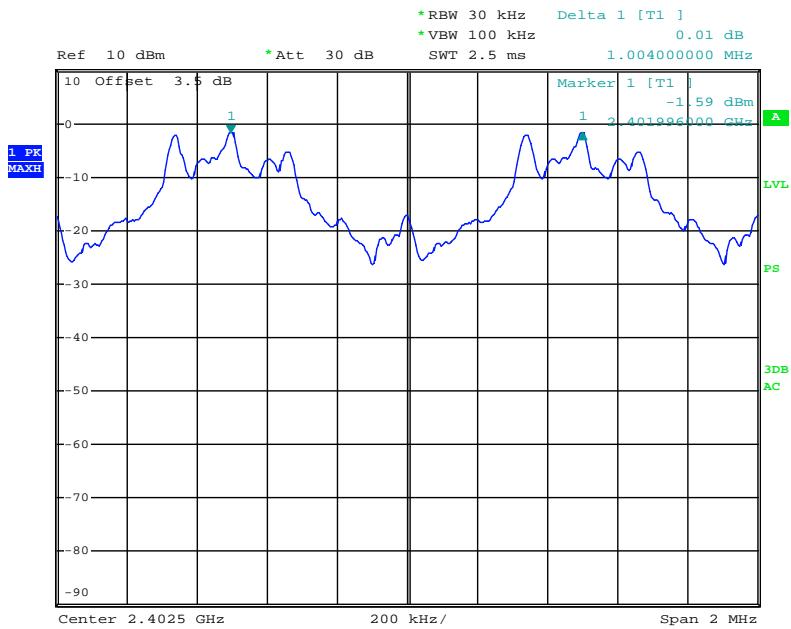Low Channel

Date: 10.FEB.2012 21:58:29

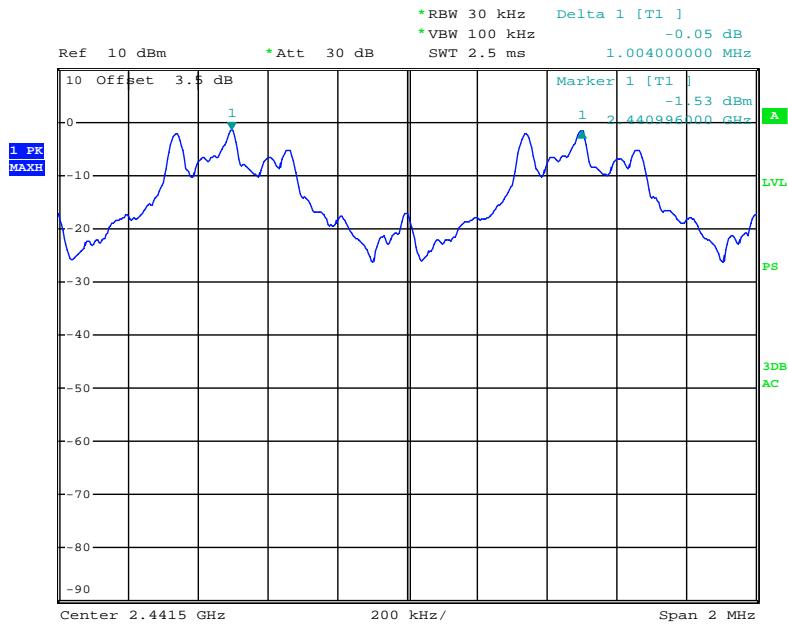Middle Channel

Date: 10.FEB.2012 21:59:40

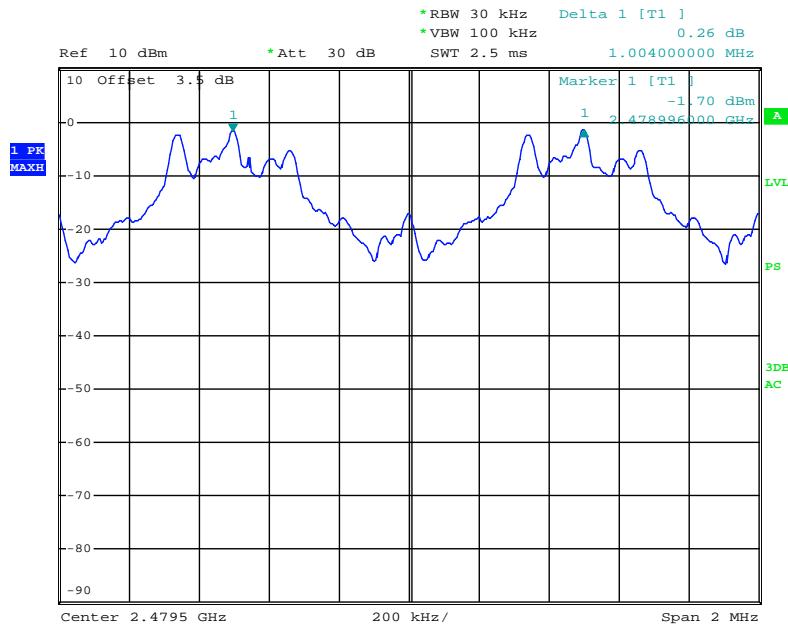High Channel

Date: 10.FEB.2012 22:01:35

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9kPa |


* The testing was performed by Tiger Ye on 2012-02-09.

Test Result: Compliance. Please refer to following tables and plots.


Test Mode: Transmitting

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low | 2402 | 1.020 |
| Middle | 2441 | 1.016 |
| High | 2480 | 1.020 |


Low Channel

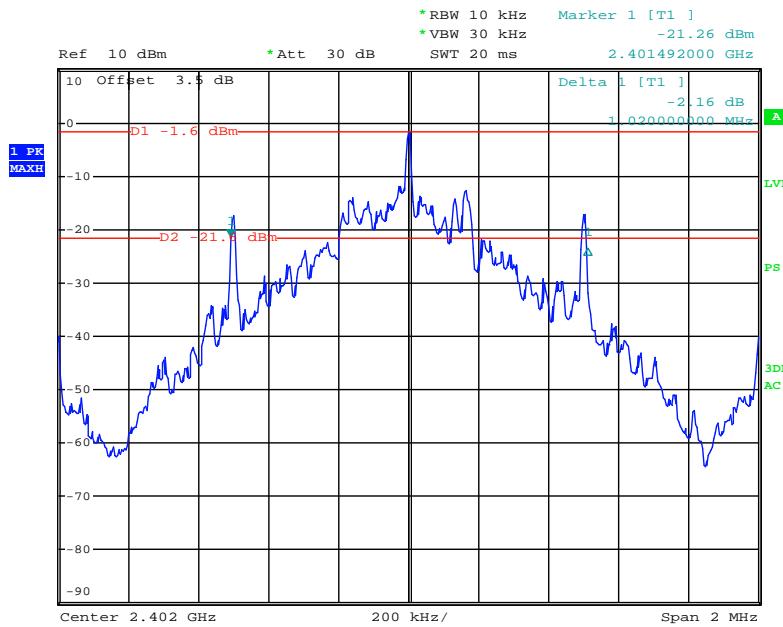

Date: 9.FEB.2012 21:53:21

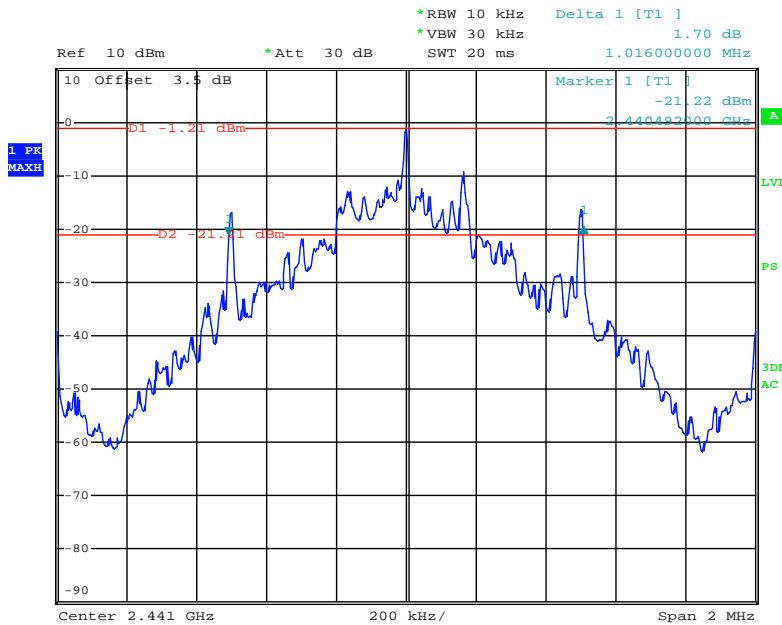Middle Channel

Date: 9.FEB.2012 22:02:35

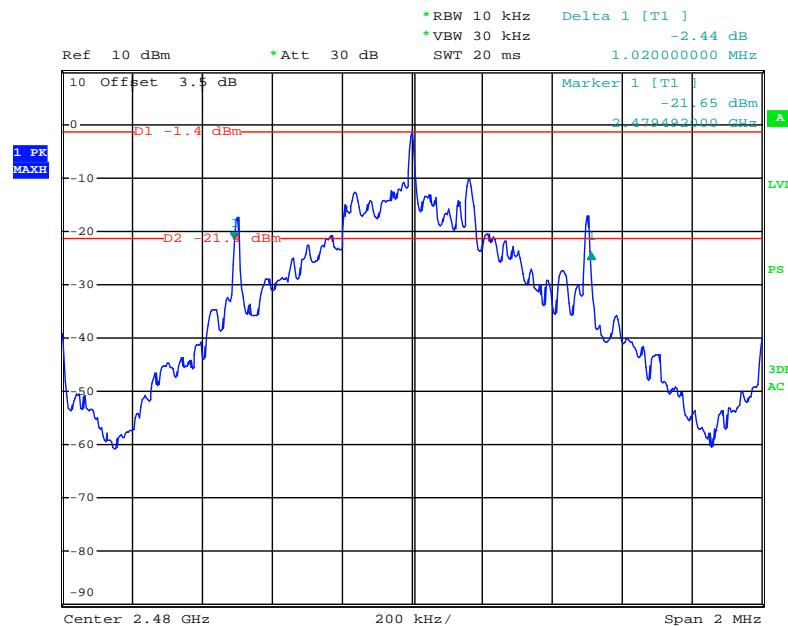High Channel

Date: 9.FEB.2012 21:59:30

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9kPa |


The testing was performed by Tiger Ye on 2012-02-09.

Test Result: Compliance. Please refer to following tables and plots.

Test Mode: Transmitting

| Frequency Range (MHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 2400-2483.50 | 79 | ≥15 |

Number of Hopping Channels

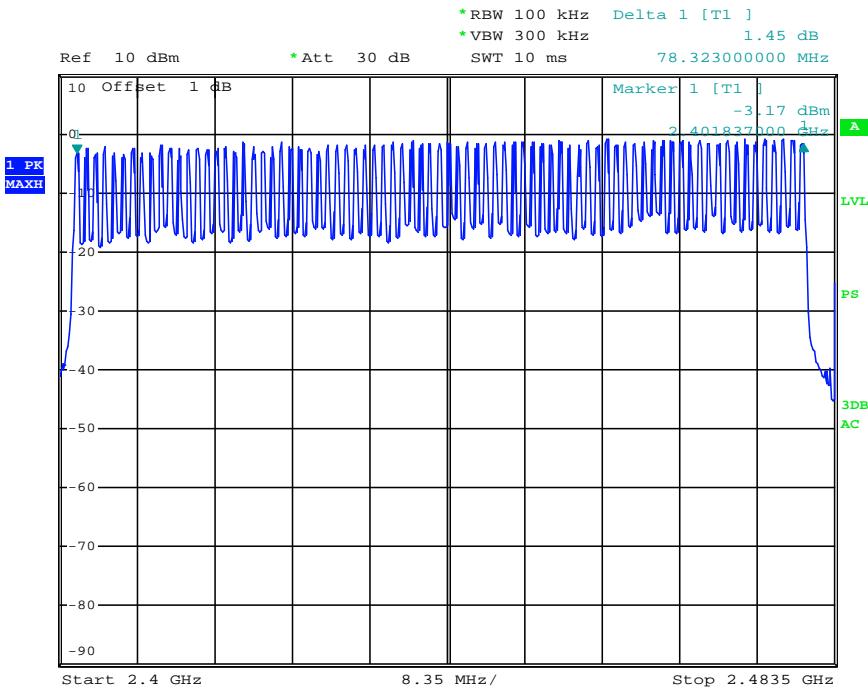

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s

Hop rate=1600/s

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**


| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9kPa |

* The testing was performed by Tiger Ye on 2011-11-02.

Test Result: Compliance. Please refer to following tables and plots.


Test Mode: Transmitting

| Mode | Channel | Pulse Width (ms) | Dwell Time (s) | Limit (s) | Result |
|---|---------|------------------|----------------|-----------|--------|
| DH 1 | Low | 0.430 | 0.1376 | 0.4 | Pass |
| | Middle | 0.430 | 0.1376 | 0.4 | Pass |
| | High | 0.430 | 0.1376 | 0.4 | Pass |
| Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s | | | | | |
| DH 3 | Low | 1.690 | 0.270 | 0.4 | Pass |
| | Middle | 1.690 | 0.270 | 0.4 | Pass |
| | High | 1.700 | 0.272 | 0.4 | Pass |
| Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s | | | | | |
| DH 5 | Low | 2.96 | 0.316 | 0.4 | Pass |
| | Middle | 2.98 | 0.318 | 0.4 | Pass |
| | High | 2.98 | 0.318 | 0.4 | Pass |
| Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s | | | | | |

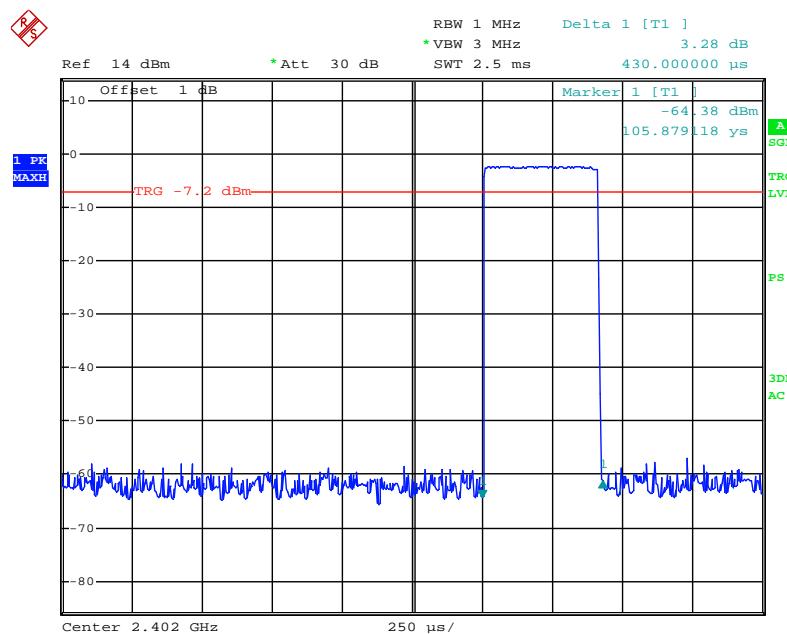Low Channel for DH1


Date: 2.NOV.2011 00:11:08

Middle Channel for DH1

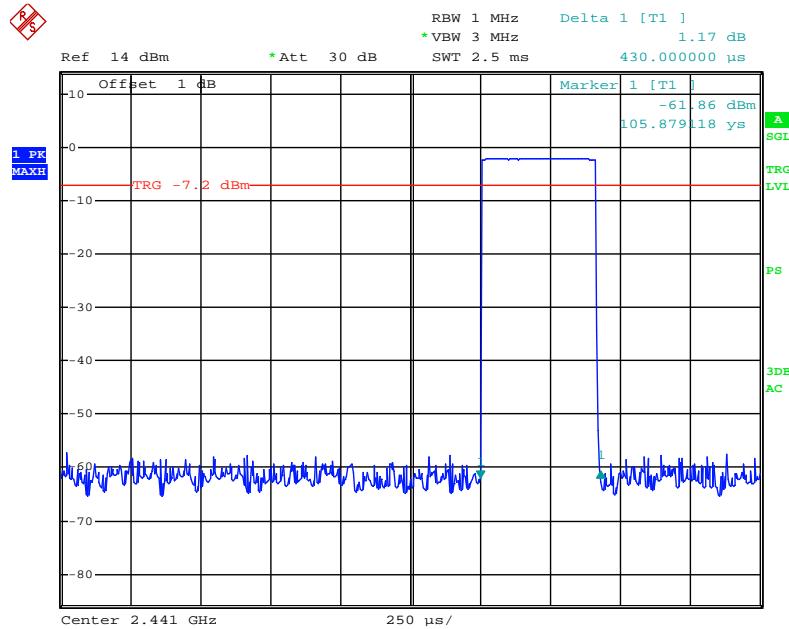


Date: 2.NOV.2011 00:11:50

High Channel for DH1

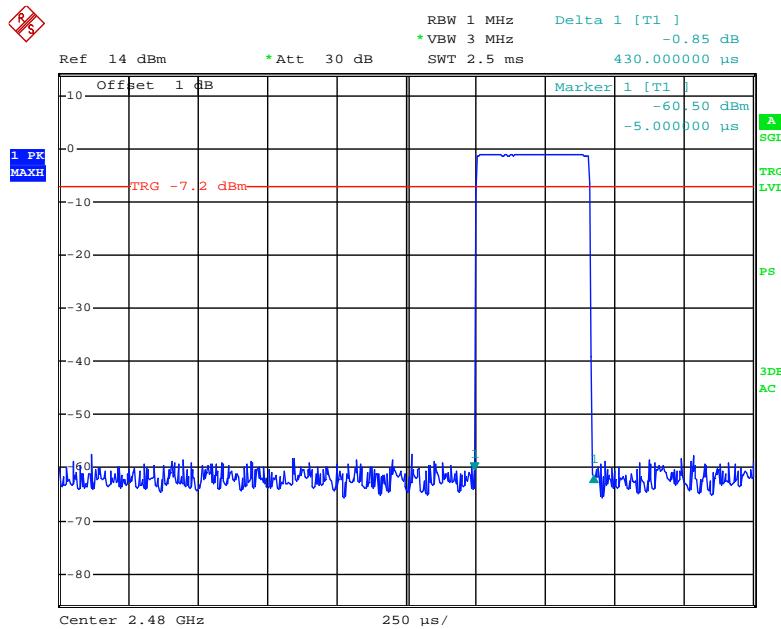


Date: 2.NOV.2011 00:12:25

Low Channel for DH3

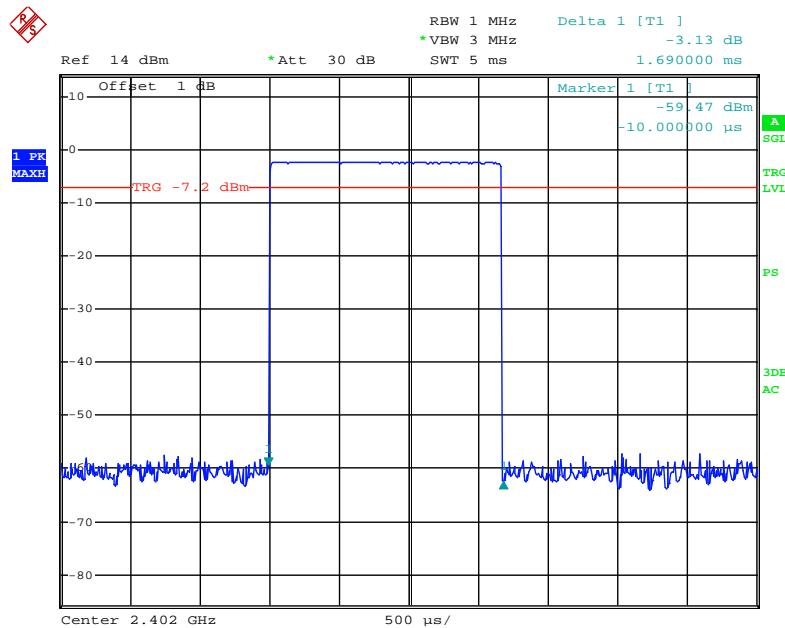


Date: 2.NOV.2011 00:02:27

Middle Channel for DH3

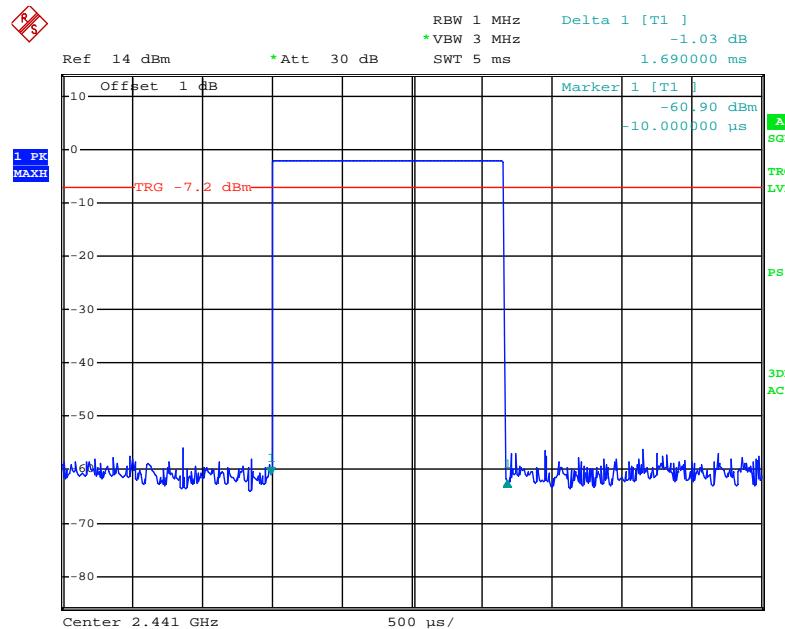


Date: 2.NOV.2011 00:04:20

High Channel for DH3

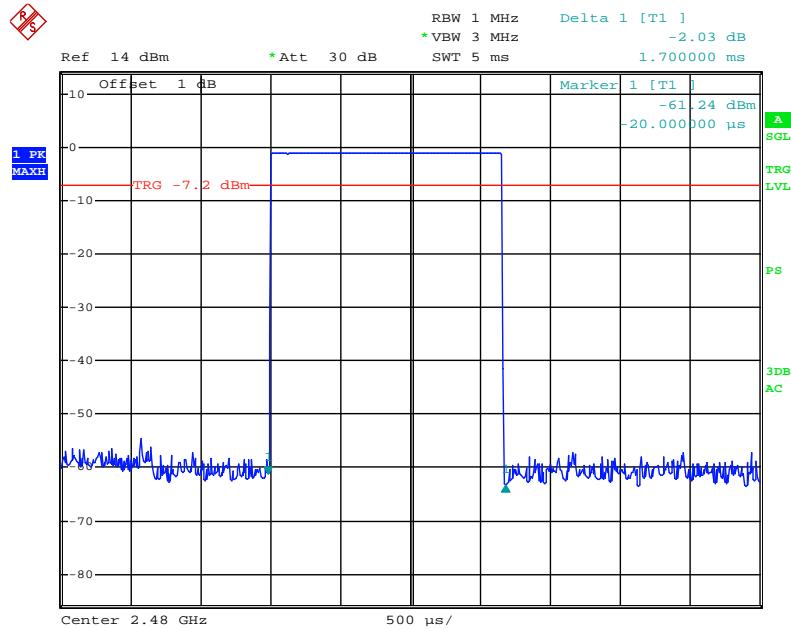


Date: 2.NOV.2011 00:06:02

Low Channel for DH5

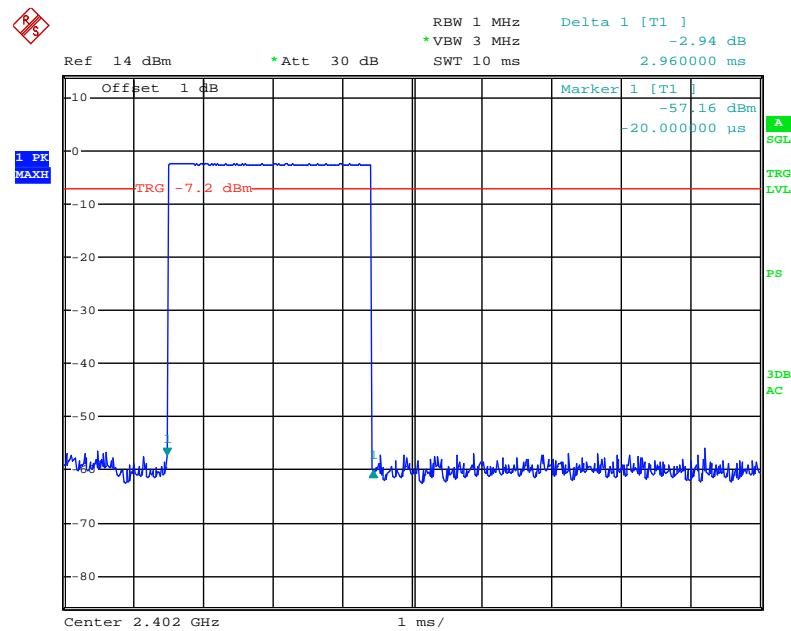


Date: 2.NOV.2011 00:09:27

Middle Channel for DH5

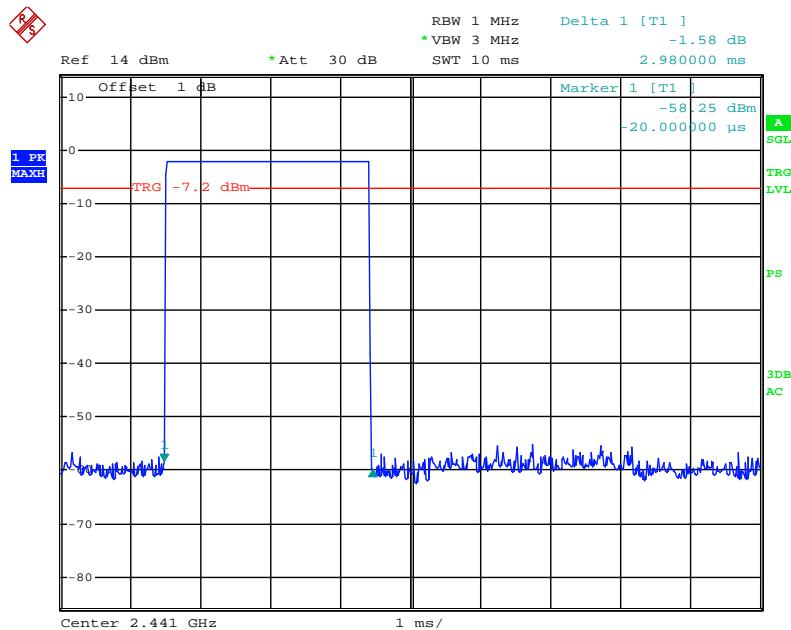

Date: 2.NOV.2011 00:08:47

High Channel for DH5

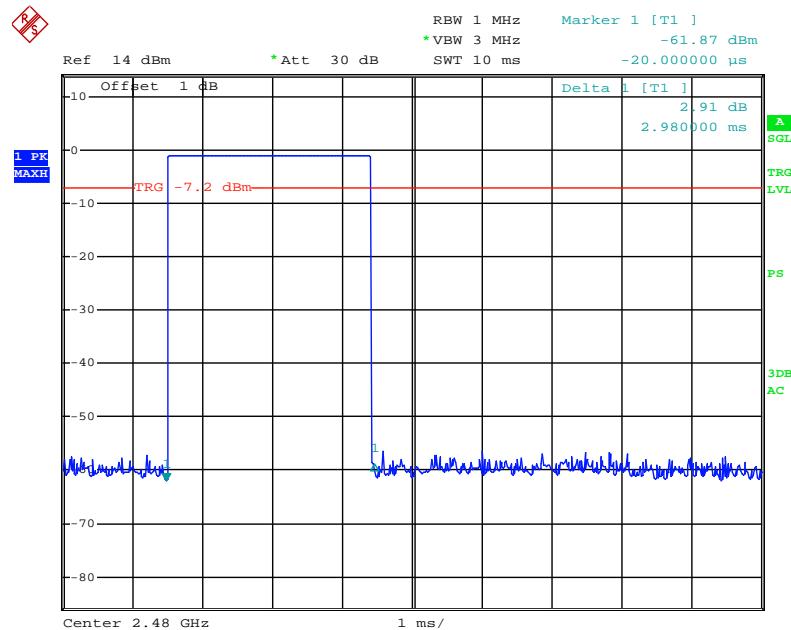

Date: 2.NOV.2011 00:07:18


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

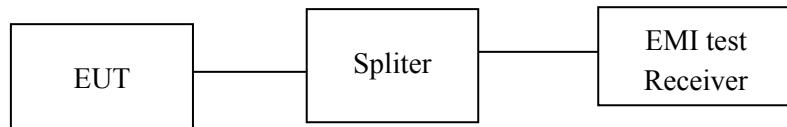

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9kPa |


* The testing was performed by Tiger Ye on 2011-11-01.

Test Result: Compliance. Please refer to the following table and plots.


Test Mode: Transmitting

| channel | Channel frequency (MHz) | Reading output power (dBm) | Output Power (mW) | Limit (mW) |
|----------------|-------------------------|----------------------------|-------------------|------------|
| Low channel | 2402 | -2.39 | 0.577 | 1000 |
| Middle channel | 2441 | -1.99 | 0.632 | 1000 |
| High channel | 2480 | -1.07 | 0.782 | 1000 |


Note: The data above was tested in conducted mode.

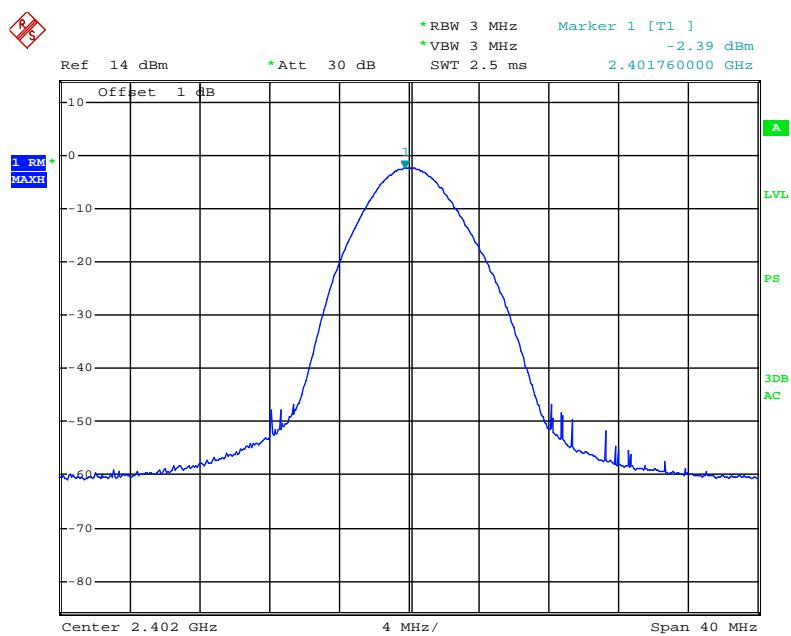Low Channel

Date: 1.NOV.2011 23:57:07

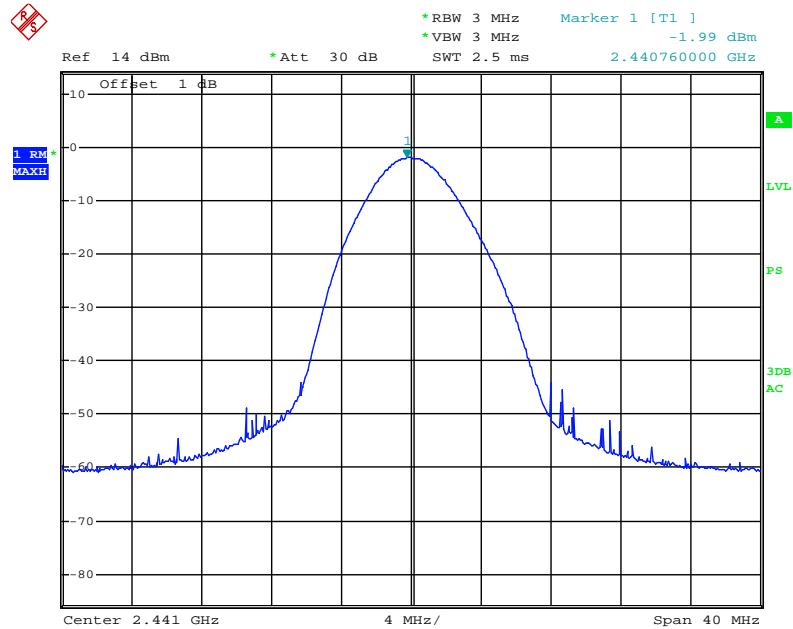Middle Channel

Date: 1.NOV.2011 23:57:57

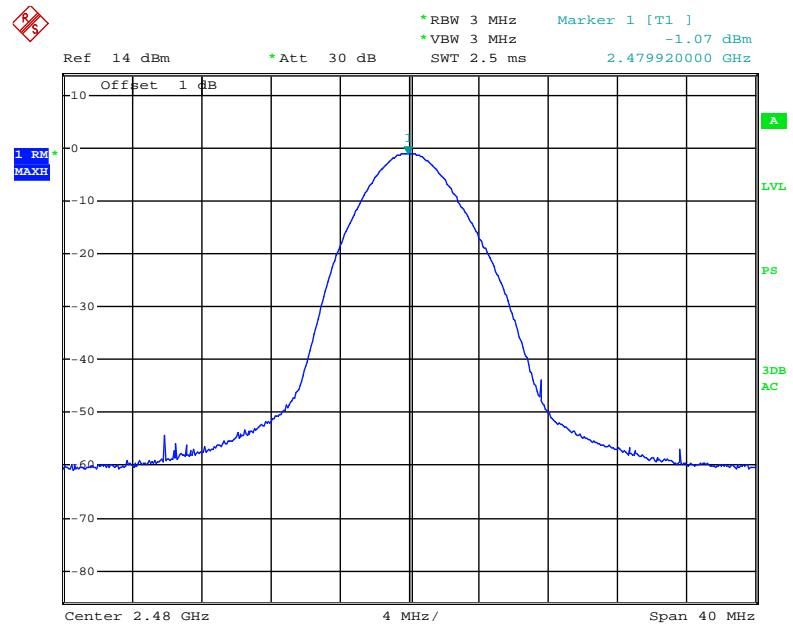High Chanel

Date: 1.NOV.2011 23:58:16

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2011-11-11 | 2012-11-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 20°C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.9 kPa |


*The testing was performed by Tiger Ye 2011-11-01.

Test Result: Compliance. Please refer to the following table and plots.


Test Mode: Transmitting

| Frequency (MHz) | Delta Peak to Band Emission (dBc) | Delta Limit (dBc) |
|-----------------|-----------------------------------|-------------------|
| 2399.750 | 38.60 | 20 |
| 2483.641 | 47.10 | 20 |

Band Edge: Left Side

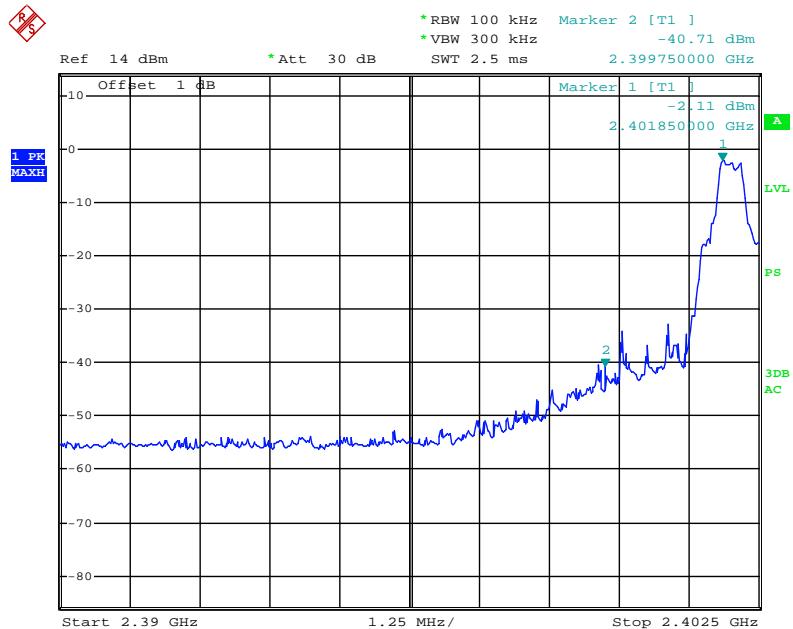

Date: 1.NOV.2011 23:13:24

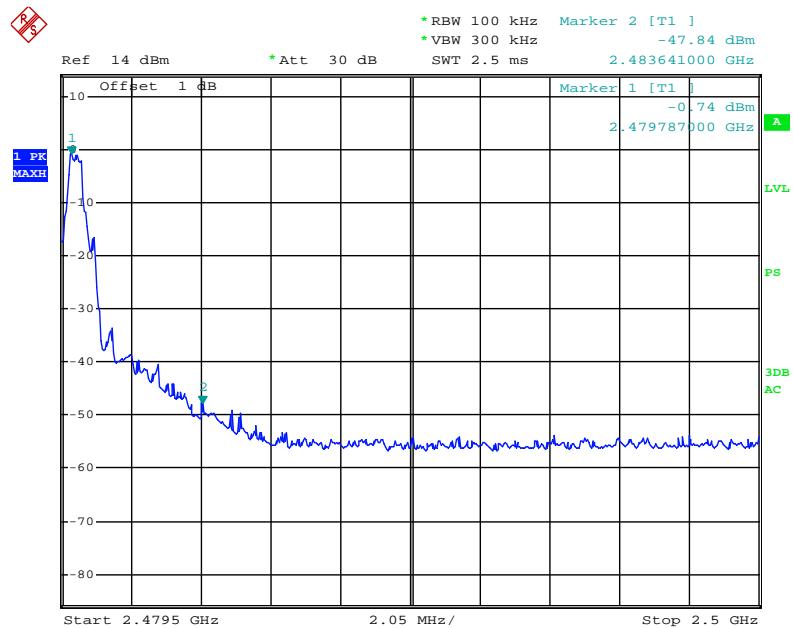Band Edge: Right Side

Date: 1.NOV.2011 23:17:10

******* END OF REPORT *******