

Equipment

: TransferJet compatible adapter

Brand Name

: TOSHIBA

Model No.

: TJM35420LT

FCC ID

: ZVZ420L1TJ

Standard

: 47 CFR FCC Part 15.517

Operating Band

: 4470 MHz

FCC Classification: UWB

Applicant

: Toshiba Corporation, Semiconductor & Storage Products Co., Memory Div., Memory Application Engineering Dept. 2-5-1, Kasama, Sakae-Ku, Yakohama,

247-8585, Japan

Manufacturer

: GOOD WAY TECHNOLOGY CO.,LTD.

3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist.,

New Taipei City 231, Taiwan, R.O.C

The product sample received on Oct. 30, 2014 and completely tested on Dec. 30, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Vic Hsiao / Supervisor

1190

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No.

: 1 of 46

Report Version

: Rev. 01

Report No.: FR4O3047



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Support Equipment	g
1.3	Testing Applied Standards	c
1.4	Testing Location Information	<u>c</u>
1.5	Measurement Uncertainty	
2	TEST CONFIGURATION OF EUT	11
2.1	The Worst Case Modulation Configuration	11
2.2	Test Channel Frequencies Configuration	
2.3	The Worse Case Power Setting Parameter	11
2.4	The Worst Case Measurement Configuration	
2.5	Test Setup Diagram	
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	UWB bandwidth	18
3.3	Peak Emissions within a 50 MHz Bandwidth	20
3.4	Radiated Emissions	22
4	TEST EQUIPMENT AND CALIBRATION DATA	46
APPE	ENDIX A. TEST PHOTOS	

APPENDIX B. PHOTOGRAPHS OF EUT

Report No.: FR4O3047



Summary of Test Result

Report No.: FR4O3047

	Conformance Test Specifications						
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result		
1.1.2	15.203	Antenna Requirement	Mechanism complied	FCC 15.203	Complied		
1.1.6	15.517(a)	Operational Restriction	Informed the applicant	15.517(a)	Complied		
1.1.7	15.517(f)	Labeling Requirements	Informed the applicant	15.517(a)	Complied		
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1658860MHz 43.18 (Margin 21.98dB) - QP 31.19 (Margin 23.97dB) - AV	FCC 15.207	Complied		
3.2	15.517(b)	UWB Bandwidth	720MHz	≥ 500MHz	Complied		
3.3	15.517(e)	Peak Emissions within a 50 MHz Bandwidth	-29.47 dBm/50MHz	≤ 0 dBm/50MHz	Complied		
3.4	15.517(c) /15.517(d)	Radiated Emissions	[dBuV]: 961.200MHz -76.97(Margin 1.67dB)- RMS	UWB Emissions: FCC 15.517(c) GPS Emissions: FCC 15.517(d) Digital Emissions: FCC 15.209	Complied		

SPORTON INTERNATIONAL INC. Page No. : 3 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR4O3047

Report No.	Version	Description	Issued Date
FR4O3047	Rev. 01	Initial issue of report	Jan. 13, 2015

SPORTON INTERNATIONAL INC. Page No. : 4 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (GHz)	Mode	Ch. Freq. (GHz)	Channel Number	Transmit Chains (N _{TX})	Peak Power (dBm/50MHz) EIRP	Avg Power (dBm/MHz) EIRP
4.2-4.8	TransferJet	4.47	1	1	-29.47	-71.23
Note 1: TransferJet uses π /2-shift Binary Phase-shift Keying						

Report No.: FR4O3047

1.1.2 Antenna Information

		Antenna Category
\boxtimes	Inte	gral antenna (antenna permanently attached)
		Temporary RF connector provided
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
	Exte	ernal antenna (dedicated antennas)
		Single power level with corresponding antenna(s).
		Multiple power level and corresponding antenna(s).
		RF connector provided
		☐ Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type)
		Standard antenna connector. (e.g., SMA, N, BNC, and TNC type)

	Antenna General Information				
No. Ant. Cat. Ant. Type Gain (dBi)					
1	Integral	PCB	1.1		

SPORTON INTERNATIONAL INC. Page No. : 5 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



1.1.3 Type of EUT

Identify EUT				
EUT Serial Number N/A				
Presentatio	n of Equipment	□ Production ; □ Production	e-Production; Prototype	
		Type	of EUT	
⊠ Stand-a	alone			
Combin	ned (EUT where	the radio part is fully integ	rated within another device)	
Combir	ned Equipment	- Brand Name / Model No.:		
☐ Plug-in	radio (EUT inte	ended for a variety of host s	systems)	
Host S	ystem - Brand N	lame / Model No.:		
Other:				
1.1.4 Te	st Signal Du		r Worst Duty Cycle	
			r Worst Duty Cycle	
☐ Operat	ted normally mo	Operated Mode fo	r Worst Duty Cycle	
☐ Operat	ted normally mo	Operated Mode for de for worst duty cycle or worst duty cycle	r Worst Duty Cycle Power Dut [dB] – (10	
☐ Operat	ted normally mo	Operated Mode for de for worst duty cycle or worst duty cycle	Power Dut	
☐ Operate ☐ Operate ☐ ☐ Operate ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	ted normally mo ted test mode fo Test Signal D	Operated Mode for de for worst duty cycle or worst duty cycle	Power Dut [dB] – (10	
☐ Operate ☐ Operate ☐ ☐ Operate ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	ted normally mode for Test Signal D	Operated Mode for ode for worst duty cycle or worst duty cycle uty Cycle (x)	Power Dut [dB] – (10	

Report No.: FR4O3047

SPORTON INTERNATIONAL INC. Page No. : 6 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report Report No.: FR4O3047

1.1.6 Operational Restriction

Operation Restriction	Informed the applicant	Not applicable	User Manual Informed	Passed
Must be capable of operation only indoors. The necessity to operate with a fixed indoor infrastructure. [A transmitter that had been connected to the AC power lines and operates solely through the AC mains. Or The device under test operates solely through USB port of a PC. It is not intended to operate from any other power source and be considered sufficient to demonstrate a fixed indoor infrastructure]				
The emissions from equipment operated shall not be intentionally directed outside of the building in which the equipment is located, such as through a window or a doorway, to perform an outside function, such as the detection of persons about to enter a building. [The applicant has been informed of this requirement.]	\boxtimes			\boxtimes
	•			
The use of outdoor mounted antennas, e.g., antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited. [The applicant has been informed without any outdoor mounted antennas.]	\boxtimes			\boxtimes
⊠ Field disturbance sensors install				
Field disturbance sensors installed inside of metal or underground storage tanks are considered to operate indoors provided the emissions are directed towards the ground. [Not applicable for this client.]		\boxtimes		
☑ A communications system shall transmit only				
A communications system shall transmit only when the intentional radiator is sending information to an associated receiver. [The applicant has been informed of this requirement and is clearly stated on the user manual.]			\boxtimes	\boxtimes

SPORTON INTERNATIONAL INC. Page No. : 7 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

1.1.7 Labeling and Instruction Manual Requirements

UWB systems operating under the provisions of this section shall bear the following or similar statement in a conspicuous location on the device or in the instruction manual supplied with the device.

Report No.: FR4O3047

"This equipment may only be operated indoors. Operation outdoors is in violation of 47 U.S.C. 301 and could subject the operator to serious legal penalties."

In addition to the above requirements, a UWB device subject to certification shall be labeled as followed in a conspicuous location on the device:

"This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

- (1) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified directly above this section is required to be affixed only to the main control unit.
- (2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

The users' manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

SPORTON INTERNATIONAL INC. Page No. : 8 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

1.2 Support Equipment

Support Equipment - RF Conducted						
No.	No. Equipment Brand Name Model Name FCC ID					
1	1 Notebook DELL E5520 DoC					

Report No.: FR4O3047

	Support Equipment - AC Conduction and Radiated Emission					
No.	No. Equipment Brand Name Model Name FCC ID					
1	1 Notebook DELL E5530 DoC					

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 393764

1.4 Testing Location Information

	Testing Location						
\boxtimes	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.			
	TEL: 886-3-327-3456 FAX: 886-3-327-0973						
	Test Condition			Test Site No.	Test Engineer	Test Environment	
	AC Conduction			CO04-HY	Zeus	21°C / 45%	
RF Conducted			TH01-HY	Candy	22°C / 64%		
F	Radiated Emission			03CH03-HY	Allen	25.4°C / 54%	

SPORTON INTERNATIONAL INC. Page No. : 9 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR4O3047

Measurement Uncertainty				
Test Ite	em	Uncertainty		
AC power-line conducted emissions	±2.2 dB			
Emission bandwidth		±1.4 %		
Emissions, conducted	9 – 150 kHz	±0.3 dB		
	0.15 – 30 MHz	±0.4 dB		
	30 – 1000 MHz	±0.5 dB		
	1 – 18 GHz	±0.6 dB		
	18 – 40 GHz	±0.8 dB		
	40 – 200 GHz	N/A		
Emissions, radiated	9 – 150 kHz	±2.4 dB		
	0.15 – 30 MHz	±2.2 dB		
	30 – 1000 MHz	±2.5 dB		
	1 – 18 GHz	±3.5 dB		
	18 – 40 GHz	±3.8 dB		
	40 – 200 GHz	N/A		
Temperature		±0.8 °C		
Humidity		±3 %		
DC and low frequency voltages		±3 %		
Time		±1.4 %		
Duty Cycle		±1.4 %		

SPORTON INTERNATIONAL INC. Page No. : 10 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Mode Transmit Chains (N _{TX}) Data Rate				
TransferJet	1	560Mbps		

Report No.: FR4O3047

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration			
Mode	Test Channel Frequencies (MHz)		
TransferJet	4470-(F1)		

2.3 The Worse Case Power Setting Parameter

The Worst Case Power Setting Parameter		
Test Software Version DOS		
Mada	Test Frequency (MHz)	
Mode	4470	
TransferJet	default	

2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests		
Tests Item AC power-line conducted emissions		
Condition AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz		
Operating Mode	Operating Mode Description	
1	System host & transmit	

The Worst Case Mode for Following Conformance Tests		
Tests Item	Tests Item Conducted Emissions, UWB Bandwidth	
Test Condition	Conducted measurement at transmit chains	
Mode	TransferJet	

SPORTON INTERNATIONAL INC. Page No. : 11 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01




Th	The Worst Case Mode for Following Conformance Tests			
Tests Item	UWB Bandwidth, Peak Emissions within a 50 MHz Bandwidth, Radiated Emissions			
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.			
	☐ EUT will be placed in	EUT will be placed in fixed position.		
User Position	EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.			
EUT will be a hand-held or body-worn battery-powered devices an operating multiple positions. EUT shall be performed three orthogonal planes.				
Operating Mode below 960MHz	System host & transmit			
Mode	TransferJet			
	X Plane Y Plane Z Plane		Z Plane	
Orthogonal Planes of EUT				
Worst Planes of EUT	V			

Report No.: FR4O3047

SPORTON INTERNATIONAL INC. Page No. : 12 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



2.5 Test Setup Diagram

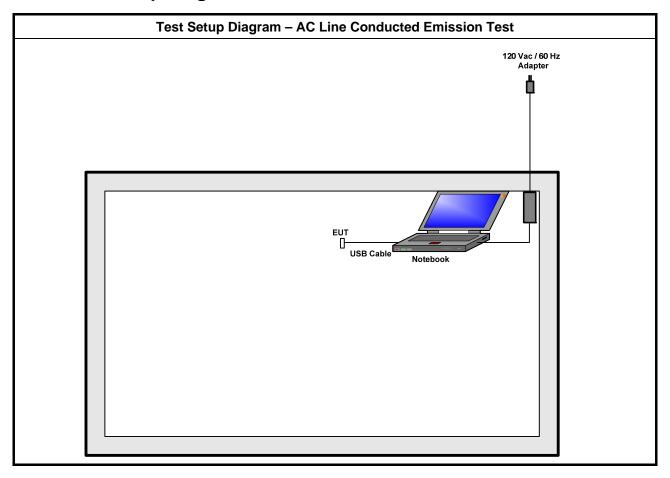

Report No.: FR4O3047

SPORTON INTERNATIONAL INC. Page No. : 13 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01


Test Setup Diagram - Radiated Test (30MHz-1GHz)

120 Vac / 60 Hz
Adapter

Notebook

Test Setup Diagram - Radiated Test (3GHz to 5GHz / 1 GHz to 18 GHz)

120 Vac / 60 Hz
Adapter

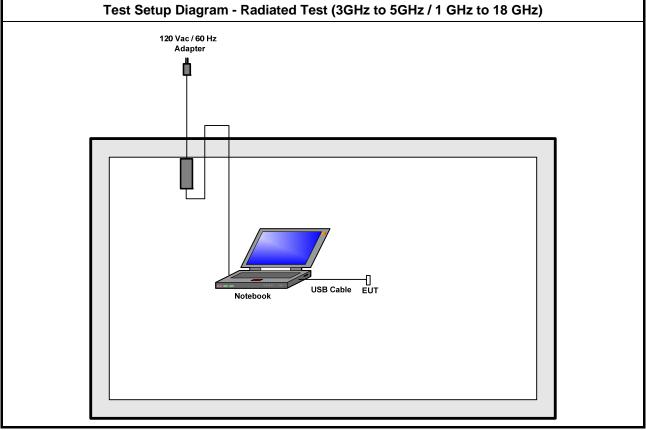

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 14 of 46

Report Version

: Rev. 01

Report No.: FR4O3047



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit				
Frequency Emission (MHz) Quasi-Peak Average				
56 - 46 *				
46				
50				
5-30 60 50 Note 1: * Decreases with the logarithm of the frequency.				

Report No.: FR4O3047


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.	


3.1.4 Test Setup

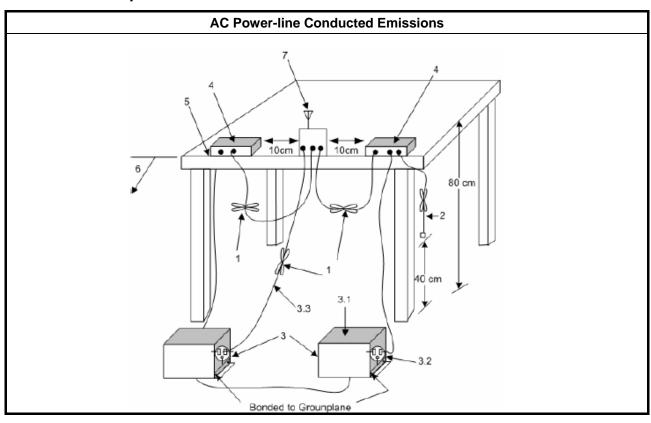

SPORTON INTERNATIONAL INC. Page No. : 15 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR4O3047


3.1.5 Test Result of AC Power-line Conducted Emissions

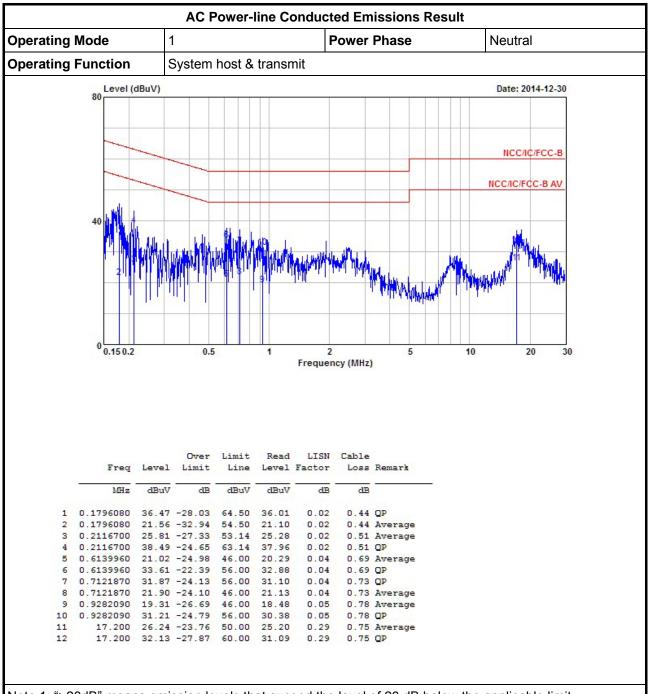

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 16 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR4O3047

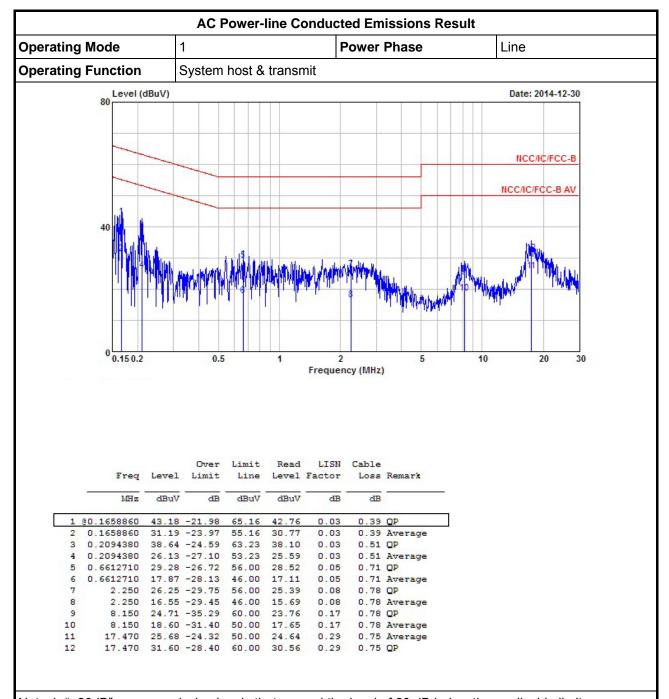

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 17 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

3.2 UWB bandwidth

3.2.1 UWB bandwidth Limit

UWB bandwidth Limit

Report No.: FR4O3047

Systems using digital modulation techniques:

UWB bandwidth ≥ 500 MHz or Fractional bandwidth ≥ 0.2; Fractional bandwidth = 2(f_H-f_L)/ (f_H + f_L)

3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.


3.2.3 Test Procedures

Test Method

- For the UWB bandwidth shall be measured using one of the options below:
 - Refer as ANSI C63.10, clause 6.9.1 and clause 7.10.1 for UWB bandwidth testing.
 - Refer as IC RSS-Gen, clause 4.6.4 for UWB bandwidth.

3.2.4 Test Setup

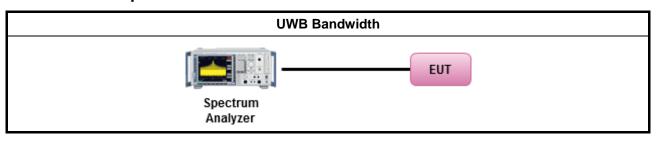

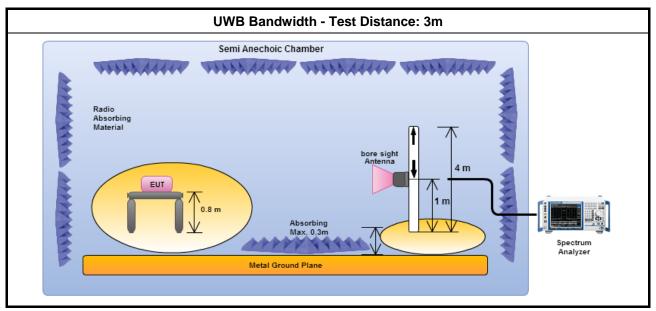


SPORTON INTERNATIONAL INC. Page No. : 18 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

3.2.5 Test Result of UWB Bandwidth

UWB Bandwidth Result				
Condition UWB Bandwidth (MH			ridth (MHz)	
Mode	Freq. (MHz)	F _L F _H UWB Bandwidth		
TransferJet	4470	4094	4814	720
Limit			500	
	Resu	lt		Complied

Report No.: FR4O3047

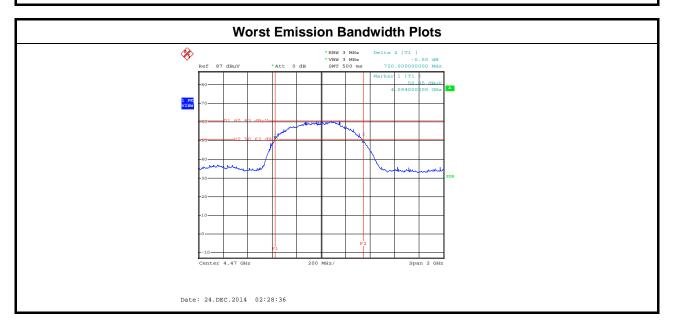

SPORTON INTERNATIONAL INC. Page No. : 19 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 Peak Emissions within a 50 MHz Bandwidth

3.3.1 Peak Emissions within a 50 MHz Bandwidth Limit

Peak Emissions within a 50 MHz Bandwidth Limit

 $P_{eirp} = 0 dBm/50MHz$


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method Peak Emissions within a 50 MHz Bandwidth \boxtimes Refer as ANSI C63.10, clause 7.10.3 for radiated measurement procedure testing. Refer as ANSI C63.10, clause 7.10.3.1 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [3 m]/specific distance [3 m]) (dB) \boxtimes Refer as ANSI C63.10, clause 7.10.3.3 for peak detector procedure testing. Refer as ANSI C63.10, clause 7.10.3.5 for bandwidth conversion of peak power. $EIRP_{50MHz} = EIRP3_{MHz} - 20 log(3MHz/50MHz)$ \boxtimes For radiated measurement. Refer as KDB 412172, clause 2.2 following eirp can be used radiated test configuration. \boxtimes Refer as KDB 412172, clause 5 following eirp can be directly determined using the field strength. Refer as KDB 412172, clause 6 following eirp can be used signal/antenna substitution techniques. Refer as RSS-Gen, clause 4.8 for power measurement.

3.3.4 Test Setup

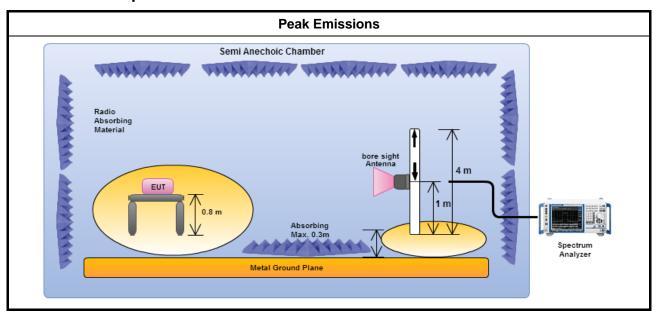

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 20 of 46

Report Version

: Rev. 01

Report No.: FR4O3047



Test Result of Peak Emissions within a 50 MHz Bandwidth 3.3.5

Peak Emissions within a 50 MHz Bandwidth Result								
Mode	Freq. (MHz)	E-Field [dBuV/m]	BWCF [dB]	ERIP3 _{MHz} [dBm]	ERIP _{50MHz} [dBm]	EIRP _{50MHz} Limit [dBm]	Margin [dB]	Pol [H/V]
TransferJet	4470	41.29	-24.44	-53.91	-29.47	0	-29.47	Н

Report No.: FR4O3047

Note 1: EIRP [dBm] = E-Field [dBuV/m] - 95.2

Note 2: Bandwidth Correction Factor (BWCF) = 20 log (3MHz/50MHz). Note 3: $EIRP_{50MHz} = EIRP3_{MHz} - BWCF$; $EIRP3_{MHz} = EIRP PSD/3MHz$; $EIRP_{50MHz} = EIRP PSD/50MHz$. Note 4: Measurement worst emissions of receive antenna polarization.

SPORTON INTERNATIONAL INC. Page No. : 21 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01



3.4 Radiated Emissions

3.4.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit				
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)	
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300	
0.490~1.705	24000/F(kHz)	33.8 - 23	30	
1.705~30.0	30	29	30	
30~88	100	40	3	
88~216	150	43.5	3	
216~960	200	46	3	
Above 960	500	54	3	

Report No.: FR4O3047

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit			
Frequency Range (MHz)	EIRP (dBm)		
960-1610	-75.3		
1610-1990	-53.3		
1990-3100	-51.3		
3100-10600	-41.3		
10600 above	-51.3		

Radiated Emissions in GPS Bands Limit									
Frequency Range (MHz)	EIRP (dBm)								
1164-1240	-85.3								
1559-1610	-85.3								

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 22 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report Report No.: FR4O3047


3.4.3 Test Procedures

		Test Mathed for Dedicted Emissions above 000MHz							
<u>~</u>		Test Method for Radiated Emissions above 960MHz							
	r	iated Emissions above 960MHz							
		Refer as ANSI C63.10, clause 7.10.3 for radiated measurement procedure testing.							
		Refer as ANSI C63.10, clause 7.10.3.1 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [3 m]/specific distance [3 m]) (dB)							
		Refer as ANSI C63.10, clause 7.10.3.3 for rms detector procedure testing.							
	\boxtimes	Refer as ANSI C63.10, clause 7.10.3.6 for evaluating AVG-PSD (RBW=1MHz).							
	\boxtimes	Refer as ANSI C63.10, clause 7.10.3.9 for evaluating AVG-PSD in GPS Band (RBW≥1kHz).							
	For	radiated measurement.							
	\boxtimes	Refer as KDB 412172, clause 2.2 following eirp can be used radiated test configuration.							
	\boxtimes	Refer as KDB 412172, clause 5 following eirp can be directly determined using the field strength.							
		Refer as KDB 412172, clause 6 following eirp can be used signal/antenna substitution techniques.							
		Refer as RSS-Gen, clause 4.8 for power measurement.							
	Te	est Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry							
\boxtimes	For	the transmitter unwanted emissions shall be measured using following options below:							
	\boxtimes	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle ≥ 100%.							
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).							
		Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.							
	For	radiated measurement.							
	\boxtimes	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.							
	\boxtimes	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.							
	\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz to 18 GHz and test distance is 3m.							
	\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 18 GHz and test distance is 1m.							
\boxtimes	The	any unwanted emissions level shall not exceed the fundamental emission level.							


SPORTON INTERNATIONAL INC. Page No. : 23 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



3.4.4 Test Setup

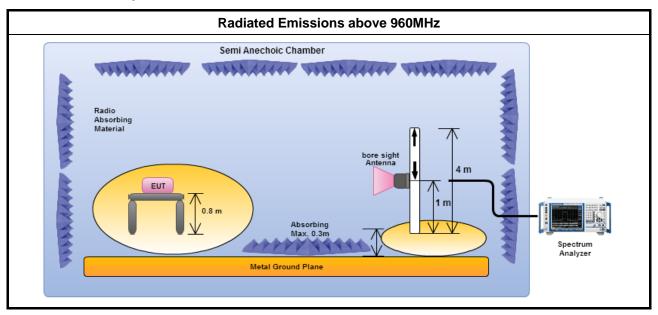

Report No.: FR4O3047

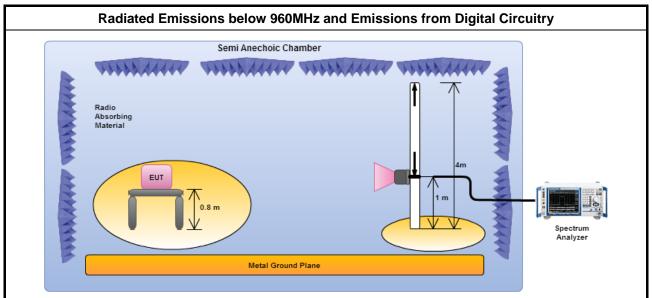

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


3.4.5 Radiated Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 24 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR403047

3.4.6 Radiated Emissions (30MHz - 960MHz)



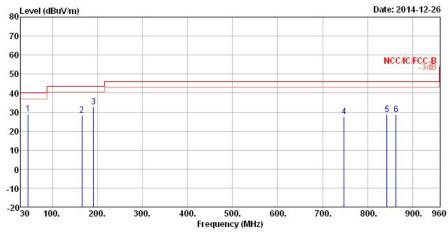


			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
-	MHz	dBuV/m	dB	$\overline{\text{dBuV/m}}$	dBuV	dB/m	dB	dB		Cm	deg
1	46.740	29.10	-10.90	40.00	45.73	9.65	1.10	27.38	Peak		
2	165.780	28.23	-15.27	43.50	43.39	9.87	2.12	27.15	Peak		
3	191.820	32.87	-10.63	43.50	48.60	9.13	2.28	27.14	Peak		
4	747.960	27.68	-18.32	46.00	31.18	19.55	4.66	27.71	Peak	555	
5	842.820	28.59	-17.41	46.00	30.92	20.22	4.93	27.48	Peak		
6	863.280	28.79	-17.21	46.00	30.78	20.42	5.00	27.41	Peak		


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 25 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



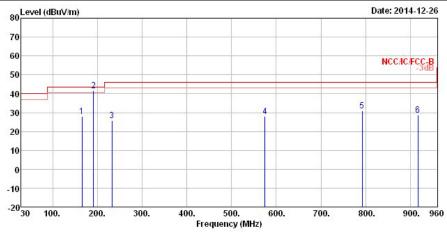


	Freq	Le∨el	0∨er Limit			Antenna Factor		•		A/Pos	T/Pos
-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		Cm	deg
1	165.780	27.82	- 15 . 68	43.50	42.98	9.87	2.12	27.15	Peak		
2 !	191.820	41.72	-1.78	43.50	57.45	9.13	2.28	27.14	QP		
3	232.740	25.87	-20.13	46.00	39.49	10.85	2.51	26.98	Peak	222	222
4	574.980	27.90	-18.10	46.00	33.46	18.21	4.04	27.81	Peak		555
5	792.600	31.04	-14.96	46.00	34.12	19.68	4.88	27.64	Peak		
6	917.220	28.70	-17.30	46.00	30.17	20.61	5.24	27.32	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 26 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

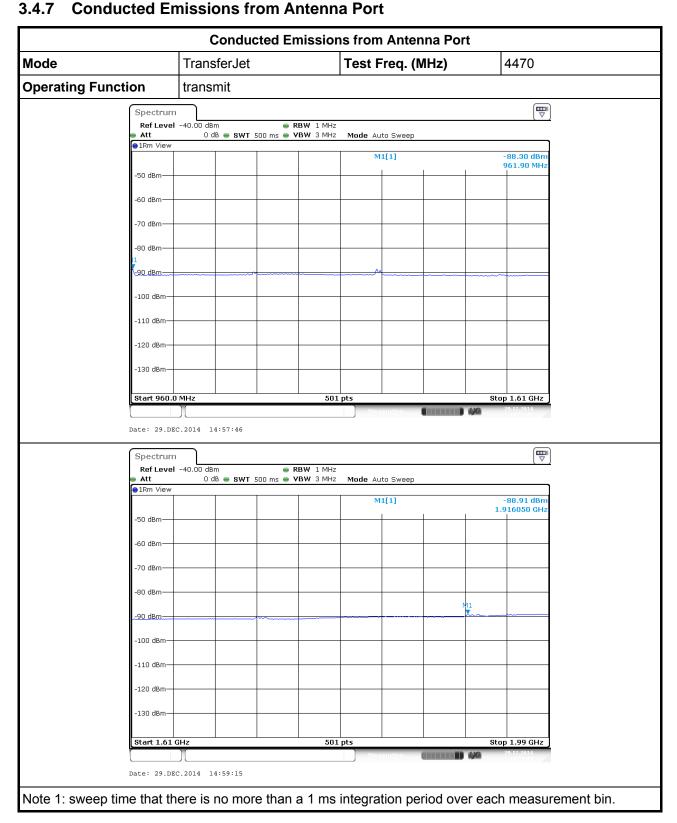


SPORTON INTERNATIONAL INC. Page No. : 27 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR4O3047



SPORTON INTERNATIONAL INC. Page No. : 28 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01

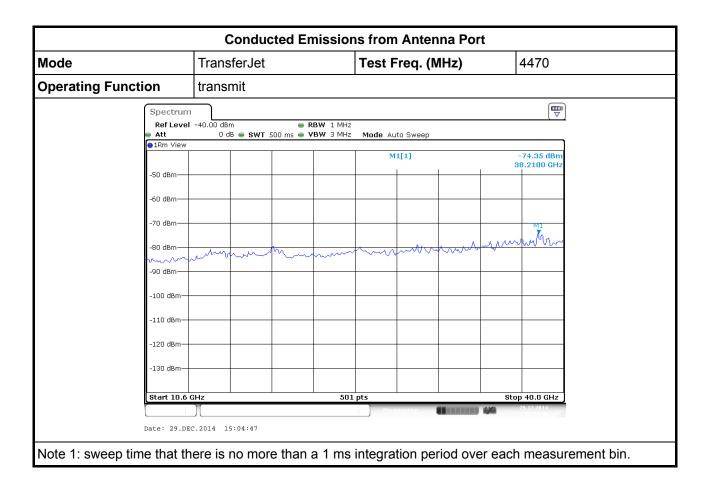

SPORTON INTERNATIONAL INC. Page No. : 29 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

Conducted Emissions from Antenna Port Mode TransferJet Test Freq. (MHz) 4470 **Operating Function** transmit Spectrum Ref Level -40.00 dBm ■ RBW 10 kHz 0 dB • SWT 500 ms • VBW 30 kHz Att Mode Auto Sweep -106.00 dBn 1.198660 GH M1[1] -50 dBm -60 dBm-70 dBm -80 dBm -90 dBm -100 dBm 1120kH8n1 -120 dBm -130 dBm Start 1.164 GHz 501 pts Stop 1.24 GHz Date: 29.DEC.2014 14:58:24 Spectrum Ref Level -40.00 dBm ■ RBW 10 kHz 0 dB • SWT 500 ms • VBW 30 kHz Mode Auto Sweep -107.43 dBn 1.607200 GH M1[1] -50 dBm -60 dBm-70 dBm--80 dBm -90 dBm -100 dBm -120 dBm -130 dBm Start 1.559 GHz 501 pts Stop 1.61 GHz

Report No.: FR4O3047

SPORTON INTERNATIONAL INC. : 30 of 46
TEL: 886-3-327-3456 : Report Version : Rev. 01

Note 1: sweep time that there is no more than a 1 ms integration period over each measurement bin.


FAX: 886-3-327-0973

Date: 29.DEC.2014 14:58:54

Radiated Emissions within UWB Bandwidth

Radiated Emissions within UWB Bandwidth									
Mode	TransferJet	Test Freq. (MHz)	4470						
Operating Function	transmit	Polarization	Н						

Report No.: FR4O3047

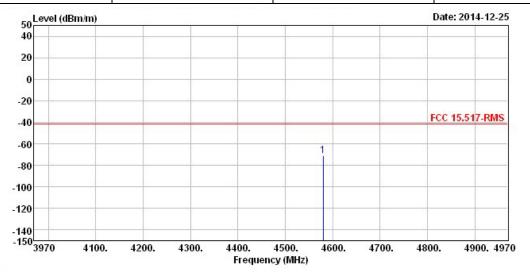

	Freq	Level		Limit Line				•	A/Pos	T/Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	 Cm	deg
1	1580 000	-71 23	-29 93	-/11 30	-75 94	32 84	1 38	32 51		

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: sweep time that there is no more than a 1 ms integration period over each measurement bin.

SPORTON INTERNATIONAL INC. Page No. : 31 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR4O3047

3.4.9 Radiated Emissions from Antenna

Radiated Emissions from Antenna									
Mode	TransferJet	Test Freq. (MHz)	4470						
Operating Function	transmit	Polarization	V						

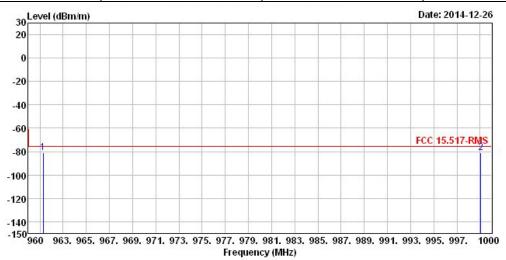

	Freq	Level				Antenna Factor			A/Pos	T/Pos
	MHz	dBm/m	dB	3 dBm/m	dBm	dB/m	dB dB	 cm	deg	
1	961.280	-80.61	-5.31	-75.30	-79.87	21.27	5.37	27.38		
2	999.040	-80.82	-5.52	-75.30	-80.14	21.24	5.51	27.43		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 32 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna									
Mode TransferJet Test Freq. (MHz) 4470									
Operating Function	transmit	Polarization	Н						

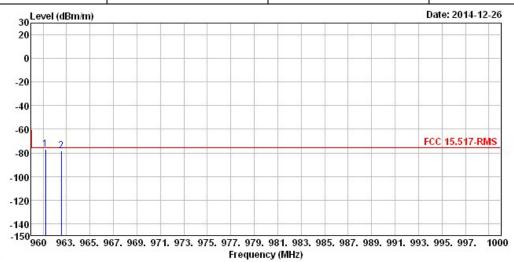

			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
-	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	()	Cm	deg
1	961.200	-76.97	-1.67	-75.30	-76.23	21.27	5.37	27.38			
2	962.560	-78.15	-2.85	-75.30	-77.40	21.25	5.38	27.38			

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 33 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna										
Mode TransferJet Test Freq. (MHz) 4470										
Operating Function	transmit	Polarization	V							

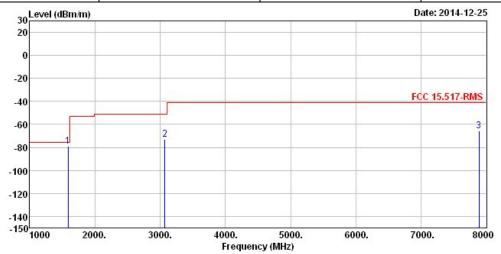

		Freq Level					Antenna Factor				A/Pos	T/Pos
		dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	·	cm	deg	
1	1588.000	-78.83	-3.53	-75.30	-74.33	25.78	2.57	32.85				
2	3072.000	-73.26	-21.96	-51.30	-74.70	30.35	3.58	32.49				
3	7888.000	-65.45	-24.15	-41.30	-75.55	36.98	5.97	32.85		2020		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 34 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna								
ModeTransferJetTest Freq. (MHz)4470								
Operating Function	transmit	Polarization	Н					

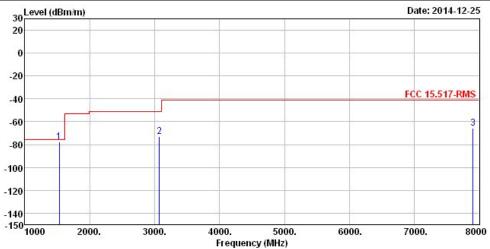

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	9	Cm	deg
1	1532.000	-77.40	-2.10	-75.30	-72.51	25.46	2.54	32.89			
2	3072.000	-72.85	-21.55	-51.30	-74.29	30.35	3.58	32.49			
3	7902.000	-65.34	-24.04	-41.30	-75.46	37.00	5.97	32.85		222	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 35 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01



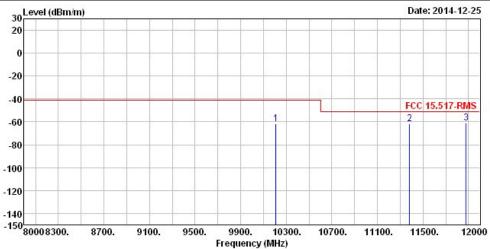

			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	,	cm	deg
1	10208.000	-61.90	-20.60	-41.30	-74.87	39.00	6.91	32.94			
2	11384.000	-61.52	-10.22	-51.30	-75.74	39.18	7.46	32.42			
3	11880.000	-60.70	-9.40	-51.30	-75.47	39.53	7.67	32.43		222	2/2/25

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 36 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna									
Mode	Mode TransferJet Test Freq. (MHz) 4470								
Operating Function transmit Polarization H									

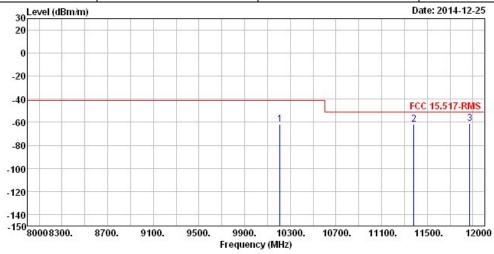

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	-	cm	deg
1	10208.000	-61.93	-20.63	-41.30	-74.90	39.00	6.91	32.94		5.5.5	
2	11384.000	-61.54	-10.24	-51.30	-75.76	39.18	7.46	32.42			
3	11872 000	-60 66	-9.36	-51 30	-75 43	39 53	7 67	32 43		222	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. : 37 of 46 Page No. TEL: 886-3-327-3456 Report Version : Rev. 01



Radiated Emissions from Antenna								
ModeTransferJetTest Freq. (MHz)4470								
Operating Function	transmit	Polarization	V					

Report No.: FR4O3047

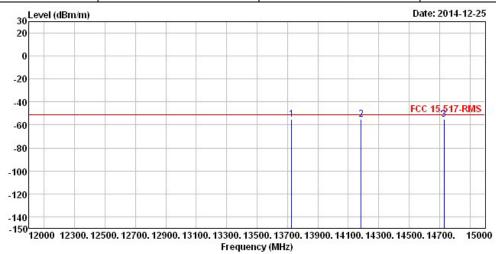

			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		Cm	deg
1	13728.000	-55.35	-4.05	-51.30	-73.87	41.05	8.25	30.78			
2	14184.000	-54.97	-3.67	-51.30	-74.35	42.07	8.33	31.02			
3	14730.000	-54.98	-3.68	-51.30	-73.64	41.66	8.50	31.50		234234234	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 38 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



Radiated Emissions from Antenna								
Mode TransferJet Test Freq. (MHz) 4470								
Operating Function	transmit	Polarization	Н					

Report No.: FR4O3047

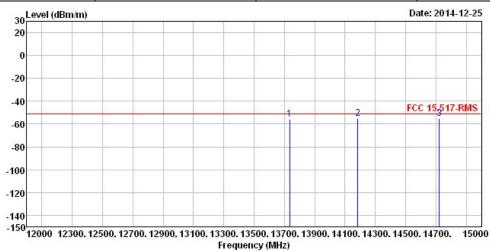

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	,	cm	deg
1	13734.000	-55.36	-4.06	-51.30	-73.88	41.05	8.25	30.78			
2	14184.000	-54.83	-3.53	-51.30	-74.21	42.07	8.33	31.02			
3	14724 000	-54 92	-3 62	-51 30	-73 64	41 72	8 50	31.50		222	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 39 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna								
Mode TransferJet Test Freq. (MHz) 4470								
Operating Function	V							

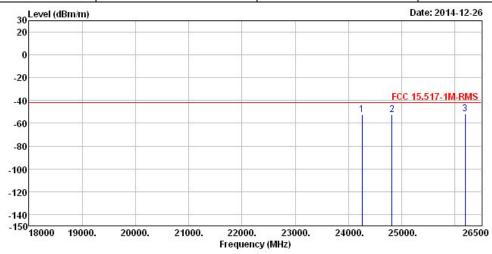

	Freq	Le∨el				Factor		•		A/Pos	1/Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	9		deg
1	24256.000	-52.69	-10.93	-41.76	-70.44	39.25	10.47	31.97			
2	24817.000	-52.57	-10.81	-41.76	-70.38	39.07	11.00	32.26			
3	26194.000	-51.62	-9.86	-41.76	-71.60	39.58	11.08	30.68		222	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 40 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01



Radiated Emissions from Antenna								
Mode TransferJet Test Freq. (MHz) 4470								
Operating Function	transmit	Polarization	Н					

Report No.: FR4O3047

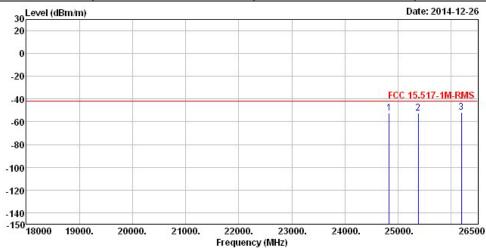

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	-	cm	deg
1	24834.000	-52.68	-10.92	-41.76	-70.50	39.07	11.00	32.25			
2	25378.000	-52.65	-10.89	-41.76	-70.82	39.40	11.18	32.41			
3	26194 000	-51 64	0 88	-41 76	-71 62	30 58	11 08	30 68		5959658	200000

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 41 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

	Radiated Emission	ons from Antenna	
Mode	TransferJet	Test Freq. (MHz)	4470
Operating Function	transmit	Polarization	V

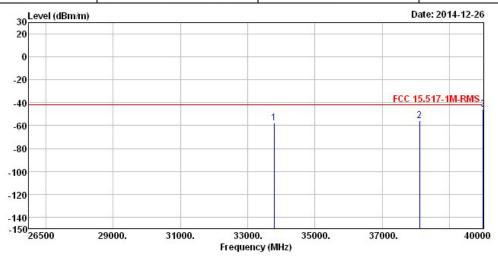

			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	9	Cm	deg
1	33790.000	-57.82	-16.06	-41.76	-59.52	41.80	14.1 3	54.23			
2	38110.000	-55.87	-14.11	-41.76	-60.19	43.87	14.53	54.08			
્ર	40000 000	-45 64	-3 88	-41 76	-56 75	47 30	14 07	50.26		200	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. : 42 of 46 Page No. TEL: 886-3-327-3456 Report Version : Rev. 01

Radiated Emissions from Antenna

Report No.: FR4O3047

ModeTransferJetTest Freq. (MHz)4470Operating FunctiontransmitPolarizationH

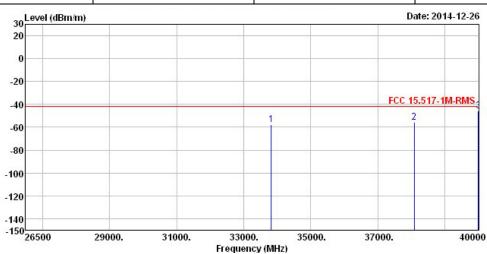

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	9	cm	deg
1	33817.000	-57.94	-16.18	-41.76	-59.64	41.80	14.13	54.23			
2	38083.000	-55.92	-14.16	-41.76	-60.26	43.80	14.59	54.05			
3	10000 000	-45 83	-4 97	-41.76	-56 94	17 30	1/1 / 07	50.26		2/2/21	212121

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

SPORTON INTERNATIONAL INC. Page No. : 43 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

3.4.10 Radiated Emissions within GPS Band

	Radiated Emission	s within GPS Band	
Mode	TransferJet	Test Freq. (MHz)	4470
Operating Function	transmit	Polarization	V

Report No.: FR4O3047

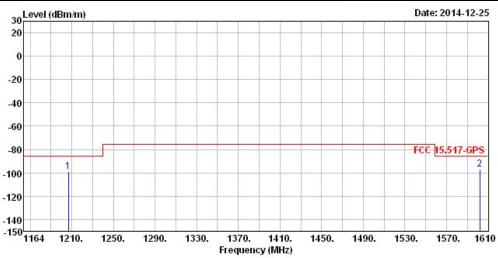

	Enoa	Lovel				Antenna Factor				A/Pos	T/Pos
	rreq	rever	LIMIT	LINE	rever	ractor	LUSS	ractor.	Nelliarik		
80	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	1206.816	-98.68	-13.38	-85.30	-92.09	24.66	2.23	33.48			
2	1601 972	-96 81	-11 51	-85 30	-92 32	25 78	2 57	32 84			

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 44 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01

	Radiated Emissions within GPS Band									
Mode	TransferJet	Test Freq. (MHz)	4470							
Operating Function	transmit	Polarization	Н							

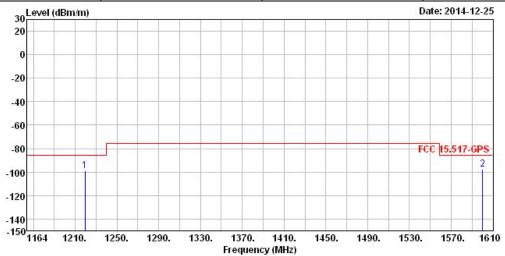

			0∨er	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark		
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	-	cm	deg
1	1219.304	-98.88	-13.58	-85.30	-92.37	24.69	2.26	33.46		5.5.5	
2	1600.188	-97.30	-12.00	-85.30	-92.81	25.78	2.57	32.84			

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 45 of 46 TEL: 886-3-327-3456 Report Version : Rev. 01

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14. 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Report No.: FR4O3047

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	RF Conducted
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Dec. 04, 2014	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz ~ 30MHz	Jul. 28, 2014	Radiation

Note: Calibration Interval of instruments listed above is two year.

SPORTON INTERNATIONAL INC. Page No. : 46 of 46
TEL: 886-3-327-3456 Report Version : Rev. 01