

FCC PART 90

TEST REPORT

For

Hytera Mobilfunk GmbH

Fritz-Hahne-Str 7 D-31848 Bad Muender Germany

FCC ID: ZW4DIB5800

Report Type:
Original Report

TETRA Digital base station

Test Engineer: Dean Liu

Report Number: RDG150803003-00A

Report Date: 2015-08-26

Sula Huang

Reviewed By: RF Leader

Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan)

No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

| GENERAL INFORMATION | 3 |
|--|--------|
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | |
| Objective | |
| RELATED SUBMITTAL(S)/GRANT(S) | |
| TEST METHODOLOGY TEST FACILITY | |
| | |
| SYSTEM TEST CONFIGURATION | |
| DESCRIPTION OF TEST CONFIGURATION | |
| EQUIPMENT MODIFICATIONS | |
| SUPPORT EQUIPMENT LIST AND DETAILS EXTERNAL I/O CABLE. | 4 1 |
| TEST CONFIGURATION BLOCK DIAGRAM | 4 4 |
| BLOCK DIAGRAM OF TEST SETUP | |
| SUMMARY OF TEST RESULTS | |
| FCC§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 7 |
| APPLICABLE STANDARD | |
| Result | 7 |
| FCC §2.1046 & §90.205- RF OUTPUT POWER | 8 |
| APPLICABLE STANDARD | |
| Test Procedure | |
| TEST EQUIPMENT LIST AND DETAILS. | |
| TEST DATA | 8 |
| FCC §2.1046, §90.210& §90.221- ADJACENT CHANNEL POWER | 10 |
| APPLICABLE STANDARD | 10 |
| TEST PROCEDURE | |
| TEST EQUIPMENT LIST AND DETAILS. | 10 |
| TEST DATA | |
| FCC §2.1049 & §90.209, §90.210§90.691 – OCCUPIED BANDWIDTH & EMISSION MASK | |
| APPLICABLE STANDARD | 15 |
| TEST PROCEDURE | |
| TEST EQUIPMENT LIST AND DETAILS | |
| TEST DATA | |
| FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 20 |
| APPLICABLE STANDARD | |
| Test Procedure | |
| TEST EQUIPMENT LIST AND DETAILS | |
| TEST DATA | |
| FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS | |
| APPLICABLE STANDARD | |
| Test Procedure | |
| TEST EQUIPMENT LIST AND DETAILS. | |
| TEST DATA | |
| FCC §2.1055 & §90.213- FREQUENCY STABILITY | |
| APPLICABLE STANDARD | |
| TEST PROCEDURE | |
| TEST EQUIPMENT LIST AND DETAILS | |
| 1 D/11 D/11/11 | |

Report No.: RDG150803003-00A

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Mobilfunk GmbH's* product, model number: *DIB-R5 (FCC ID:* ZW4DIB5800) or the "EUT" in this report was a *TETRA Digital base station*, the advanced unit which was measured approximately: 600 mm (L) x 600 mm (W) x 1200 mm (H), the compacted unit was measured approximately: 445mm (L)×535mm (W)×643mm (H), rated with input voltage: AC 120V/60Hz or DC -48V.

Report No.: RDG150803003-00A

*All measurement and test data in this report was gathered from production sample serial number: DC source Unit: 200023, AC source Unit: 200024. The EUT supplied by the applicant was received on 2015-08-03.

Objective

This test report is prepared on behalf of *Hytera Mobilfunk GmbH* in accordance with Part 2, and Part 90 of the Federal Communication Commission rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2009.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 90 Page 3 of 31

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|----------------|---------------------|---------------------|---------------|
| Pro instrument | DC Power Supply | pps3300 | / |
| Weinschel Corp | Terminal Load(100W) | 1440-3 | MD447 |
| AA-MCS | Attenuator(40dB) | CAT-50-40-200-Nm-Nf | 0602-010 |
| N/A | RF Coaxial Cable | 0.2m | N/A |
| Minicircuits | 10 dB Attenuator | UNAT-10+ | D15542 |
| Wilson | 6 dB Attenuator | 6dB | 859936 |


Report No.: RDG150803003-00A

External I/O Cable


| Cable Description | Length (m) | From/Port | То |
|-------------------|------------|-------------|------------|
| RF Coaxial Cable | 0.2 | EUT/RF Port | Attenuator |

Test Configuration Block Diagram

Mode 1: With Tetra ATC




Mode 2: Without Tetra ATC



FCC Part 90 Page 4 of 31


Block Diagram of Test Setup

Mode 1: Without Tetra ATC

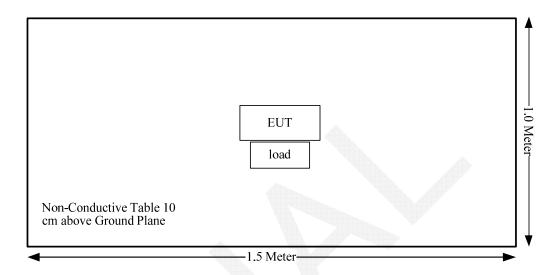

Report No.: RDG150803003-00A

Mode 2: With Tetra ATC

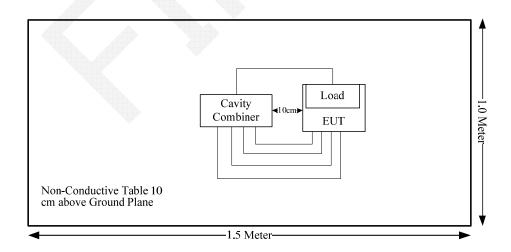

FCC Part 90 Page 5 of 31

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Results |
|---|---------------------------------------|-----------------|
| §1.1307 (b)(1), §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| §2.1046; §90.205 | RF Output Power | Compliance |
| §90.210; §90.221 | Adjacent Channel Power | Compliance |
| §2.1047;§90.207 | Modulation Characteristic | Not Applicable* |
| \$2.1049; \$90.209; \$90.210; \$90.691 | Occupied Bandwidth & Emission Mask | Compliance |
| §2.1051; §90.210 | Spurious Emission at Antenna Terminal | Compliance |
| §2.1053; §90.210 | Spurious Radiated Emissions | Compliance |
| §2.1055; §90.213 | Frequency Stability | Compliance |
| §90.214 | Transient Frequency Behavior | Not Applicable* |

Report No.: RDG150803003-00A

Not applicable*: Modulation Characteristic test item is not required for digital device

FCC Part 90 Page 6 of 31

FCC§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Report No.: RDG150803003-00A

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

| Limits for General Population/Uncontrolled Exposure | | | | | |
|---|--------------------------------------|--------------------------------------|----------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/cm²) | Averaging Time E , H or S (minutes) | |
| 0.3-1.34 | 614 | 1.63 | *100 | 30 | |
| 1.34-30 | 824/f | 2.19/f | *180/f ² | 30 | |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 | |
| 300-1,500 | | | f/1500 | 30 | |
| 1,500-100,000 | | | 1.0 | 30 | |

f = frequency in MHz

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm2)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Frequency | Antenna Gain | | Conducted Power | | Evaluation | Power | MPE Limit |
|-----------|--------------|-----------|------------------------|-------|------------------|----------------------------------|-----------------------|
| (MHz) | (dBi) | (numeric) | (dBm) | (mW) | Distance (cm) | Density (mW/cm ²) | (mW/cm ²) |
| 854.0125 | 8 | 6.31 | 45 | 31623 | 250 | 0.25 | 0.57 |

To comply with FCC RF exposure requirements, a minimum separation distance of 250 cm is required between the antenna and persons.

Result: Compliance

FCC Part 90 Page 7 of 31

^{* =} Plane-wave equivalent power density

FCC §2.1046 & §90.205- RF OUTPUT POWER

Applicable Standard

FCC §2.1046 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Report No.: RDG150803003-00A

Spectrum Analyzer Setting:

| RBW | VBW |
|---------|---------|
| 100 kHz | 300 kHz |

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------|---------------|---------------------|-------------------------|
| R&S | Spectrum Analyzer | FSEM | 831259/019 | 2015-05-09 | 2016-05-09 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| Temperature: | 27.2℃ | |
|--------------------|----------|--|
| Relative Humidity: | 56 % | |
| ATM Pressure: | 99.6 kPa | |

The testing was performed by Dean Liu on 2015-08-10.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

FCC Part 90 Page 8 of 31

| Modulation Mode | Channel Separation | f _c (MHz) | Conducted power (dBm) |
|--------------------|-----------------------|-------------------------|-----------------------------|
| | - 25kHz | 854.0125 | 44.09 |
| π/4-DQPSK | | 860 | 44.02 |
| | | 868.9875 | 44.06 |
| QAM | | 854.0125 | 40.02 |
| | | 860 | 40.01 |
| | | 868.9875 | 40.01 |

Report No.: RDG150803003-00A

Note: $\pi/4$ -DQPSK: The rated power is 44 dBm. QAM: The rated power is 40 dBm.

FCC Part 90 Page 9 of 31

FCC §2.1046, §90.210& §90.221- ADJACENT CHANNEL POWER

Applicable Standard

FCC §2.1046, §90.210& §90.221

According to FCC§90.221 (c) (1), Maximum adjacent power levels for frequencies in the 809-824/854-869 MHz band:

Report No.: RDG150803003-00A

| II ' - | , , | Maximum ACP (dBc) for devices 15 watts and above |
|--------|---------|--|
| 25 kHz | -55 dBc | −55 dBc |
| 50 kHz | -65 dBc | −65 dBc |
| 75 kHz | -65 dBc | -70 dBc |

(2) In any case, no requirement in excess of -36 dBm shall apply

Test Procedure

The EUT was connected to the Spectrum Analyzer with a suitable attenuator.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------|---------------|---------------------|-------------------------|
| R&S | Spectrum Analyzer | FSEM | 831259/019 | 2015-05-09 | 2016-05-09 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| Temperature: | 26.8-27.5℃ | |
|--------------------|-----------------|--|
| Relative Humidity: | 55-58 % | |
| ATM Pressure: | 100.3-100.5 kPa | |

The testing was performed by Dean Liu on 2015-08-07 & 2015-08-09 & 2015-08-19.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 90 Page 10 of 31


| Modulation Mode | Channel Separation | f _c (MHz) | Channel Separation (kHz) | Frequency offset (kHz) | Adjacent Channel Power Ratio (dB) | Limit (dB) | | | | | | |
|--------------------|-----------------------|-------------------------|--------------------------------|------------------------------|--|---------------|----------|----------|---------|-----|-------|----|
| | | | | ±25 | 70.95 | 55 | | | | | | |
| | | 854.0125 | | ±50 | 71.89 | 65 | | | | | | |
| | | | | ±75 | 71.41 | 70 | | | | | | |
| | | | | ±25 | 71.06 | 55 | | | | | | |
| π/4-DQPSK | | 860 | 25 | ±50 | 72.38 | 65 | | | | | | |
| | | | | ±75 | 72.05 | 70 | | | | | | |
| | | | ±25 | 71.85 | 55 | | | | | | | |
| | | 868.9875 | | ±50 | 73.97 | 65 | | | | | | |
| | 25kHz | | | | | | ±75 | 73.18 | 70 | | | |
| | 23KHZ | | | ±25 | 65.95 | 55 | | | | | | |
| | | 854.0125 | 854.0125 | 854.0125 | 854.0125 | 854.0125 | 854.0125 | 854.0125 | 54.0125 | ±50 | 69.35 | 65 |
| | | | | ±75 | 70.66 | 65 | | | | | | |
| | | | | ±25 | 64.82 | 55 | | | | | | |
| QAM | | 860 | 25 | ±50 | 68.86 | 65 | | | | | | |
| | | | | ±75 | 70.08 | 65 | | | | | | |
| | | | | ±25 | 67.01 | 55 | | | | | | |
| | | 868.9875 | _ | ±50 | 70.69 | 65 | | | | | | |
| | | | | ±75 | 70.98 | 65 | | | | | | |

Note: $\pi/4$ -DQPSK: The rated power is 44 dBm. QAM: The rated power is 40 dBm.


FCC Part 90 Page 11 of 31

$\pi/4$ -DQPSK for Frequency 854.0125 MHz

Report No.: RDG150803003-00A

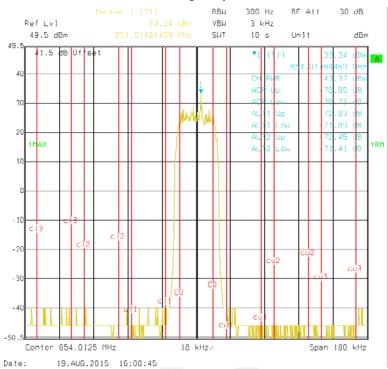


π/4-DQPSK for Frequency 860 MHz

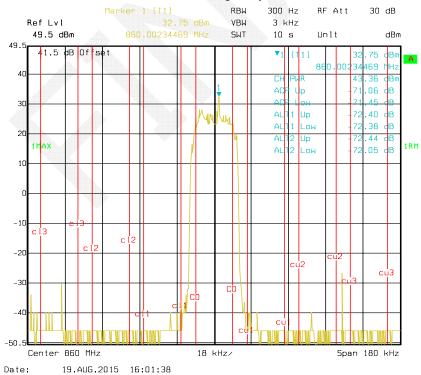


FCC Part 90 Page 12 of 31

$\pi/4$ -DQPSK for Frequency 868.9875 MHz

Report No.: RDG150803003-00A

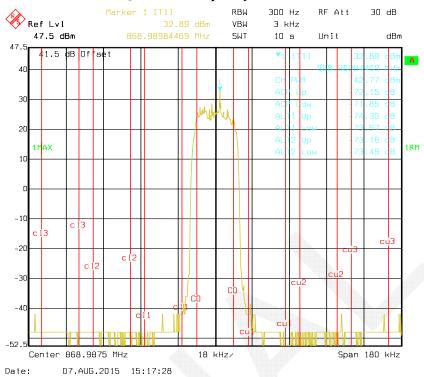


QAM for Frequency 854.0125 MHz

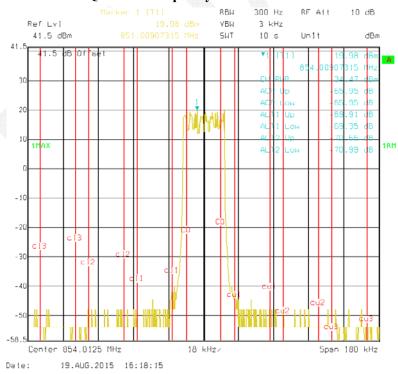


FCC Part 90 Page 13 of 31

QAM for Frequency 860 MHz

Report No.: RDG150803003-00A

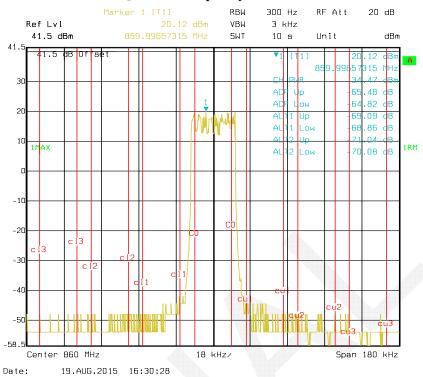

19.AUG.2015 16:30:28

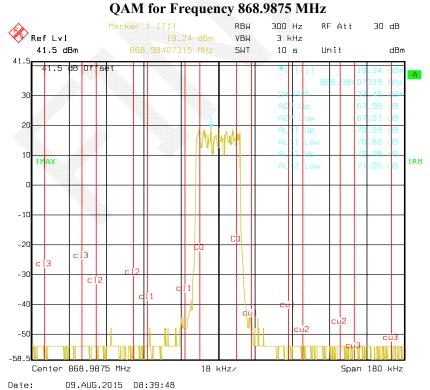

Page 14 of 31 FCC Part 90

FCC §2.1049 & §90.209, §90.210§90.691 – OCCUPIED BANDWIDTH & EMISSION MASK

Report No.: RDG150803003-00A

Applicable Standard

FCC §2.1049, §90.209, §90.210 and §90.691

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P) dB$.

Emission Mask I. For transmitters that are equipped with an audio low pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 6.8 kHz, but no more than 9.0 kHz: At least 25 dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 9.0 kHz, but no more than 15 kHz: At least 35 dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 15 kHz: At least 43 + 10 log (P) dB, or 70 dB, whichever is the lesser attenuation.

Emission mask requirements for EA-based systems.

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $Log_{10}(f/6.1)$ decibels or $50 + 10 Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.
- (b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC Part 90 Page 15 of 31

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Report No.: RDG150803003-00A

Test Equipment List and Details

| Manufacturer | Description | Model No. Serial No. | | Calibration Date | Calibration Due Date |
|--------------|-------------------|----------------------|------------|---------------------|-------------------------|
| R&S | Spectrum Analyzer | FSEM | 831259/019 | 2015-05-09 | 2016-05-09 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| Temperature: | 25.8-27.1℃ |
|--------------------|-----------------|
| Relative Humidity: | 56-58 % |
| ATM Pressure: | 99.8 -100.3 kPa |

The testing was performed by Dean Liu on 2015-08-07 & 2015-08-09&2015-08-19.


| Modulation Mode | Channel Separation | f _c | 99% Occupied Bandwidth | Limit |
|--------------------|-----------------------|----------------|---------------------------|-------|
| | | MHz | kHz | kHz |
| | | 854.0125 | 21.04 | 22 |
| $\pi/4$ -DQPSK | - 25kHz | 860 | 20.84 | 22 |
| | | 868.9875 | 20.84 | 22 |
| | | 854.0125 | 21.24 | 22 |
| QAM | | 860 | 21.24 | 22 |
| | | 868.9875 | 21.44 | 22 |

Note: Equipment meets the Adjacent Channel Power limits of §90.221, so emission mask is not tested.


FCC Part 90 Page 16 of 31

Occupied Bandwidth $-\pi/4$ -DQPSK, 854.0125 MHz

Report No.: RDG150803003-00A

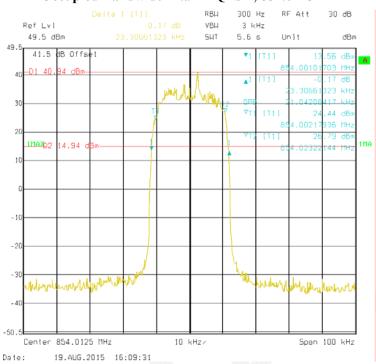


Occupied Bandwidth –π/4-DQPSK, 860 MHz

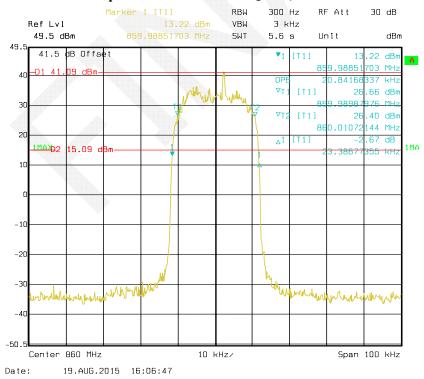


FCC Part 90 Page 17 of 31

Occupied Bandwidth –π/4-DQPSK, 868.9875 MHz

Report No.: RDG150803003-00A

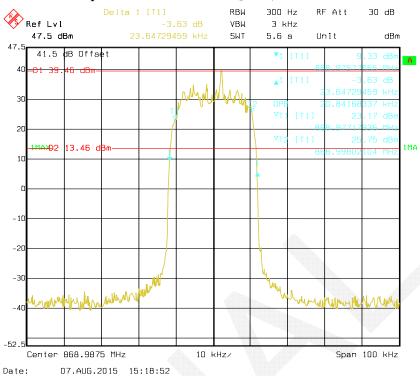


Occupied Bandwidth -QAM, 854.0125 MHz

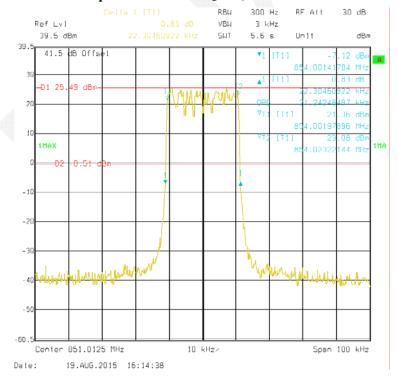


FCC Part 90 Page 18 of 31

Occupied Bandwidth -QAM, 860 MHz

Report No.: RDG150803003-00A

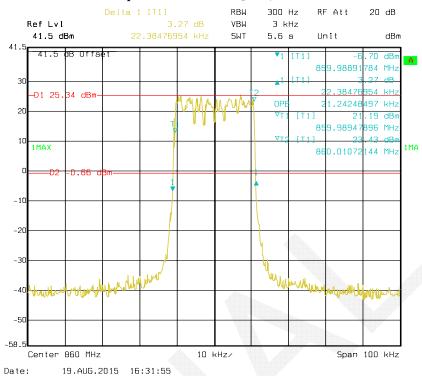

Occupied Bandwidth -QAM, 868.9875 MHz

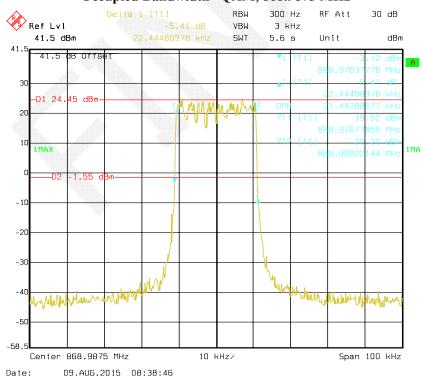

FCC Part 90 Page 19 of 31

FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

Report No.: RDG150803003-00A

- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P) dB$.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------|------------|---------------------|-------------------------|
| R&S | Spectrum Analyzer | FSEM | 831259/019 | 2015-05-09 | 2016-05-09 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


| Temperature: | 27.2-27.3℃ |
|--------------------|---------------|
| Relative Humidity: | 58-59 % |
| ATM Pressure: | 99.8-99.9 kPa |

The testing was performed by Dean Liu on 2015-08-07&2015-08-09.


Test Mode: Transmitting

FCC Part 90 Page 20 of 31

$\pi/4$ -DQPSK, 854.0125 MHz

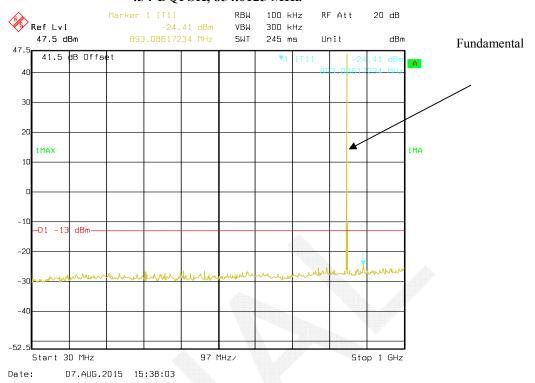


Report No.: RDG150803003-00A

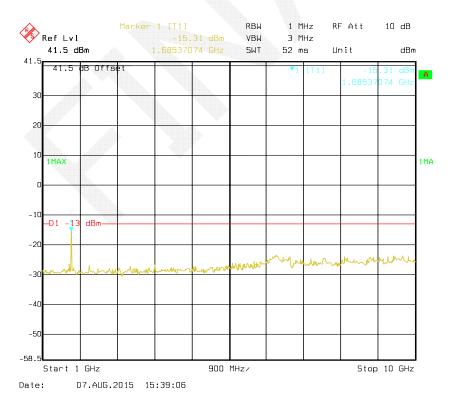


FCC Part 90 Page 21 of 31

$\pi/4$ -DQPSK, 860 MHz

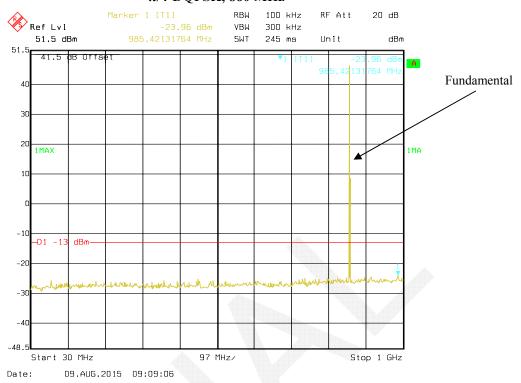


Report No.: RDG150803003-00A

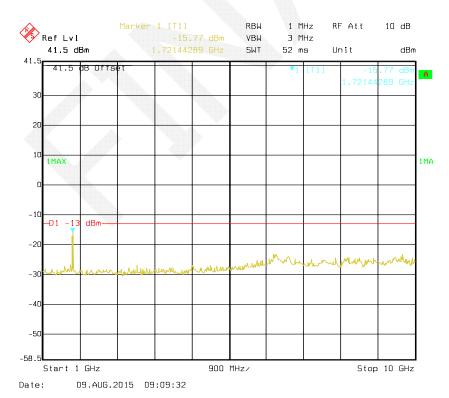


FCC Part 90 Page 22 of 31

$\pi/4$ -DQPSK, 868.9875 MHz

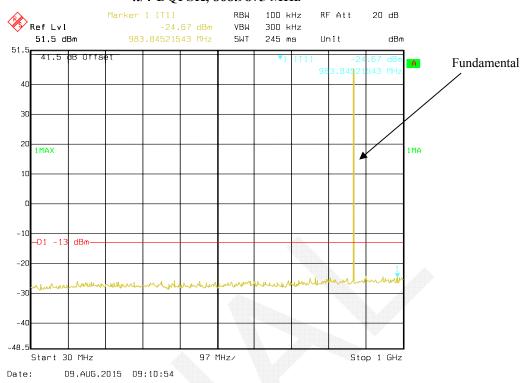


Report No.: RDG150803003-00A

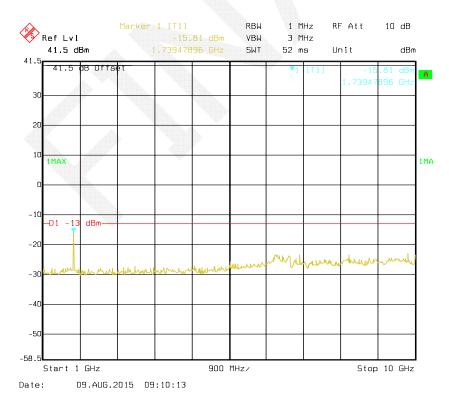


FCC Part 90 Page 23 of 31

QAM, 854.0125 MHz

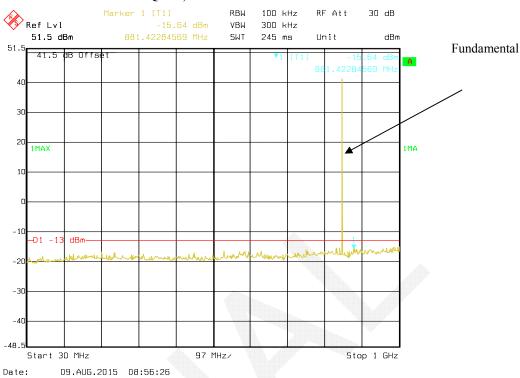


Report No.: RDG150803003-00A

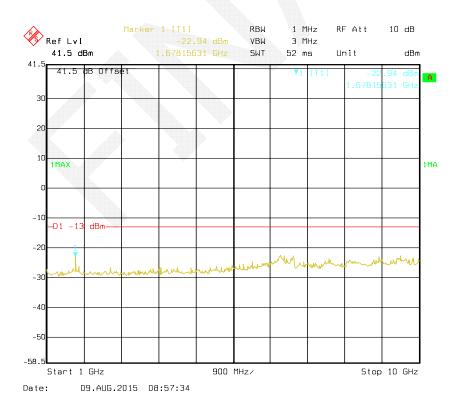


FCC Part 90 Page 24 of 31

QAM, 860 MHz

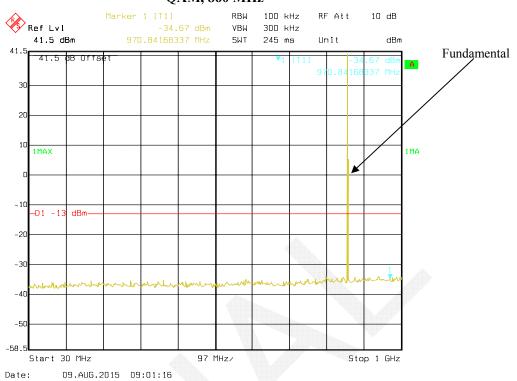


Report No.: RDG150803003-00A

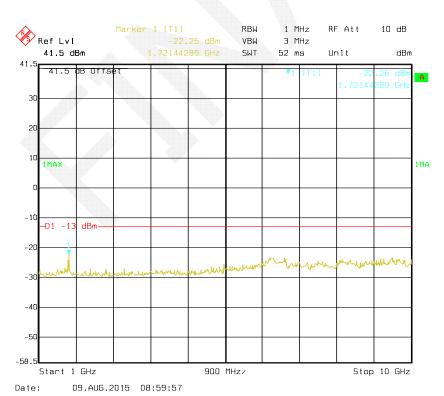


FCC Part 90 Page 25 of 31

QAM, 868.9875 MHz

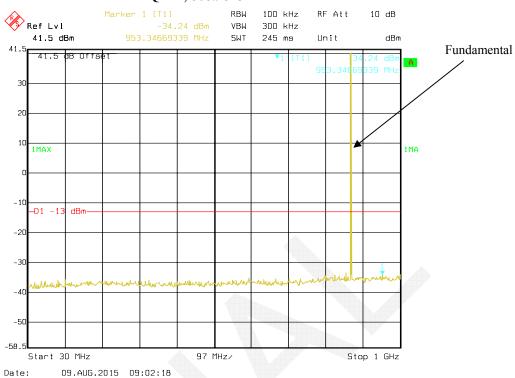

Report No.: RDG150803003-00A

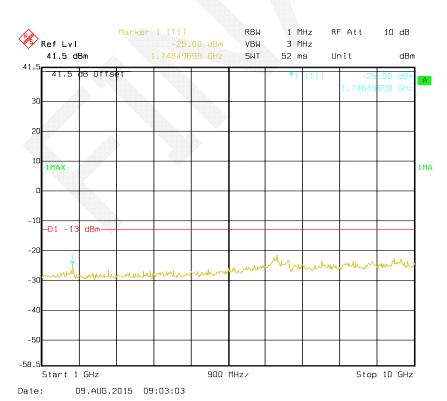

FCC Part 90 Page 26 of 31

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

Report No.: RDG150803003-00A

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 1g (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = $43+10 \text{ Log}_{10}$ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|-------------------|------------------------------|------------|------------|---------------------|-------------------------|
| HP | Signal Generator | 8648A | 3426A00831 | 2014-11-06 | 2015-11-06 |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2014-09-06 | 2017-09-05 |
| EMCO | Adjustable Dipole Antenna | 3121C | 9109-753 | N/A | N/A |
| HP | Amplifier | 8447E | 2434A02181 | 2014-09-06 | 2015-09-06 |
| R&S | EMI Test Receiver | ESCI | 100224 | 2015-05-09 | 2016-05-09 |
| Agilent | Signal Generator | E8247C | MY43321350 | 2014-10-15 | 2015-10-15 |
| Mini-Circuit | Amplifier | ZVA-213-S+ | 054201245 | 2015-02-19 | 2016-02-19 |
| TDK RF | Horn Antenna | HRN-0118 | 130 084 | 2012-09-06 | 2015-09-06 |
| ETS LINDGREN | Horn Antenna | 3115 | 000 527 35 | 2012-09-06 | 2015-09-06 |
| R&S | Spectrum Analyzer | FSEM | DE31388 | 2015-05-09 | 2016-05-09 |
| / | RF Coxial cable | 10m | / | 2015-05-09 | 2016-05-09 |
| / | RF Coxial cable | 14m | / | 2015-05-09 | 2016-05-09 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 90 Page 27 of 31

Test Data

Environmental Conditions

| Temperature: | 27.1℃ |
|--------------------|----------|
| Relative Humidity: | 57 % |
| ATM Pressure: | 99.9 kPa |

The testing was performed by Dean Liu on 2015-08-10.

Test Mode: Transmitting (Prescan With DC source unit & AC source unit, AC source unit is the worst case) $\pi/4$ -DQPSK

Report No.: RDG150803003-00A

30MHz - 10GHz:

| | | D : | S | ubstituted Me | ethod | A1 1 (| | |
|--------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | S.G. Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| | | | MHz | | | | | |
| 1708.025 | Н | 32.57 | -68.4 | 10.8 | 1.4 | -59.0 | -13.0 | 46.0 |
| 1708.025 | V | 32.19 | -68.9 | 10.8 | 1.4 | -59.5 | -13.0 | 46.5 |
| 2562.038 | Н | 36.88 | -59.1 | 13.2 | 2.5 | -48.4 | -13.0 | 35.4 |
| 2562.038 | V | 35.29 | -61.8 | 13.2 | 2.5 | -51.1 | -13.0 | 38.1 |
| 3416.050 | Н | 32.04 | -65.4 | 14.0 | 2.3 | -53.7 | -13.0 | 40.7 |
| 3416.050 | V | 31.65 | -65.4 | 14.0 | 2.3 | -53.7 | -13.0 | 40.7 |
| 375.320 | Н | 38.64 | -62.6 | 0.0 | 0.6 | -63.2 | -13.0 | 50.2 |
| 375.320 | V | 37.02 | -67.1 | 0.0 | 0.6 | -67.7 | -13.0 | 54.7 |
| | | | Frequ | iency:860.000 | 0 MHz | | | |
| 1720.000 | Н | 32.35 | -68.5 | 10.8 | 1.4 | -59.1 | -13.0 | 46.1 |
| 1720.000 | V | 31.98 | -69.1 | 10.8 | 1.4 | -59.7 | -13.0 | 46.7 |
| 2580.000 | Н | 39.87 | -55.4 | 13.2 | 2.5 | -44.7 | -13.0 | 31.7 |
| 2580.000 | V | 38.32 | -58.8 | 13.2 | 2.5 | -48.1 | -13.0 | 35.1 |
| 3440.000 | Н | 32.70 | -64.5 | 14.0 | 2.2 | -52.7 | -13.0 | 39.7 |
| 3440.000 | V | 32.16 | -64.5 | 14.0 | 2.2 | -52.7 | -13.0 | 39.7 |
| 375.320 | Н | 38.65 | -62.6 | 0.0 | 0.6 | -63.2 | -13.0 | 50.2 |
| 375.320 | V | 39.11 | -65 | 0.0 | 0.6 | -65.6 | -13.0 | 52.6 |
| | | | Freque | 1cy:868.9875 | MHz | | | |
| 1737.975 | Н | 32.69 | -68 | 10.9 | 1.4 | -58.5 | -13.0 | 45.5 |
| 1737.975 | V | 32.27 | -68.7 | 10.9 | 1.4 | -59.2 | -13.0 | 46.2 |
| 2606.963 | Н | 37.94 | -56.6 | 13.2 | 2.5 | -45.9 | -13.0 | 32.9 |
| 2606.963 | V | 36.63 | -60.5 | 13.2 | 2.5 | -49.8 | -13.0 | 36.8 |
| 3475.950 | Н | 32.02 | -64.8 | 13.9 | 2.1 | -53.0 | -13.0 | 40.0 |
| 3475.950 | V | 31.41 | -64.6 | 13.9 | 2.1 | -52.8 | -13.0 | 39.8 |
| 375.320 | Н | 38.92 | -62.4 | 0.0 | 0.6 | -63.0 | -13.0 | 50.0 |
| 375.320 | V | 39.17 | -65 | 0.0 | 0.6 | -65.6 | -13.0 | 52.6 |

FCC Part 90 Page 28 of 31

QAM:

| QAM; | | n | Si | ubstituted Me | ethod | A11.4. | | |
|--------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | S.G. Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dRm) | Margin (dB) |
| | | | Frequer | ncy:854.0125 | MHz | | | |
| 1708.025 | Н | 33.15 | -67.8 | 10.8 | 1.4 | -58.4 | -13.0 | 45.4 |
| 1708.025 | V | 32.75 | -68.4 | 10.8 | 1.4 | -59.0 | -13.0 | 46.0 |
| 2562.038 | Н | 36.84 | -59.1 | 13.2 | 2.5 | -48.4 | -13.0 | 35.4 |
| 2562.038 | V | 35.19 | -61.9 | 13.2 | 2.5 | -51.2 | -13.0 | 38.2 |
| 3416.050 | Н | 32.02 | -65.4 | 14.0 | 2.3 | -53.7 | -13.0 | 40.7 |
| 3416.050 | V | 31.58 | -65.5 | 14.0 | 2.3 | -53.8 | -13.0 | 40.8 |
| 375.320 | Н | 38.62 | -62.7 | 0.0 | 0.6 | -63.3 | -13.0 | 50.3 |
| 375.320 | V | 36.94 | -67.2 | 0.0 | 0.6 | -67.8 | -13.0 | 54.8 |
| | | | Frequ | ency:860.000 | 0 MHz | | | |
| 1720.000 | Н | 32.24 | -68.6 | 10.8 | 1.4 | -59.2 | -13.0 | 46.2 |
| 1720.000 | V | 31.92 | -69.1 | 10.8 | 1.4 | -59.7 | -13.0 | 46.7 |
| 2580.000 | Н | 39.84 | -55.4 | 13.2 | 2.5 | -44.7 | -13.0 | 31.7 |
| 2580.000 | V | 38.31 | -58.8 | 13.2 | 2.5 | -48.1 | -13.0 | 35.1 |
| 3440.000 | Н | 32.68 | -64.5 | 14.0 | 2.2 | -52.7 | -13.0 | 39.7 |
| 3440.000 | V | 32.08 | -64.5 | 14.0 | 2.2 | -52.7 | -13.0 | 39.7 |
| 375.320 | Н | 38.56 | -62.7 | 0.0 | 0.6 | -63.3 | -13.0 | 50.3 |
| 375.320 | V | 39.04 | -65.1 | 0.0 | 0.6 | -65.7 | -13.0 | 52.7 |
| | | | Frequer | icy:868.9875 | MHz | | | |
| 1737.975 | Н | 32.68 | -68 | 10.9 | 1.4 | -58.5 | -13.0 | 45.5 |
| 1737.975 | V | 32.20 | -68.8 | 10.9 | 1.4 | -59.3 | -13.0 | 46.3 |
| 2606.963 | Н | 37.90 | -56.7 | 13.2 | 2.5 | -46.0 | -13.0 | 33.0 |
| 2606.963 | V | 36.60 | -60.6 | 13.2 | 2.5 | -49.9 | -13.0 | 36.9 |
| 3475.950 | Н | 31.91 | -64.9 | 13.9 | 2.1 | -53.1 | -13.0 | 40.1 |
| 3475.950 | V | 31.36 | -64.6 | 13.9 | 2.1 | -52.8 | -13.0 | 39.8 |
| 375.320 | Н | 38.87 | -62.4 | 0.0 | 0.6 | -63.0 | -13.0 | 50.0 |
| 375.320 | V | 39.14 | -65 | 0.0 | 0.6 | -65.6 | -13.0 | 52.6 |

Report No.: RDG150803003-00A

Note: Absolute Level = SG Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

FCC Part 90 Page 29 of 31

FCC §2.1055 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

Report No.: RDG150803003-00A

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|--------------|----------------------------------|-----------|-------------|---------------------|-------------------------|
| R&S | Spectrum Analyzer | FSEM | 831259/019 | 2015-05-09 | 2016-05-09 |
| Dongzhixu | High Temperature Test Chamber | DP1000 | 201105083-4 | 2015-08-11 | 2016-08-11 |
| UNI-T | Multimeter | UT39A | M130199938 | 2015-04-10 | 2016-04-10 |

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| Temperature: | 27.5 °C |
|--------------------|-----------|
| Relative Humidity: | 56 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Dean Liu on 2015-08-17.

Test Mode: Transmitting

FCC Part 90 Page 30 of 31

AC Power Supply:

| fc =854.0125 MHz | | | | | | |
|------------------|---------|------------|-----------------|-------|--|--|
| Temerature | Voltage | Reading | Frequency Error | Limit | | |
| င | Vac | MHz | ppm | ppm | | |
| -30 | 120 | 854.012469 | -0.04 | | | |
| -20 | 120 | 854.012473 | -0.03 | | | |
| -10 | 120 | 854.012481 | -0.02 | | | |
| 0 | 120 | 854.012476 | -0.03 | | | |
| 10 | 120 | 854.012492 | -0.01 | | | |
| 20 | 120 | 854.012490 | -0.01 | 1.5 | | |
| 30 | 120 | 854.012488 | -0.01 | | | |
| 40 | 120 | 854.012480 | -0.02 | | | |
| 50 | 120 | 854.012475 | -0.03 | | | |
| 25 | 102 | 854.012472 | -0.03 | | | |
| 25 | 138 | 854.012469 | -0.04 | | | |

Report No.: RDG150803003-00A

DC Power Supply:

| fc =854.0125 MHz | | | | | | |
|------------------|---------|------------|-----------------|-------|--|--|
| Temerature | Voltage | Reading | Frequency Error | Limit | | |
| ${\mathbb C}$ | Vdc | MHz | ppm | ppm | | |
| -30 | -48 | 854.012465 | -0.04 | | | |
| -20 | -48 | 854.012458 | -0.05 | | | |
| -10 | -48 | 854.012462 | -0.04 | | | |
| 0 | -48 | 854.012473 | -0.03 | | | |
| 10 | -48 | 854.012469 | -0.04 | | | |
| 20 | -48 | 854.012463 | -0.04 | 1.5 | | |
| 30 | -48 | 854.012474 | -0.03 | | | |
| 40 | -48 | 854.012457 | -0.05 | | | |
| 50 | -48 | 854.012463 | -0.04 | | | |
| 25 | -40.8 | 854.012471 | -0.03 | | | |
| 25 | -55.2 | 854.012465 | -0.04 | | | |

***** END OF REPORT *****

FCC Part 90 Page 31 of 31