


EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

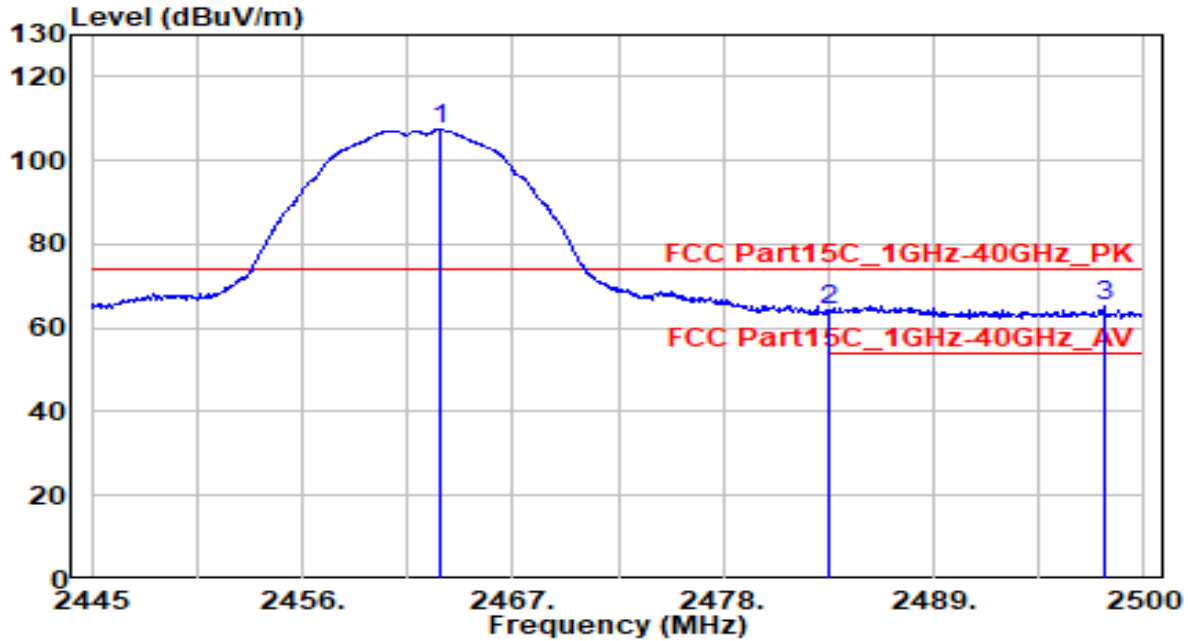


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.205	76.33	30.95	107.28	N/A	N/A	265	95	Peak
2	2483.500	33.22	30.99	64.21	-9.79	74.00	265	95	Peak
3	* 2497.910	34.09	31.02	65.10	-8.90	74.00	265	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

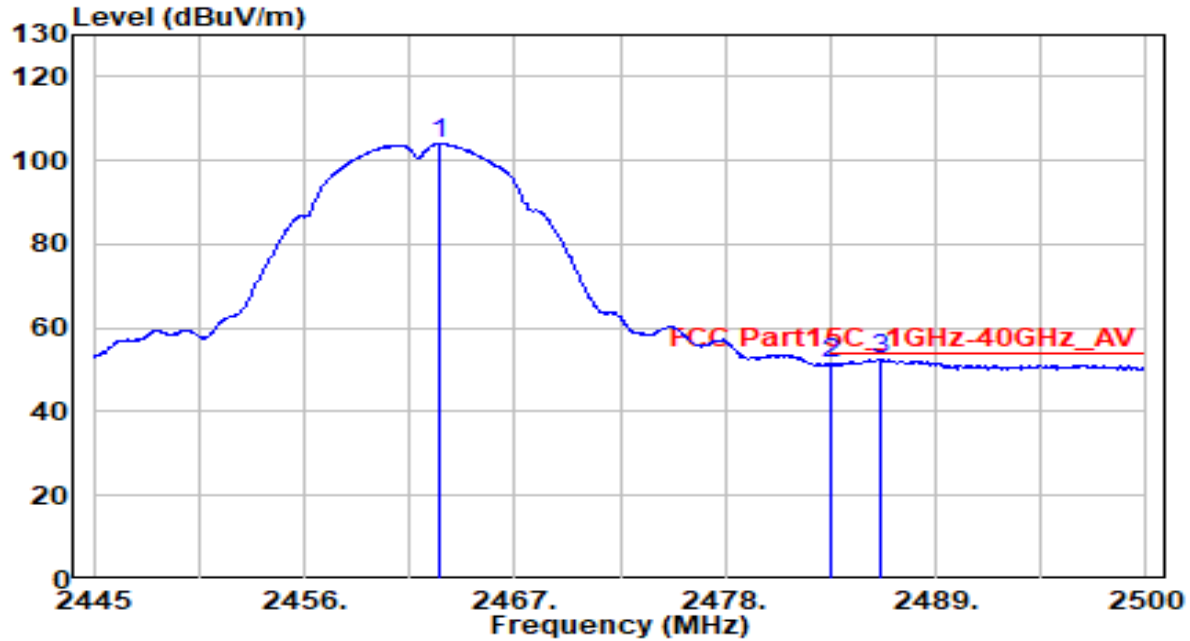


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	73.04	30.95	103.99	N/A	N/A	265	95	Average
2	2483.500	20.49	30.99	51.47	-2.53	54.00	265	95	Average
3	* 2486.140	21.69	30.99	52.68	-1.32	54.00	265	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

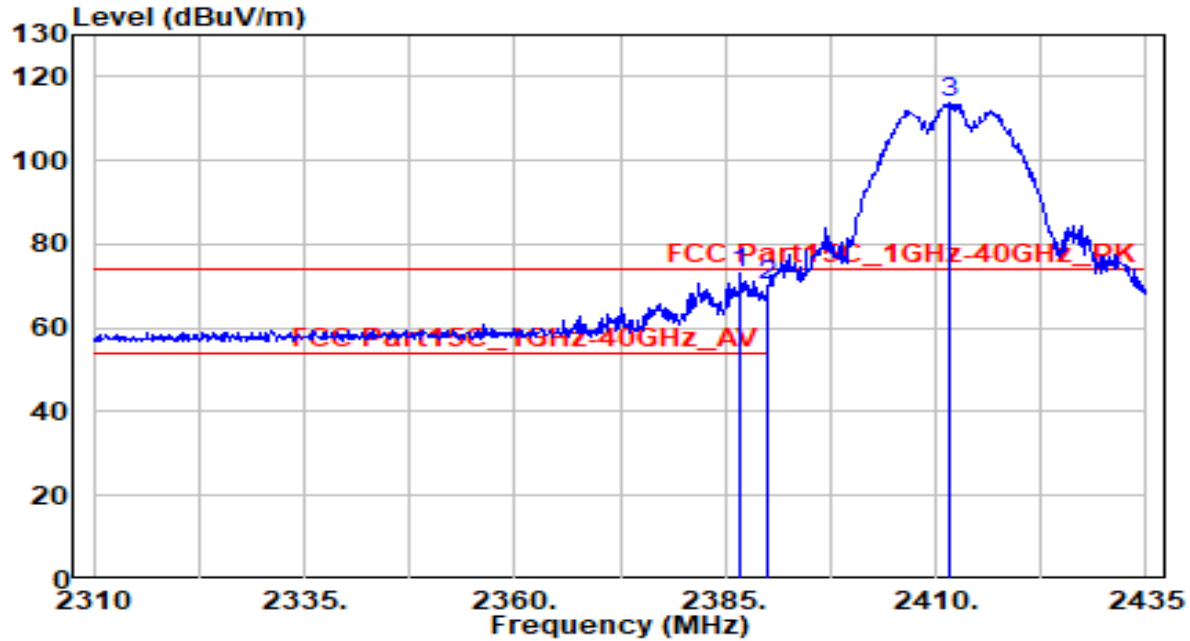


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.875	42.39	30.80	73.19	-0.81	74.00	150	15	Peak
2		2390.000	39.54	30.80	70.34	-3.66	74.00	150	15	Peak
3		2411.500	82.81	30.85	113.66	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

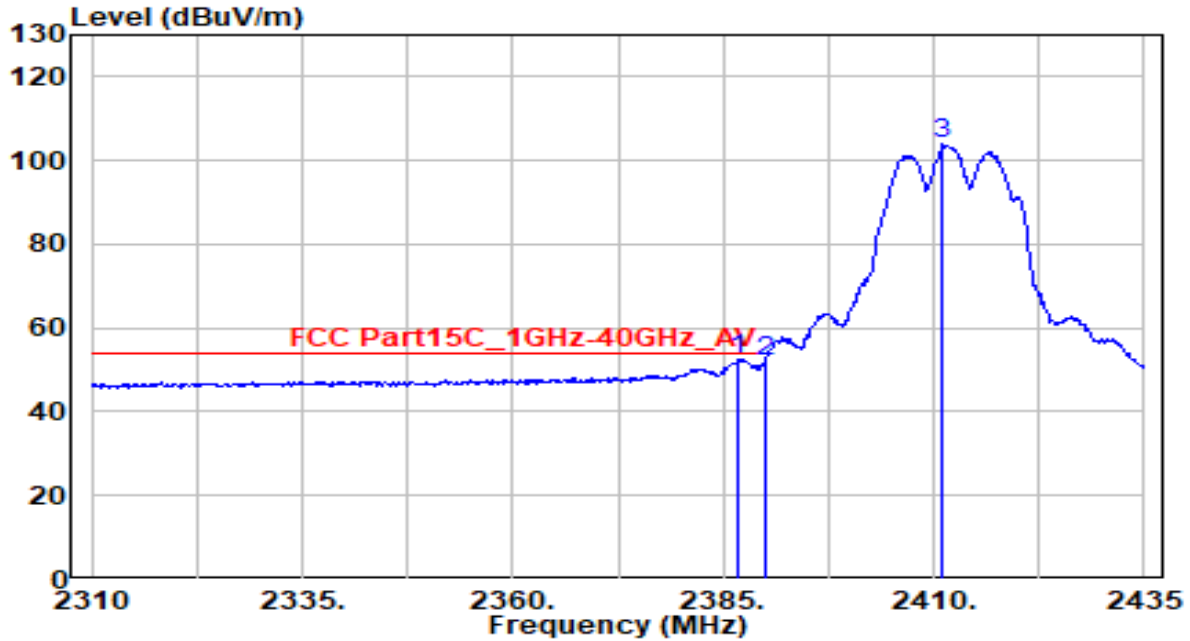


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.750	21.55	30.80	52.34	-1.66	54.00	150	15	Average
2	2390.000	21.39	30.80	52.19	-1.81	54.00	150	15	Average
3	2411.125	73.05	30.85	103.90	N/A	N/A	150	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

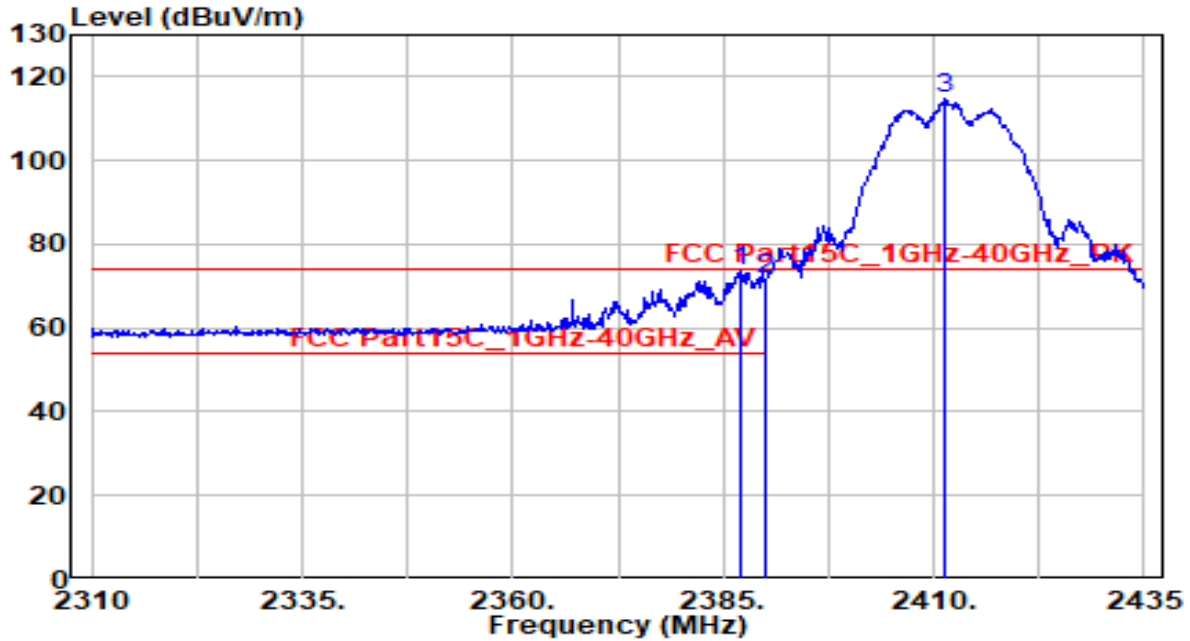


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	42.68	30.80	73.48	-0.52	74.00	300	310	Peak
2		2390.000	40.72	30.80	71.53	-2.47	74.00	300	310	Peak
3		2411.375	83.82	30.85	114.67	N/A	N/A	300	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

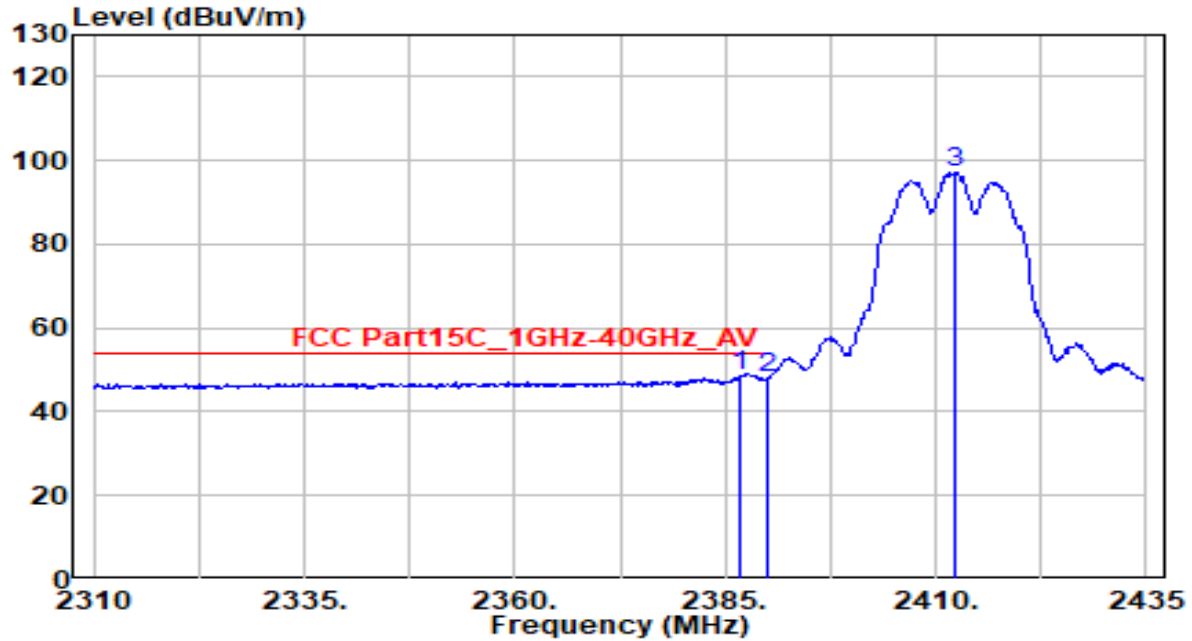


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	17.77	30.80	48.57	-5.43	54.00	300	310	Average
2		2390.000	17.12	30.80	47.93	-6.07	54.00	300	310	Average
3		2412.250	66.21	30.85	97.06	N/A	N/A	300	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

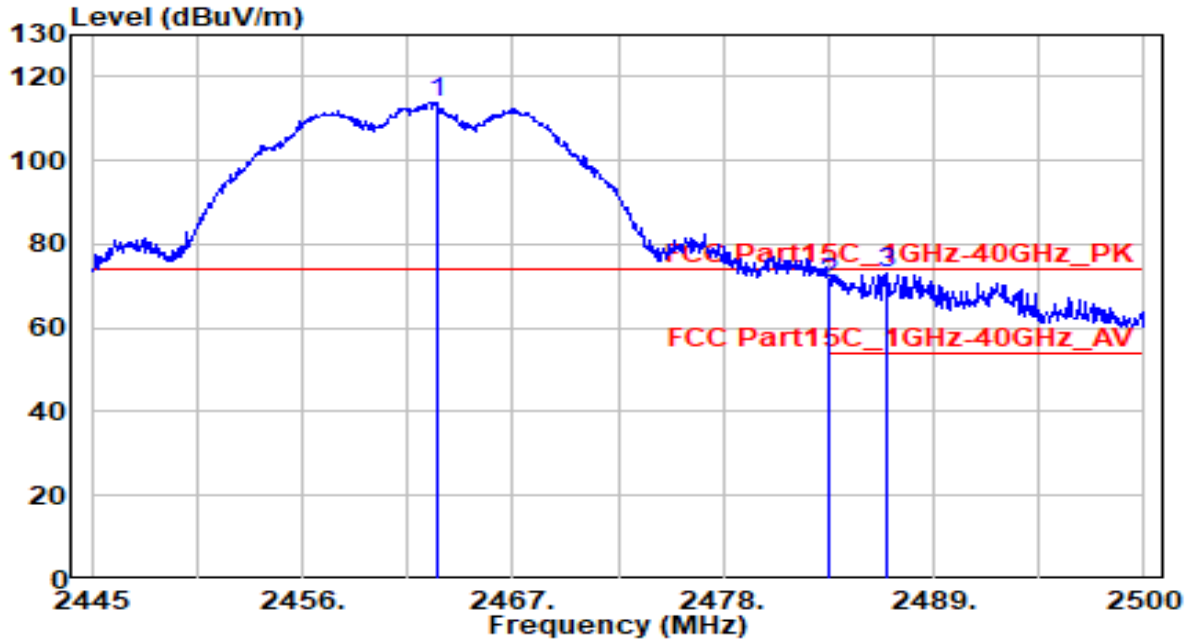


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	83.09	30.95	114.04	N/A	N/A	330	350	Peak
2	2483.500	39.63	30.99	70.62	-3.38	74.00	330	350	Peak
3	* 2486.580	41.93	30.99	72.92	-1.08	74.00	330	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

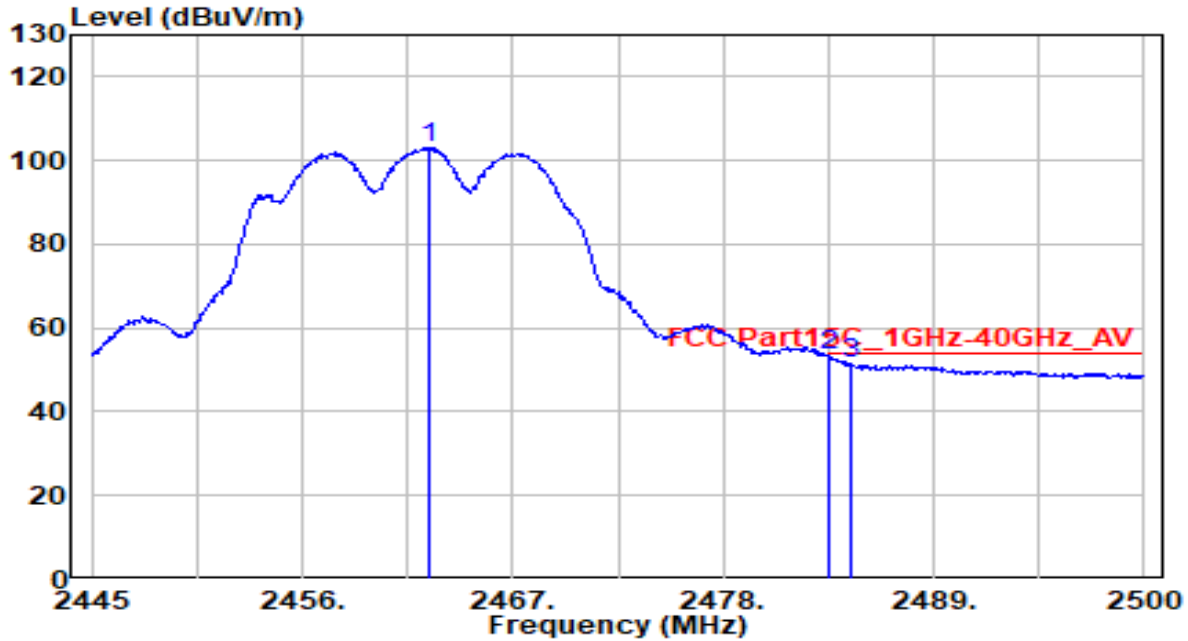


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.655	72.11	30.95	103.06	N/A	N/A	330	350	Average
2	* 2483.500	22.31	30.99	53.30	-0.70	54.00	330	350	Average
3	2484.655	20.75	30.99	51.75	-2.25	54.00	330	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

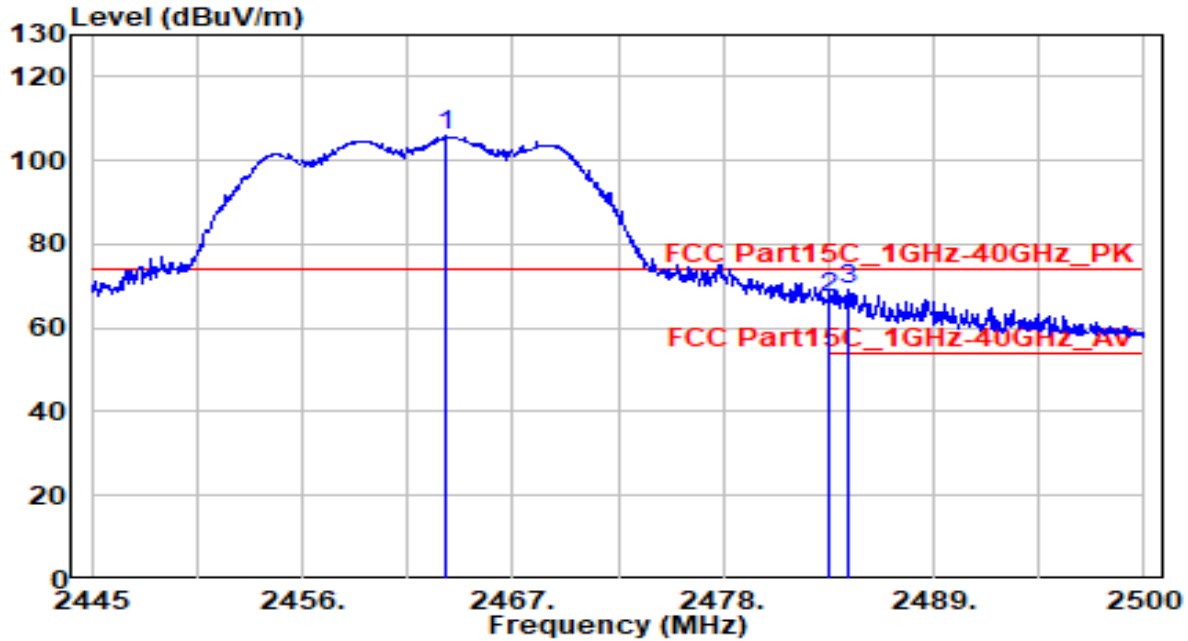


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.480	75.03	30.95	105.98	N/A	N/A	265	95	Peak
2	2483.500	36.12	30.99	67.11	-6.89	74.00	265	95	Peak
3	* 2484.490	37.98	30.99	68.97	-5.03	74.00	265	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

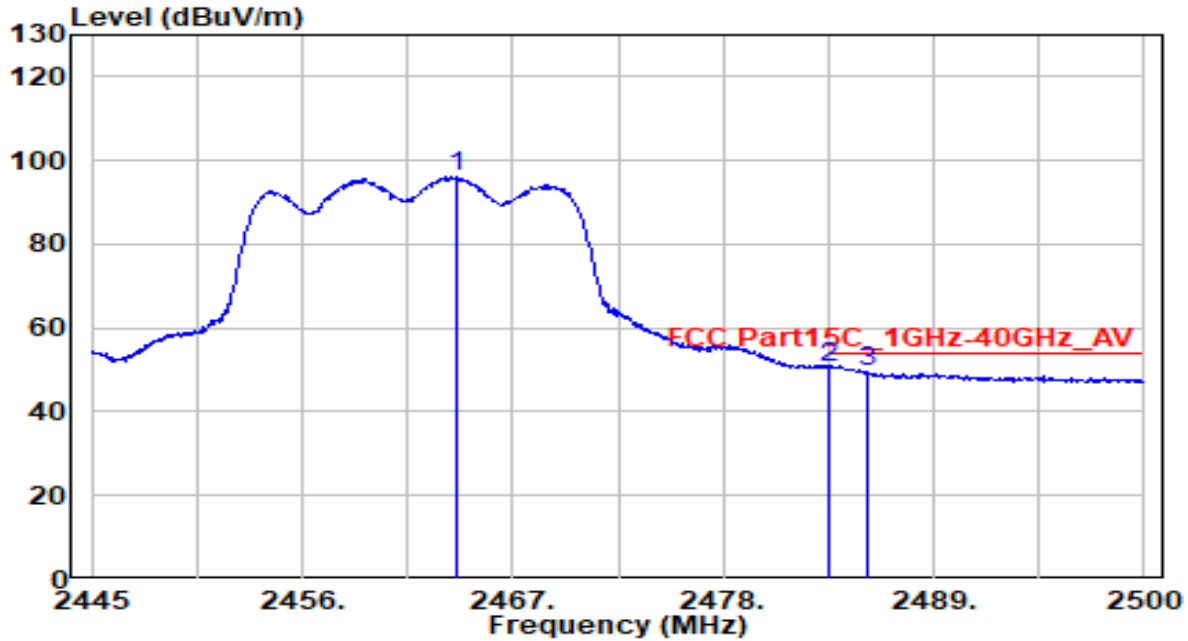


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.140	65.28	30.95	96.23	N/A	N/A	265	95	Average
2	* 2483.500	19.31	30.99	50.30	-3.70	54.00	265	95	Average
3	2485.535	18.74	30.99	49.74	-4.26	54.00	265	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

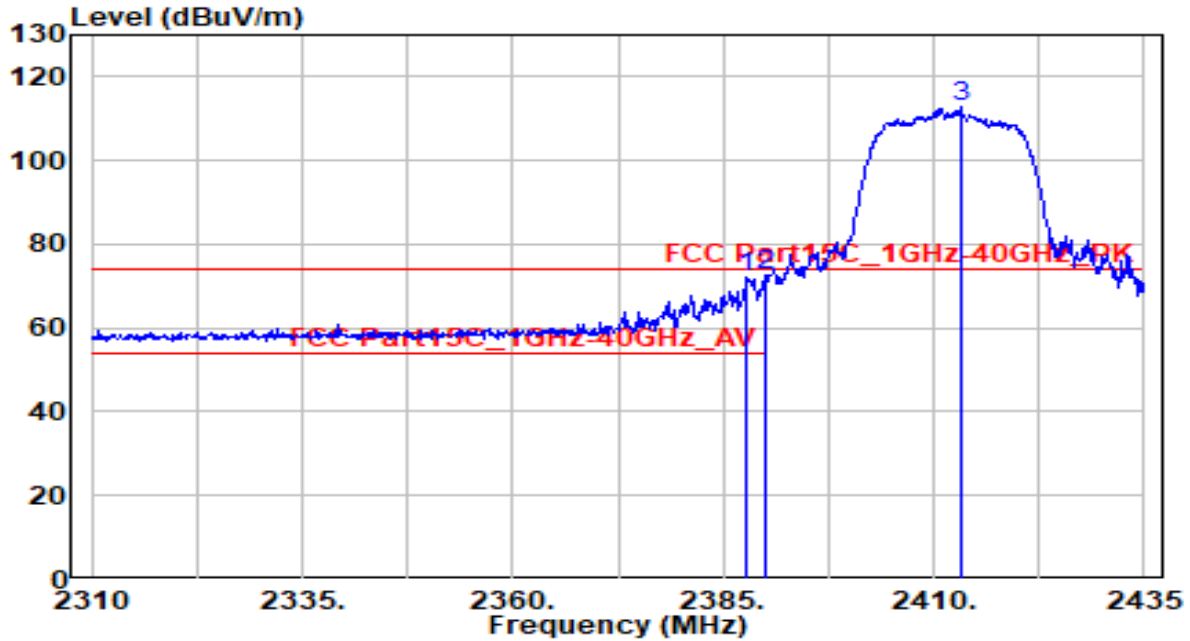


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	41.47	30.80	72.27	-1.73	74.00	150	15	Peak
2	* 2390.000	41.90	30.80	72.71	-1.29	74.00	150	15	Peak
3	2413.250	81.83	30.85	112.68	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

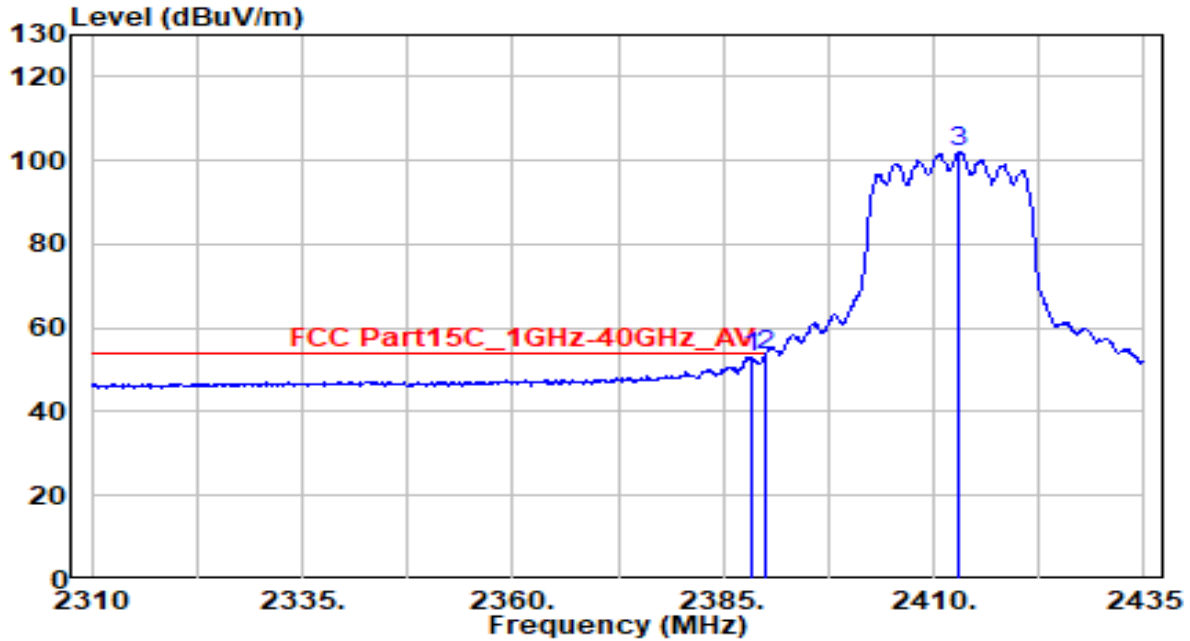


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.250	22.27	30.80	53.07	-0.93	54.00	150	15	Average
2	* 2390.000	22.54	30.80	53.34	-0.66	54.00	150	15	Average
3	2413.000	71.08	30.85	101.94	N/A	N/A	150	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

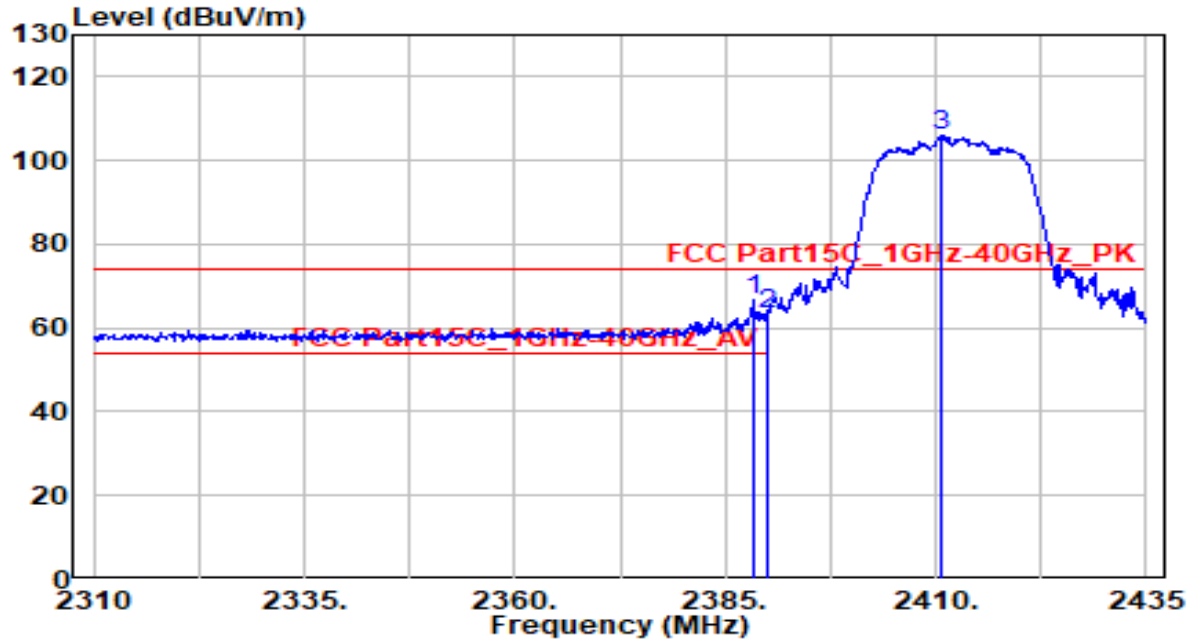


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	35.69	30.80	66.49	-7.51	74.00	300	310	Peak
2		2390.000	32.39	30.80	63.19	-10.81	74.00	300	310	Peak
3		2410.625	75.01	30.85	105.86	N/A	N/A	300	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

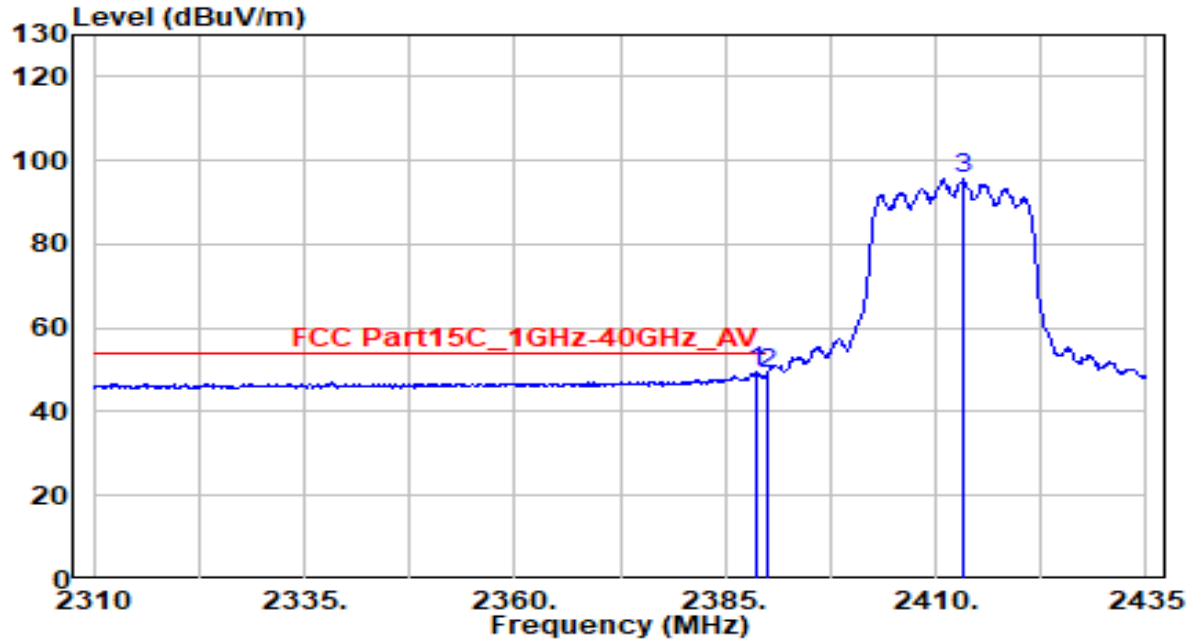


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	18.57	30.80	49.37	-4.63	54.00	300	310	Average
2		2390.000	18.28	30.80	49.08	-4.92	54.00	300	310	Average
3		2413.375	64.67	30.85	95.52	N/A	N/A	300	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

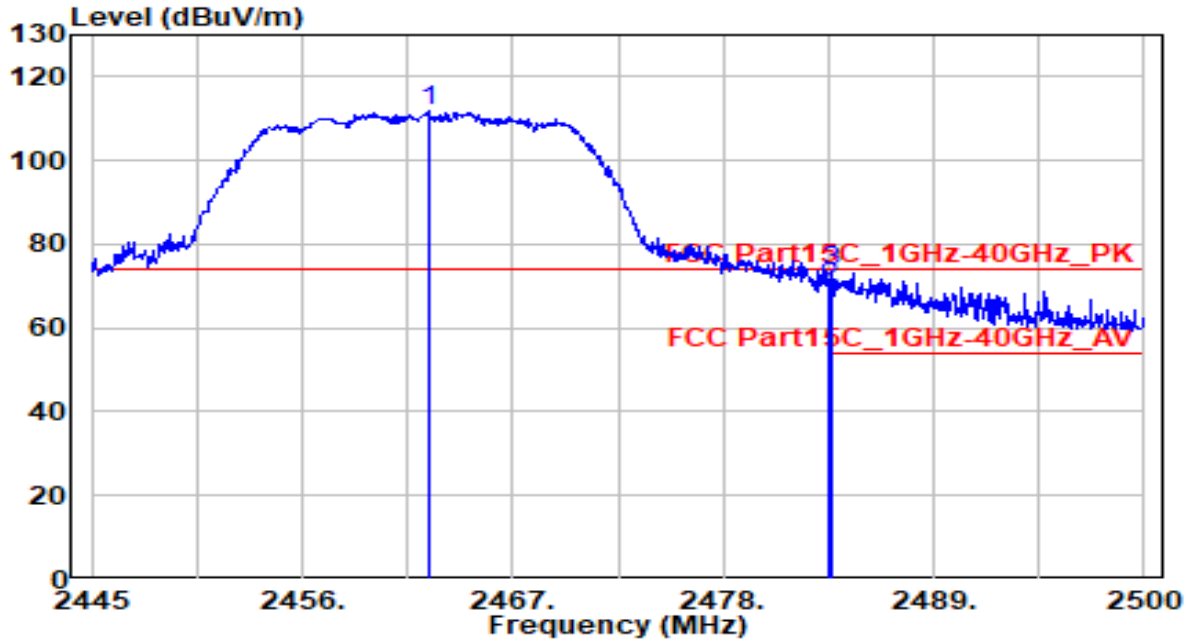


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.600	80.94	30.95	111.89	N/A	N/A	330	350	Peak
2	2483.500	38.51	30.99	69.49	-4.51	74.00	330	350	Peak
3	* 2483.720	42.35	30.99	73.34	-0.66	74.00	330	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

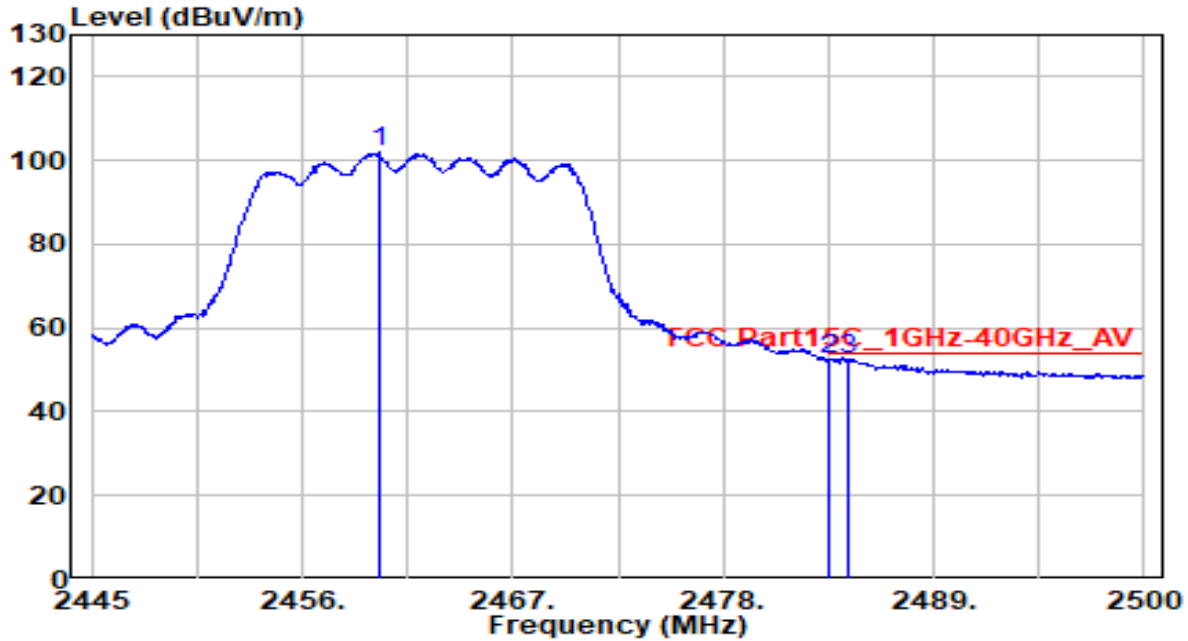


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.015	71.00	30.94	101.94	N/A	N/A	330	350	Average
2	2483.500	21.51	30.99	52.49	-1.51	54.00	330	350	Average
3	* 2484.600	21.62	30.99	52.61	-1.39	54.00	330	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

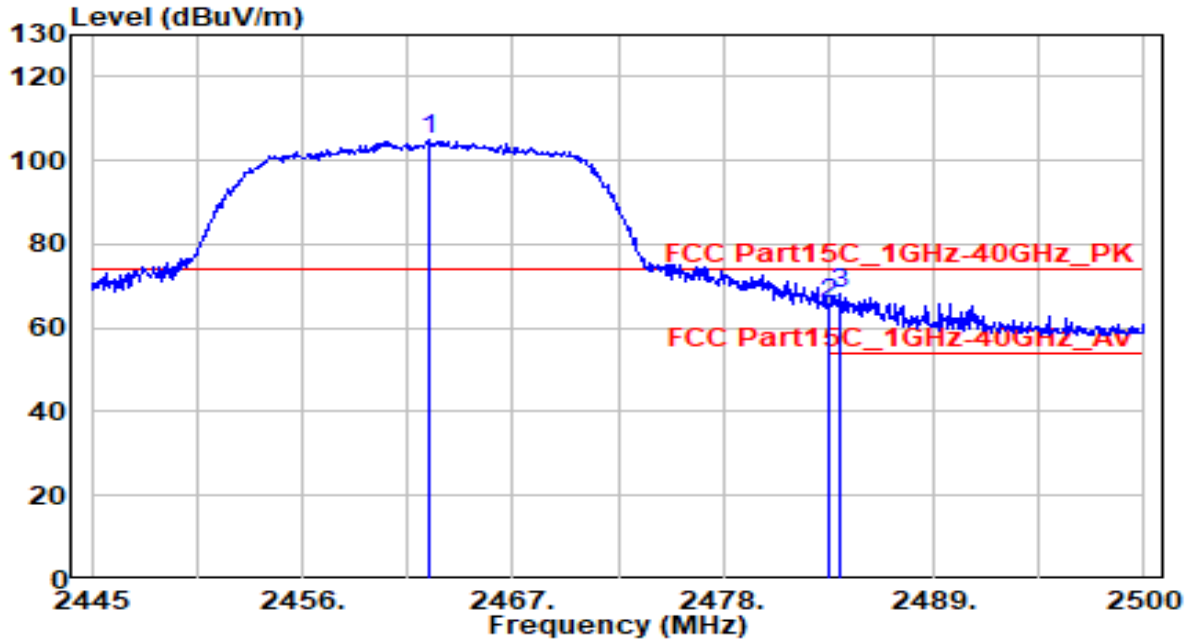


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.655	73.83	30.95	104.78	N/A	N/A	265	95	Peak
2	2483.500	34.96	30.99	65.95	-8.05	74.00	265	95	Peak
3	* 2484.050	36.98	30.99	67.97	-6.03	74.00	265	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-01-18
Factor	DRH18-E	Temp. / Humidity	21°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

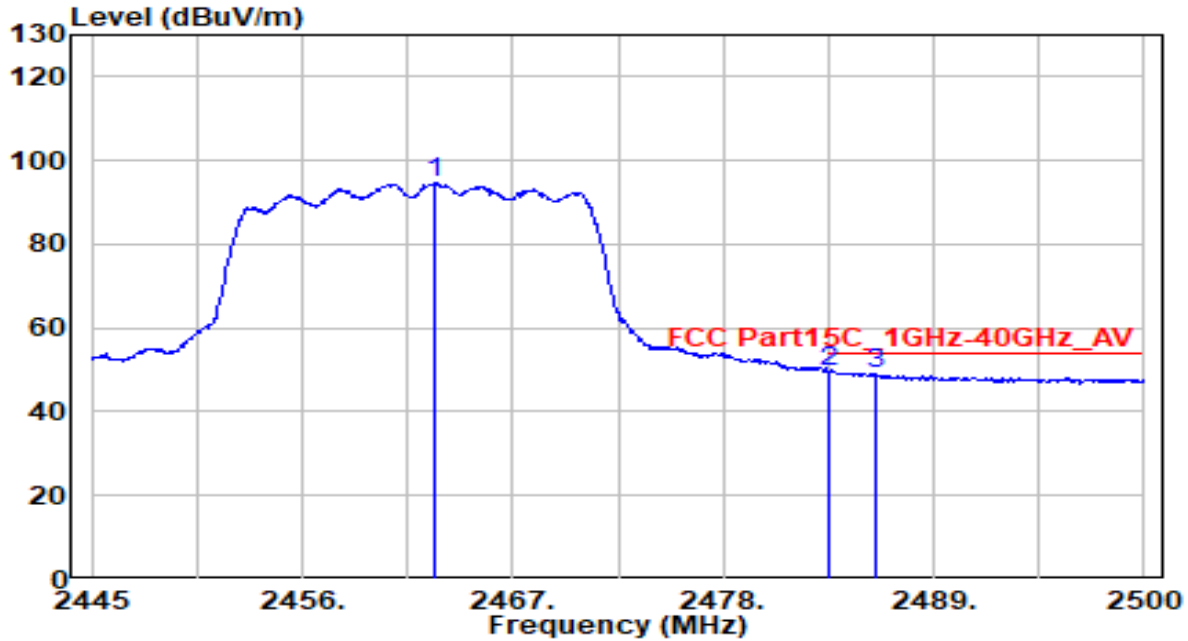

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.930	63.63	30.95	94.58	N/A	N/A	265	95	Average
2	* 2483.500	18.53	30.99	49.52	-4.48	54.00	265	95	Average
3	2485.920	17.86	30.99	48.86	-5.14	54.00	265	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

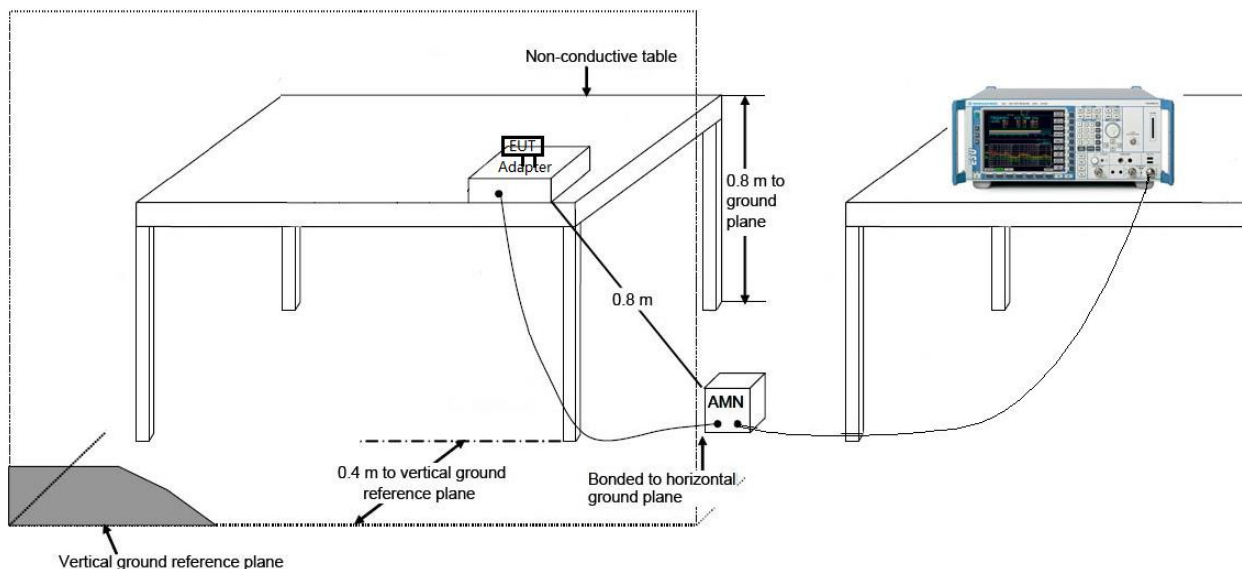

7.8.3. Test Result

EUT	Module	Date of Test	2022-01-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.7°C /71%
Polarity	Line1	Site / Test Engineer	SR2 / Owen
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

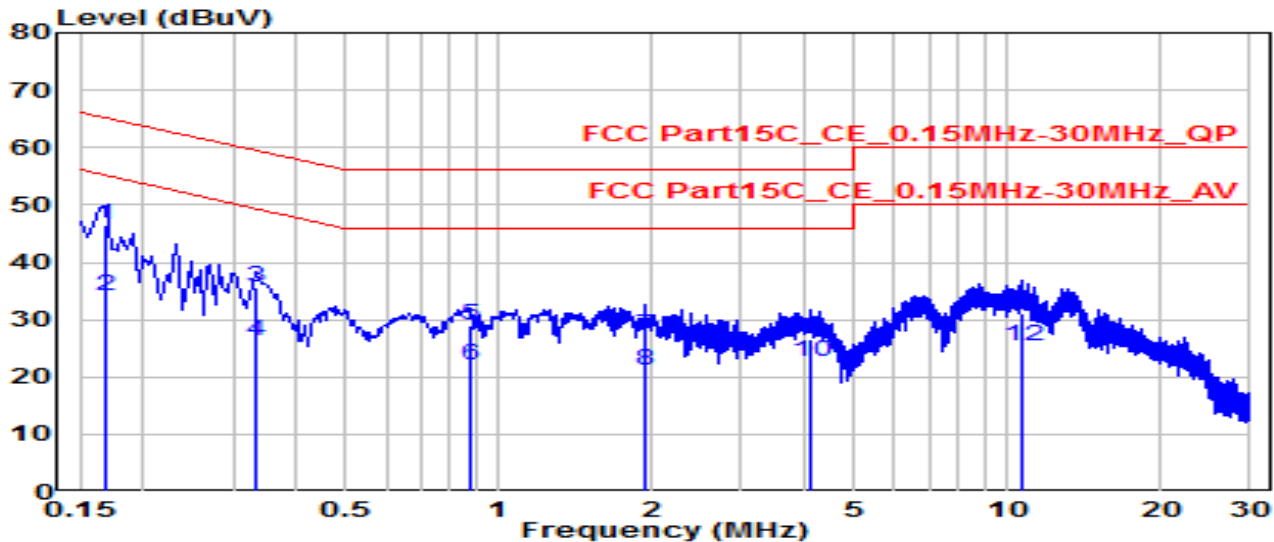


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.168	36.92	9.61	46.53	-18.52	65.06	QP
2	*	0.168	24.41	9.61	34.02	-21.04	55.06	Average
3		0.334	25.96	9.62	35.58	-23.76	59.34	QP
4		0.334	16.69	9.62	26.31	-23.03	49.34	Average
5		0.879	19.35	9.65	29.00	-27.00	56.00	QP
6		0.879	12.24	9.65	21.89	-24.11	46.00	Average
7		1.936	17.52	9.69	27.21	-28.79	56.00	QP
8		1.936	11.54	9.69	21.23	-24.77	46.00	Average
9		4.105	16.92	9.72	26.64	-29.36	56.00	QP
10		4.105	12.87	9.72	22.60	-23.40	46.00	Average
11		10.634	21.19	9.88	31.07	-28.93	60.00	QP
12		10.634	15.50	9.88	25.38	-24.62	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-01-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.7°C / 71%
Polarity	Neutral	Site / Test Engineer	SR2 / Owen
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

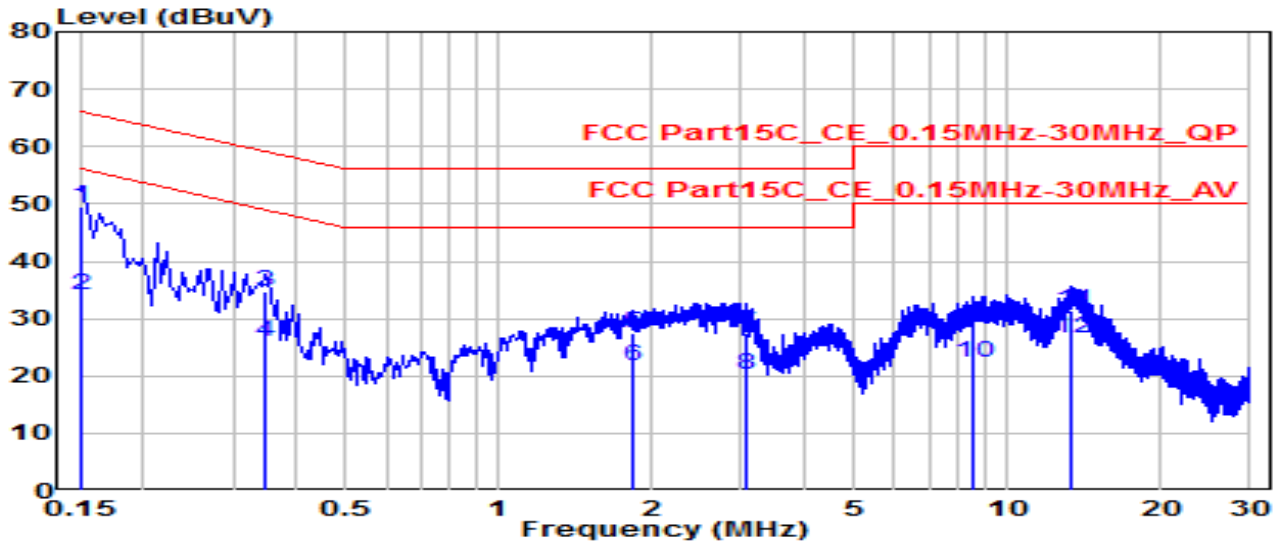


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.150	39.94	9.62	49.56	-16.44	66.00	QP
2	*	0.150	24.48	9.62	34.10	-21.90	56.00	Average
3		0.348	25.01	9.62	34.63	-24.38	59.01	QP
4		0.348	16.32	9.62	25.94	-23.07	49.01	Average
5		1.824	17.88	9.69	27.57	-28.43	56.00	QP
6		1.824	12.15	9.69	21.83	-24.17	46.00	Average
7		3.066	17.67	9.71	27.38	-28.62	56.00	QP
8		3.066	10.64	9.71	20.35	-25.65	46.00	Average
9		8.519	18.51	9.85	28.36	-31.64	60.00	QP
10		8.519	12.50	9.85	22.34	-27.66	50.00	Average
11		13.415	21.44	9.94	31.38	-28.62	60.00	QP
12		13.415	16.52	9.94	26.46	-23.54	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-01-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.7°C /71%
Polarity	Line1	Site / Test Engineer	SR2 / Owen
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

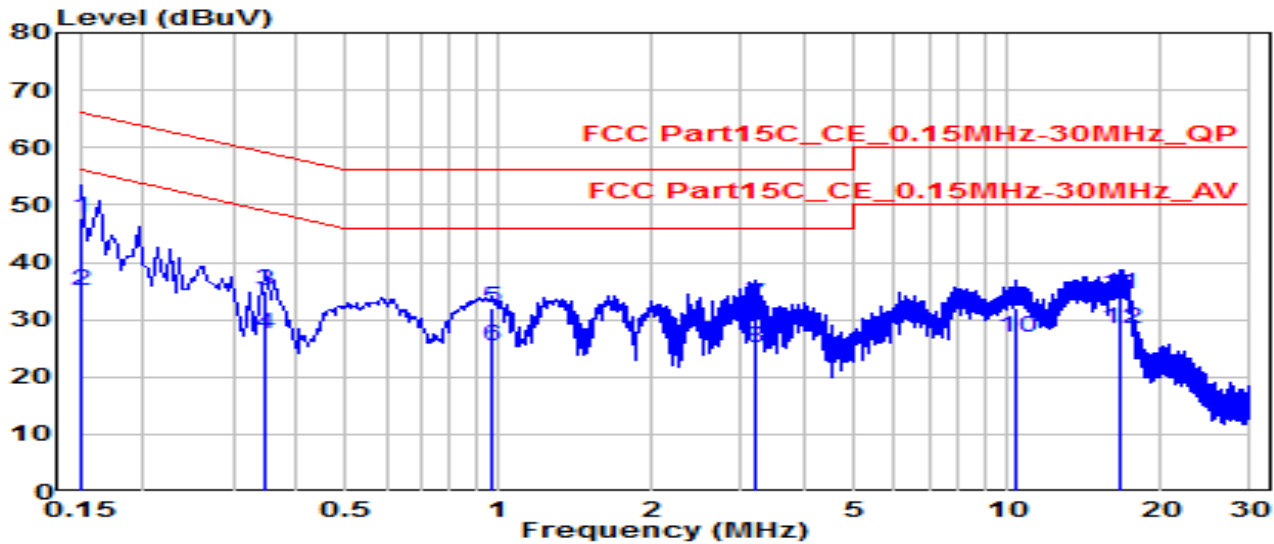


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.150	38.07	9.61	47.68	-18.32	66.00	QP
2	*	0.150	25.48	9.61	35.09	-20.91	56.00	Average
3		0.348	25.49	9.62	35.11	-23.90	59.01	QP
4		0.348	17.79	9.62	27.41	-21.60	49.01	Average
5		0.973	22.27	9.66	31.93	-24.07	56.00	QP
6		0.973	15.60	9.66	25.26	-20.74	46.00	Average
7		3.178	22.80	9.71	32.51	-23.49	56.00	QP
8		3.178	15.34	9.71	25.05	-20.95	46.00	Average
9		10.368	22.06	9.87	31.93	-28.07	60.00	QP
10		10.368	16.90	9.87	26.77	-23.23	50.00	Average
11		16.596	24.62	9.94	34.56	-25.44	60.00	QP
12		16.596	18.48	9.94	28.42	-21.58	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-01-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.7°C / 71%
Polarity	Neutral	Site / Test Engineer	SR2 / Owen
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

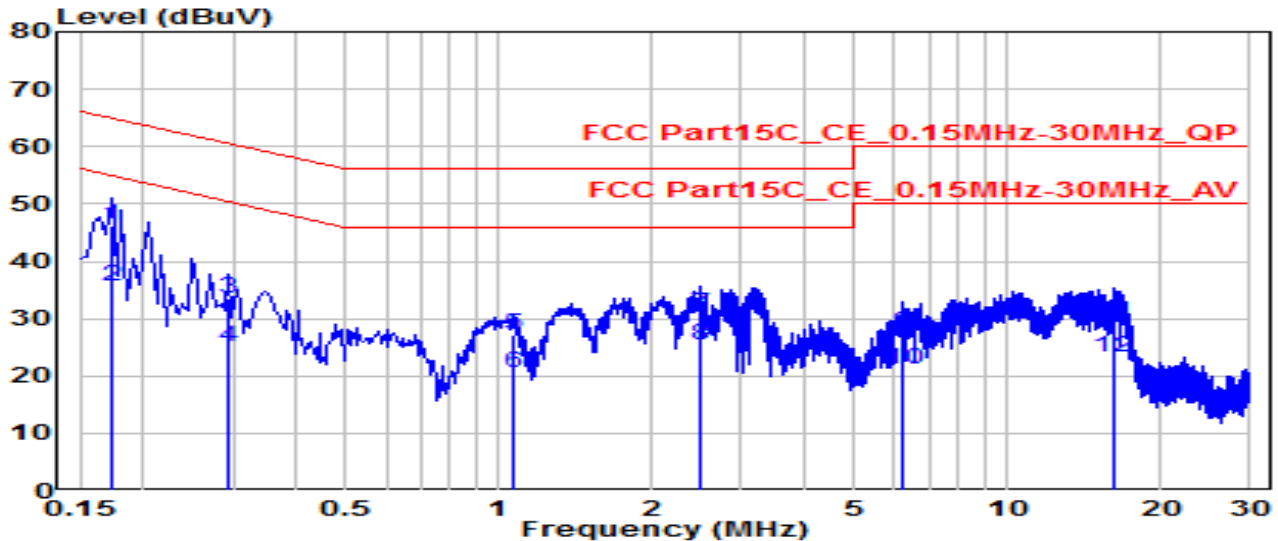

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.172	36.51	9.62	46.13	-18.71	64.84	QP
2	*	0.172	26.07	9.62	35.68	-19.16	54.84	Average
3		0.294	23.82	9.62	33.44	-26.97	60.41	QP
4		0.294	15.33	9.62	24.95	-25.46	50.41	Average
5		1.063	17.62	9.67	27.29	-28.71	56.00	QP
6		1.063	10.94	9.67	20.61	-25.39	46.00	Average
7		2.476	21.03	9.70	30.73	-25.27	56.00	QP
8		2.476	15.56	9.70	25.26	-20.74	46.00	Average
9		6.188	17.82	9.78	27.60	-32.40	60.00	QP
10		6.188	11.48	9.78	21.27	-28.73	50.00	Average
11		16.101	19.36	9.98	29.34	-30.66	60.00	QP
12		16.101	13.12	9.98	23.11	-26.89	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Module** is in compliance with Part 15C & ISSED RSS-247 of the FCC & IC Rules.

_____ The End _____