


|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH144 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

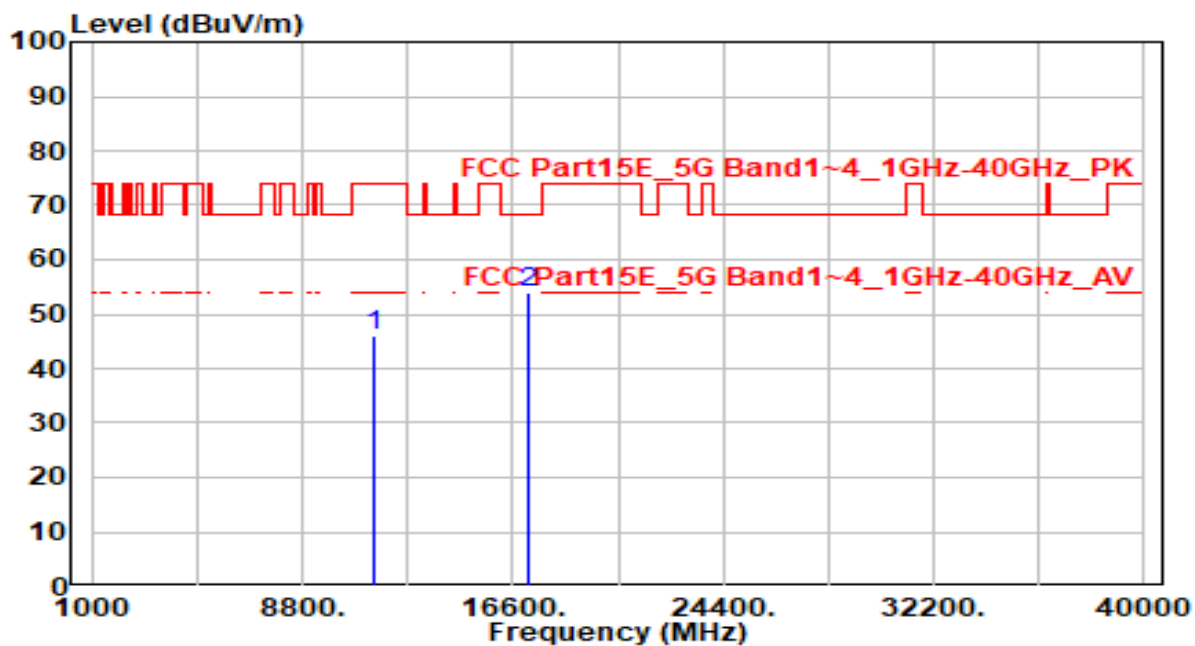


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 40.88          | 5.17       | 46.05                | -27.95      | 74.00          | 200         | 360         | Peak              |
| 2  | * 17160.000     | 48.53          | 5.28       | 53.81                | -14.39      | 68.20          | 200         | 75          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH144 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

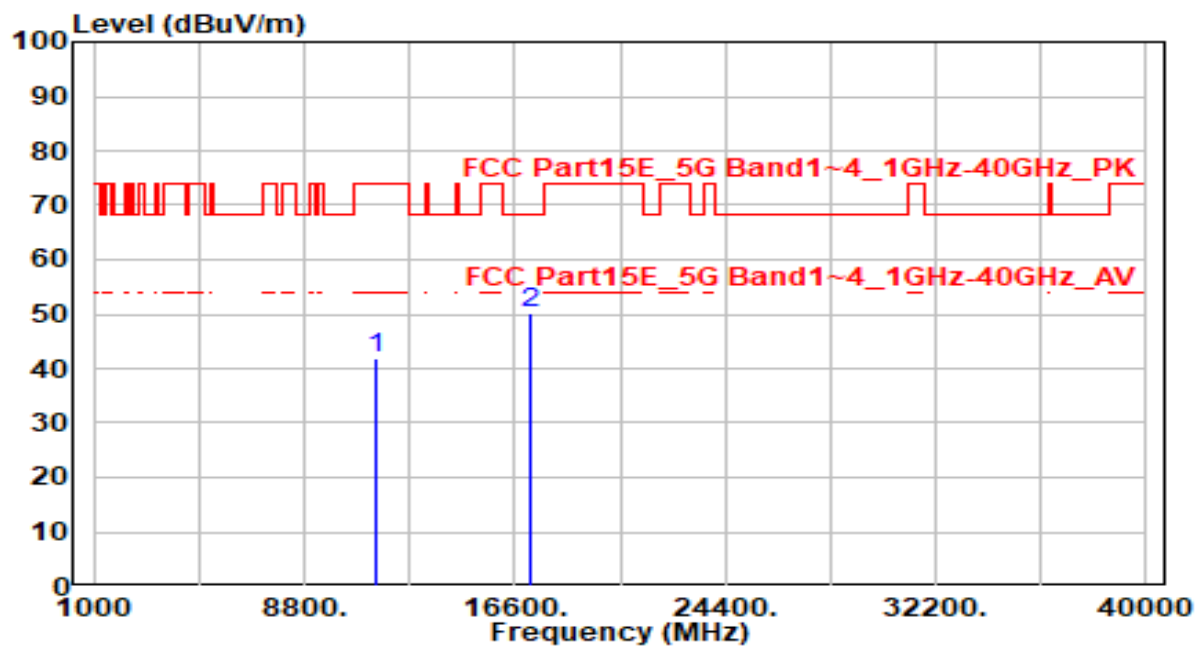


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 36.64          | 5.17       | 41.81                | -32.19      | 74.00          | 200         | 0           | Peak              |
| 2  | * 17160.000     | 44.85          | 5.28       | 50.14                | -18.06      | 68.20          | 200         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

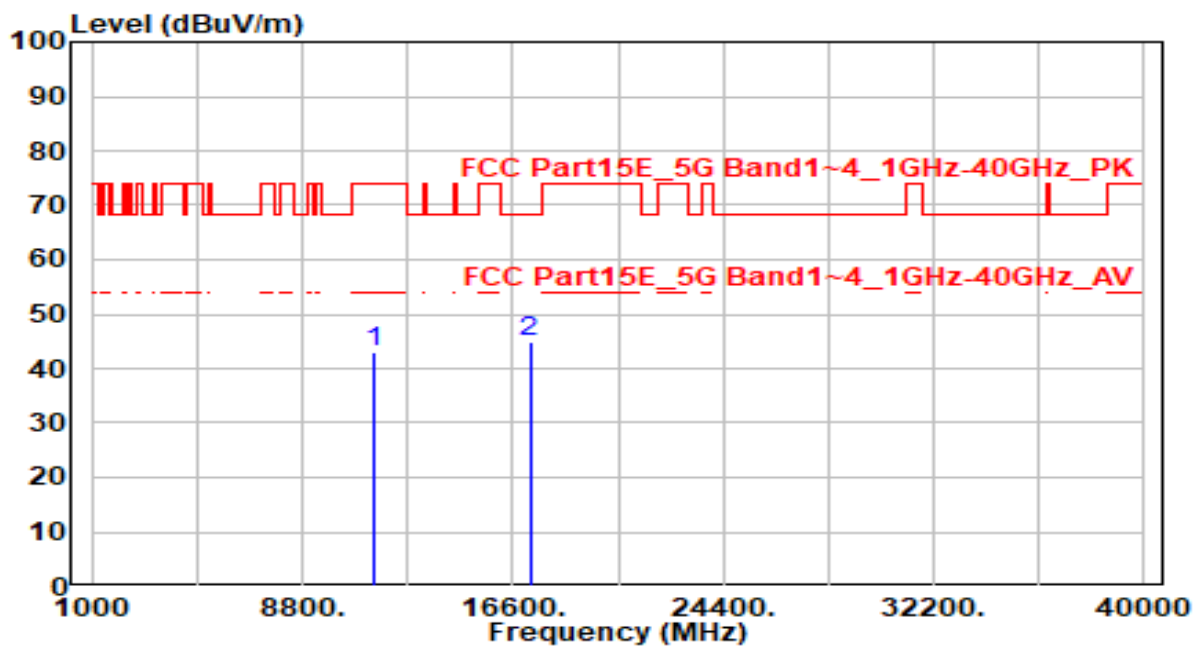


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 37.93          | 5.15       | 43.09                | -30.91      | 74.00          | 200         | 295         | Peak              |
| 2  | * 17235.000     | 39.81          | 5.17       | 44.98                | -23.22      | 68.20          | 200         | 20          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

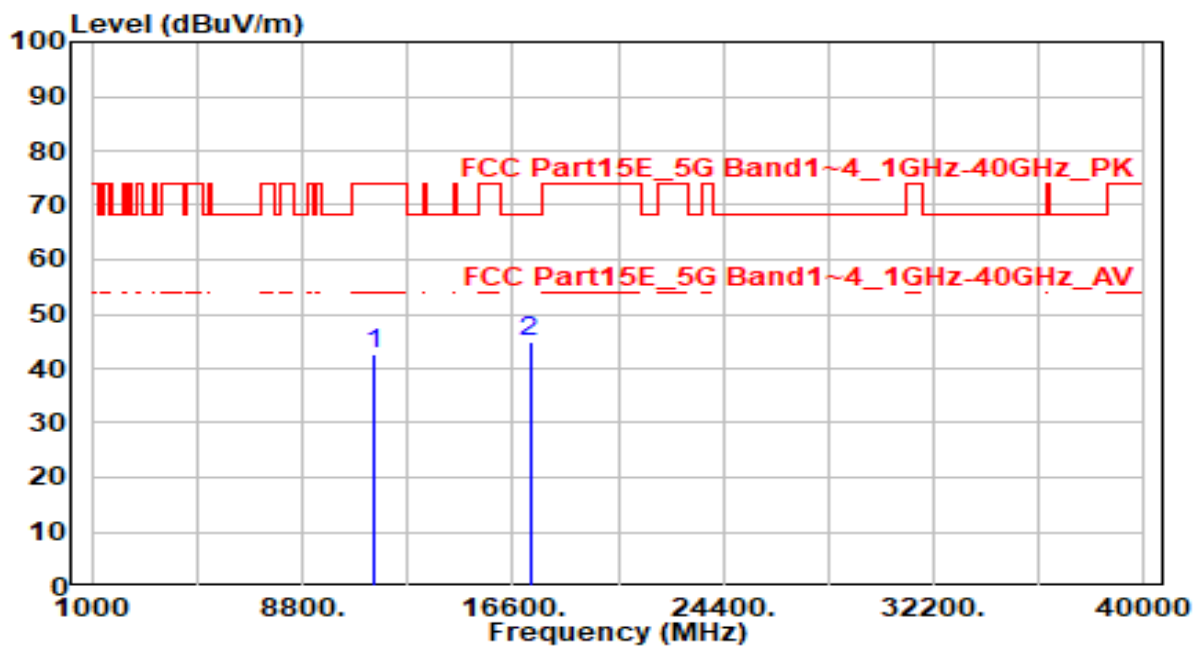


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 37.33          | 5.15       | 42.49                | -31.51      | 74.00          | 250         | 0           | Peak              |
| 2  | * 17235.000     | 39.72          | 5.17       | 44.89                | -23.31      | 68.20          | 100         | 45          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH157 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

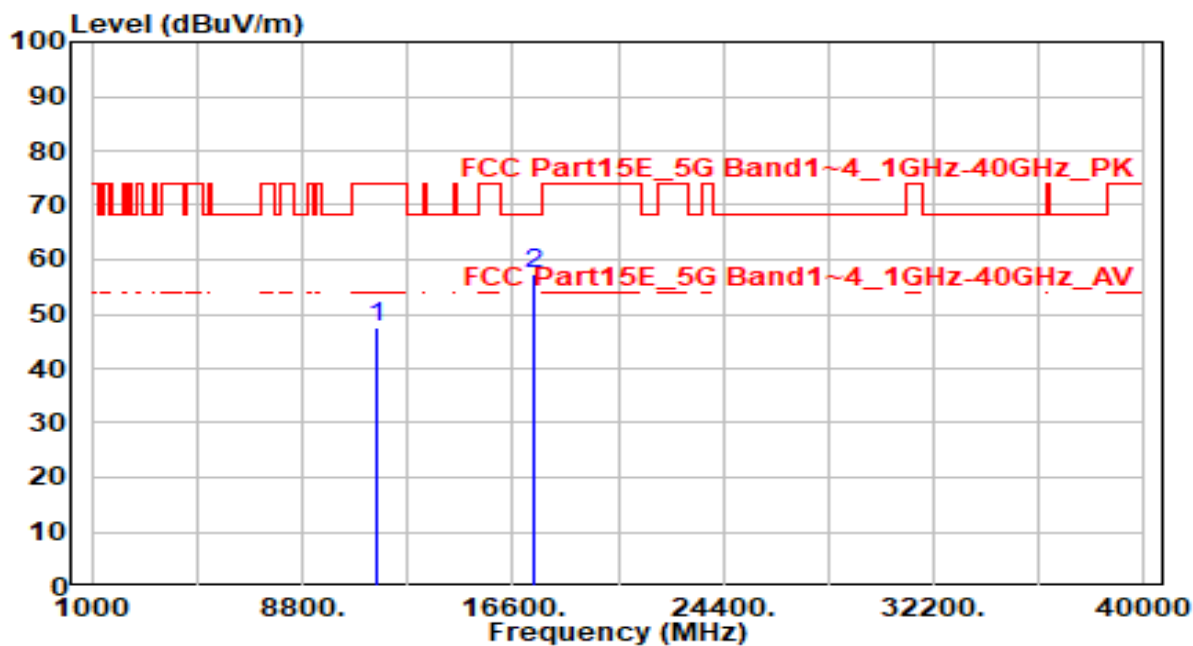


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 42.49          | 5.14       | 47.62                | -26.38      | 74.00          | 200         | 290         | Peak              |
| 2  | * 17355.000     | 52.27          | 5.09       | 57.36                | -10.84      | 68.20          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH157 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

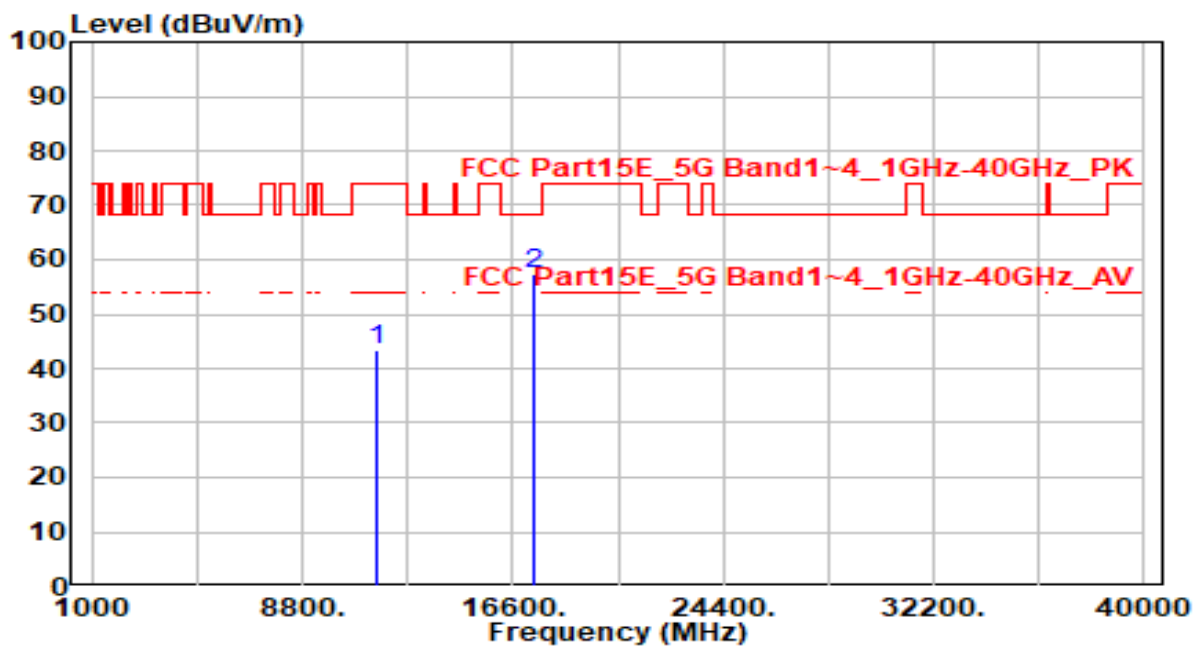


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 38.18          | 5.14       | 43.31                | -30.69      | 74.00          | 175         | 360         | Peak              |
| 2  | * 17355.000     | 52.28          | 5.09       | 57.38                | -10.82      | 68.20          | 100         | 350         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

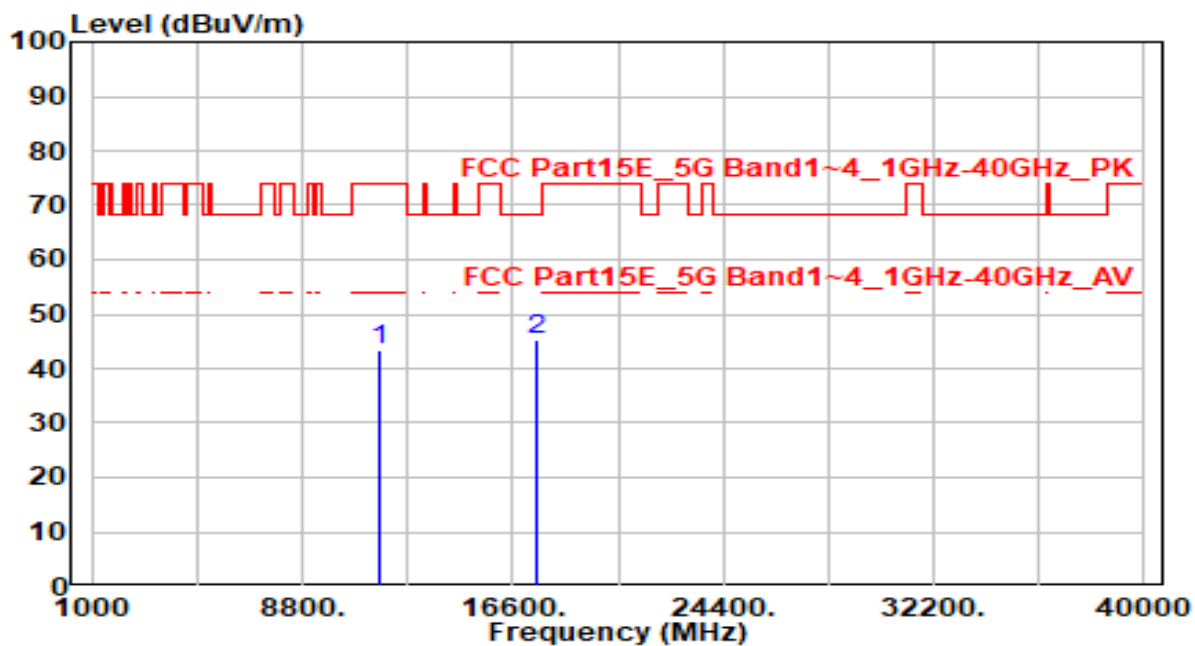


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 38.10          | 5.12       | 43.22                | -30.78      | 74.00          | 100         | 285         | Peak              |
| 2  | * 17475.000     | 40.09          | 5.10       | 45.19                | -23.01      | 68.20          | 200         | 35          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170            | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

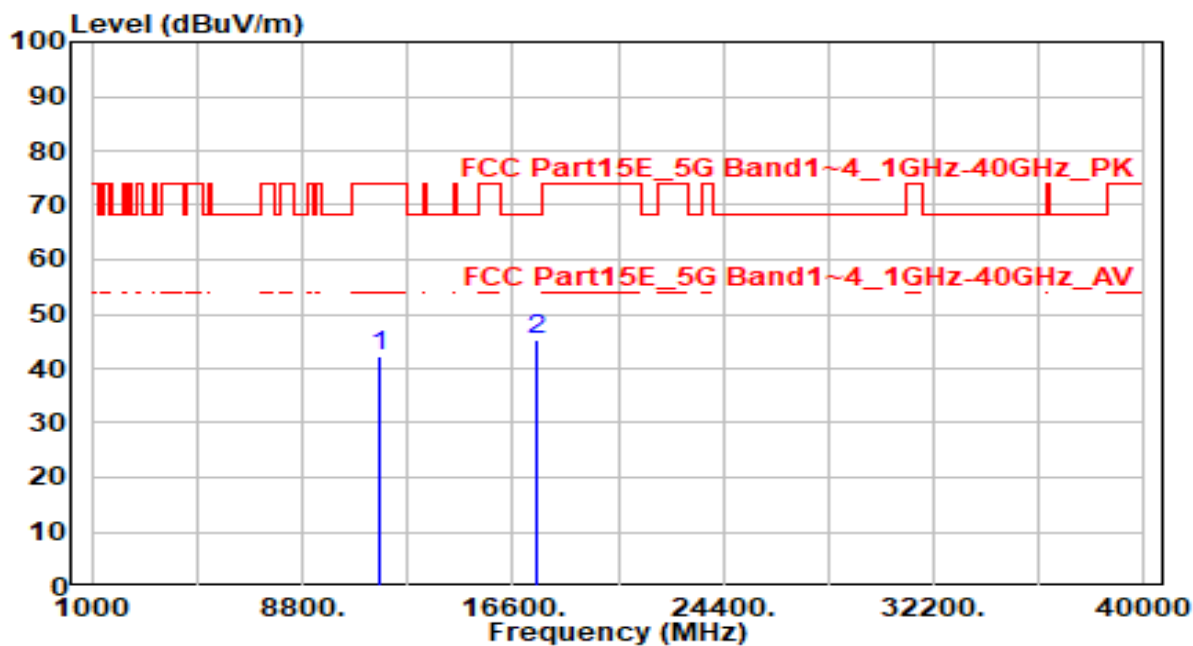


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 37.14          | 5.12       | 42.27                | -31.73      | 74.00          | 200         | 320         | Peak              |
| 2  | * 17475.000     | 40.08          | 5.10       | 45.18                | -23.02      | 68.20          | 200         | 335         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH36 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

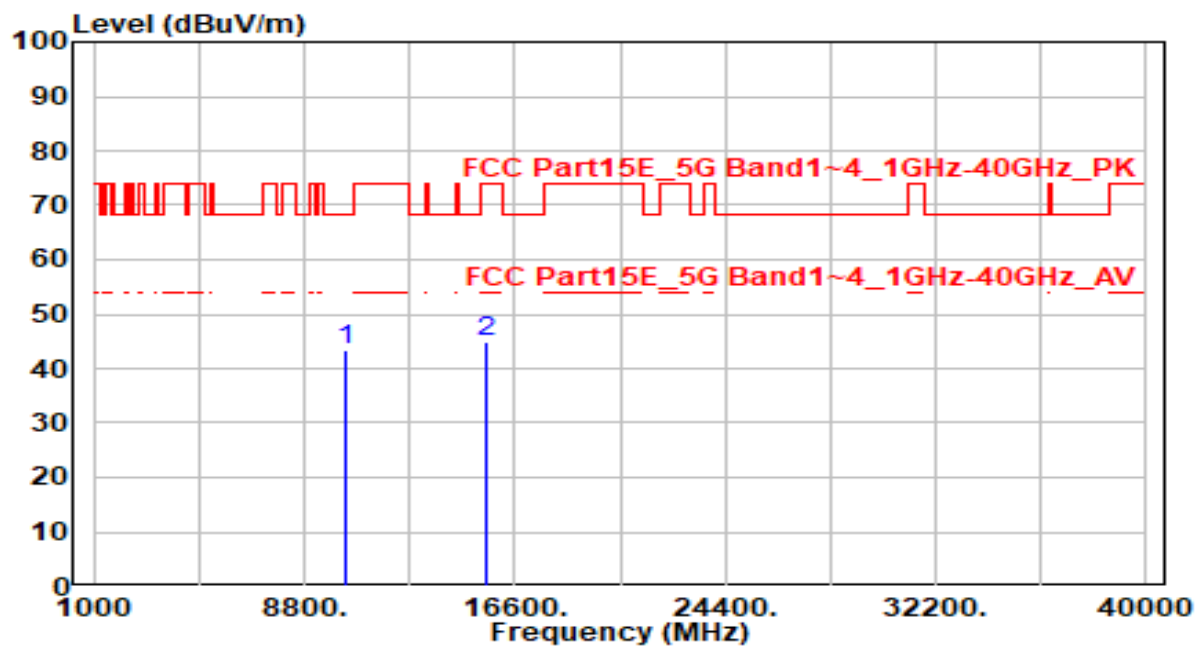


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10360.000     | 38.81          | 4.62       | 43.43                | -24.77      | 68.20          | 105         | 360         | Peak              |
| 2  | 15540.000       | 38.82          | 5.91       | 44.73                | -29.27      | 74.00          | 200         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH36 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

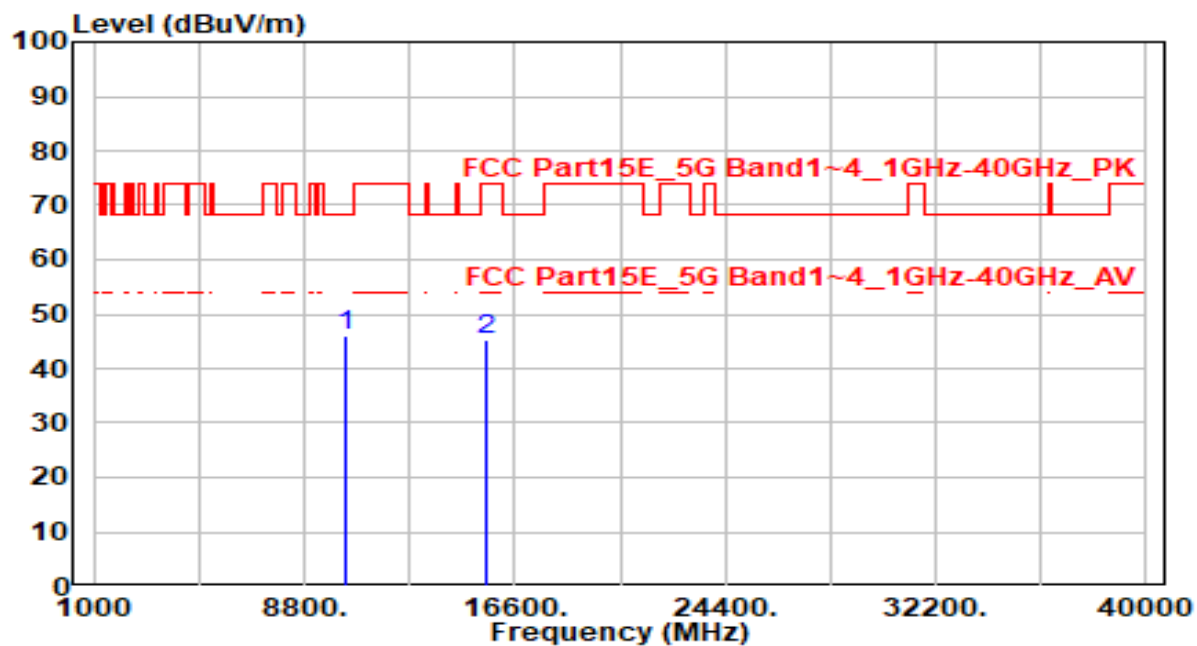


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10360.000     | 41.32          | 4.62       | 45.94                | -22.26      | 68.20          | 165         | 360         | Peak              |
| 2  | 15540.000       | 39.21          | 5.91       | 45.12                | -28.88      | 74.00          | 100         | 230         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH44 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

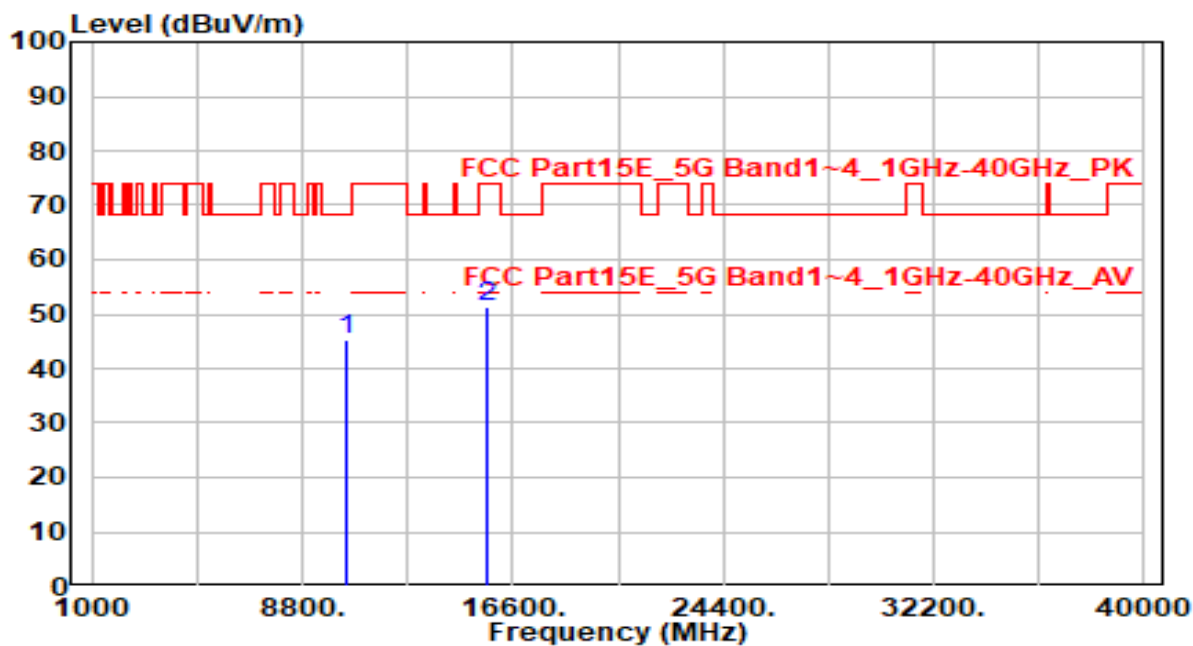


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10440.000       | 40.73          | 4.62       | 45.35                | -22.85      | 68.20          | 146         | 360         | Peak              |
| 2  | * 15660.000     | 45.35          | 5.98       | 51.33                | -22.67      | 74.00          | 200         | 21          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH44 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

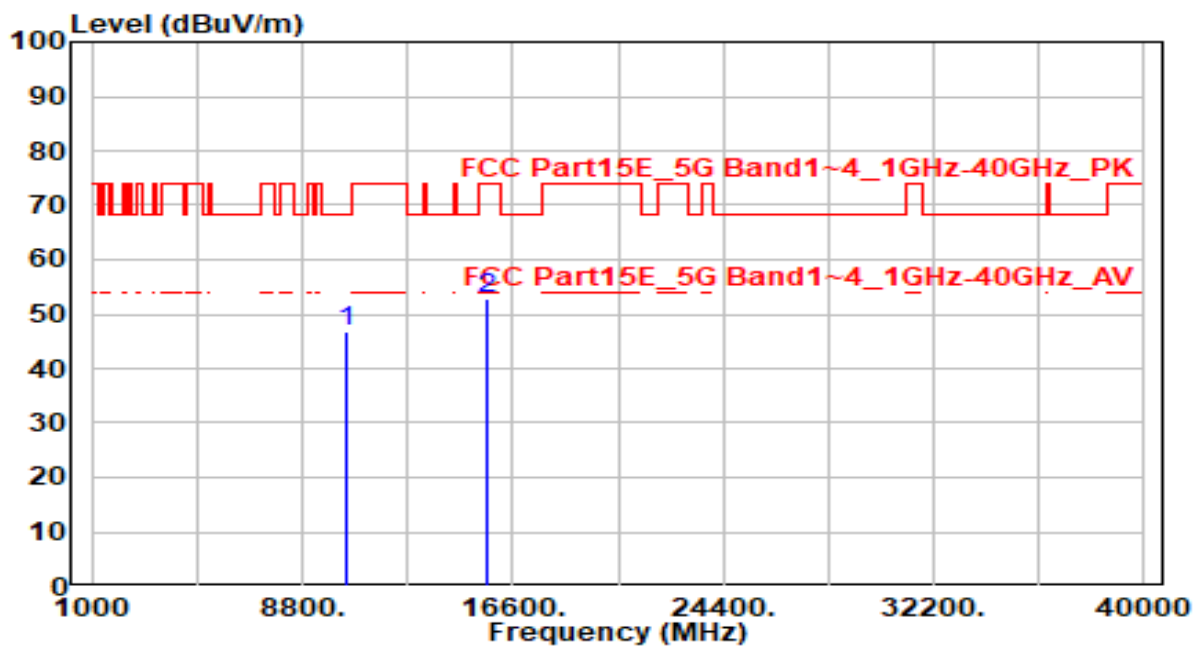


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10440.000       | 42.15          | 4.62       | 46.77                | -21.43      | 68.20          | 100         | 0           | Peak              |
| 2  | * 15660.000     | 46.73          | 5.98       | 52.70                | -21.30      | 74.00          | 162         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH48 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

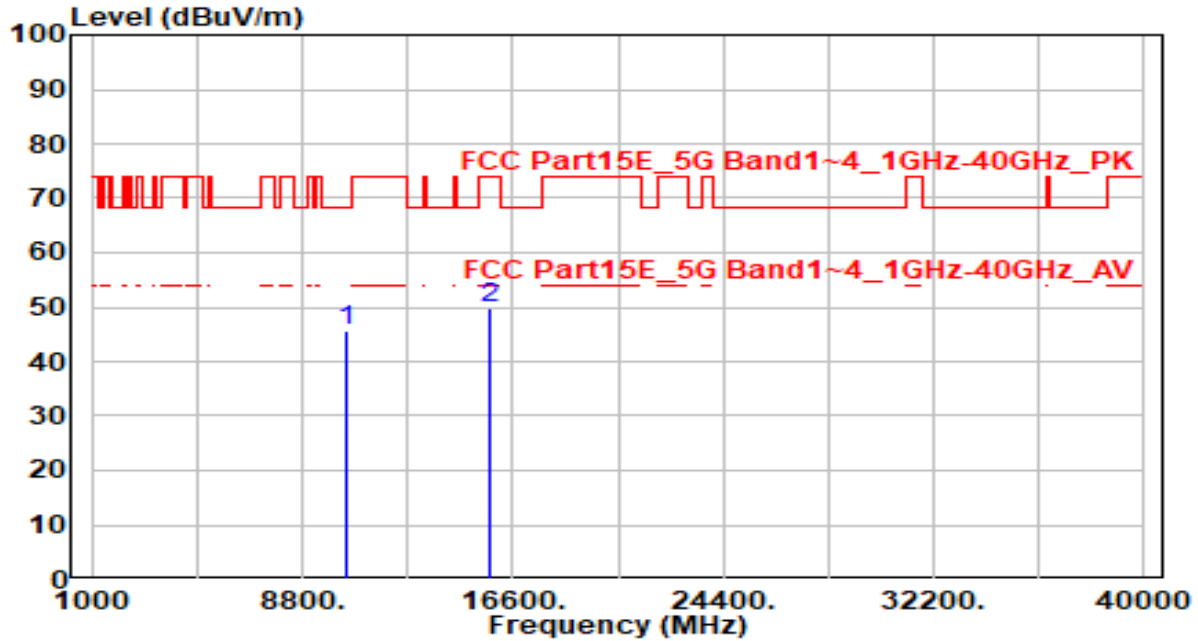


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10480.000     | 41.06          | 4.63       | 45.69                | -22.51      | 68.20          | 100         | 360         | Peak              |
| 2  | 15720.000       | 43.86          | 6.03       | 49.89                | -24.11      | 74.00          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_CH48 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

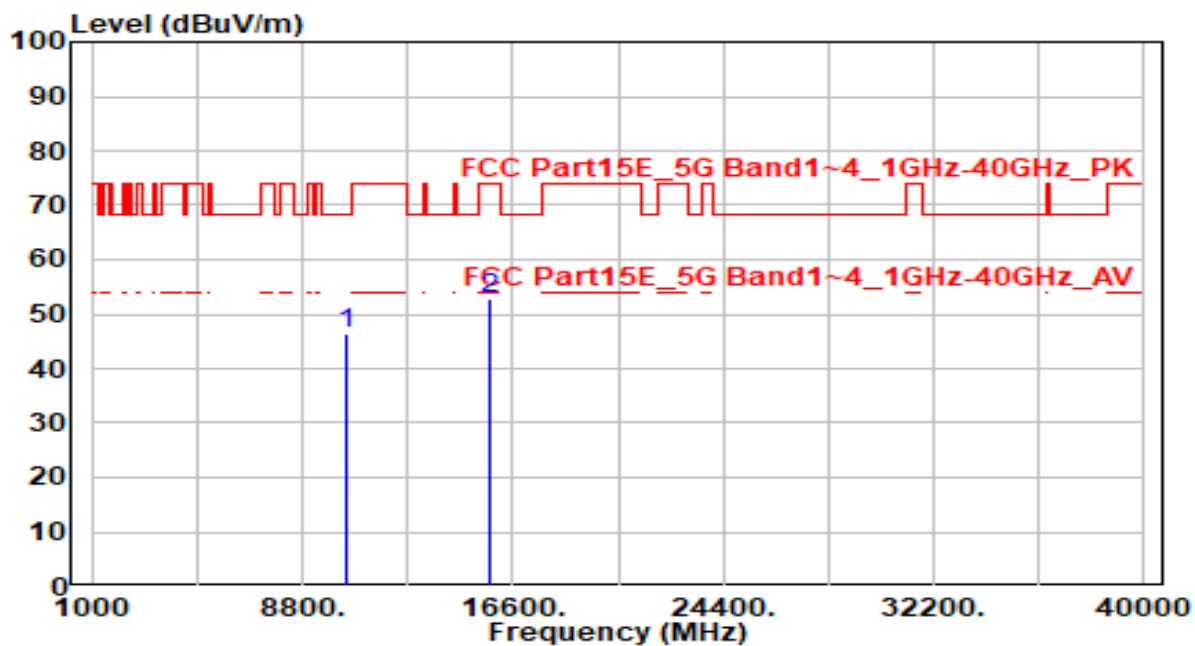


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10480.000       | 41.75          | 4.63       | 46.38                | -21.82      | 68.20          | 100         | 360         | Peak              |
| 2  | * 15720.000     | 46.74          | 6.03       | 52.77                | -21.23      | 74.00          | 185         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH52 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

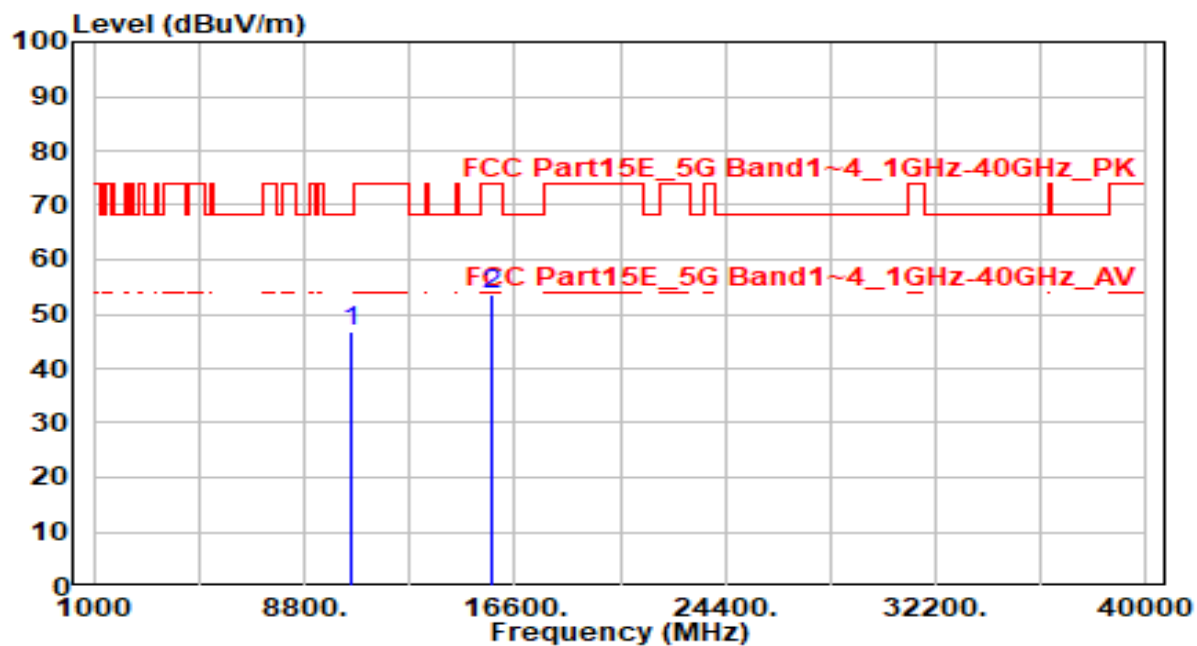


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10520.000       | 42.31          | 4.64       | 46.95                | -21.25      | 68.20          | 100         | 25          | Peak              |
| 2  | * 15780.000     | 47.34          | 6.08       | 53.42                | -20.58      | 74.00          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH52 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

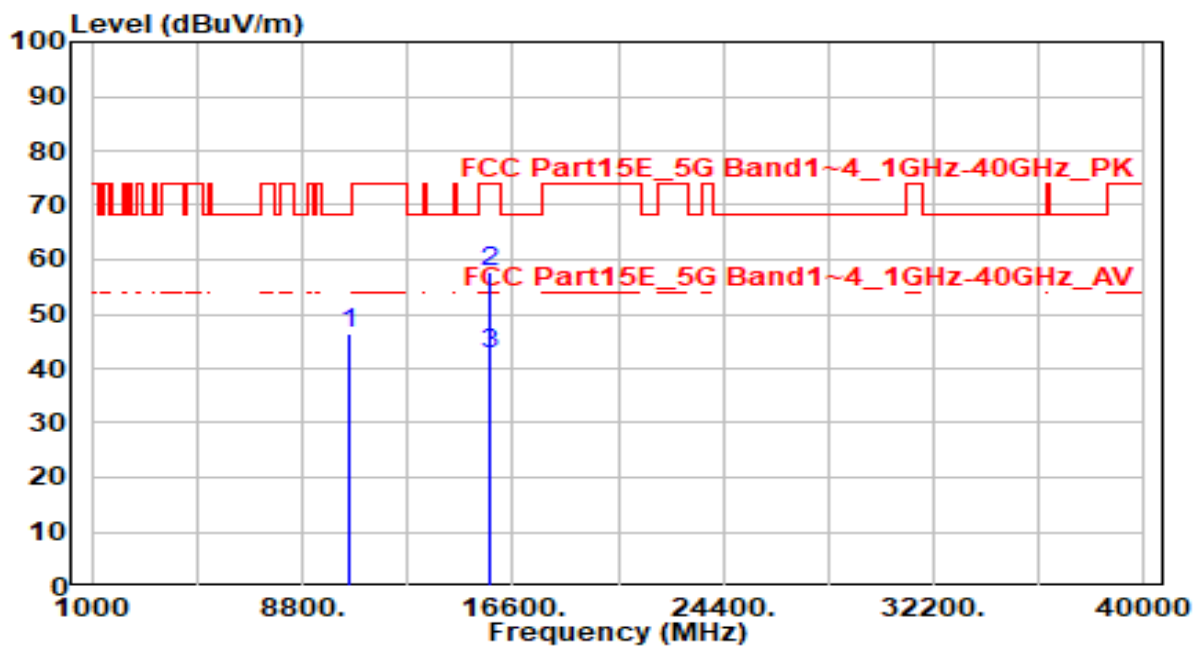


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10520.000       | 41.69          | 4.64       | 46.33                | -21.87      | 68.20          | 170         | 360         | Peak              |
| 2  | * 15780.000     | 51.49          | 6.08       | 57.57                | -16.43      | 74.00          | 210         | 20          | Peak              |
| 3  | * 15780.000     | 36.63          | 6.08       | 42.71                | -11.29      | 54.00          | 210         | 20          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH60 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

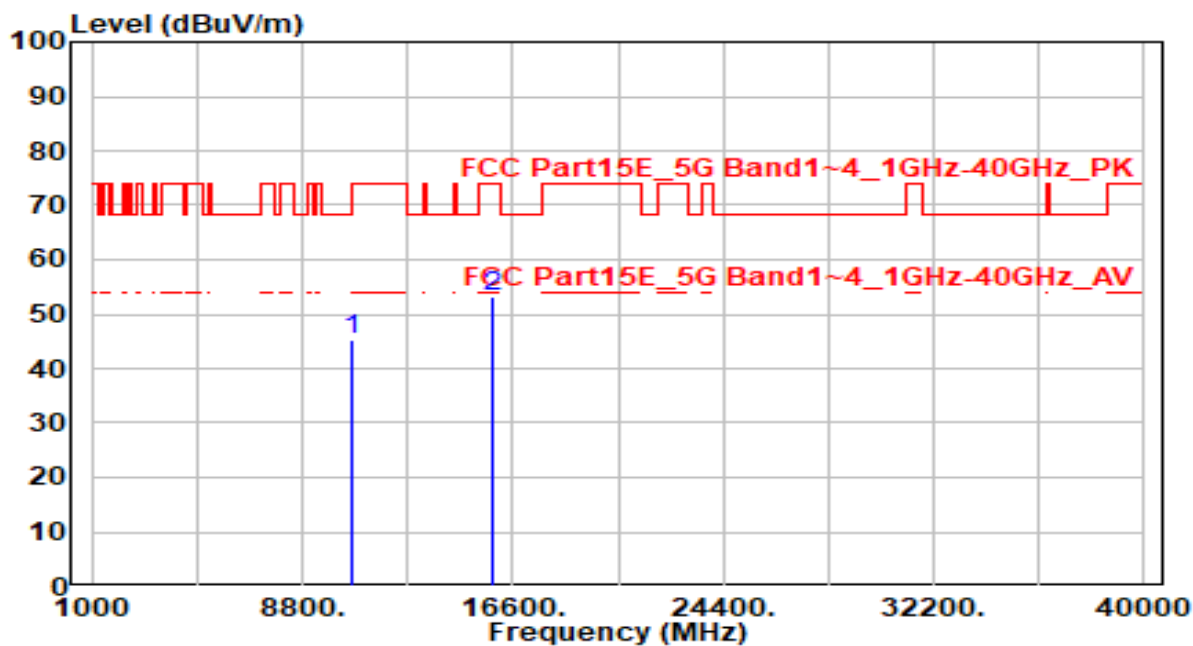


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10600.000       | 40.62          | 4.66       | 45.28                | -22.92      | 68.20          | 115         | 360         | Peak              |
| 2  | * 15900.000     | 46.88          | 6.24       | 53.12                | -20.88      | 74.00          | 200         | 50          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH60 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

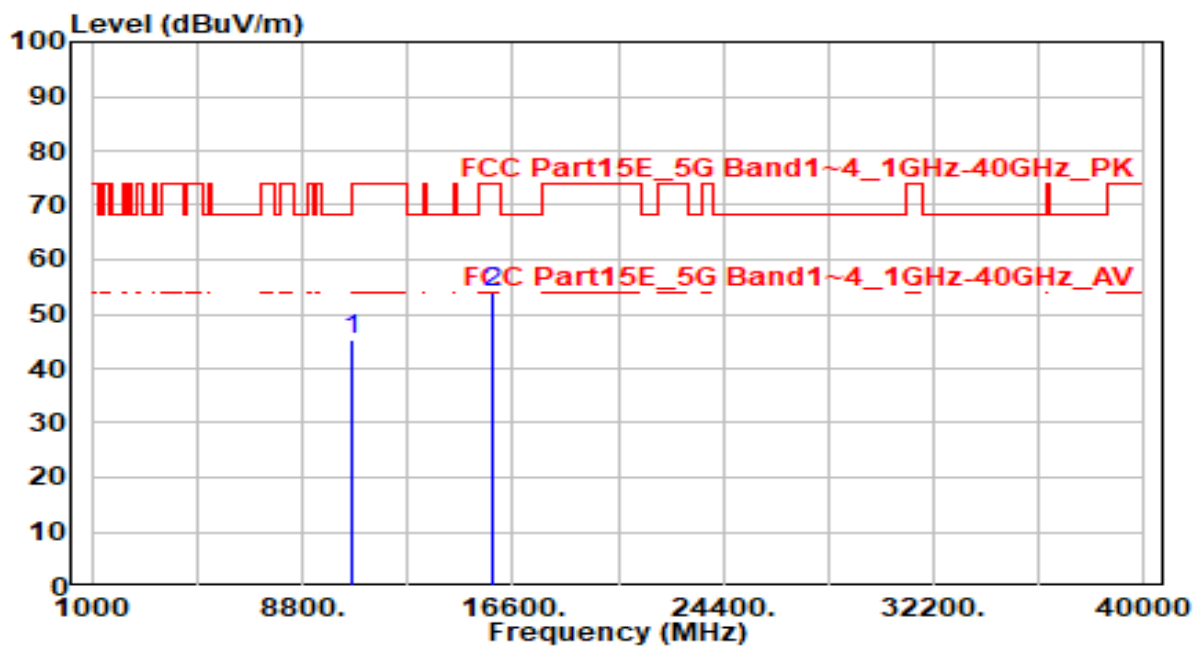


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10600.000       | 40.55          | 4.66       | 45.21                | -22.99      | 68.20          | 180         | 360         | Peak              |
| 2  | * 15900.000     | 47.67          | 6.24       | 53.90                | -20.10      | 74.00          | 100         | 290         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

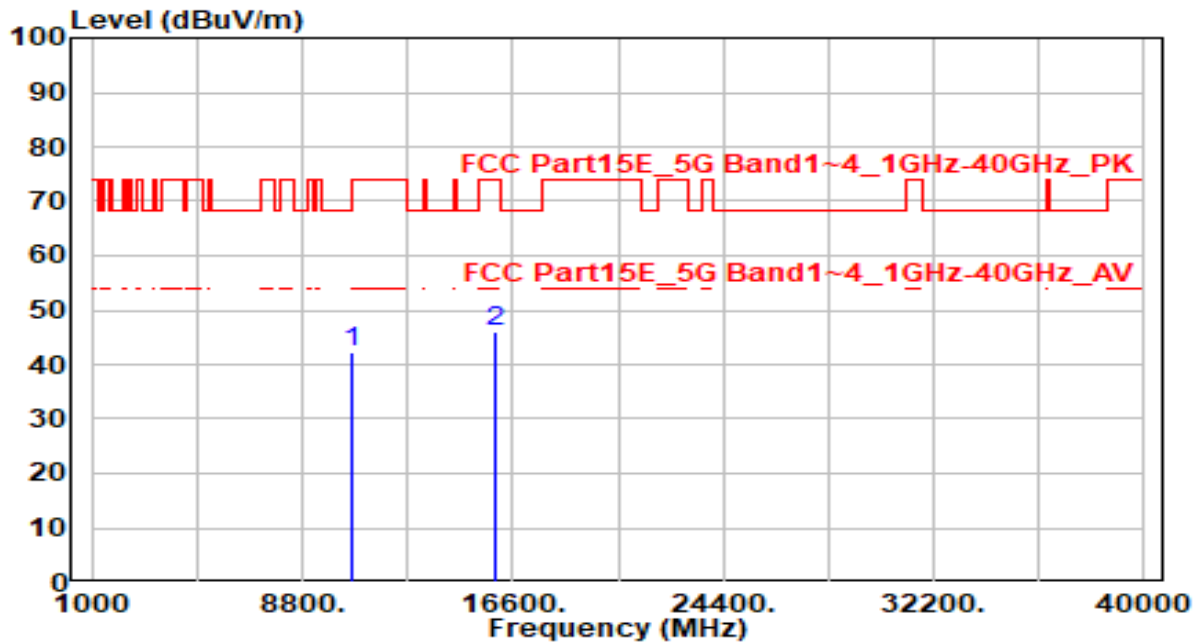


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10640.000       | 37.74          | 4.65       | 42.39                | -31.61      | 74.00          | 200         | 360         | Peak              |
| 2  | * 15960.000     | 39.68          | 6.32       | 46.00                | -28.00      | 74.00          | 200         | 320         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

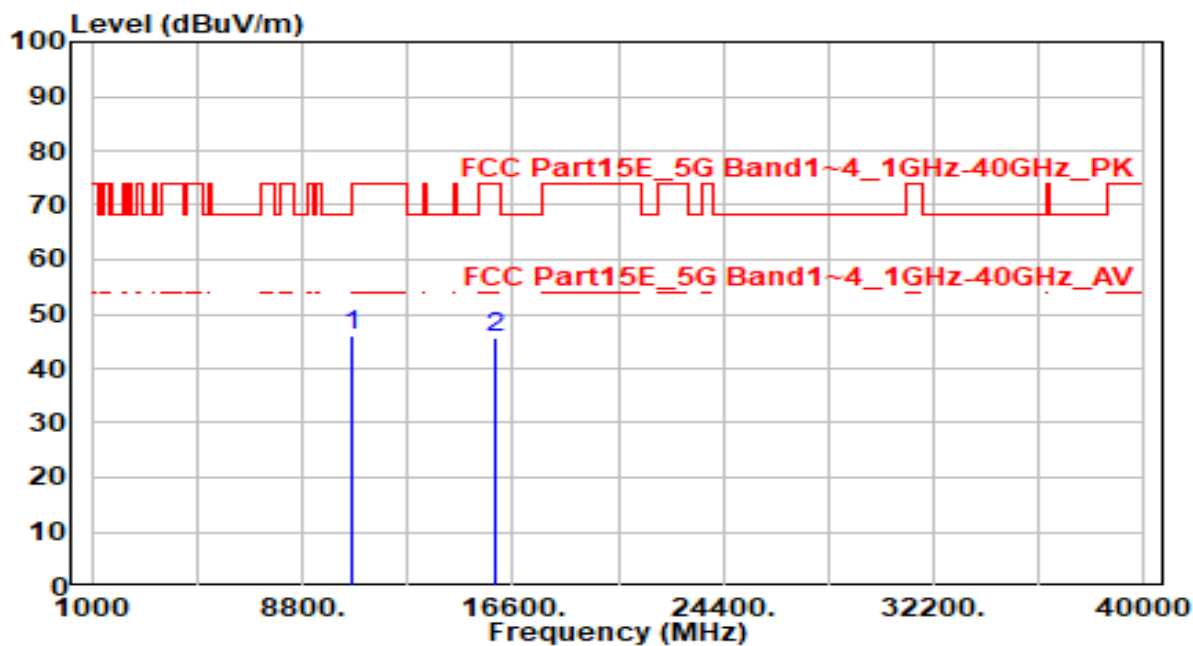


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10640.000     | 41.27          | 4.65       | 45.93                | -28.07      | 74.00          | 200         | 20          | Peak              |
| 2  | 15960.000       | 39.45          | 6.32       | 45.77                | -28.23      | 74.00          | 200         | 215         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

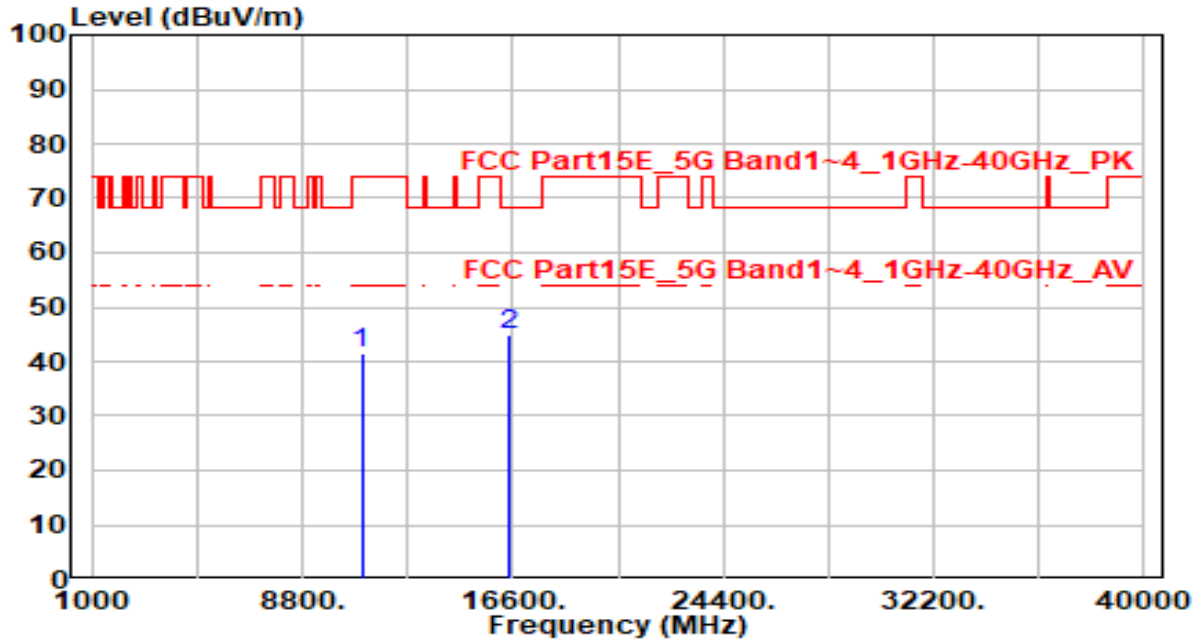


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11000.000       | 36.90          | 4.74       | 41.64                | -32.36      | 74.00          | 200         | 360         | Peak              |
| 2  | * 16500.000     | 37.92          | 6.86       | 44.78                | -23.42      | 68.20          | 200         | 250         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

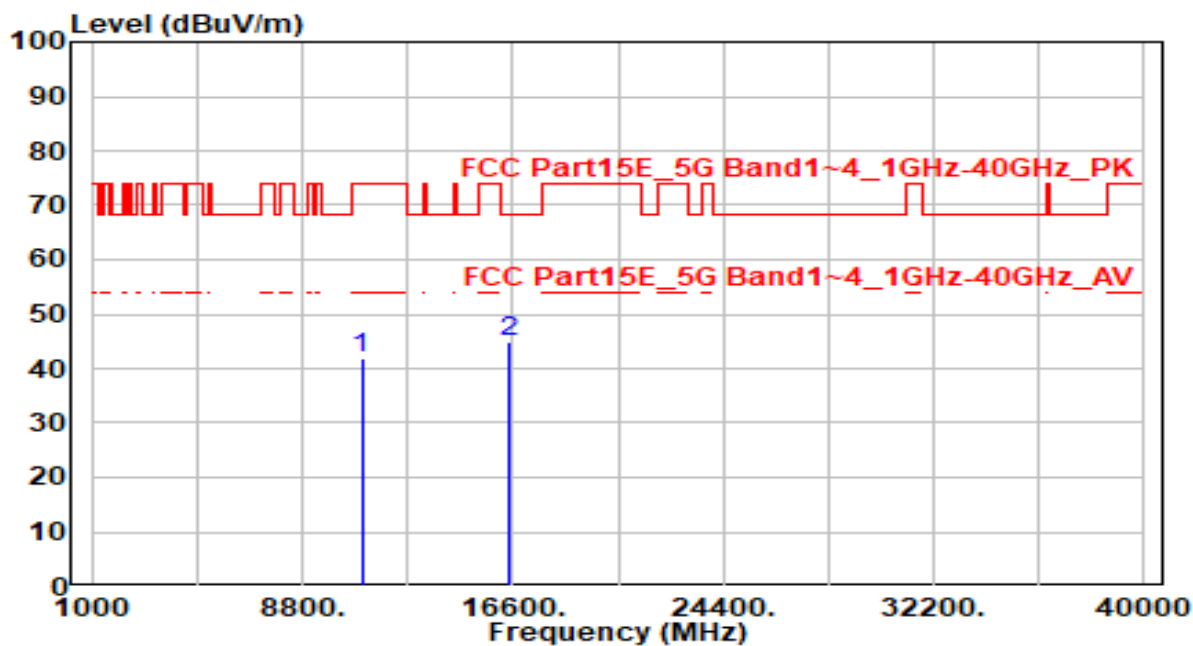


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11000.000       | 37.24          | 4.74       | 41.98                | -32.02      | 74.00          | 200         | 300         | Peak              |
| 2  | * 16500.000     | 38.11          | 6.86       | 44.97                | -23.23      | 68.20          | 200         | 160         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH120 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

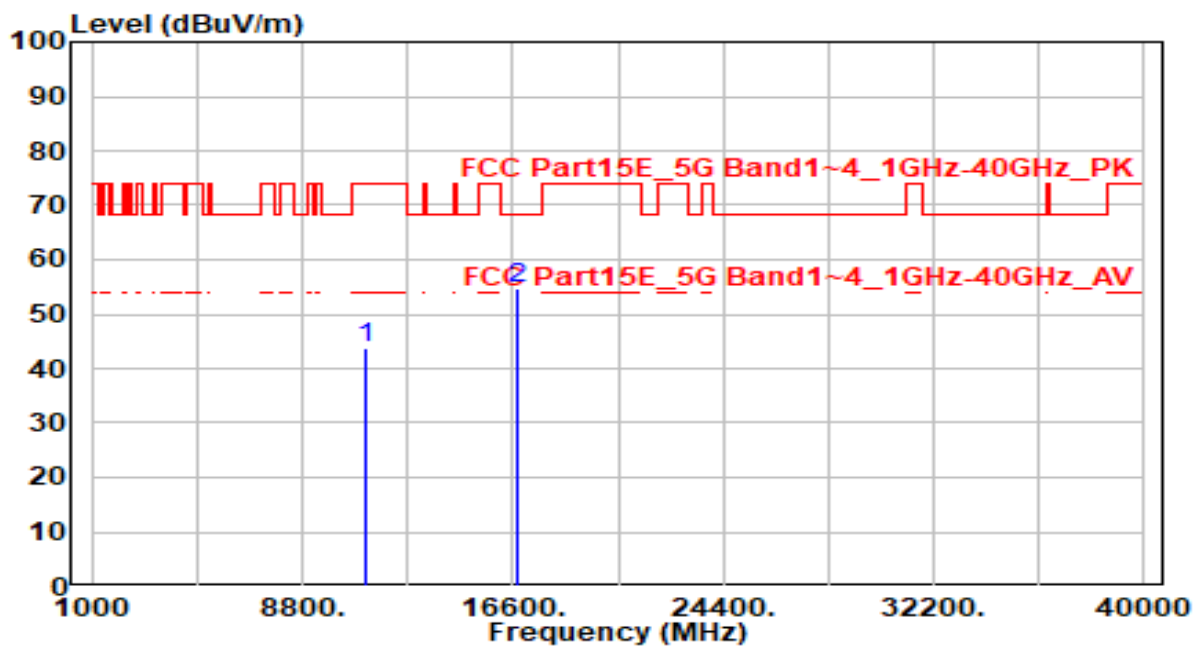


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11200.000       | 38.89          | 5.06       | 43.95                | -30.05      | 74.00          | 200         | 360         | Peak              |
| 2  | * 16800.000     | 47.53          | 7.26       | 54.79                | -13.41      | 68.20          | 145         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH120 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

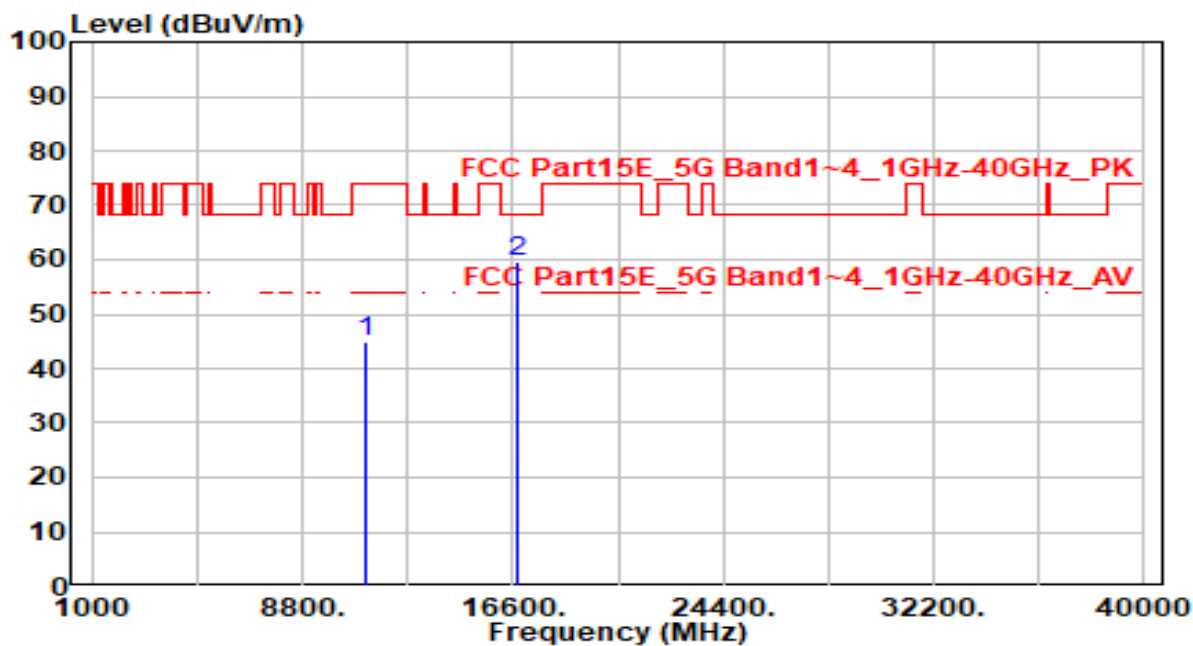


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11200.000       | 40.02          | 5.06       | 45.08                | -28.92      | 74.00          | 100         | 15          | Peak              |
| 2  | * 16800.000     | 52.36          | 7.26       | 59.62                | -8.58       | 68.20          | 100         | 5           | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

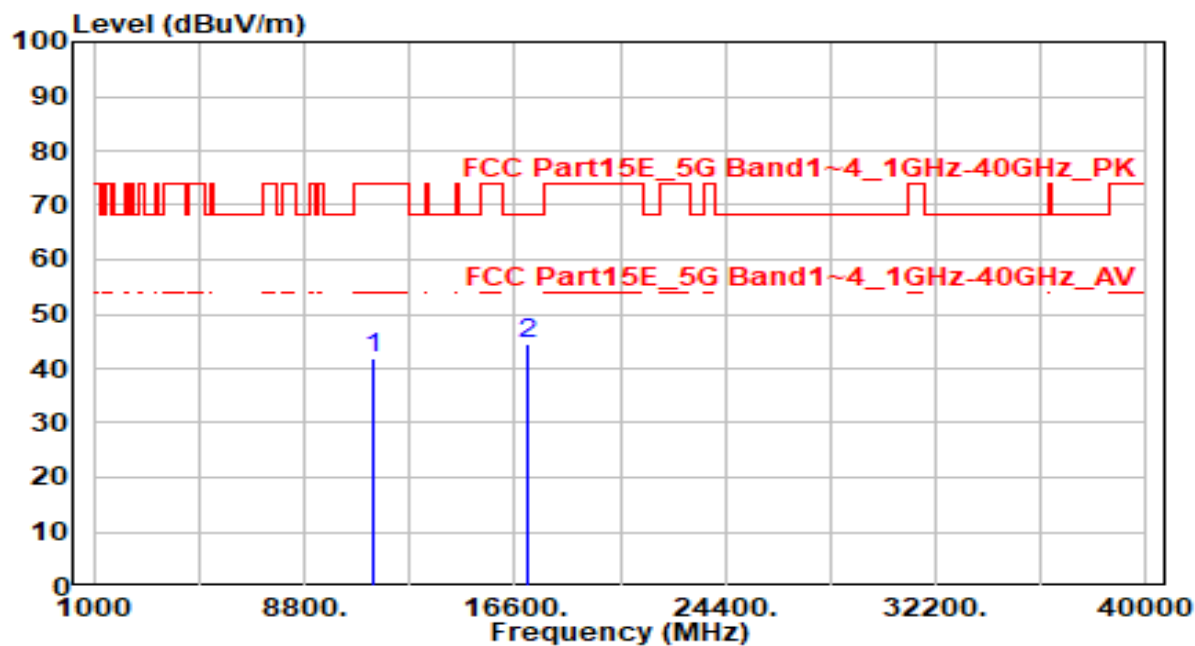


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 36.64          | 5.18       | 41.83                | -32.17      | 74.00          | 200         | 160         | Peak              |
| 2  | * 17100.000     | 39.10          | 5.41       | 44.51                | -23.69      | 68.20          | 200         | 60          | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

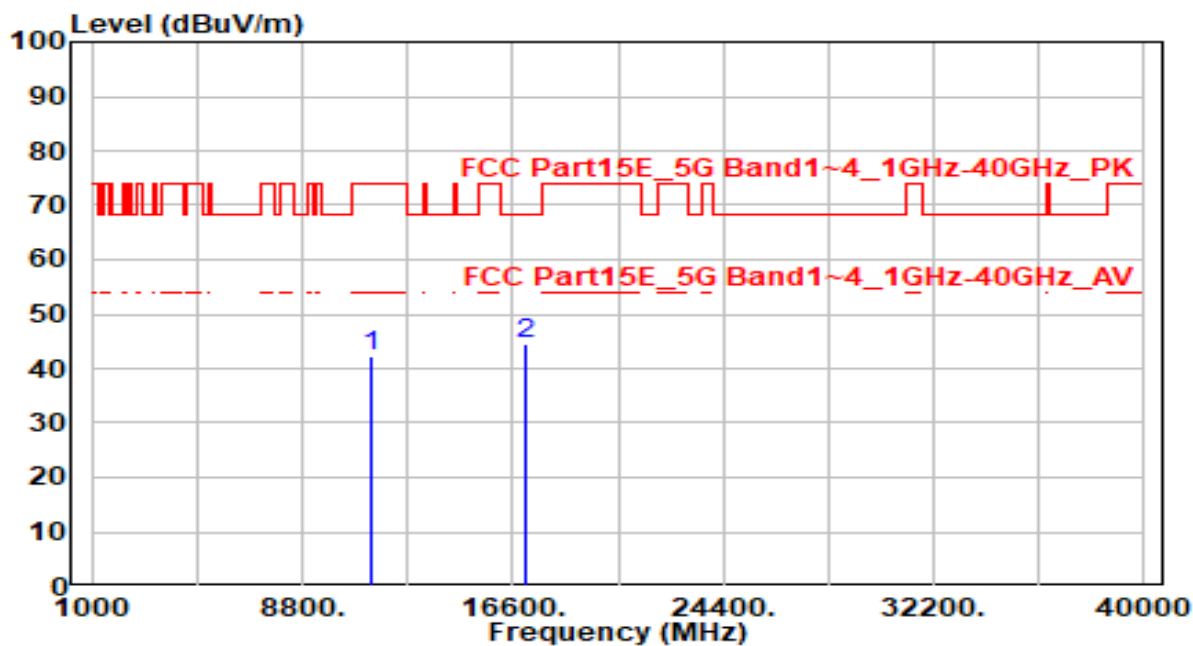


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 36.98          | 5.18       | 42.16                | -31.84      | 74.00          | 200         | 165         | Peak              |
| 2  | * 17100.000     | 39.19          | 5.41       | 44.60                | -23.60      | 68.20          | 200         | 215         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH144 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

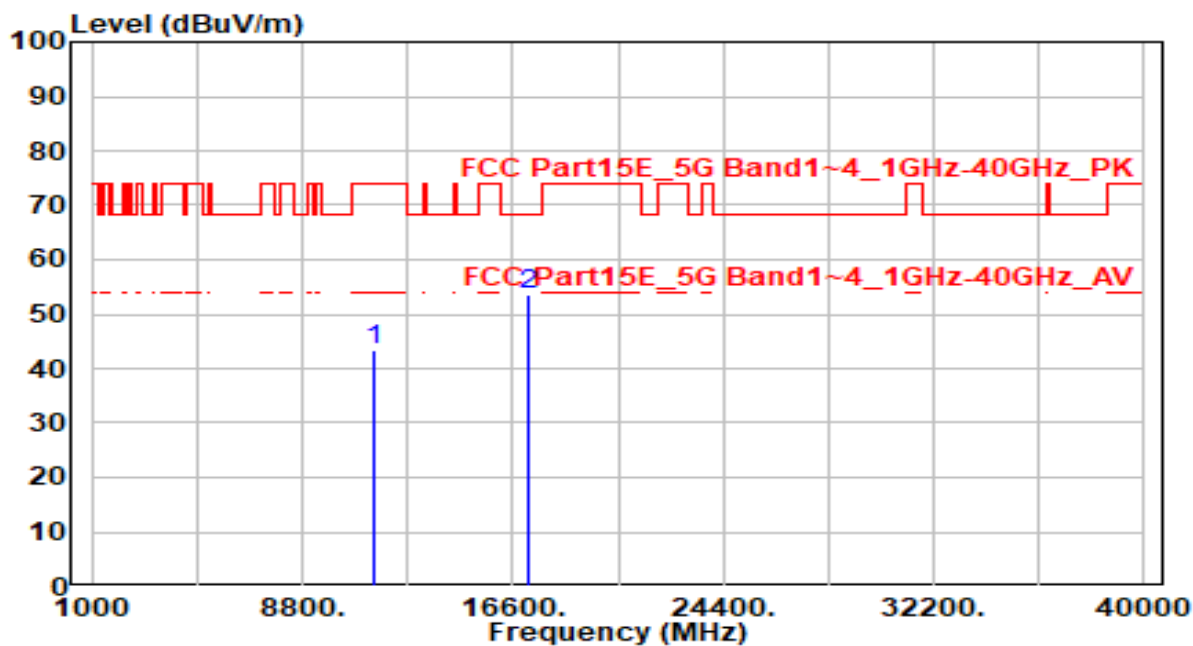


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 38.35          | 5.17       | 43.52                | -30.48      | 74.00          | 200         | 360         | Peak              |
| 2  | * 17160.000     | 48.47          | 5.28       | 53.75                | -14.45      | 68.20          | 200         | 40          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH144 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

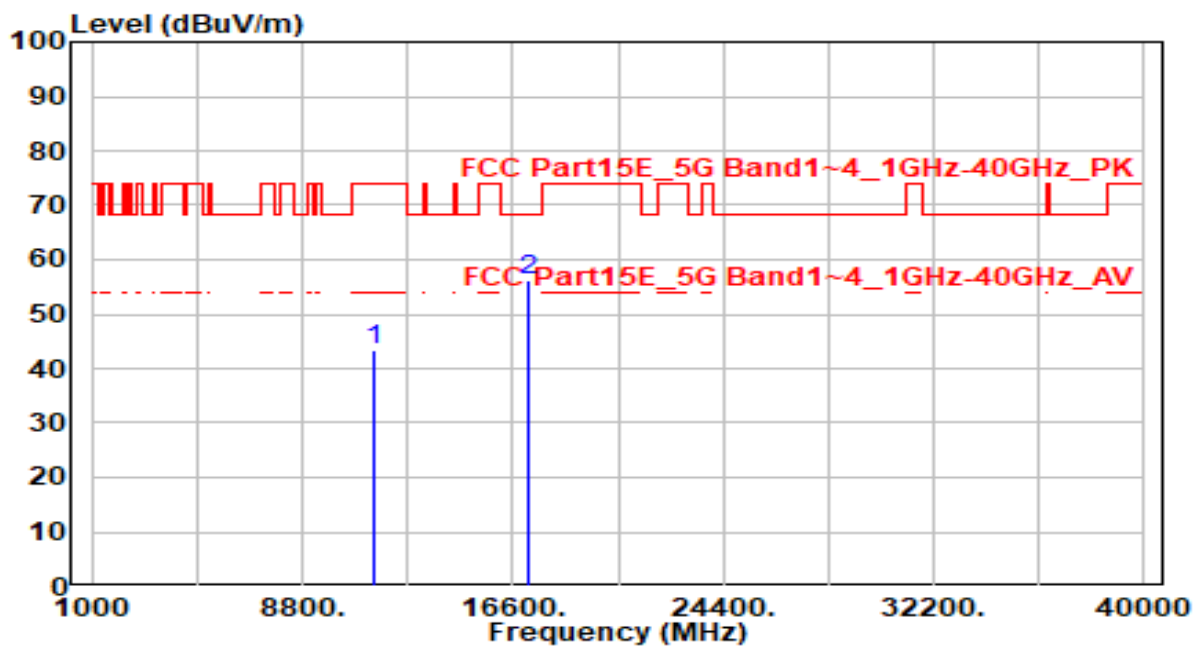


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 38.12          | 5.17       | 43.29                | -30.71      | 74.00          | 200         | 25          | Peak              |
| 2  | * 17160.000     | 50.97          | 5.28       | 56.25                | -11.95      | 68.20          | 100         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

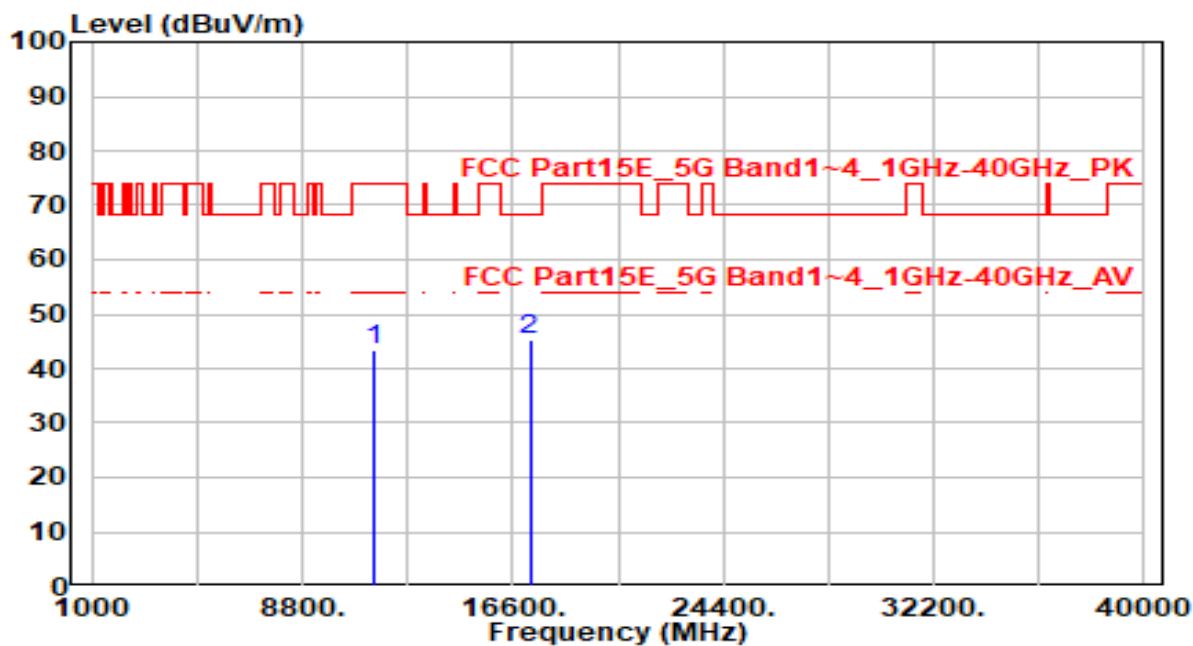


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 38.20          | 5.15       | 43.36                | -30.64      | 74.00          | 200         | 0           | Peak              |
| 2  | * 17235.000     | 39.94          | 5.17       | 45.11                | -23.09      | 68.20          | 200         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

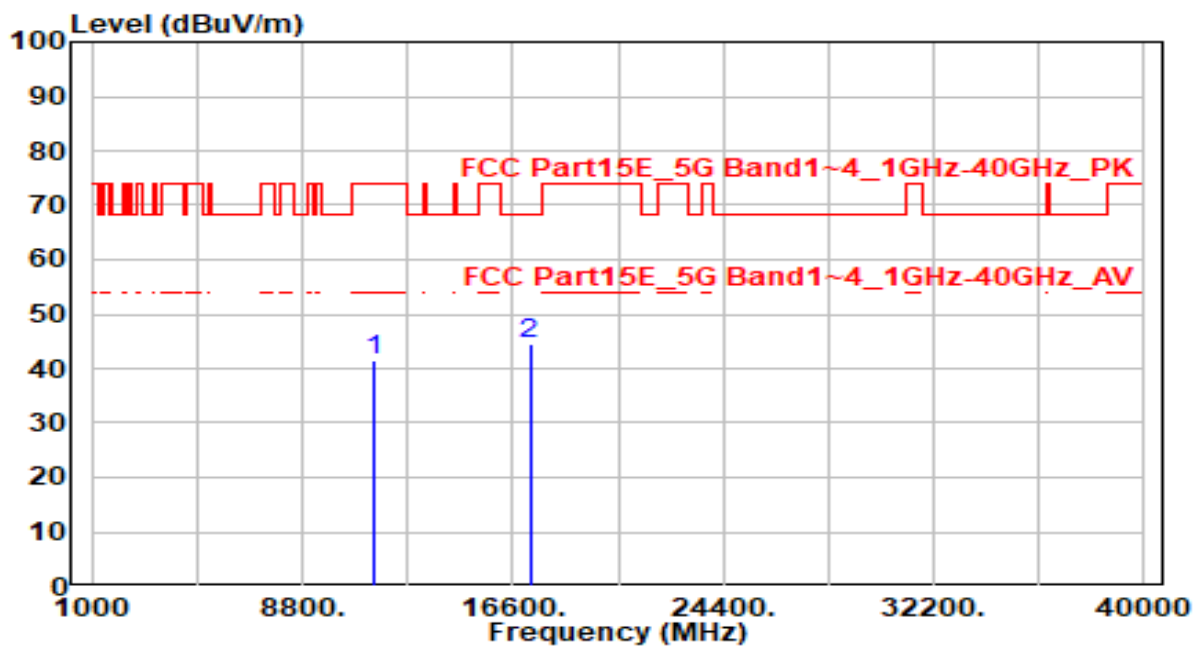


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 36.28          | 5.15       | 41.44                | -32.56      | 74.00          | 200         | 250         | Peak              |
| 2  | * 17235.000     | 39.35          | 5.17       | 44.52                | -23.68      | 68.20          | 200         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH157 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

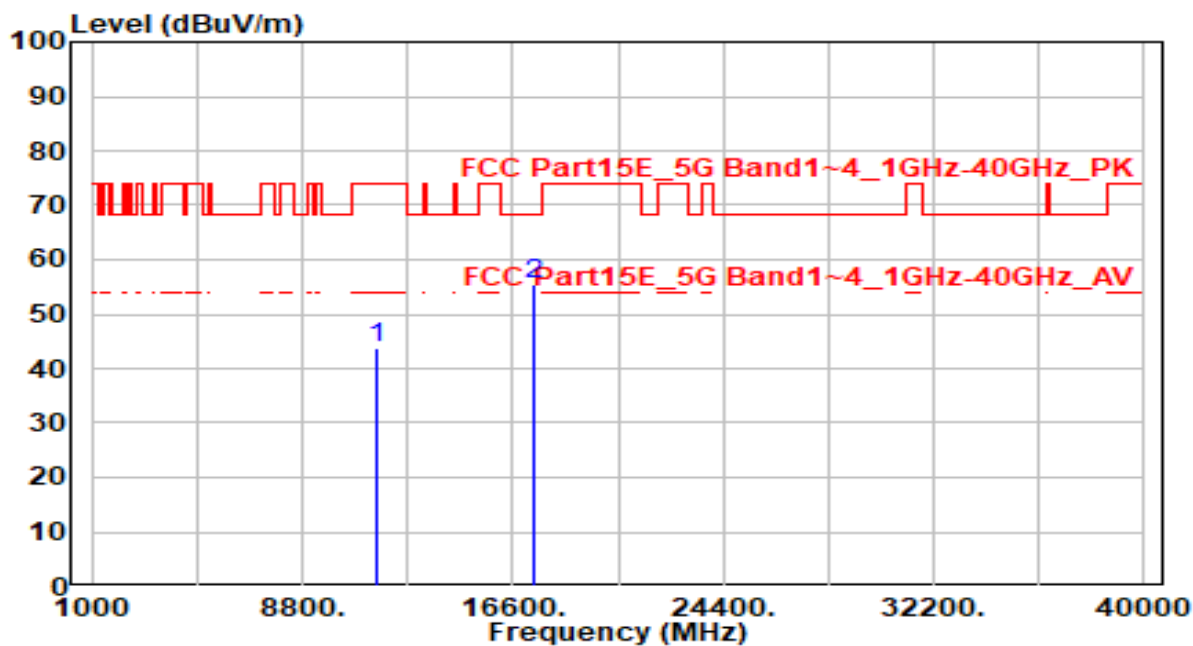


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 38.82          | 5.14       | 43.96                | -30.04      | 74.00          | 200         | 350         | Peak              |
| 2  | * 17355.000     | 50.55          | 5.09       | 55.65                | -12.55      | 68.20          | 200         | 60          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH157 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

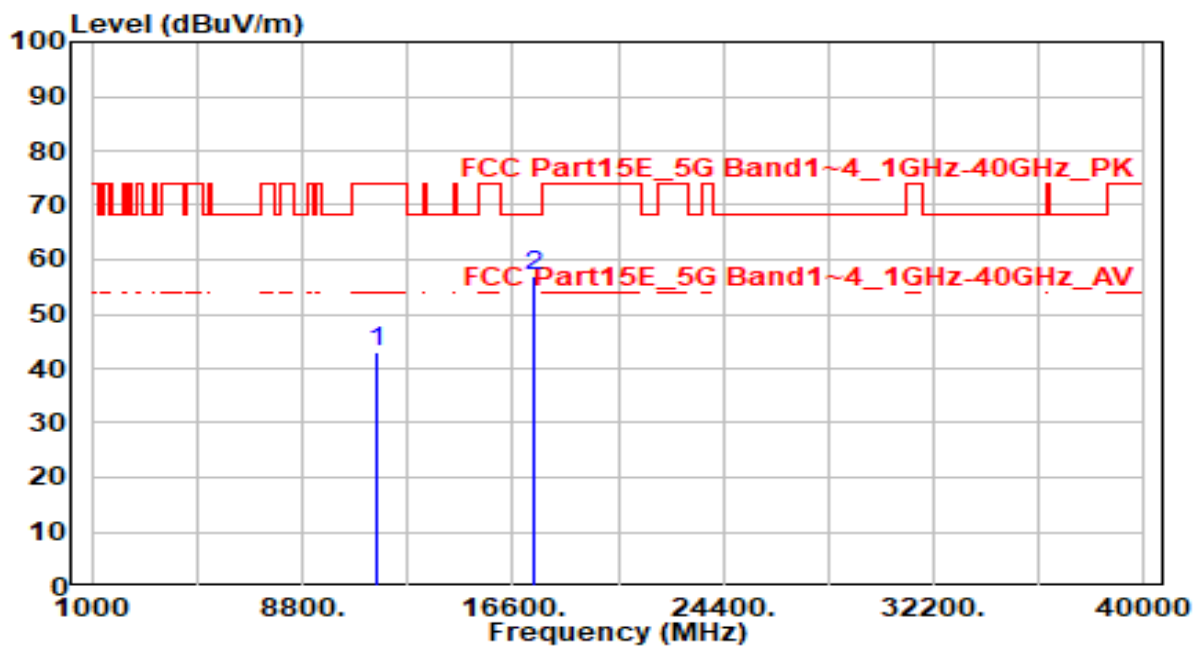


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 37.93          | 5.14       | 43.06                | -30.94      | 74.00          | 200         | 330         | Peak              |
| 2  | * 17355.000     | 52.05          | 5.09       | 57.14                | -11.06      | 68.20          | 100         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- No2 is not in restricted band, the limit is 68.2dBuV/m.
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

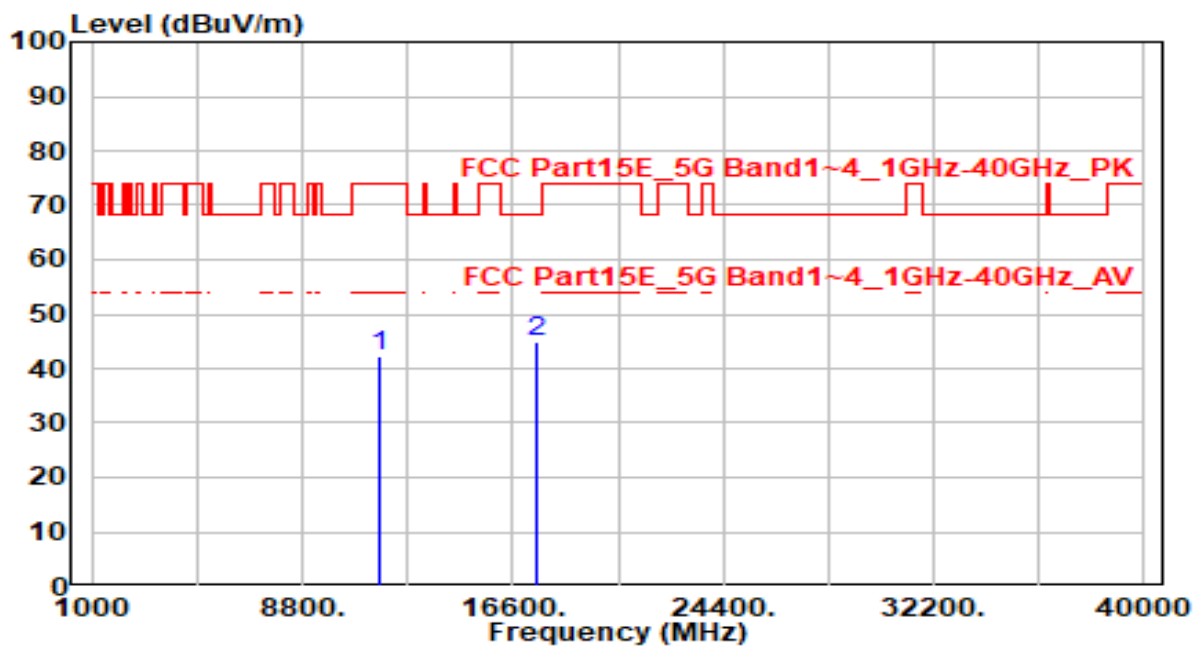


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 37.17          | 5.12       | 42.29                | -31.71      | 74.00          | 200         | 40          | Peak              |
| 2  | * 17475.000     | 39.79          | 5.10       | 44.88                | -23.32      | 68.20          | 200         | 5           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

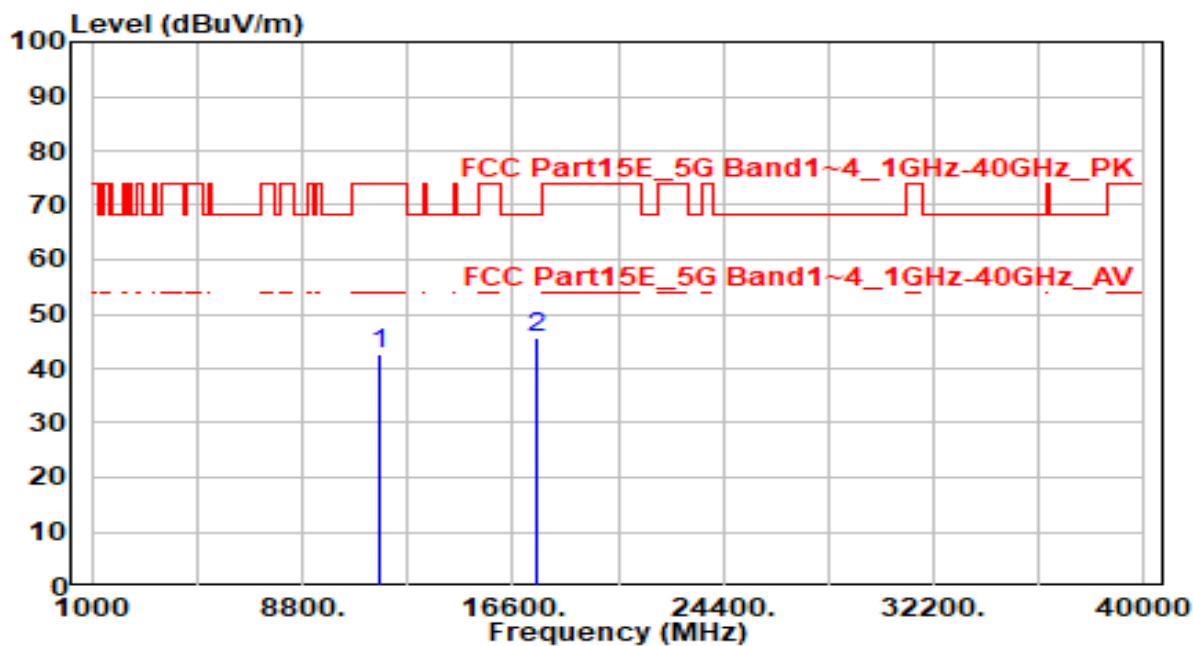


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 37.39          | 5.12       | 42.51                | -31.49      | 74.00          | 200         | 220         | Peak              |
| 2  | * 17475.000     | 40.75          | 5.10       | 45.85                | -22.35      | 68.20          | 200         | 350         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

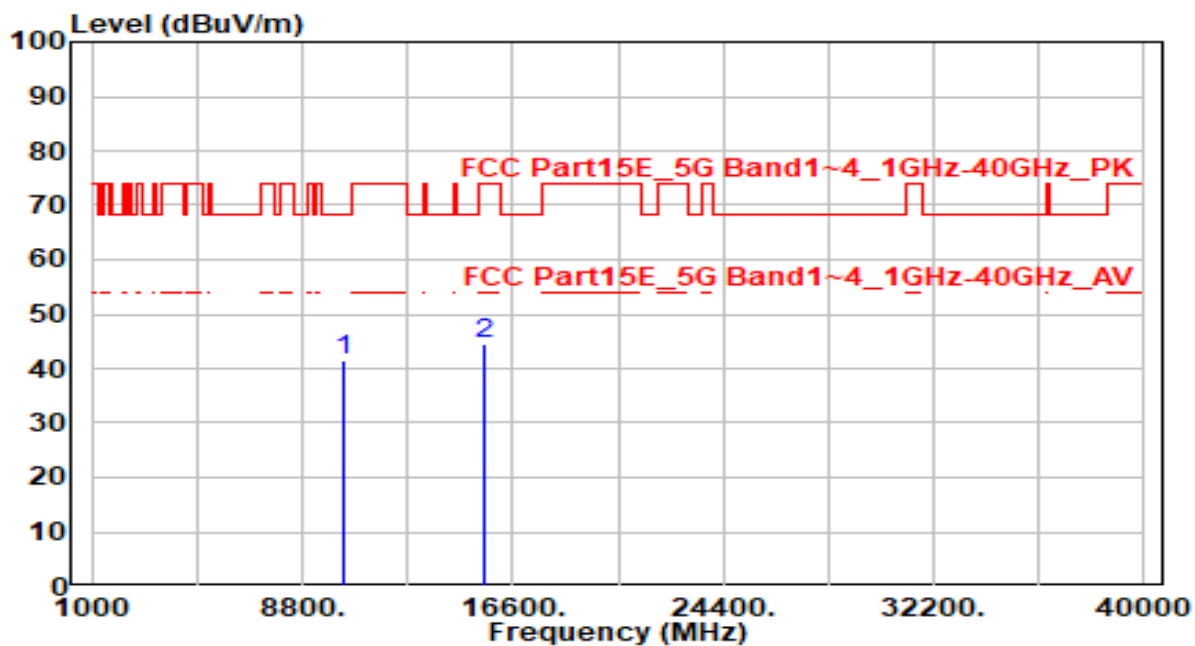


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10380.000     | 37.05          | 4.61       | 41.66                | -26.54      | 68.20          | 200         | 95          | Peak              |
| 2  | 15570.000       | 38.58          | 5.92       | 44.50                | -29.50      | 74.00          | 200         | 150         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

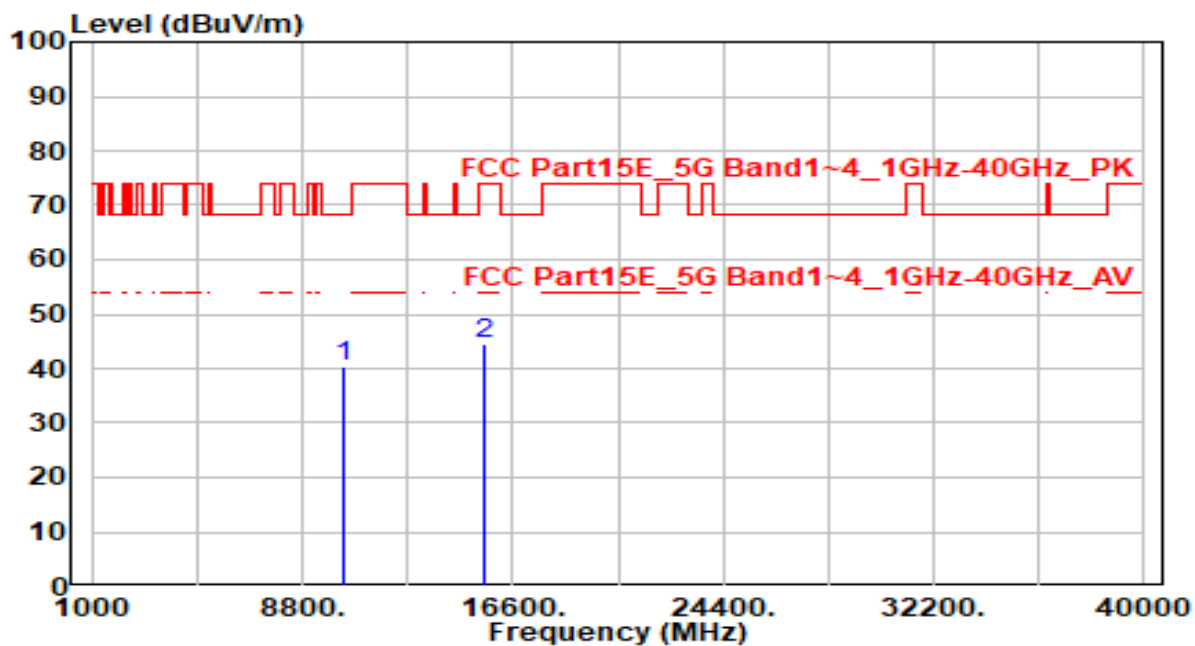


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10380.000     | 35.62          | 4.61       | 40.23                | -27.97      | 68.20          | 200         | 290         | Peak              |
| 2  | 15570.000       | 38.73          | 5.92       | 44.65                | -29.35      | 74.00          | 200         | 95          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH46 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

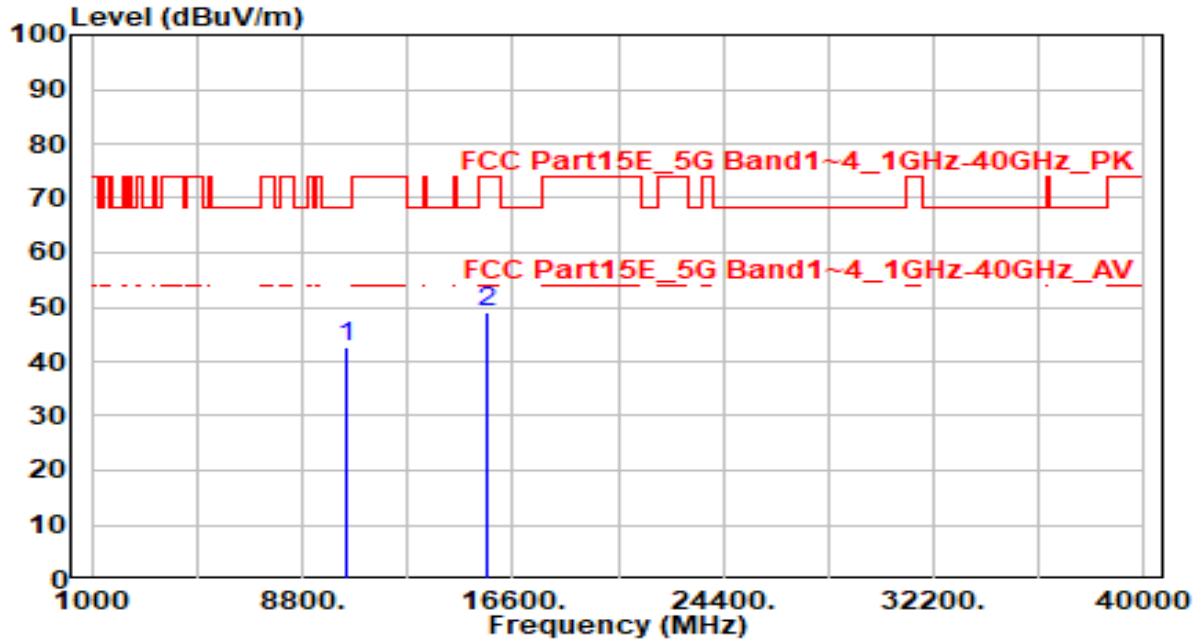


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10460.000       | 38.06          | 4.63       | 42.68                | -25.52      | 68.20          | 100         | 340         | Peak              |
| 2  | * 15690.000     | 42.94          | 6.00       | 48.94                | -25.06      | 74.00          | 200         | 30          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH46 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

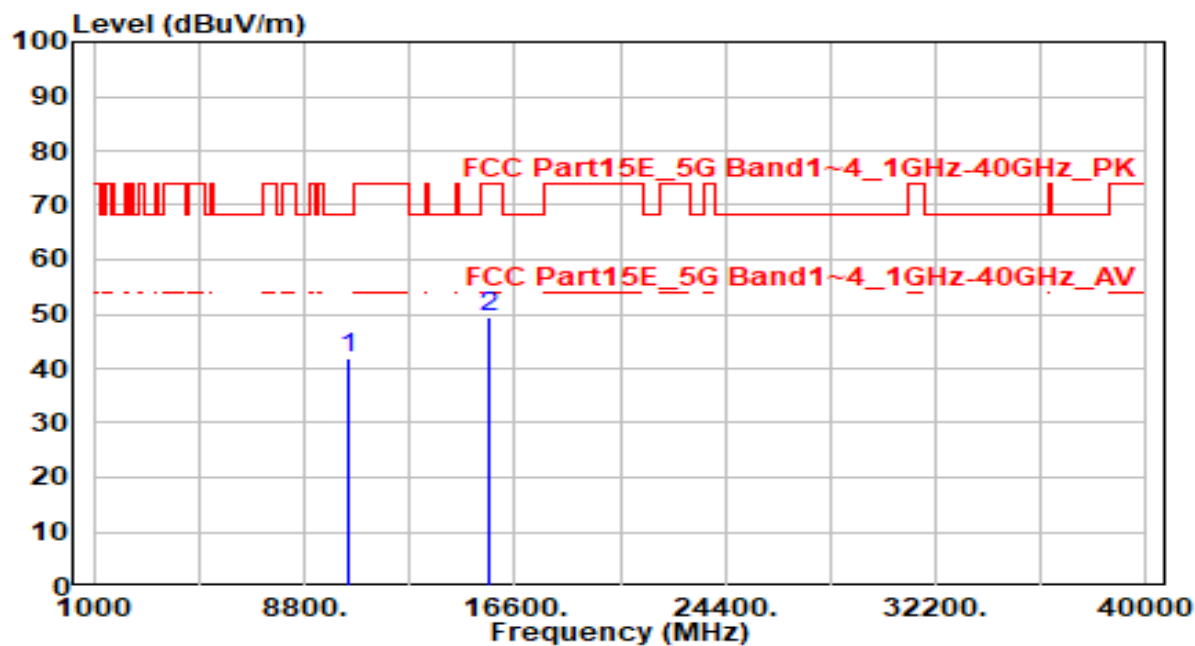


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10460.000       | 37.25          | 4.63       | 41.87                | -26.33      | 68.20          | 160         | 360         | Peak              |
| 2  | * 15690.000     | 43.60          | 6.00       | 49.60                | -24.40      | 74.00          | 175         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH54 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

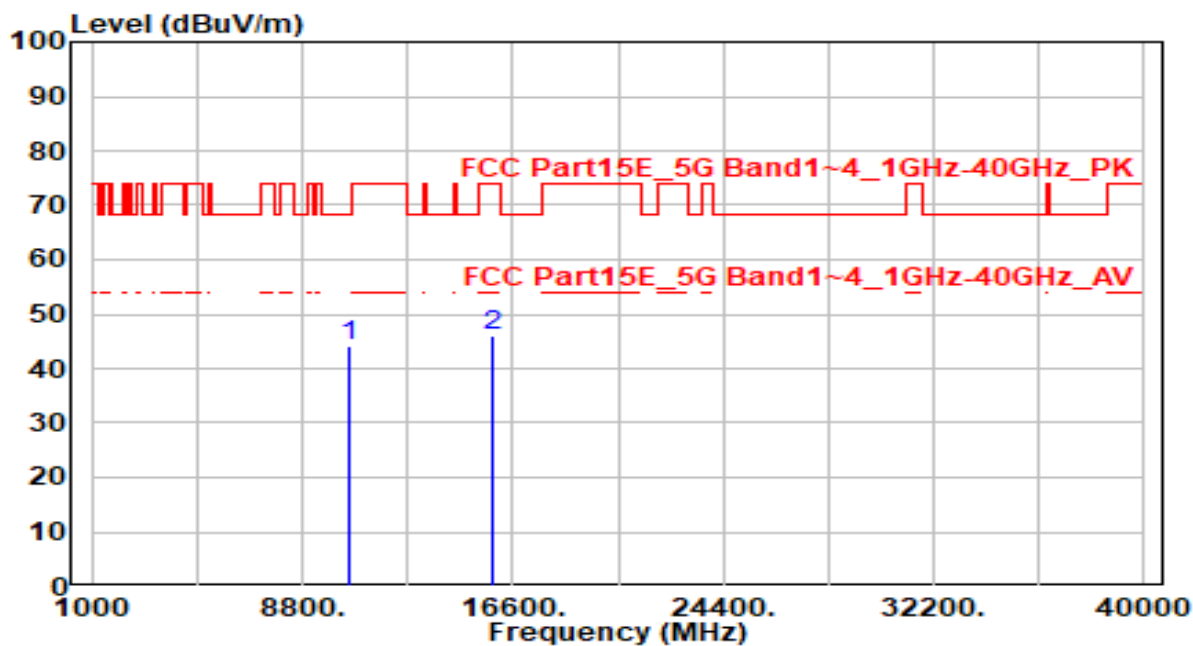


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10540.000     | 39.65          | 4.65       | 44.29                | -23.91      | 68.20          | 200         | 280         | Peak              |
| 2  | 15810.000       | 39.96          | 6.11       | 46.07                | -27.93      | 74.00          | 200         | 275         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH54 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

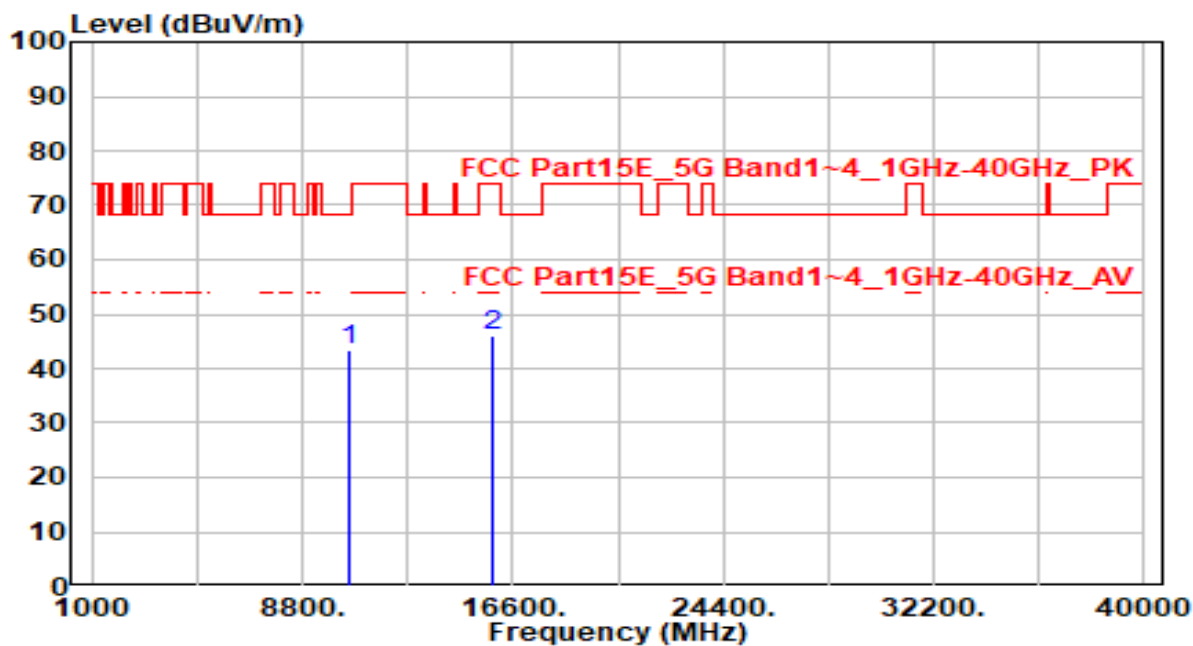


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10540.000     | 38.72          | 4.65       | 43.37                | -24.83      | 68.20          | 170         | 360         | Peak              |
| 2  | 15810.000       | 39.99          | 6.11       | 46.10                | -27.90      | 74.00          | 160         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

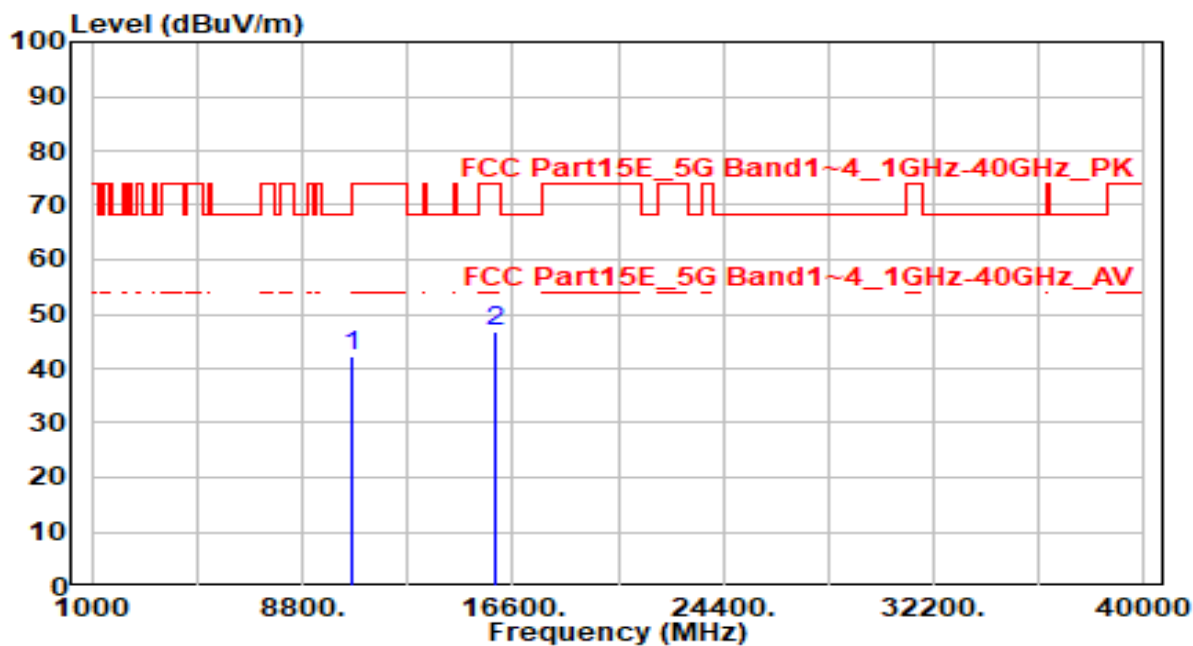


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 37.45          | 4.66       | 42.11                | -31.89      | 74.00          | 200         | 20          | Peak              |
| 2  | * 15930.000     | 40.46          | 6.28       | 46.74                | -27.26      | 74.00          | 110         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

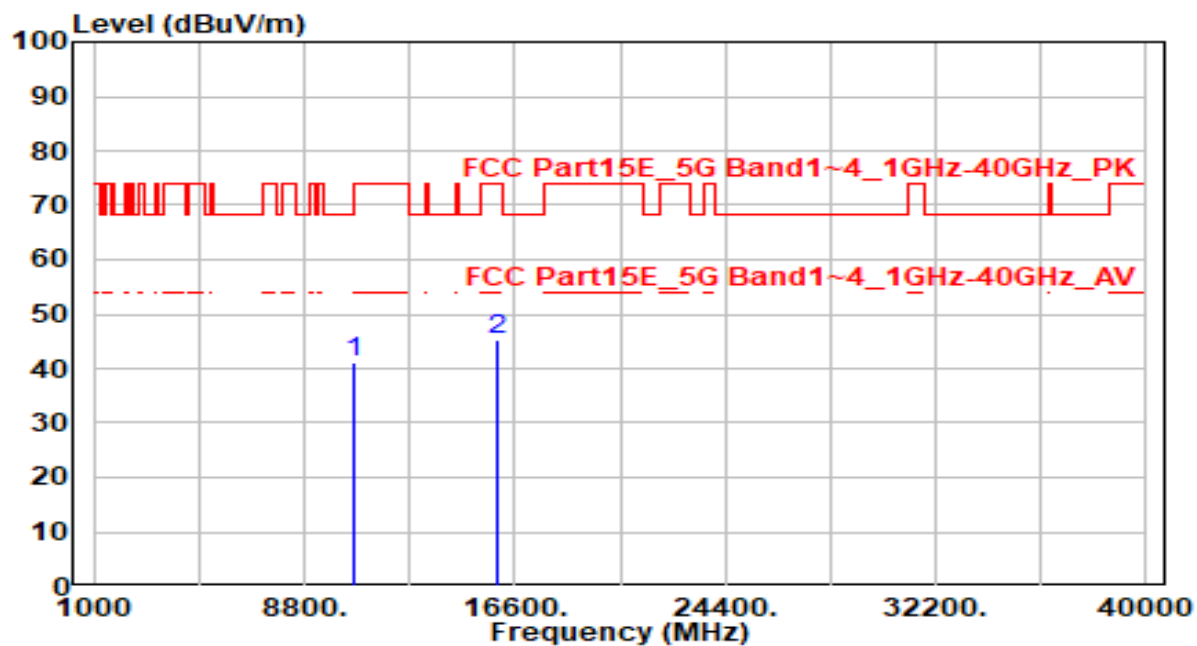


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 36.45          | 4.66       | 41.11                | -32.89      | 74.00          | 200         | 220         | Peak              |
| 2  | * 15930.000     | 38.90          | 6.28       | 45.18                | -28.82      | 74.00          | 200         | 90          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH102 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

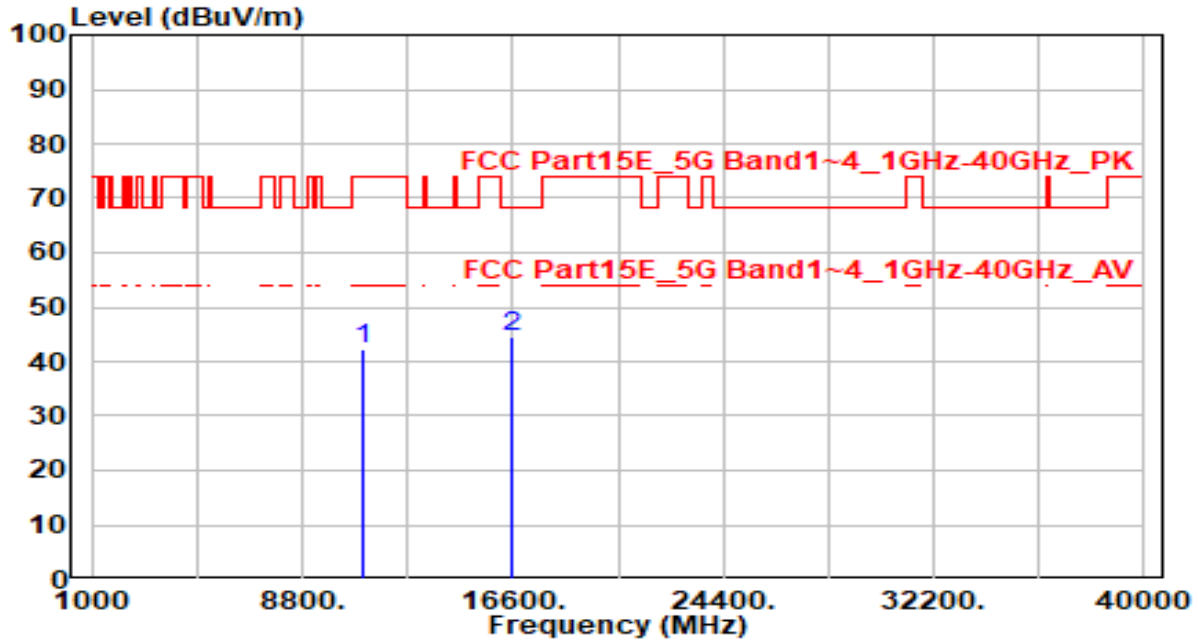


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11020.000       | 37.57          | 4.77       | 42.35                | -31.65      | 74.00          | 200         | 360         | Peak              |
| 2  | * 16530.000     | 37.78          | 6.90       | 44.68                | -23.52      | 68.20          | 200         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH102 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

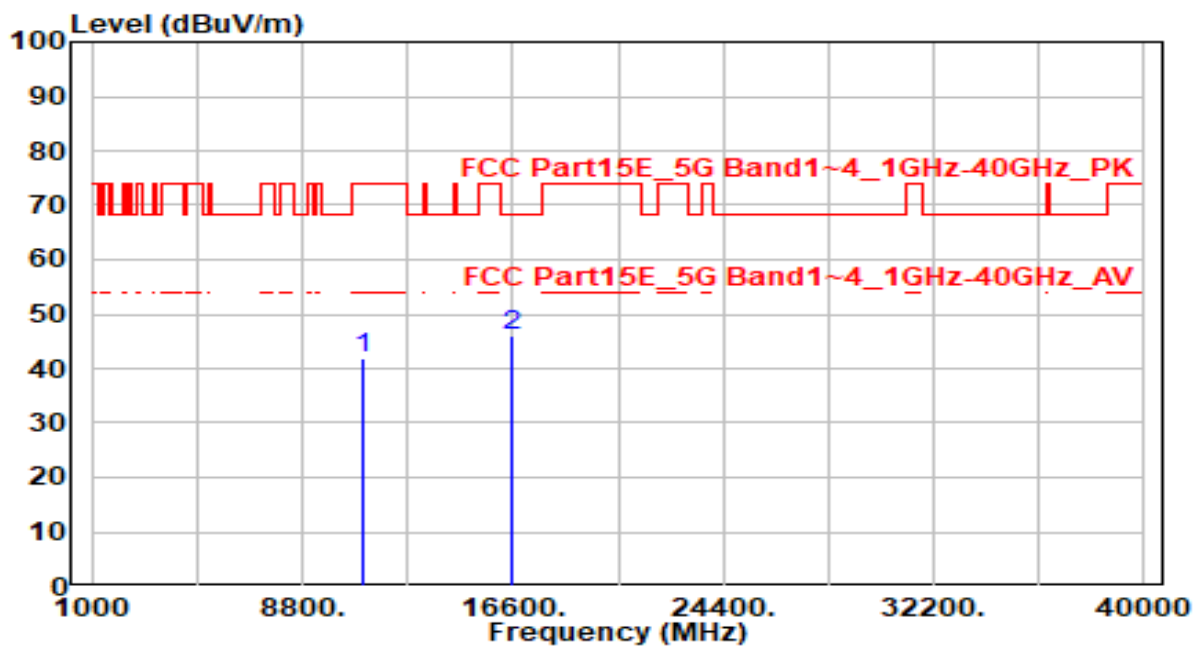


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11020.000       | 37.02          | 4.77       | 41.80                | -32.20      | 74.00          | 200         | 300         | Peak              |
| 2  | * 16530.000     | 39.32          | 6.90       | 46.22                | -21.98      | 68.20          | 200         | 35          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH110 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

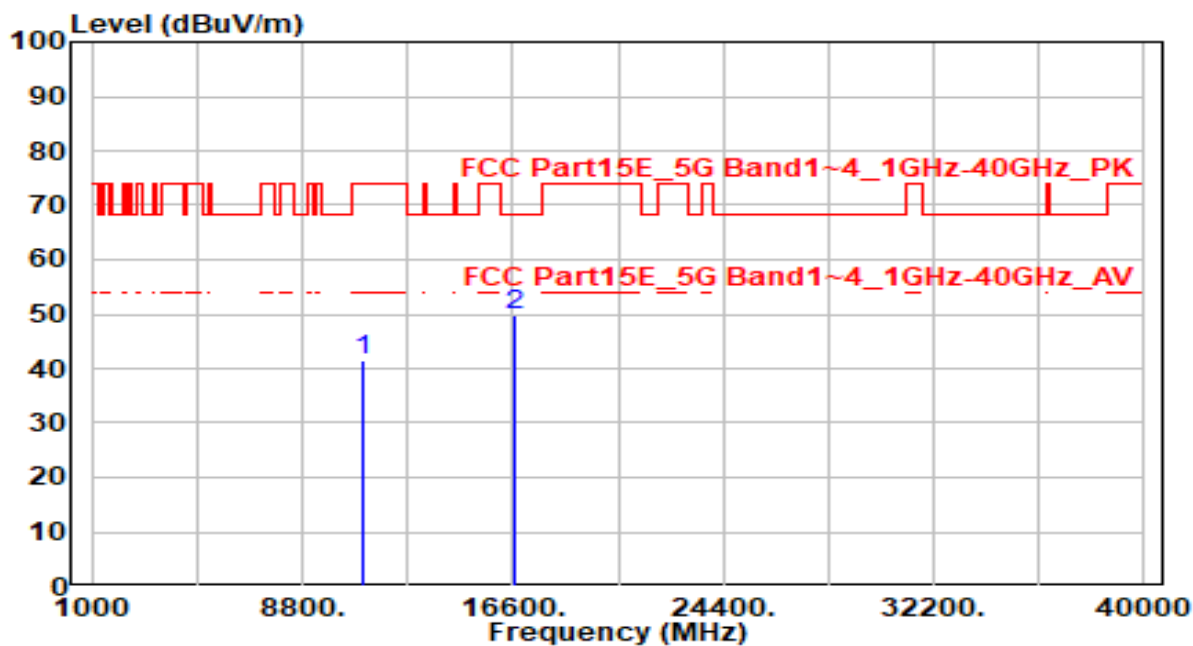


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 36.54          | 4.90       | 41.44                | -32.56      | 74.00          | 200         | 215         | Peak              |
| 2  | * 16650.000     | 42.79          | 7.06       | 49.86                | -18.34      | 68.20          | 200         | 70          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH110 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

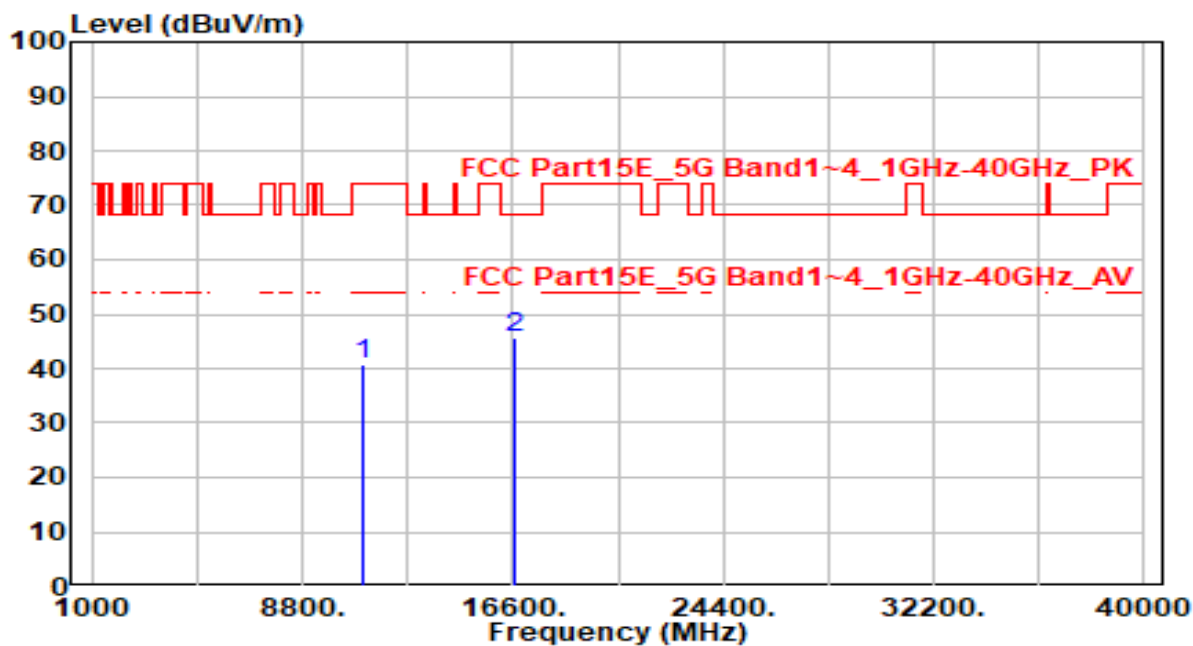


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 35.75          | 4.90       | 40.65                | -33.35      | 74.00          | 200         | 325         | Peak              |
| 2  | * 16650.000     | 38.68          | 7.06       | 45.74                | -22.46      | 68.20          | 200         | 195         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH134 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

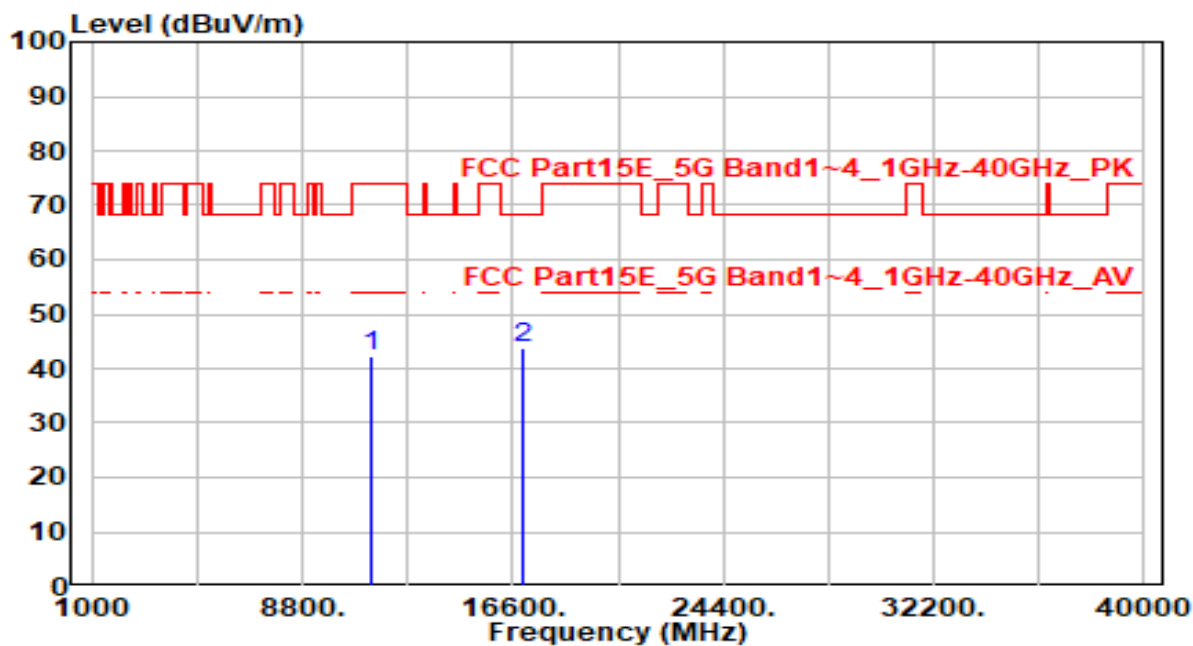


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 37.18          | 5.14       | 42.33                | -31.67      | 74.00          | 200         | 75          | Peak              |
| 2  | * 17010.000     | 38.25          | 5.59       | 43.84                | -24.36      | 68.20          | 200         | 185         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH134 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

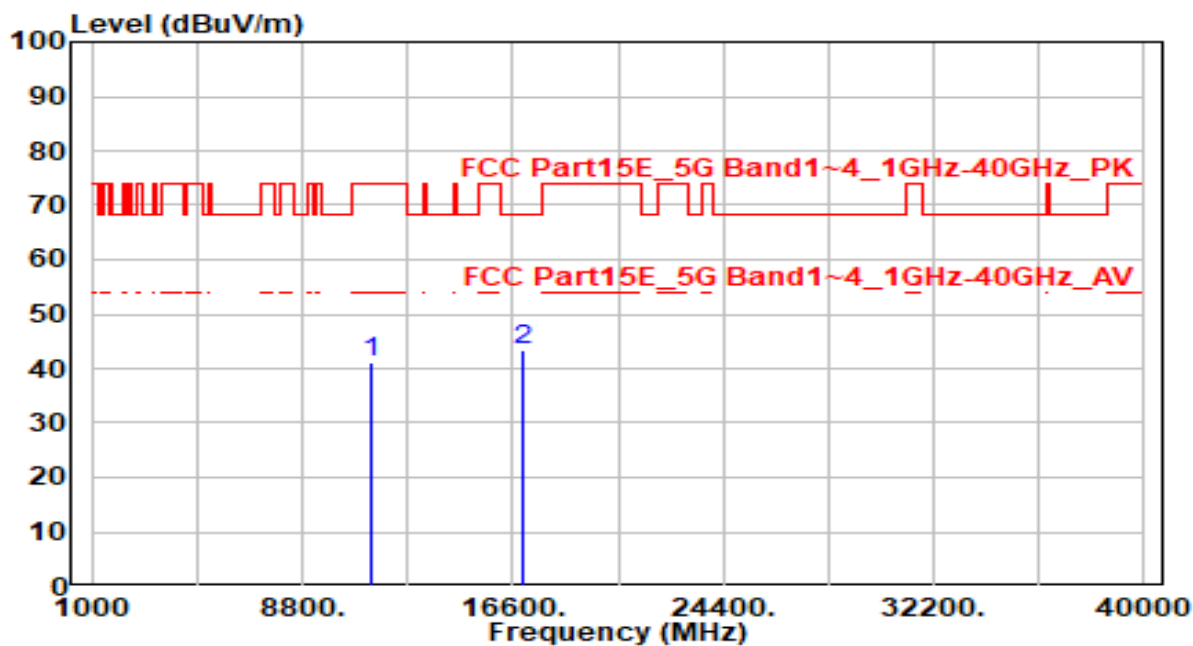


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 35.96          | 5.14       | 41.10                | -32.90      | 74.00          | 200         | 280         | Peak              |
| 2  | * 17010.000     | 37.79          | 5.59       | 43.38                | -24.82      | 68.20          | 200         | 355         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH142 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

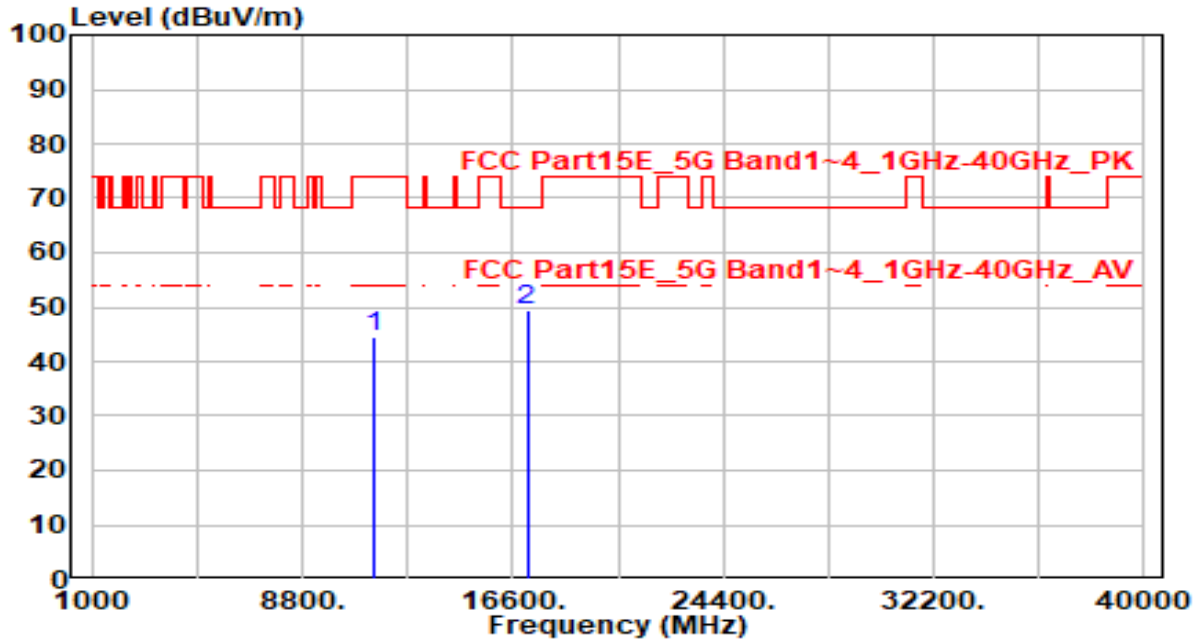


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11420.000       | 39.19          | 5.18       | 44.37                | -29.63      | 74.00          | 170         | 360         | Peak              |
| 2  | * 17130.000     | 44.00          | 5.35       | 49.35                | -18.85      | 68.20          | 180         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH142 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

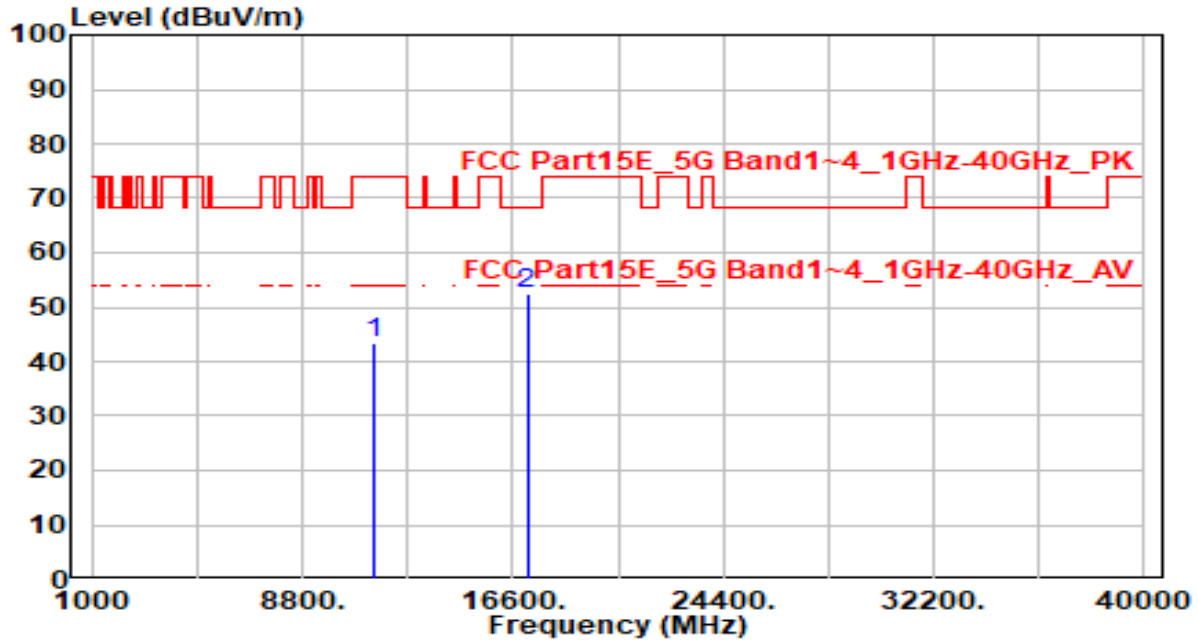


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11420.000       | 38.07          | 5.18       | 43.25                | -30.75      | 74.00          | 100         | 255         | Peak              |
| 2  | * 17130.000     | 47.17          | 5.35       | 52.51                | -15.69      | 68.20          | 100         | 0           | Peak              |

#### Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band4_CH151 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

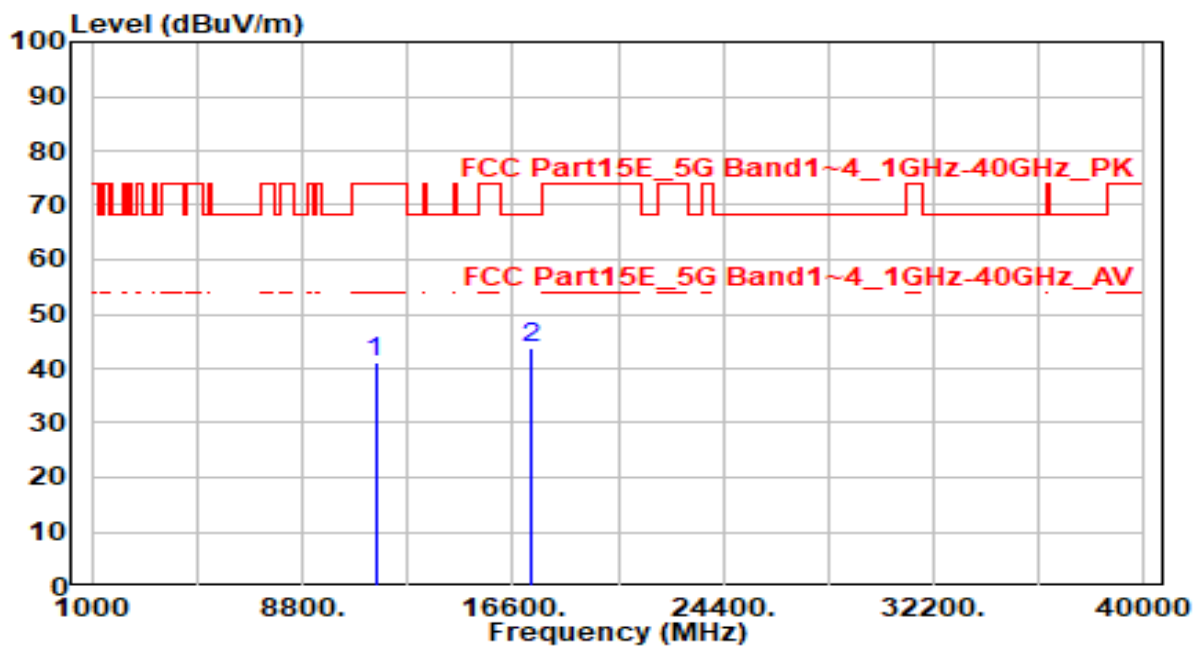


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11510.000       | 35.97          | 5.15       | 41.12                | -32.88      | 74.00          | 200         | 335         | Peak              |
| 2  | * 17265.000     | 38.56          | 5.15       | 43.72                | -24.48      | 68.20          | 200         | 310         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band4_CH151 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

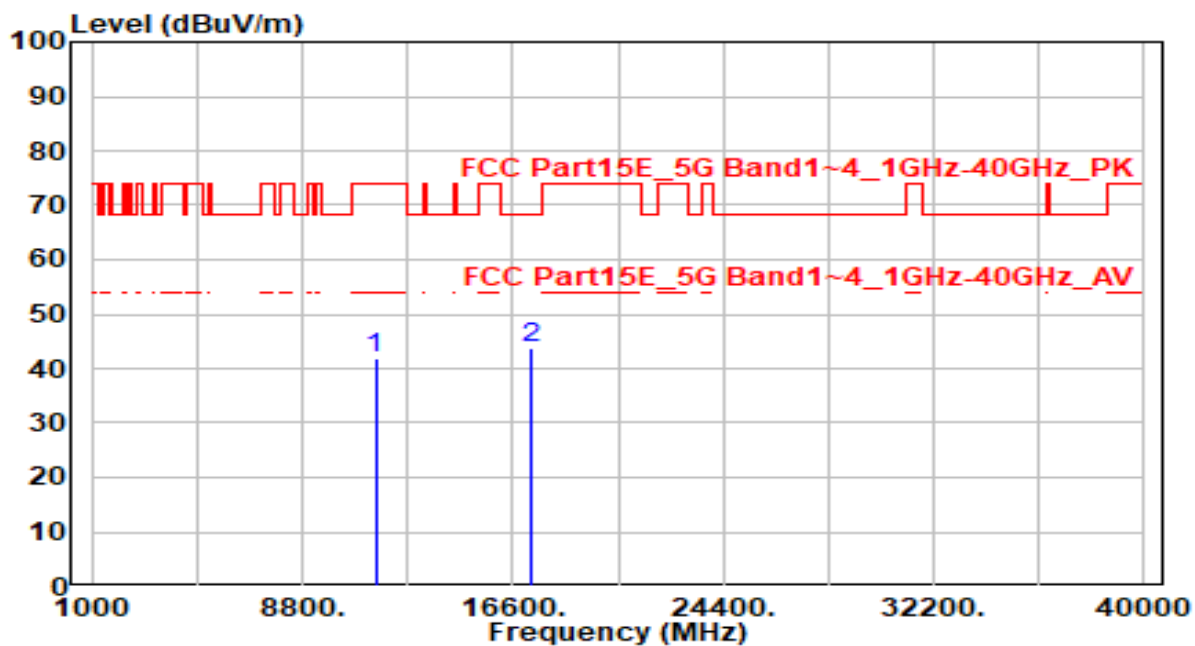


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11510.000       | 36.80          | 5.15       | 41.95                | -32.05      | 74.00          | 200         | 330         | Peak              |
| 2  | * 17265.000     | 38.75          | 5.15       | 43.90                | -24.30      | 68.20          | 200         | 40          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band4_CH159 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

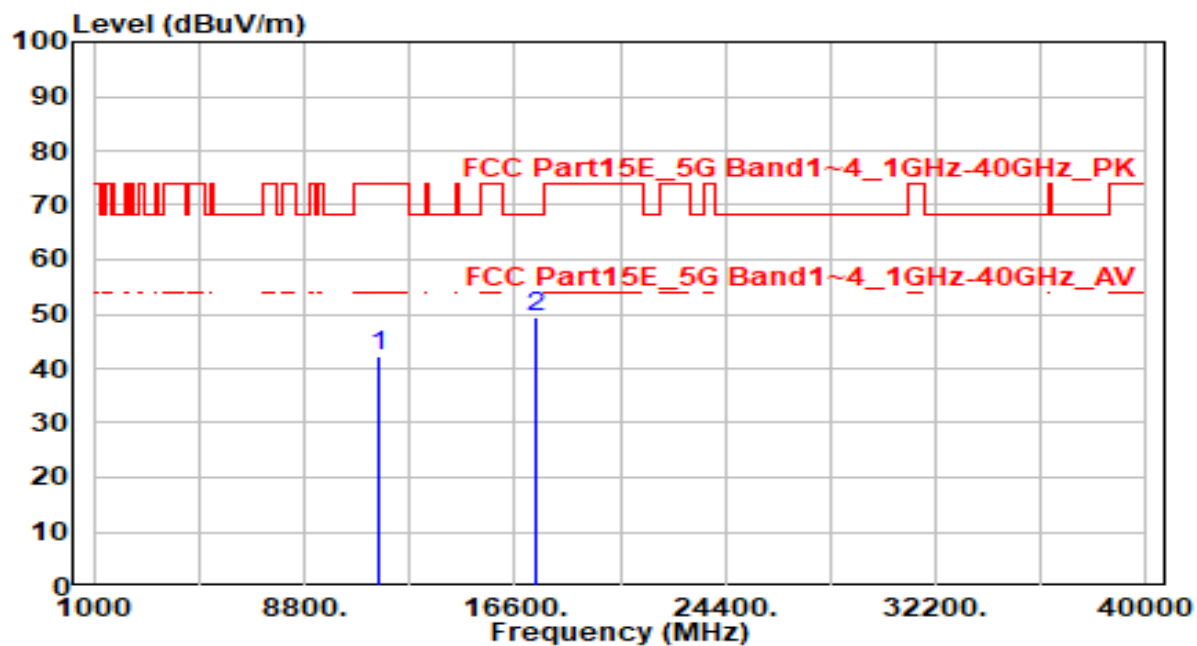


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11590.000       | 37.19          | 5.13       | 42.32                | -31.68      | 74.00          | 200         | 135         | Peak              |
| 2  | * 17398.000     | 44.41          | 5.06       | 49.48                | -18.72      | 68.20          | 200         | 60          | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band4_CH159 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

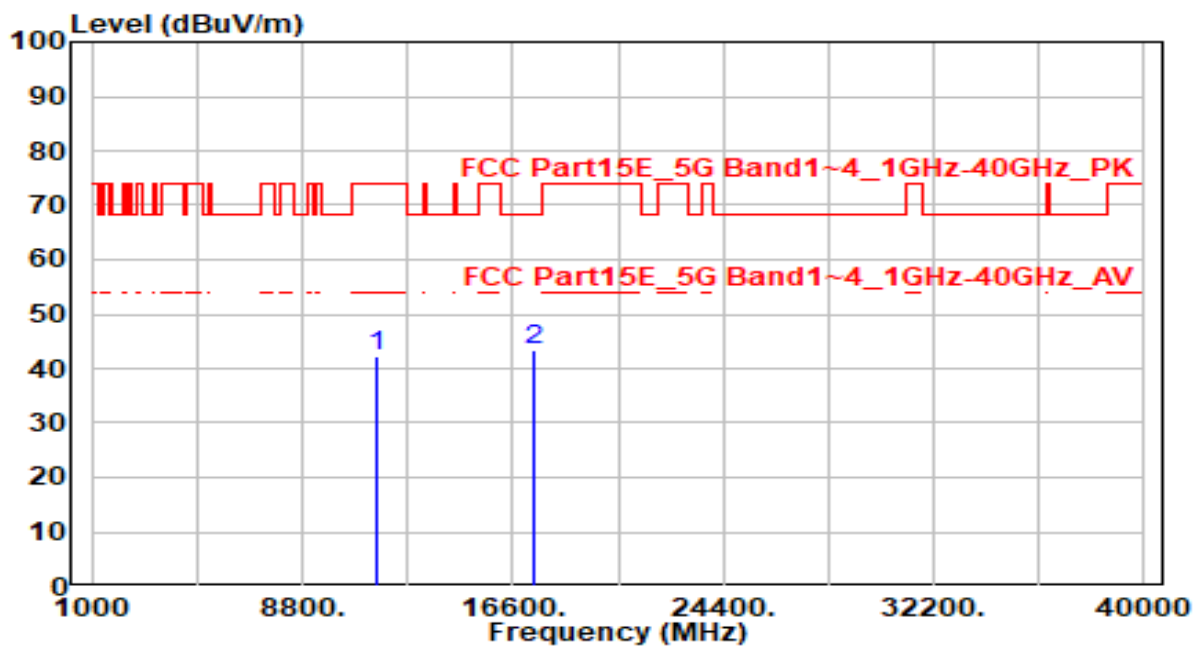


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11590.000       | 37.03          | 5.13       | 42.16                | -31.84      | 74.00          | 200         | 340         | Peak              |
| 2  | * 17385.000     | 38.45          | 5.07       | 43.52                | -24.68      | 68.20          | 200         | 60          | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH42 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

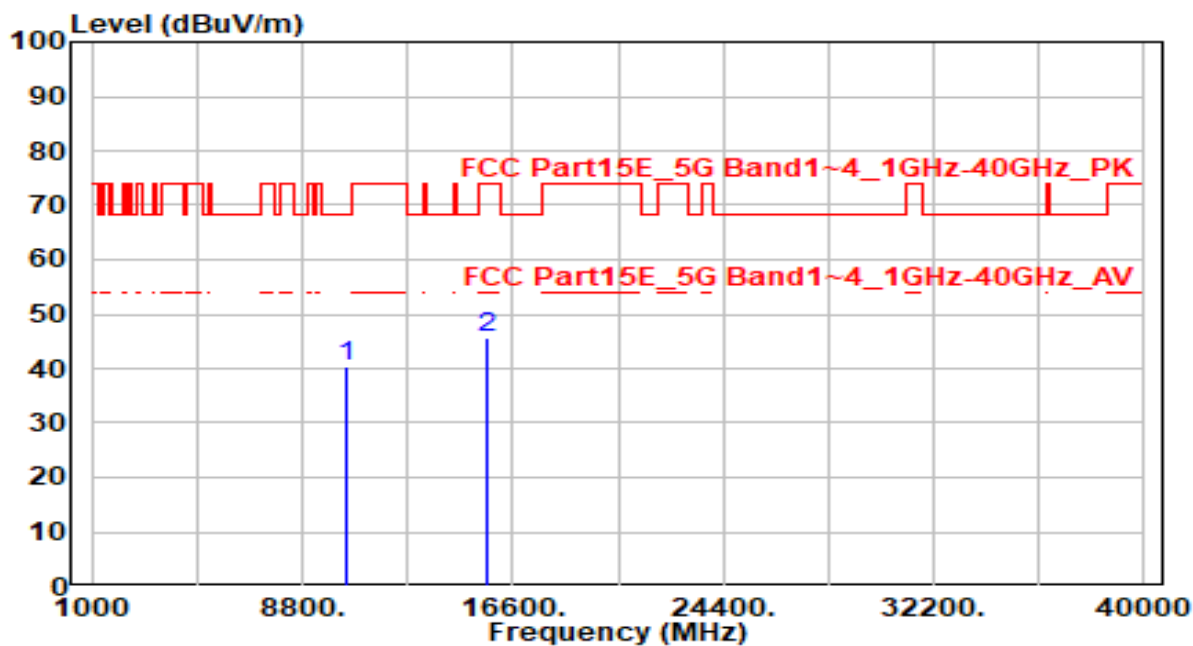


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10420.000     | 35.63          | 4.61       | 40.24                | -27.96      | 68.20          | 200         | 360         | Peak              |
| 2  | 15630.000       | 39.87          | 5.95       | 45.82                | -28.18      | 74.00          | 200         | 235         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH42 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

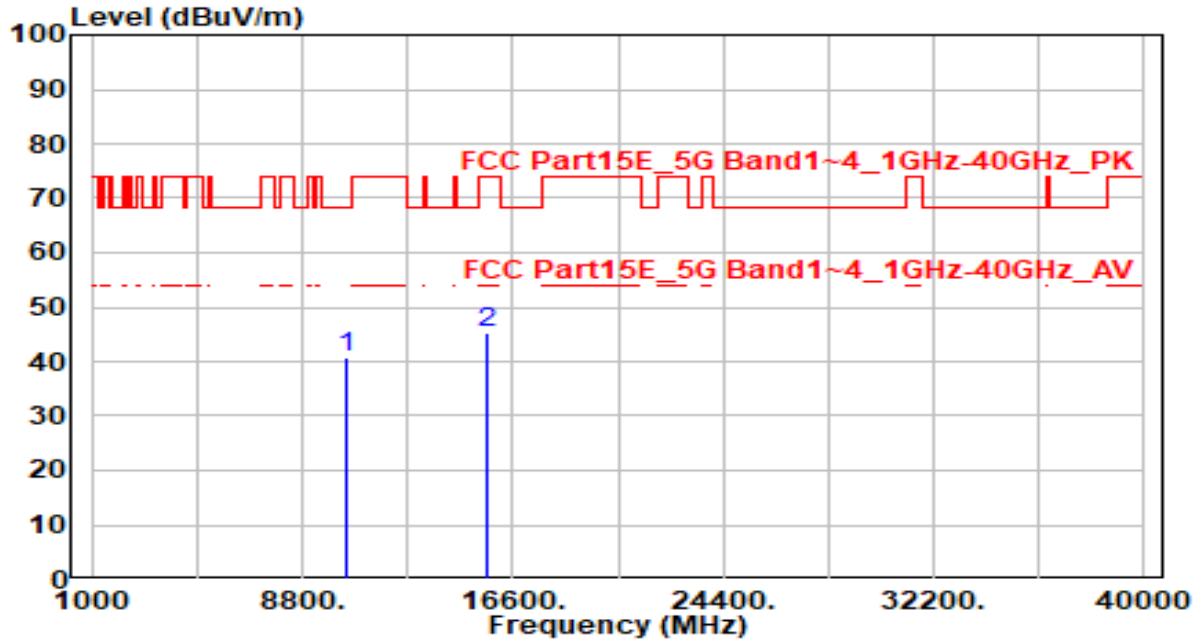


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10420.000     | 36.07          | 4.61       | 40.68                | -27.52      | 68.20          | 200         | 60          | Peak              |
| 2  | 15630.000       | 39.28          | 5.95       | 45.23                | -28.77      | 74.00          | 200         | 225         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH58 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

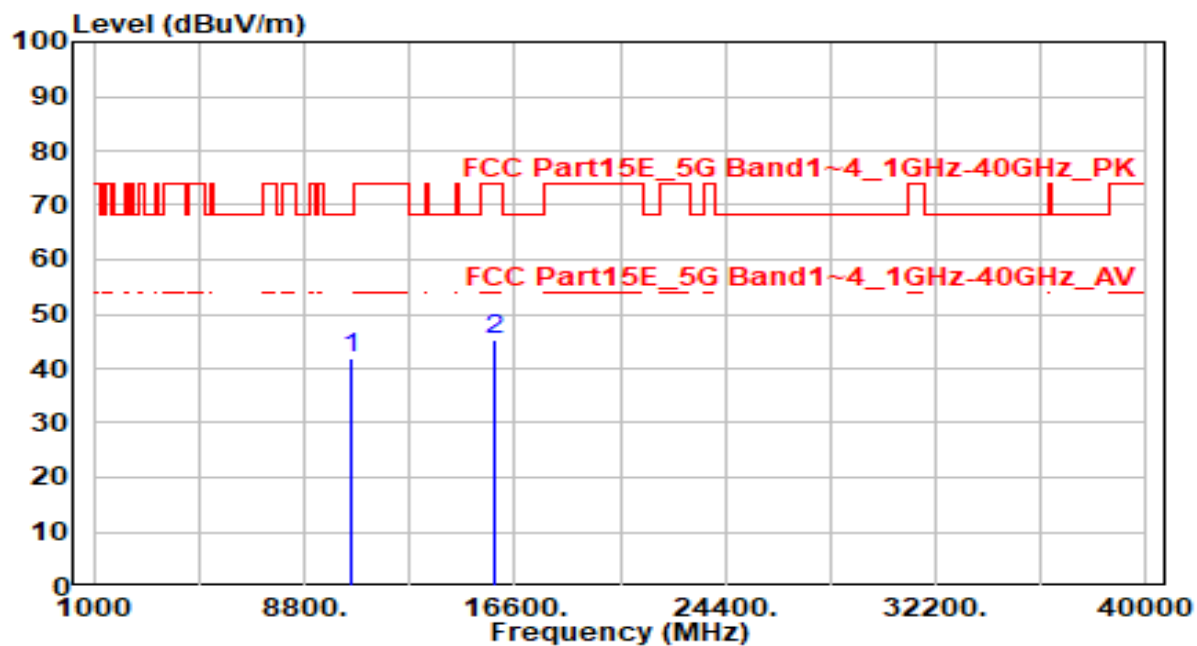


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10580.000     | 37.18          | 4.66       | 41.84                | -26.36      | 68.20          | 200         | 290         | Peak              |
| 2  | 15870.000       | 39.14          | 6.20       | 45.33                | -28.67      | 74.00          | 200         | 130         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH58 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

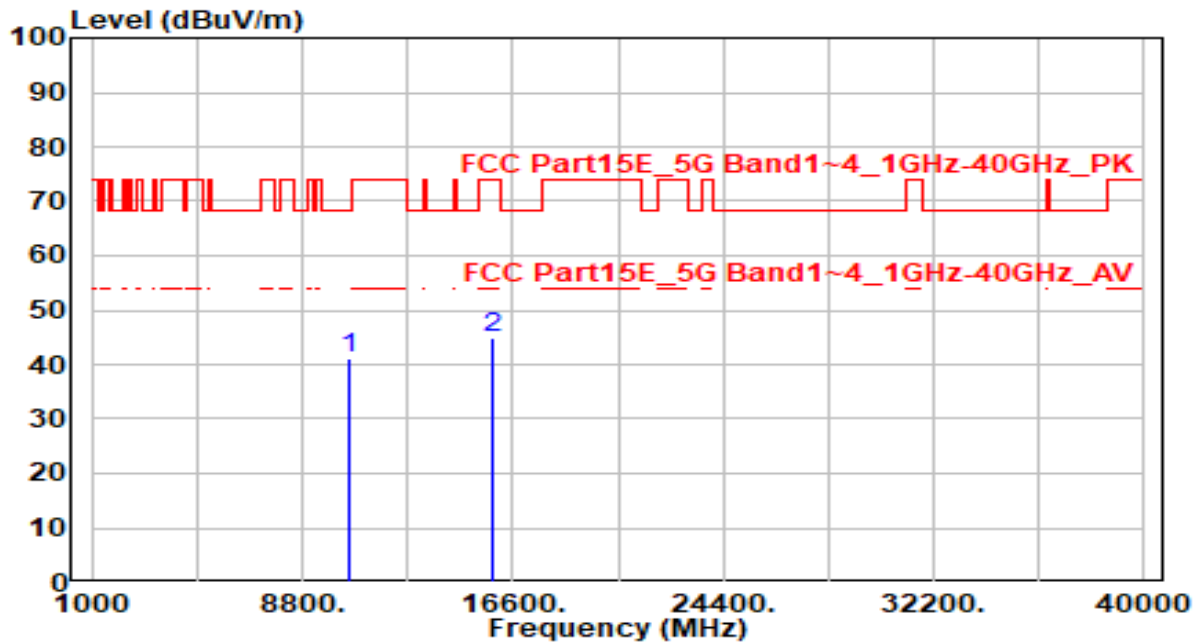


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10580.000     | 36.60          | 4.66       | 41.26                | -26.94      | 68.20          | 200         | 230         | Peak              |
| 2  | 15870.000       | 38.68          | 6.20       | 44.87                | -29.13      | 74.00          | 200         | 235         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH106 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

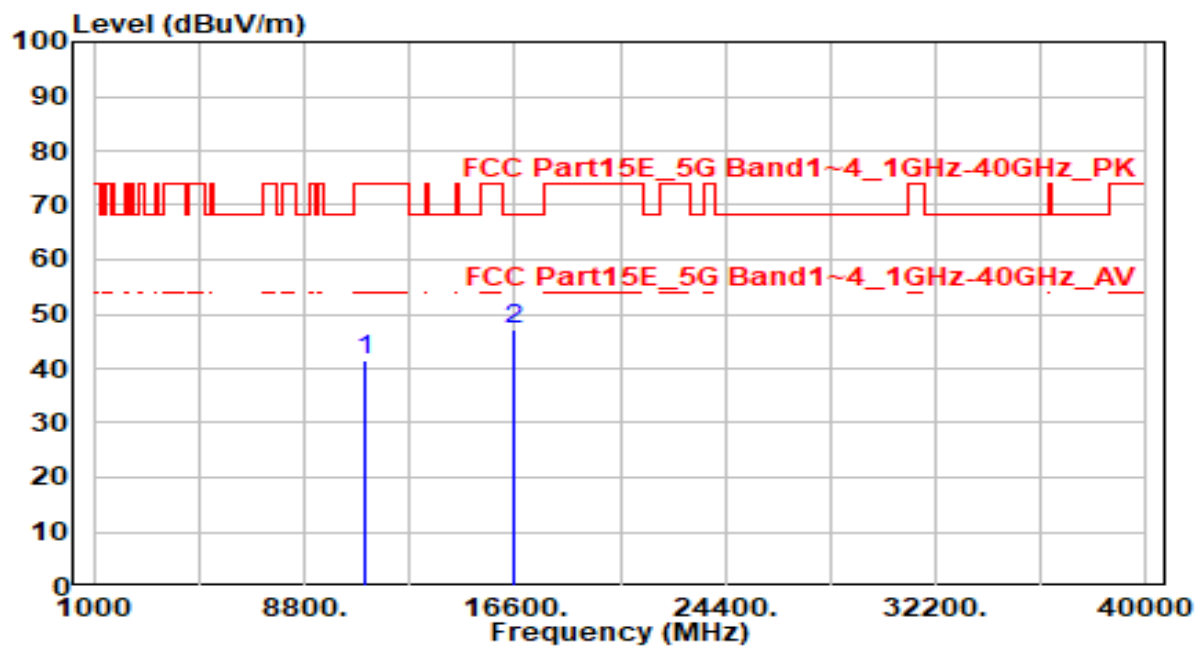


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 36.66          | 4.84       | 41.50                | -32.50      | 74.00          | 200         | 325         | Peak              |
| 2  | * 16590.000     | 40.34          | 6.97       | 47.31                | -20.89      | 68.20          | 200         | 265         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                              | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH106 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

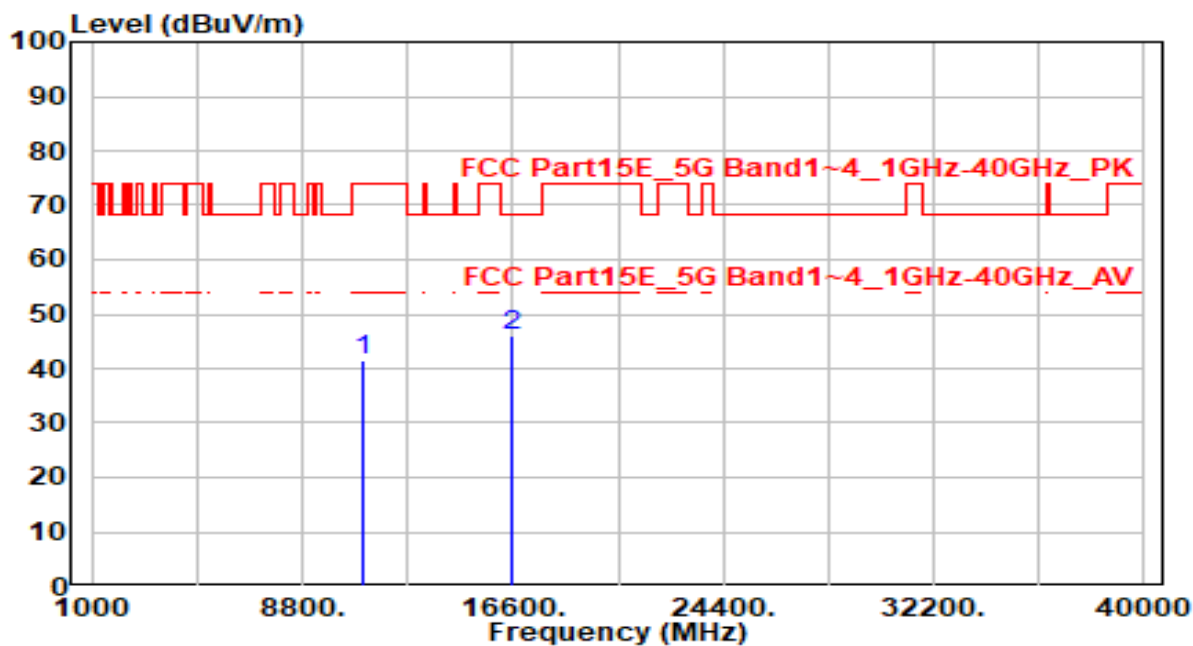


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 36.76          | 4.84       | 41.60                | -32.40      | 74.00          | 200         | 330         | Peak              |
| 2  | * 16590.000     | 38.95          | 6.97       | 45.92                | -22.28      | 68.20          | 200         | 180         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH122 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

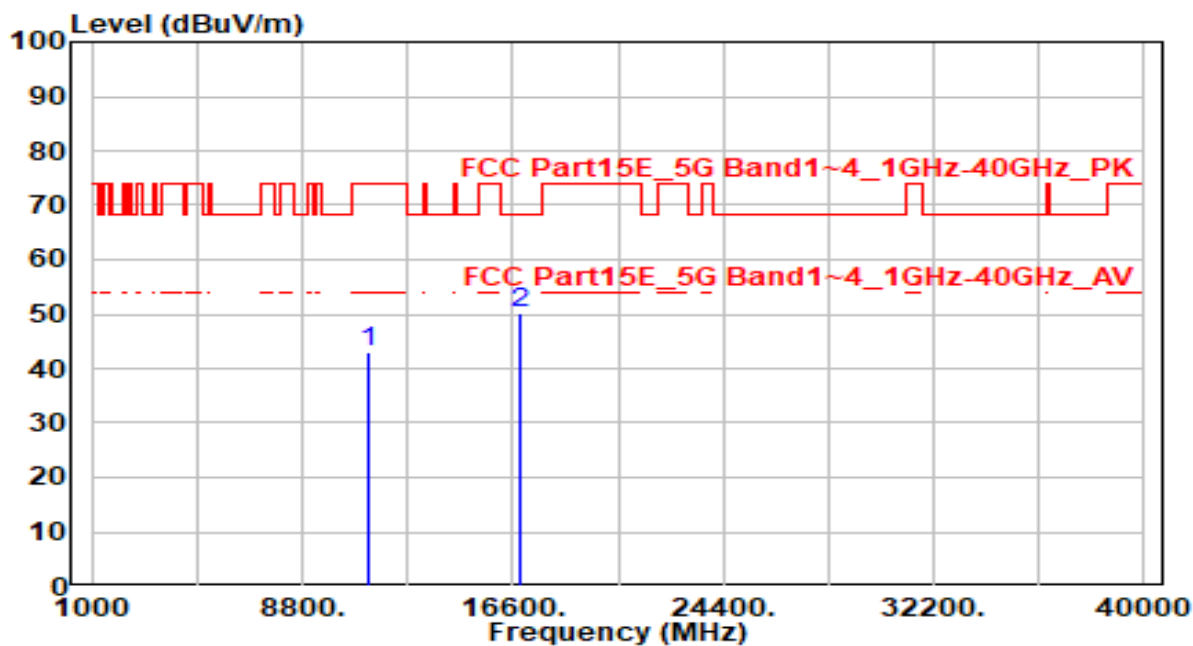


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 37.85          | 5.07       | 42.92                | -31.08      | 74.00          | 100         | 185         | Peak              |
| 2  | * 16830.000     | 43.55          | 6.58       | 50.14                | -18.06      | 68.20          | 140         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                              | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH122 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

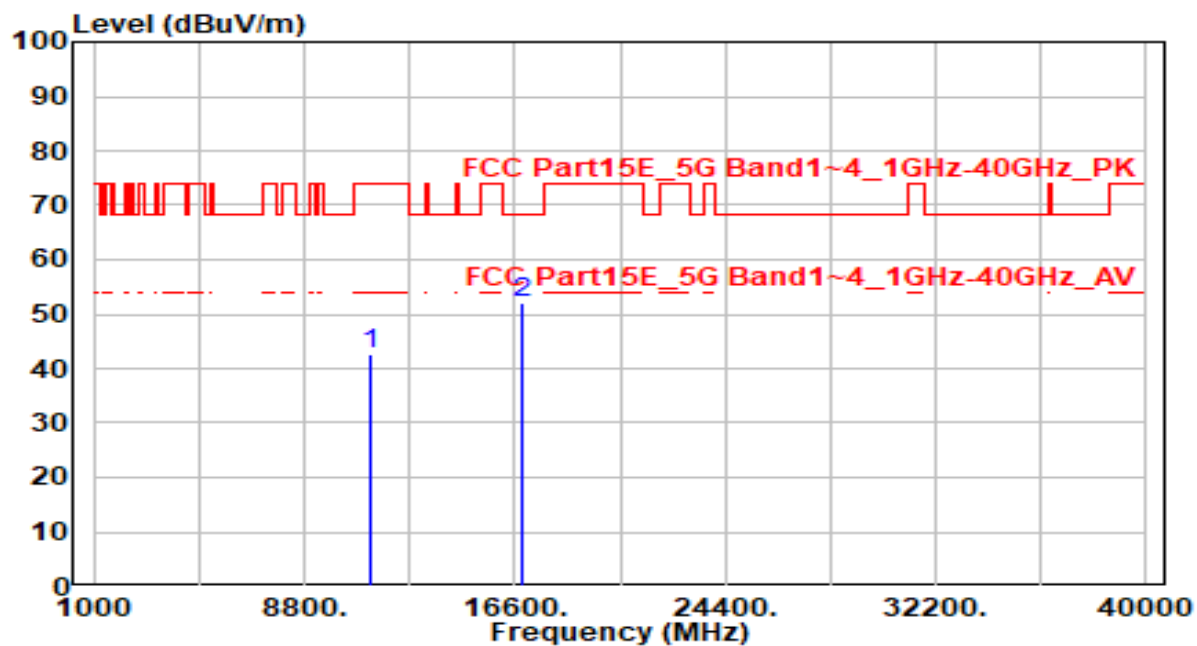


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 37.74          | 5.07       | 42.81                | -31.19      | 74.00          | 200         | 305         | Peak              |
| 2  | * 16830.000     | 45.35          | 6.58       | 51.94                | -16.26      | 68.20          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH138 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

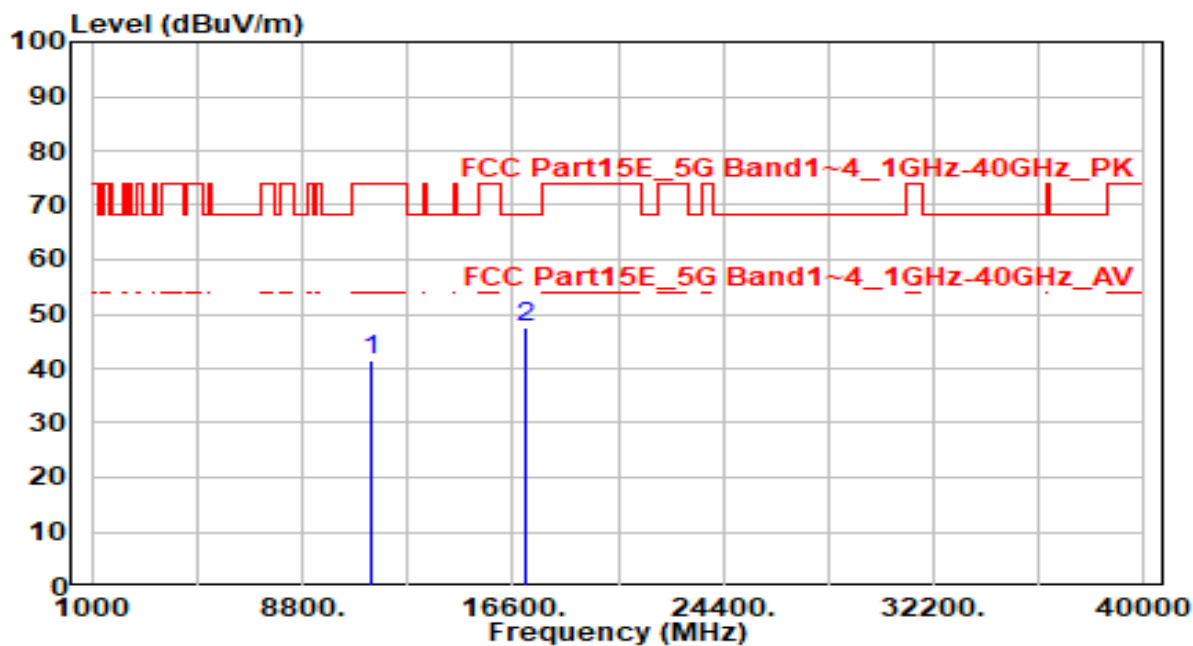


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11380.000       | 36.49          | 5.17       | 41.66                | -32.34      | 74.00          | 100         | 195         | Peak              |
| 2  | * 17070.000     | 42.20          | 5.47       | 47.67                | -20.53      | 68.20          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                              | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH138 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

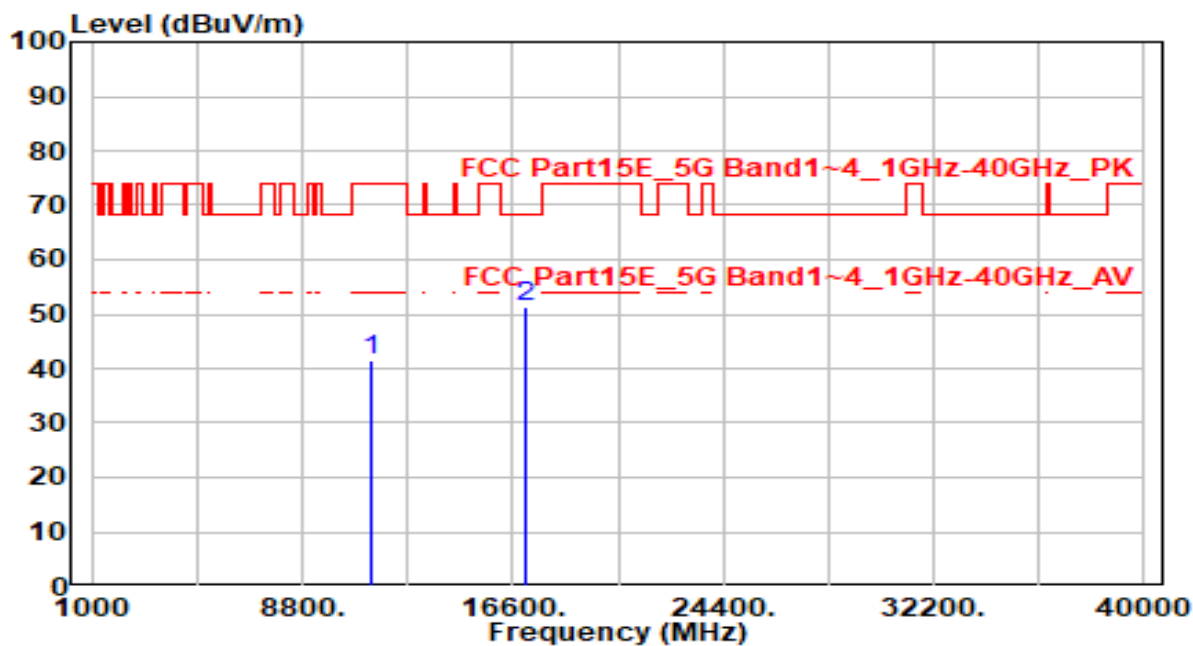


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11380.000       | 36.39          | 5.17       | 41.56                | -32.44      | 74.00          | 100         | 65          | Peak              |
| 2  | * 17070.000     | 45.82          | 5.47       | 51.29                | -16.91      | 68.20          | 155         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH155 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

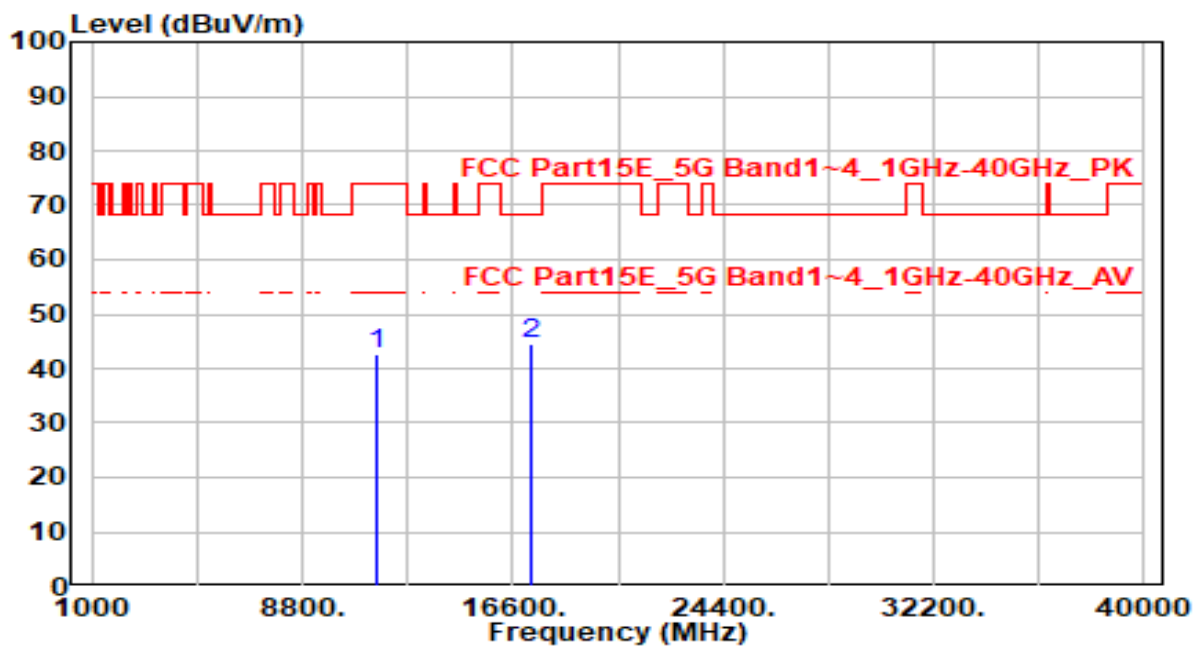


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 37.31          | 5.14       | 42.45                | -31.55      | 74.00          | 200         | 360         | Peak              |
| 2  | * 17325.000     | 39.31          | 5.11       | 44.42                | -23.78      | 68.20          | 200         | 80          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                       |                      |              |
|-----------|---------------------------------------|----------------------|--------------|
| EUT       | Module                                | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                               | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                              | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH155 ANT 0+1 | Test Voltage         | AC 110V/60Hz |

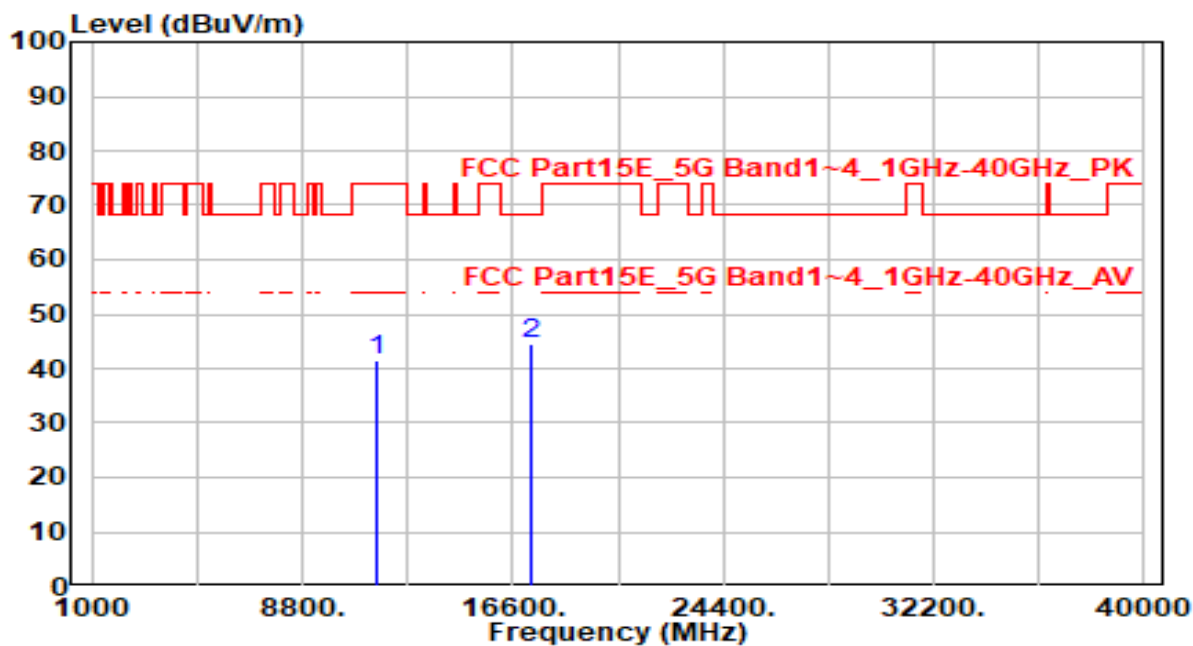


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 36.56          | 5.14       | 41.70                | -32.30      | 74.00          | 200         | 180         | Peak              |
| 2  | * 17325.000     | 39.37          | 5.11       | 44.48                | -23.72      | 68.20          | 200         | 315         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_RX_Band1_CH44 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

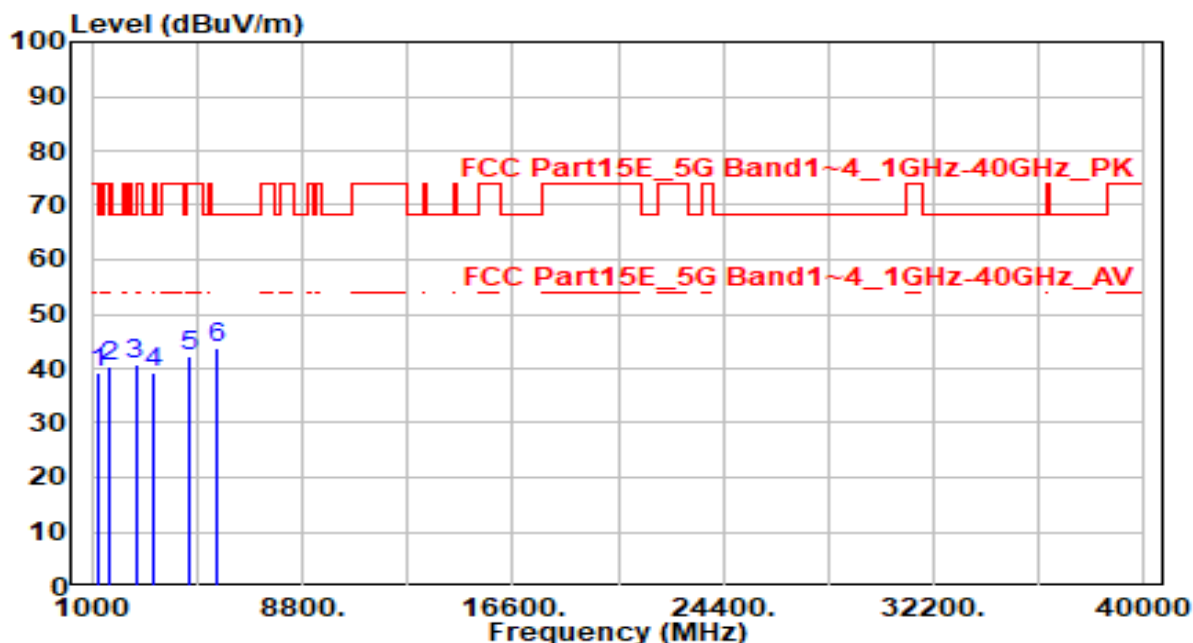


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 1198.000        | 46.87          | -7.75      | 39.12                | -34.88      | 74.00          | 100         | 310         | Peak              |
| 2  | 1640.000        | 47.84          | -7.36      | 40.48                | -27.72      | 68.20          | 195         | 360         | Peak              |
| 3  | 2623.000        | 45.56          | -4.76      | 40.80                | -27.40      | 68.20          | 160         | 360         | Peak              |
| 4  | 3313.000        | 42.62          | -3.38      | 39.24                | -28.96      | 68.20          | 140         | 360         | Peak              |
| 5  | 4642.000        | 42.67          | -0.39      | 42.28                | -31.72      | 74.00          | 100         | 290         | Peak              |
| 6  | * 5651.000      | 42.53          | 1.12       | 43.65                | -24.55      | 68.20          | 200         | 165         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_RX_Band1_CH44 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

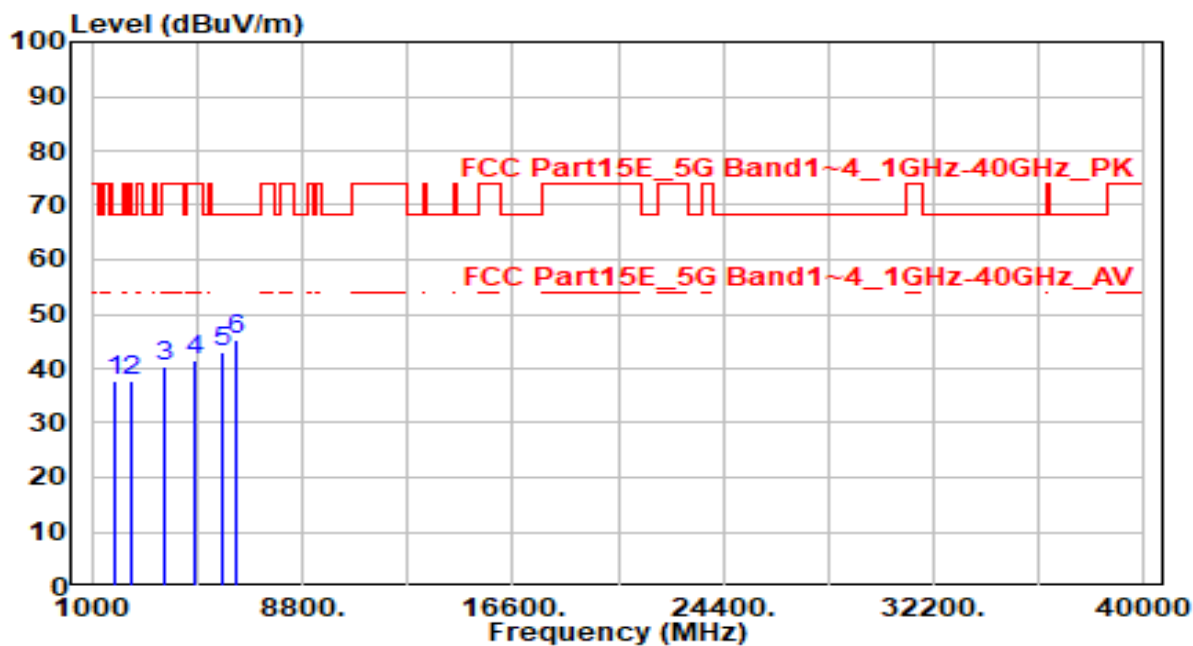

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 1881.000        | 44.43          | -6.64      | 37.78                | -30.42      | 68.20          | 200         | 185         | Peak              |
| 2  | 2477.000        | 42.95          | -5.03      | 37.92                | -30.28      | 68.20          | 200         | 145         | Peak              |
| 3  | 3686.000        | 42.38          | -2.14      | 40.24                | -33.76      | 74.00          | 200         | 305         | Peak              |
| 4  | 4847.000        | 41.36          | 0.03       | 41.39                | -32.61      | 74.00          | 200         | 355         | Peak              |
| 5  | 5889.000        | 41.25          | 1.78       | 43.03                | -25.17      | 68.20          | 200         | 145         | Peak              |
| 6  | * 6359.000      | 41.50          | 3.74       | 45.24                | -22.96      | 68.20          | 200         | 185         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.8. Radiated Restricted Band Edge Measurement

### 7.8.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.25 - 8.5         |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

**For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

**For FCC transmitters operating in the 5.725-5.85 GHz band:** All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**For IC transmitters operating in the 5.725-5.85 GHz band:** All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of  $-27$  dBm/MHz (or  $-17$  dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the  $-27$  dBm/MHz or  $-17$  dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

### FCC-Radiated emission limits; general requirements.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 ~ 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 ~ 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 ~ 30                             | 30                      | 30                            |
| 30 ~ 88                                | 100                     | 3                             |
| 88 ~ 216                               | 150                     | 3                             |
| 216 ~ 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.8.2. Test Result

|           |                                   |                      |              |
|-----------|-----------------------------------|----------------------|--------------|
| EUT       | Module                            | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                           | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                        | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

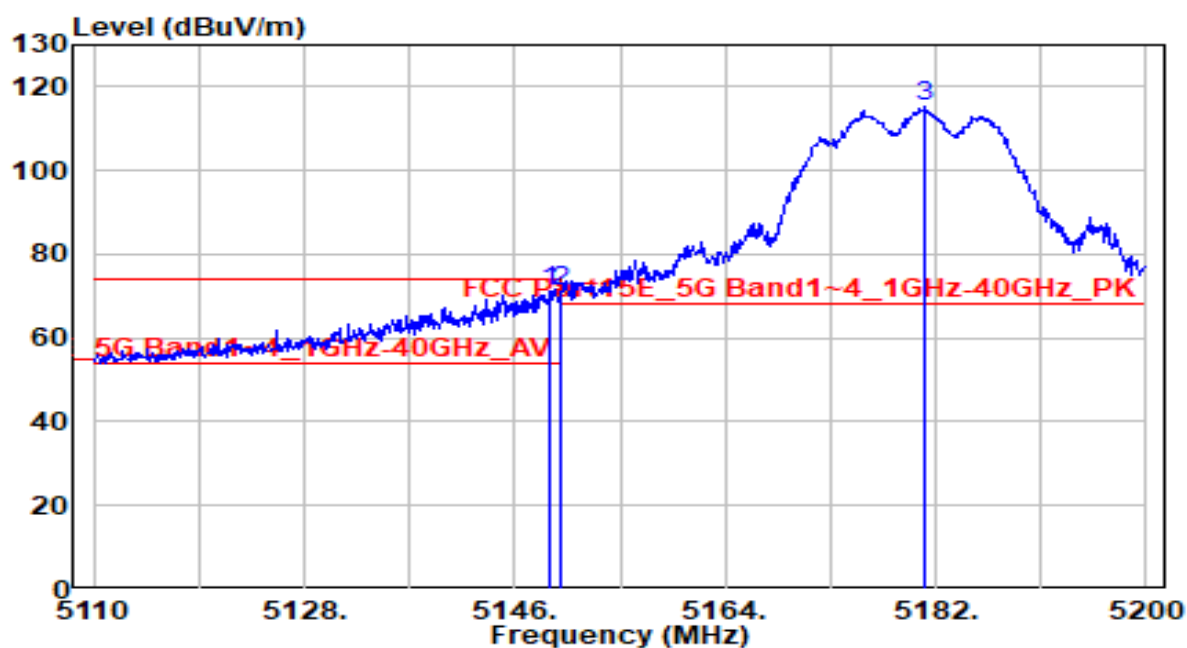


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.970        | 70.64          | 0.30       | 70.94                | -3.06       | 74.00          | 300         | 5           | Peak              |
| 2  | * 5150.000      | 70.78          | 0.30       | 71.08                | -2.92       | 74.00          | 300         | 5           | Peak              |
| 3  | 5181.100        | 114.89         | 0.29       | 115.18               | N/A         | N/A            | 300         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                   |                      |              |
|-----------|-----------------------------------|----------------------|--------------|
| EUT       | Module                            | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                           | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                        | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

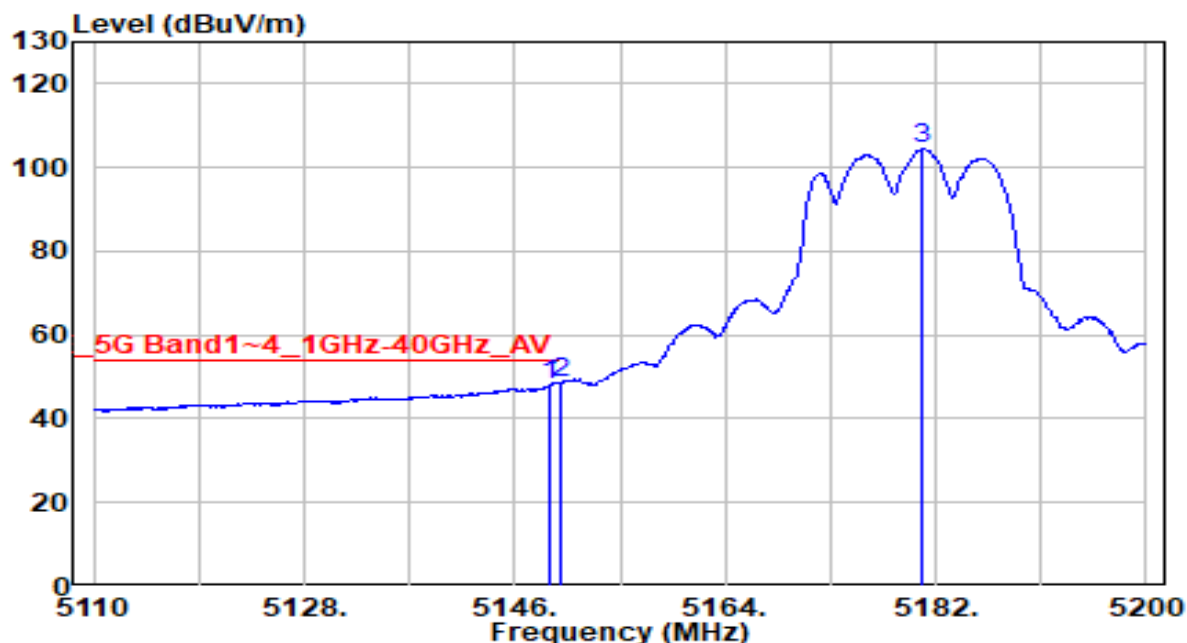


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.970        | 47.67          | 0.30       | 47.97                | -6.03       | 54.00          | 300         | 5           | Average           |
| 2  | * 5150.000      | 48.50          | 0.30       | 48.80                | -5.20       | 54.00          | 300         | 5           | Average           |
| 3  | 5180.920        | 104.34         | 0.29       | 104.63               | N/A         | N/A            | 300         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                   |                      |              |
|-----------|-----------------------------------|----------------------|--------------|
| EUT       | Module                            | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                           | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

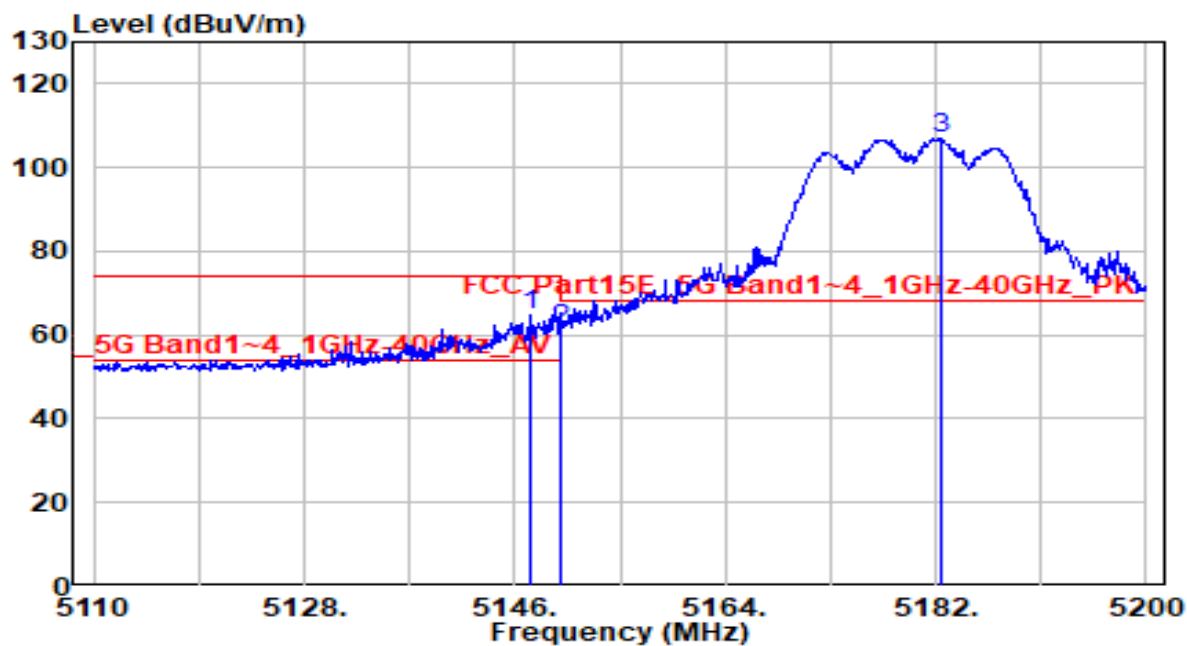


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.440        | 64.41          | 0.30       | 64.71                | -9.29       | 74.00          | 315         | 105         | Peak              |
| 2  |   | 5150.000        | 61.00          | 0.30       | 61.30                | -12.70      | 74.00          | 315         | 105         | Peak              |
| 3  |   | 5182.540        | 106.75         | 0.29       | 107.04               | N/A         | N/A            | 315         | 105         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                   |                      |              |
|-----------|-----------------------------------|----------------------|--------------|
| EUT       | Module                            | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                           | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

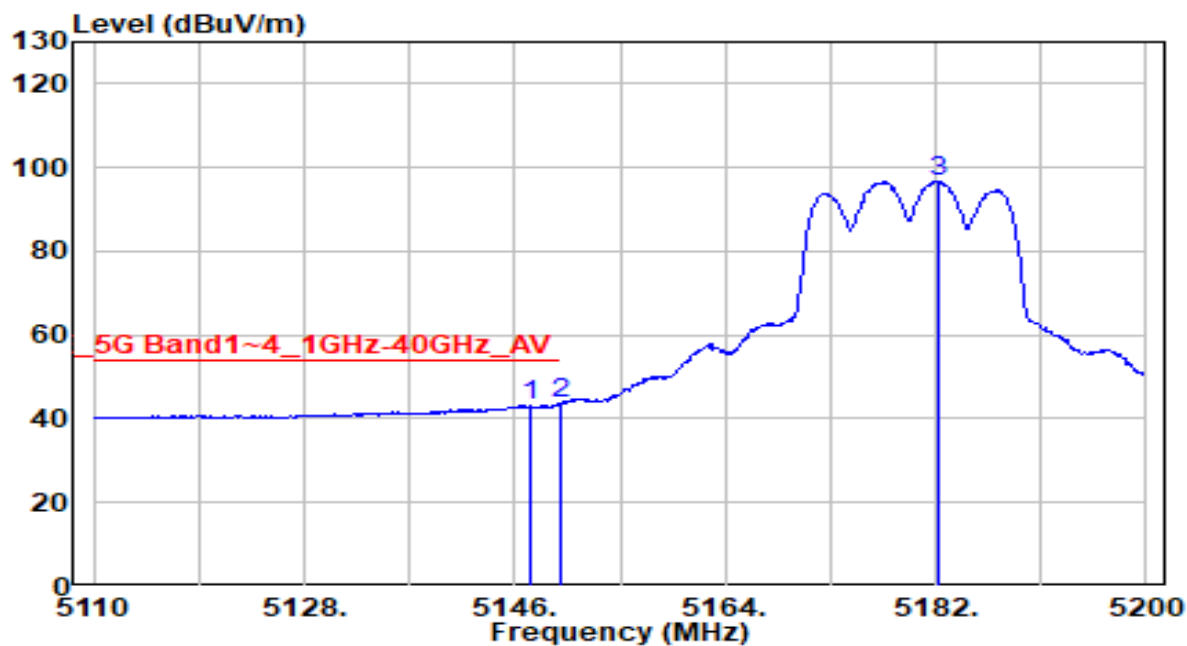


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5147.440        | 42.72          | 0.30       | 43.02                | -10.98      | 54.00          | 315         | 105         | Average           |
| 2  | * 5150.000      | 43.30          | 0.30       | 43.60                | -10.40      | 54.00          | 315         | 105         | Average           |
| 3  | 5182.180        | 96.42          | 0.29       | 96.71                | N/A         | N/A            | 315         | 105         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                  |                      |              |
|-----------|----------------------------------|----------------------|--------------|
| EUT       | Module                           | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                          | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

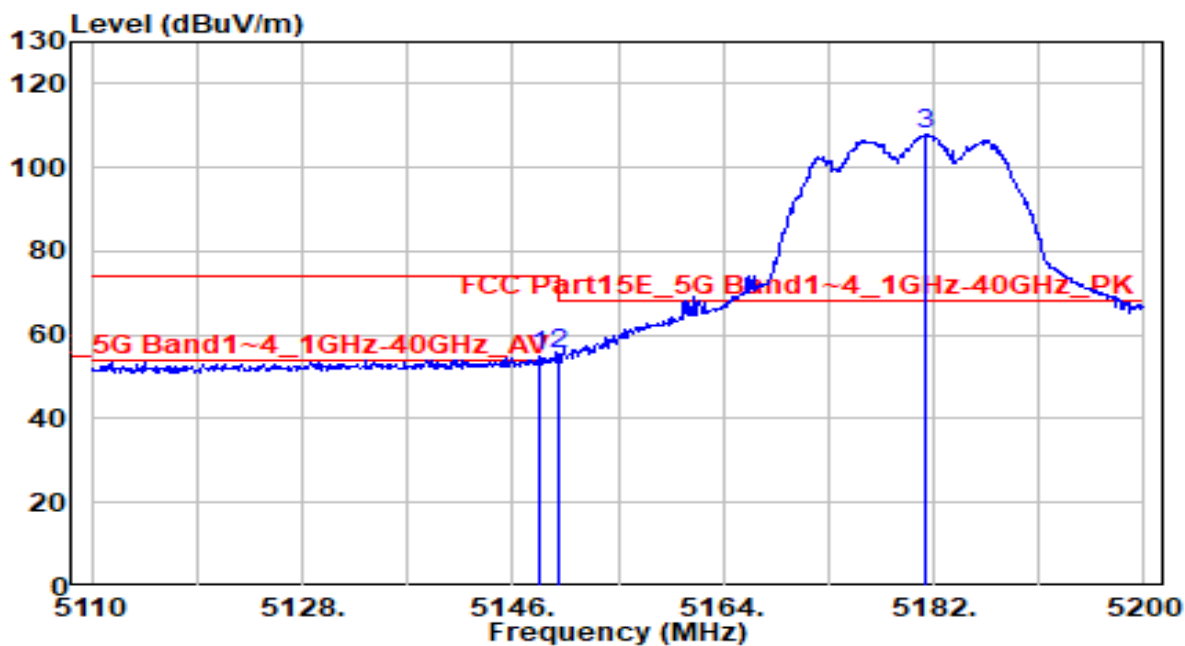


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.250        | 55.10          | -0.34      | 54.75                | -19.25      | 74.00          | 105         | 0           | Peak              |
| 2  | 5150.000        | 55.83          | -0.34      | 55.48                | -18.52      | 74.00          | 105         | 0           | Peak              |
| 3  | * 5181.190      | 108.30         | -0.35      | 107.95               | 39.75       | 68.20          | 105         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                  |                      |              |
|-----------|----------------------------------|----------------------|--------------|
| EUT       | Module                           | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                          | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

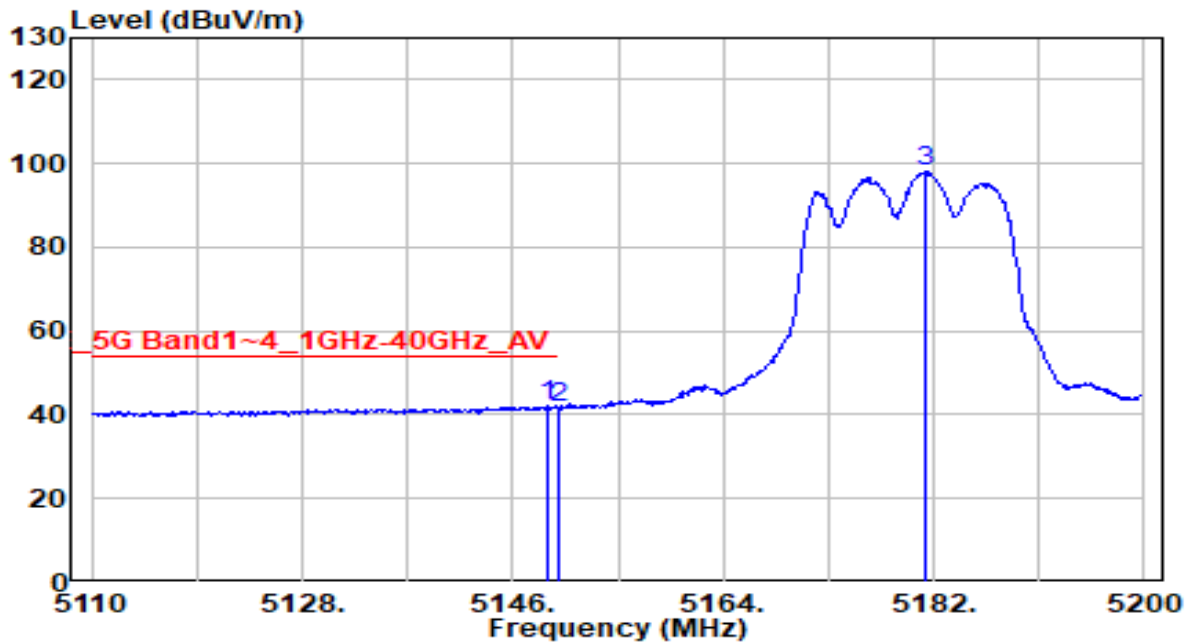


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5148.970        | 42.29          | -0.34      | 41.95                | -12.05      | 54.00          | 105         | 0           | Average           |
| 2  |   | 5150.000        | 41.83          | -0.34      | 41.49                | -12.51      | 54.00          | 105         | 0           | Average           |
| 3  |   | 5181.370        | 98.49          | -0.35      | 98.14                | -401.86     | 500.00         | 105         | 0           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                  |                      |              |
|-----------|----------------------------------|----------------------|--------------|
| EUT       | Module                           | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                          | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                         | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

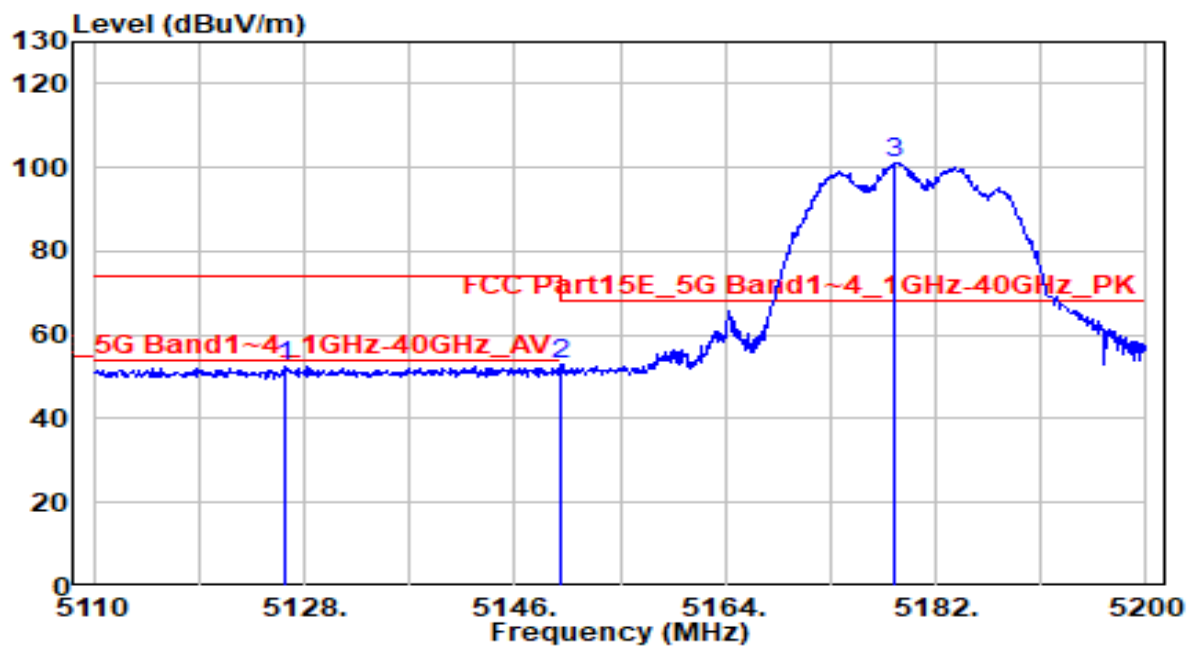


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5126.290        | 52.97          | -0.34      | 52.63                | -21.37      | 74.00          | 345         | 280         | Peak              |
| 2  | 5150.000        | 53.37          | -0.34      | 53.03                | -20.97      | 74.00          | 345         | 280         | Peak              |
| 3  | * 5178.490      | 101.60         | -0.35      | 101.25               | 33.05       | 68.20          | 345         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                  |                      |              |
|-----------|----------------------------------|----------------------|--------------|
| EUT       | Module                           | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                          | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                         | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band1_CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

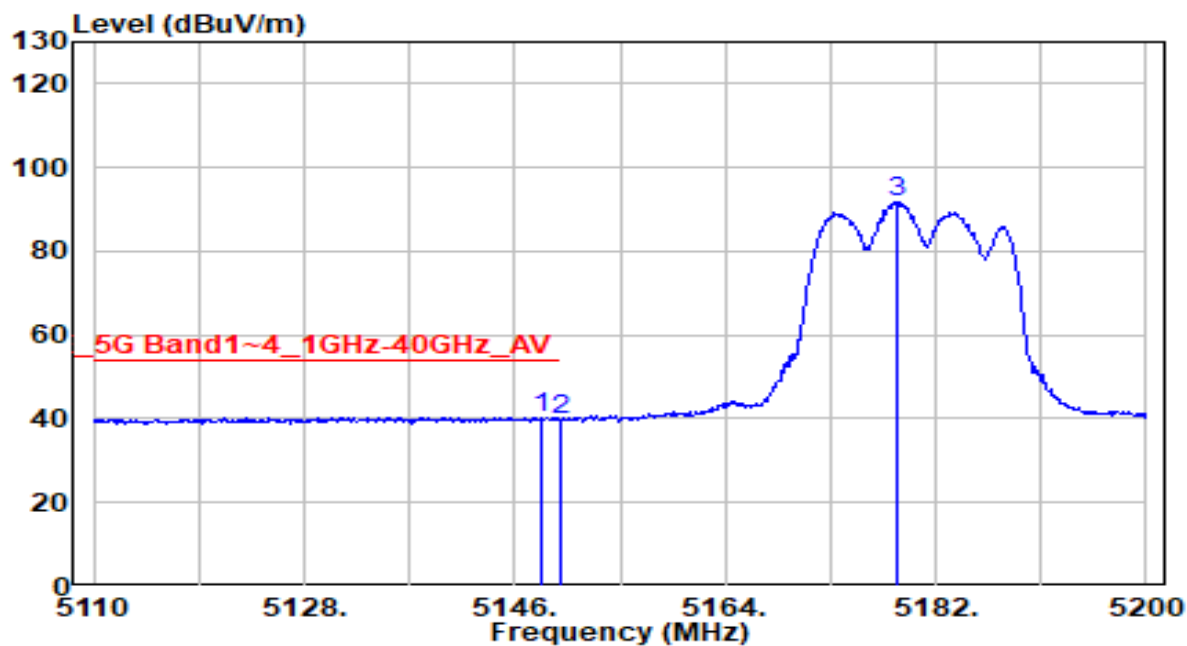


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5148.340      | 40.76          | -0.34      | 40.41                | -13.59      | 54.00          | 345         | 280         | Average           |
| 2  | 5150.000        | 40.23          | -0.34      | 39.89                | -14.11      | 54.00          | 345         | 280         | Average           |
| 3  | 5178.670        | 92.10          | -0.35      | 91.75                | -408.25     | 500.00         | 345         | 280         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Module                        | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

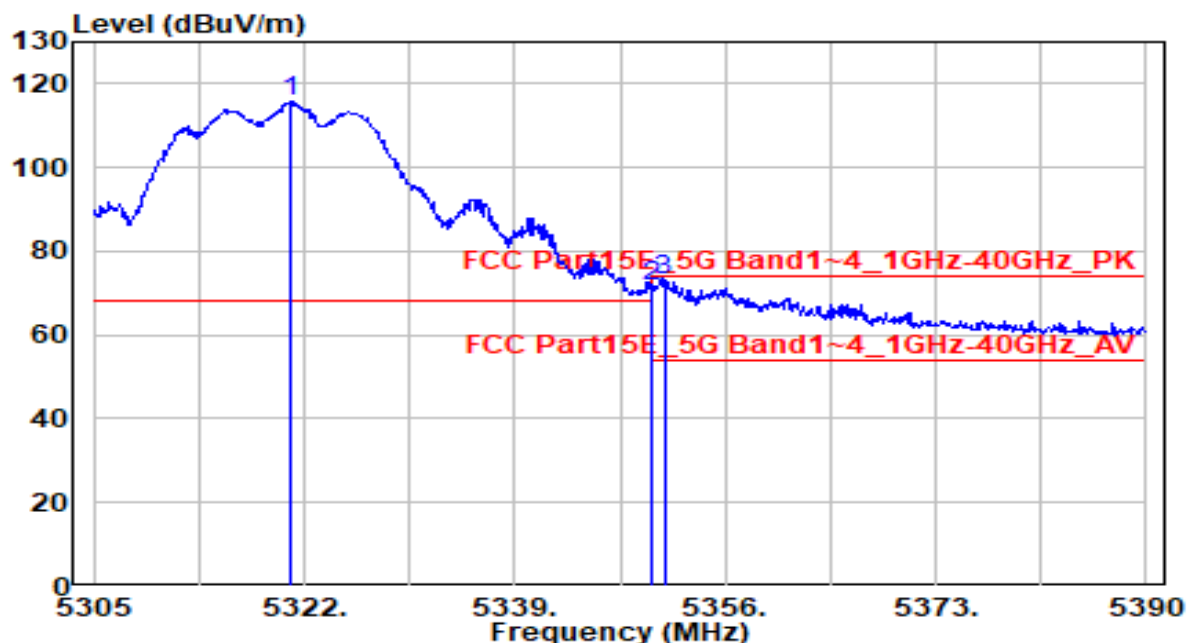


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5320.980        | 115.42         | 0.26       | 115.68               | N/A         | N/A            | 300         | 20          | Peak              |
| 2  | 5350.000        | 71.40          | 0.25       | 71.65                | -2.35       | 74.00          | 300         | 20          | Peak              |
| 3  | * 5351.070      | 72.92          | 0.25       | 73.17                | -0.83       | 74.00          | 300         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Module                        | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

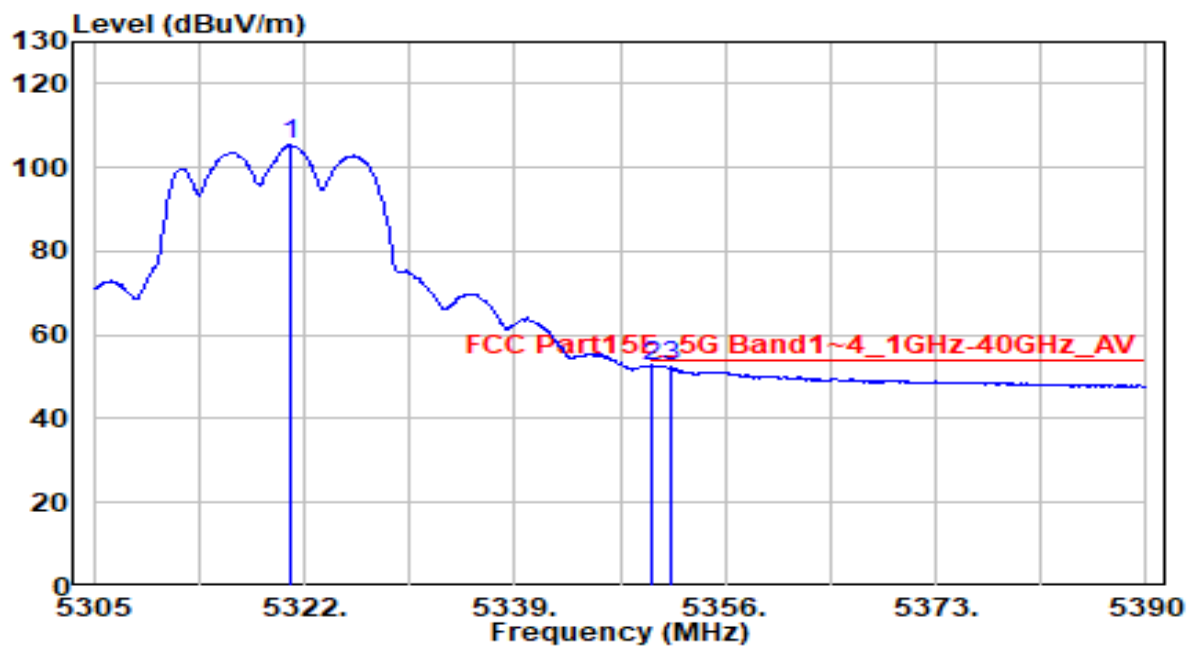


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5320.810        | 105.05         | 0.26       | 105.30               | N/A         | N/A            | 300         | 20          | Average           |
| 2  | * 5350.000      | 52.42          | 0.25       | 52.67                | -1.33       | 54.00          | 300         | 20          | Average           |
| 3  | 5351.580        | 52.32          | 0.25       | 52.57                | -1.43       | 54.00          | 300         | 20          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Module                       | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band2_C64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

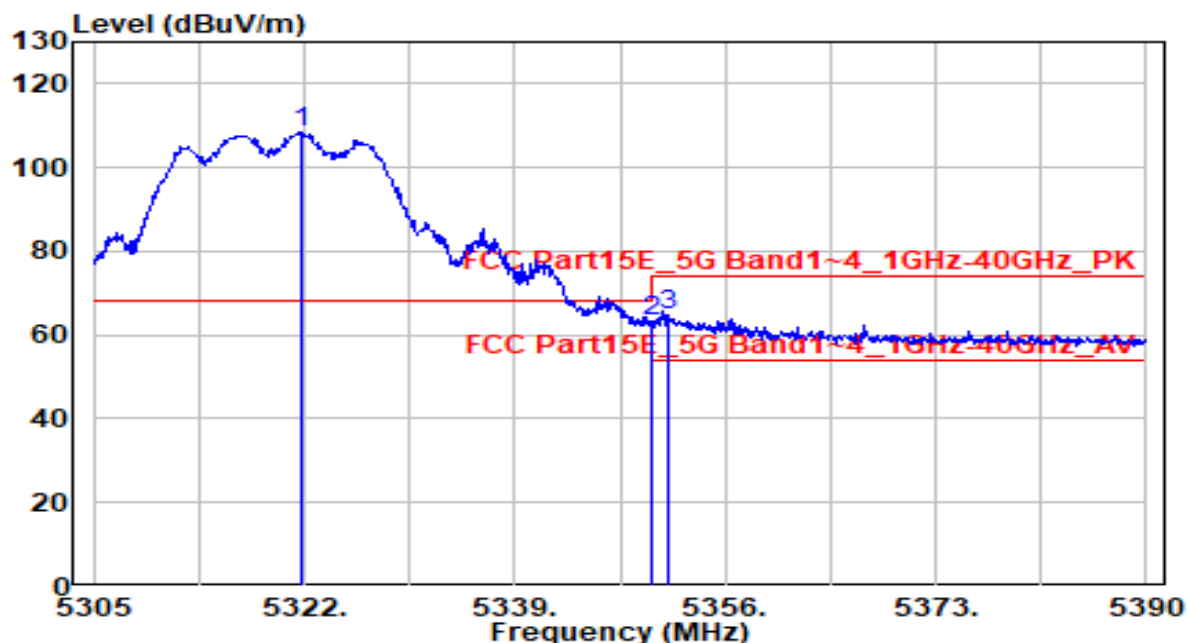


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.745        | 108.06         | 0.26       | 108.31               | N/A         | N/A            | 345         | 75          | Peak              |
| 2  | 5350.000        | 63.22          | 0.25       | 63.47                | -10.53      | 74.00          | 345         | 75          | Peak              |
| 3  | * 5351.410      | 64.47          | 0.25       | 64.73                | -9.27       | 74.00          | 345         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Module                        | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

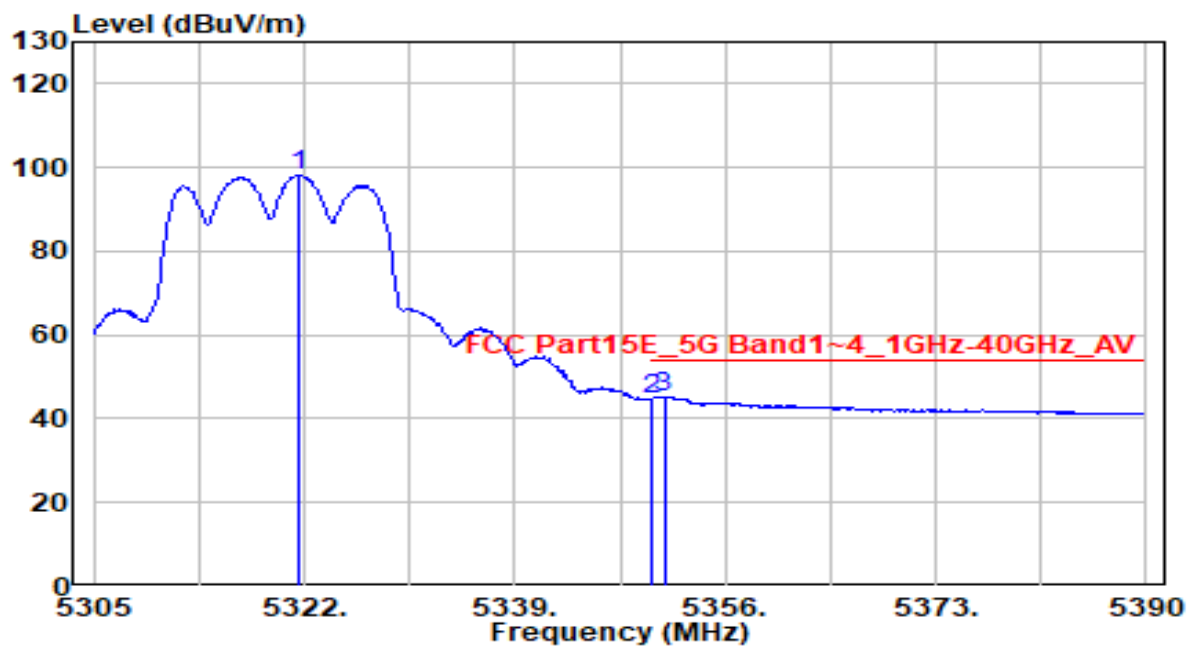


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.490        | 97.87          | 0.26       | 98.13                | N/A         | N/A            | 345         | 75          | Average           |
| 2  | 5350.000        | 44.52          | 0.25       | 44.77                | -9.23       | 54.00          | 345         | 75          | Average           |
| 3  | * 5351.070      | 45.03          | 0.25       | 45.28                | -8.72       | 54.00          | 345         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

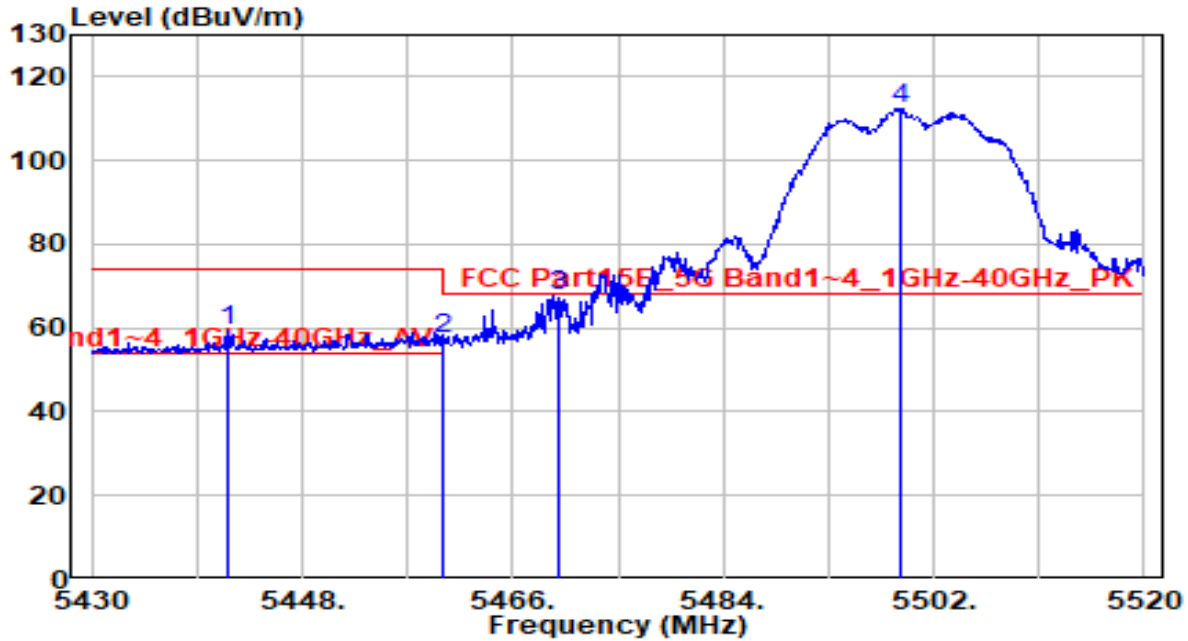


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5441.700        | 58.98          | 0.38       | 59.36                | -14.64      | 74.00          | 235         | 15          | Peak              |
| 2  | 5460.000        | 56.71          | 0.45       | 57.15                | -16.85      | 74.00          | 235         | 15          | Peak              |
| 3  | * 5470.000      | 67.04          | 0.48       | 67.52                | -0.68       | 68.20          | 233         | 15          | Peak              |
| 4  | 5499.120        | 111.87         | 0.58       | 112.45               | N/A         | N/A            | 235         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

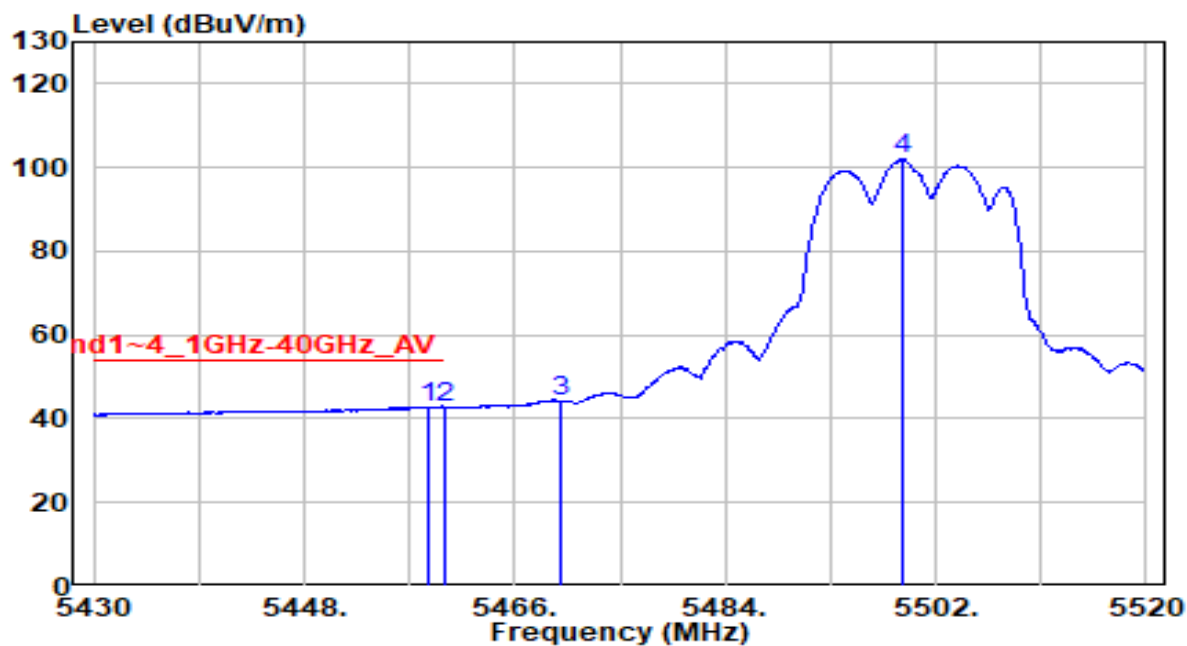


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5458.710      | 42.33          | 0.44       | 42.77                | -11.23      | 54.00          | 235         | 15          | Average           |
| 2  | 5460.000        | 42.27          | 0.45       | 42.72                | -11.28      | 54.00          | 235         | 15          | Average           |
| 3  | 5470.000        | 43.81          | 0.48       | 44.29                | N/A         | N/A            | 235         | 15          | Average           |
| 4  | 5499.120        | 101.26         | 0.58       | 101.84               | N/A         | N/A            | 235         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

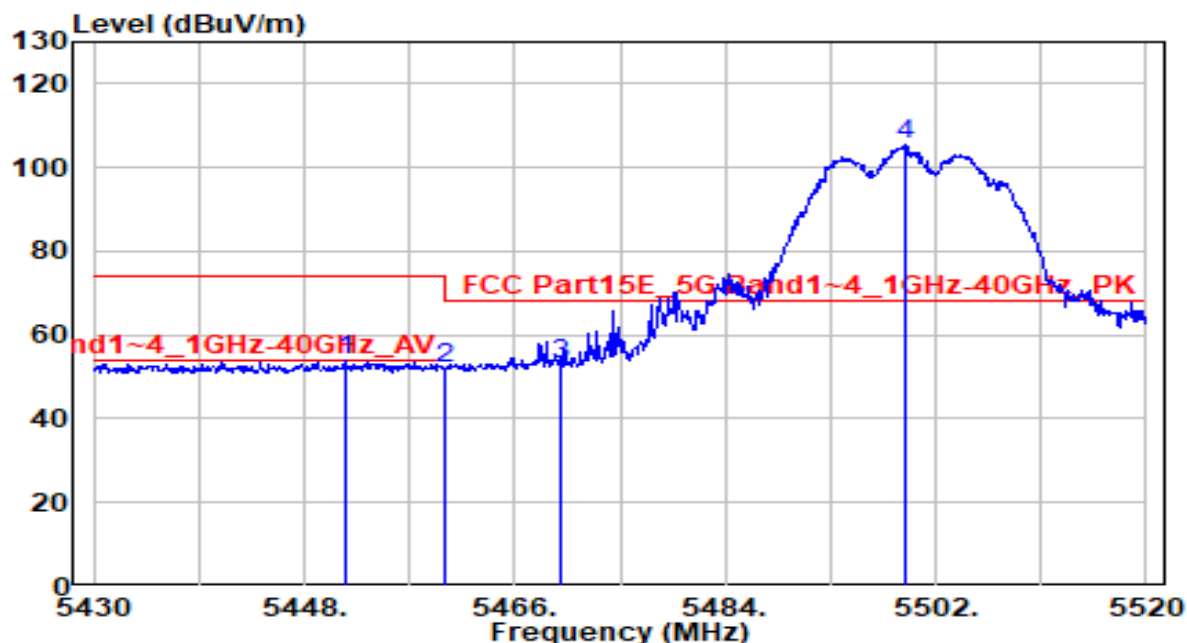


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5451.510        | 53.53          | 0.42       | 53.95                | -20.05      | 74.00          | 350         | 55          | Peak              |
| 2  | 5460.000        | 51.42          | 0.45       | 51.86                | -22.14      | 74.00          | 350         | 55          | Peak              |
| 3  | * 5470.000      | 52.56          | 0.48       | 53.04                | -15.16      | 68.20          | 350         | 55          | Peak              |
| 4  | 5499.390        | 105.05         | 0.58       | 105.63               | N/A         | N/A            | 350         | 55          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

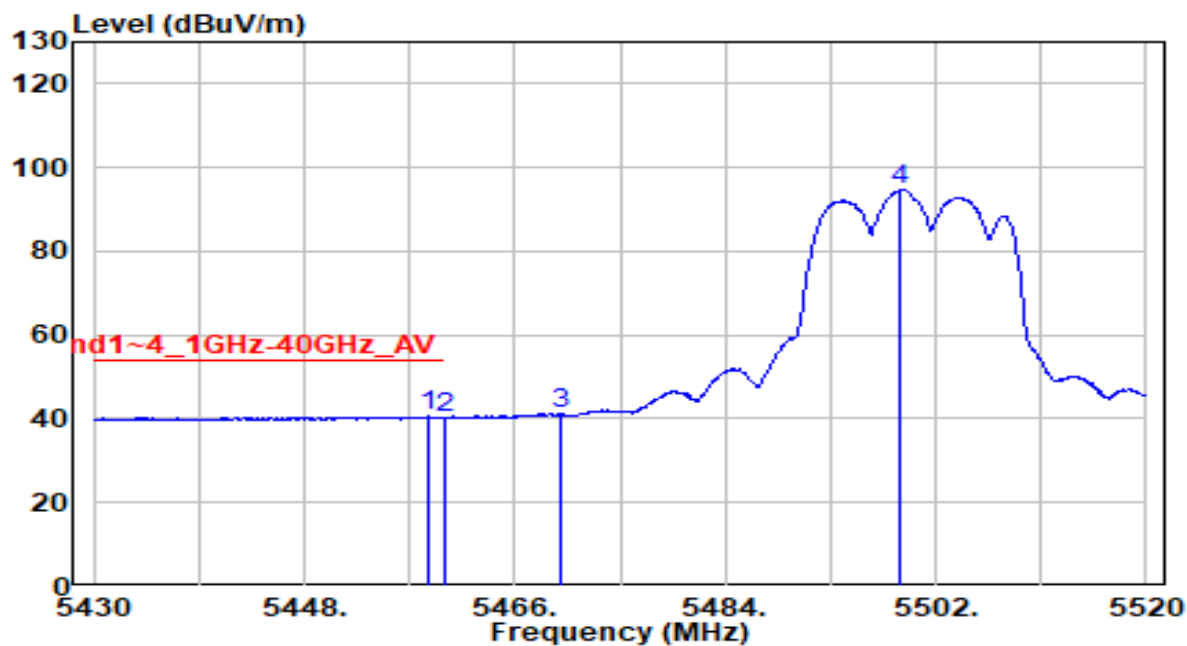


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5458.710        | 40.09          | 0.44       | 40.53                | -13.47      | 54.00          | 350         | 55          | Average           |
| 2  |   | 5460.000        | 39.86          | 0.45       | 40.31                | -13.69      | 54.00          | 350         | 55          | Average           |
| 3  |   | 5470.000        | 40.56          | 0.48       | 41.04                | N/A         | N/A            | 350         | 55          | Average           |
| 4  |   | 5498.940        | 94.14          | 0.58       | 94.72                | N/A         | N/A            | 350         | 55          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

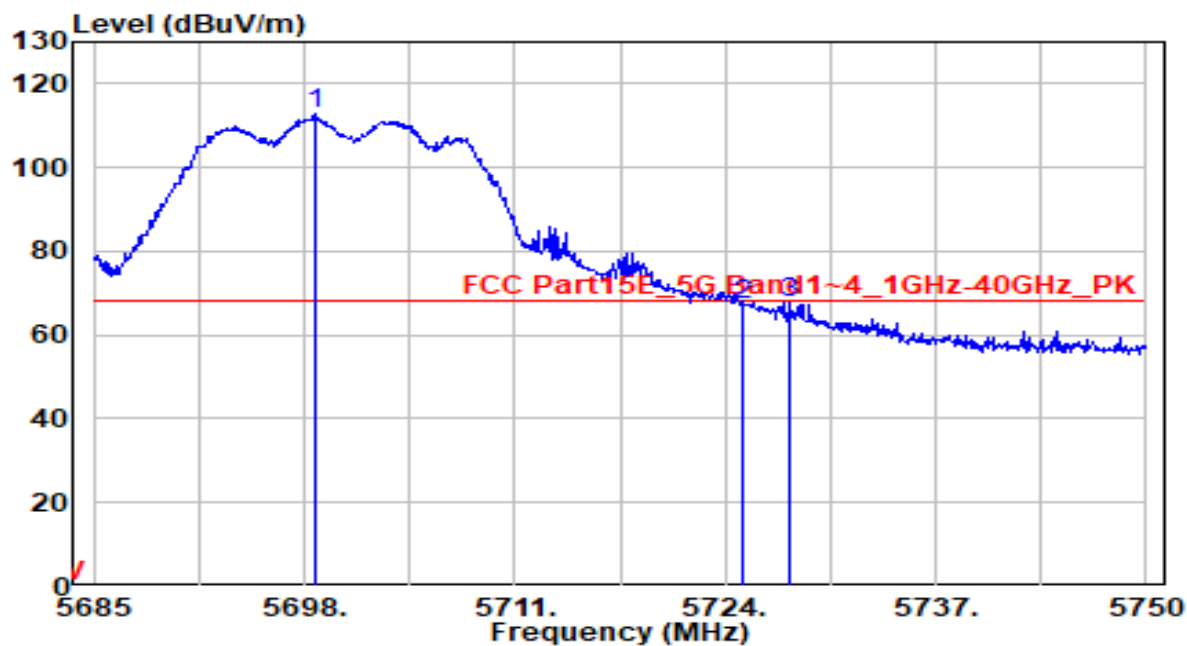


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5698.650        | 111.64         | 1.31       | 112.94               | N/A         | N/A            | 235         | 15          | Peak              |
| 2  | 5725.000        | 66.01          | 1.41       | 67.42                | -0.78       | 68.20          | 235         | 15          | Peak              |
| 3  | * 5728.030      | 66.18          | 1.42       | 67.60                | -0.60       | 68.20          | 235         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

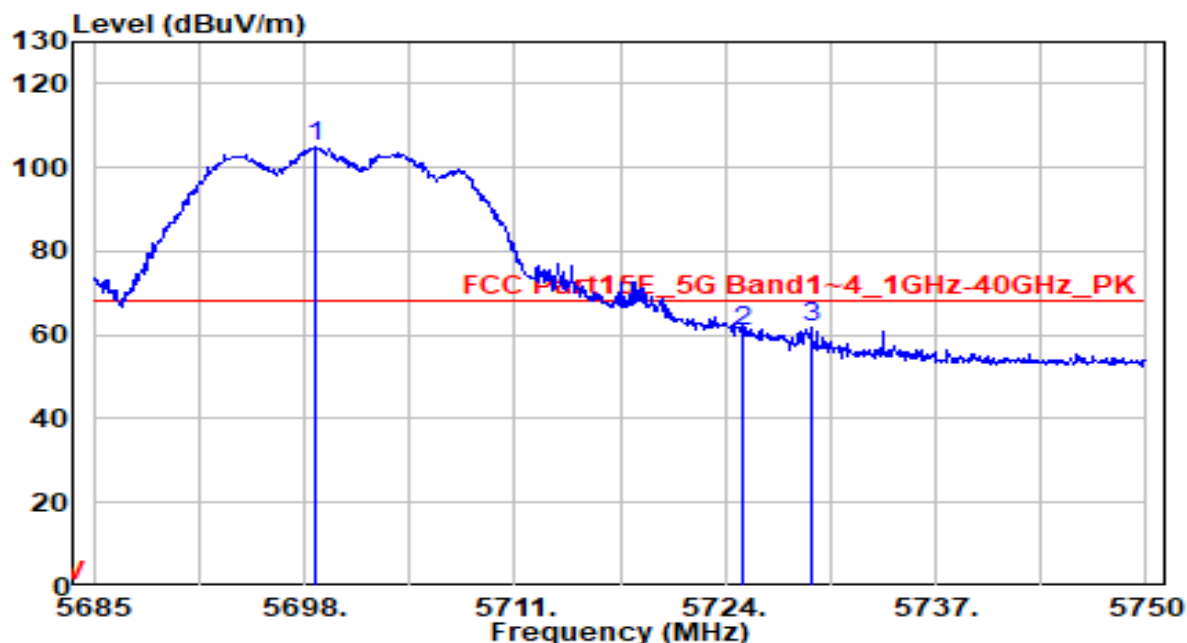


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5698.715        | 103.59         | 1.31       | 104.90               | N/A         | N/A            | 305         | 250         | Peak              |
| 2  | 5725.000        | 59.27          | 1.41       | 60.68                | -7.52       | 68.20          | 305         | 250         | Peak              |
| 3  | * 5729.265      | 60.60          | 1.43       | 62.03                | -6.17       | 68.20          | 305         | 250         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

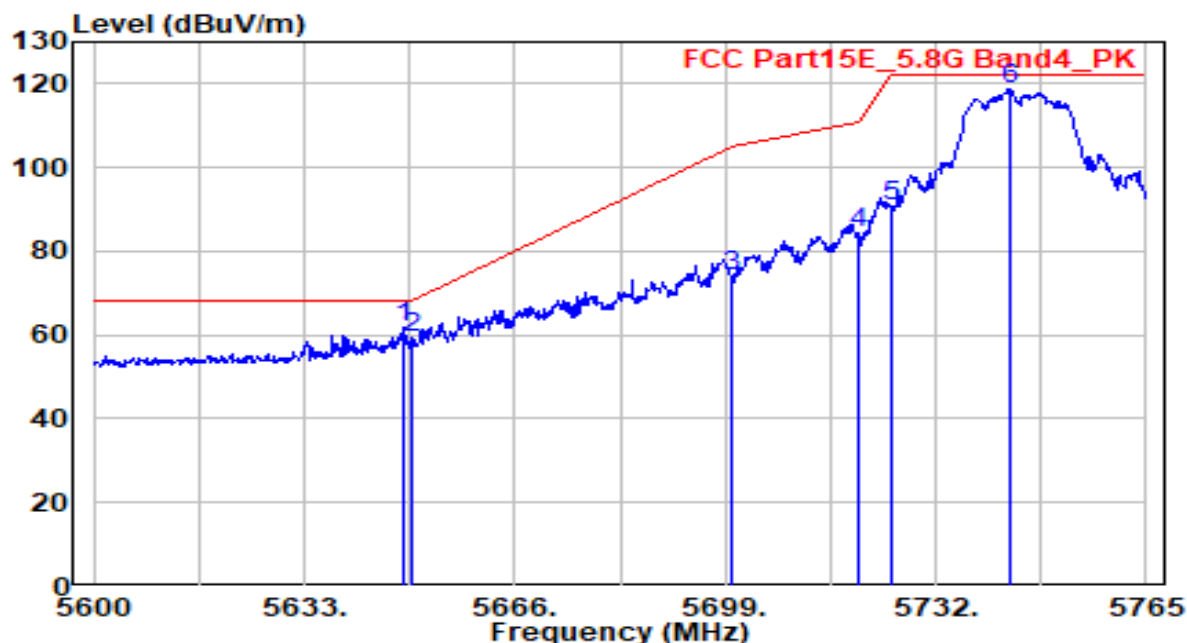


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5648.675      | 60.58          | 1.11       | 61.70                | -6.50       | 68.20          | 235         | 15          | Peak              |
| 2  | 5650.000        | 58.02          | 1.12       | 59.13                | -9.07       | 68.20          | 235         | 15          | Peak              |
| 3  | 5700.000        | 72.97          | 1.31       | 74.28                | -30.92      | 105.20         | 235         | 15          | Peak              |
| 4  | 5720.000        | 83.09          | 1.39       | 84.48                | -26.32      | 110.80         | 235         | 15          | Peak              |
| 5  | 5725.000        | 89.31          | 1.41       | 90.72                | -31.48      | 122.20         | 235         | 15          | Peak              |
| 6  | 5743.550        | 117.14         | 1.48       | 118.62               | N/A         | N/A            | 235         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

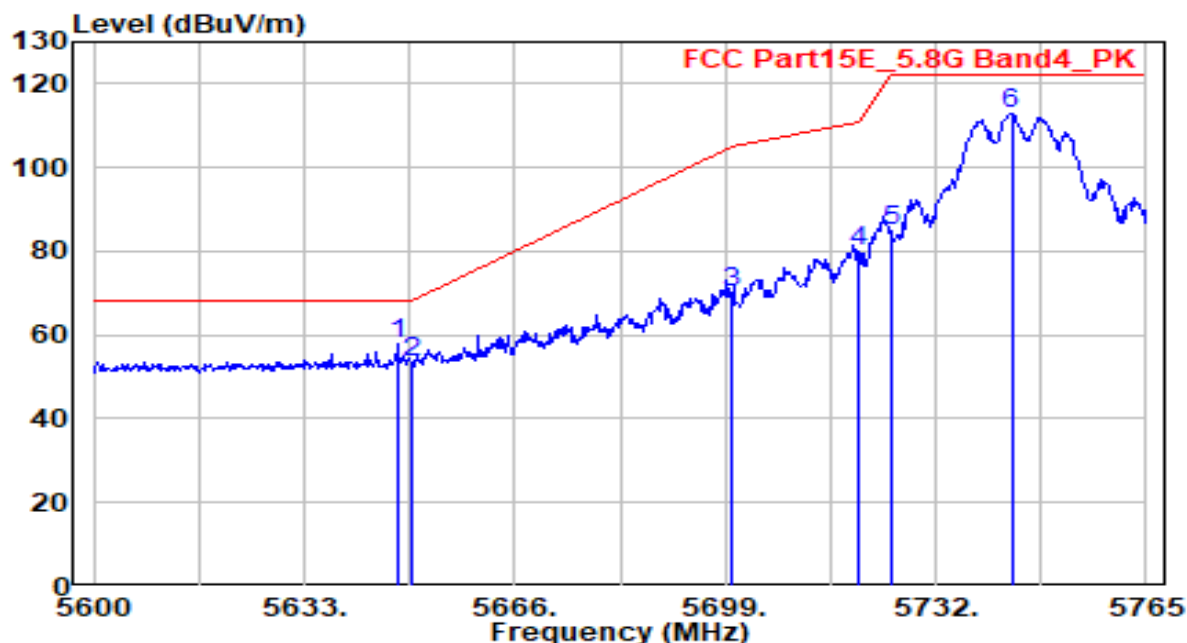


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5647.685      | 56.72          | 1.11       | 57.83                | -10.37      | 68.20          | 330         | 255         | Peak              |
| 2  | 5650.000        | 52.28          | 1.12       | 53.40                | -14.80      | 68.20          | 330         | 255         | Peak              |
| 3  | 5700.000        | 68.62          | 1.31       | 69.93                | -35.27      | 105.20         | 330         | 255         | Peak              |
| 4  | 5720.000        | 78.74          | 1.39       | 80.13                | -30.67      | 110.80         | 330         | 255         | Peak              |
| 5  | 5725.000        | 83.65          | 1.41       | 85.06                | -37.14      | 122.20         | 330         | 255         | Peak              |
| 6  | 5743.880        | 111.50         | 1.48       | 112.99               | N/A         | N/A            | 330         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

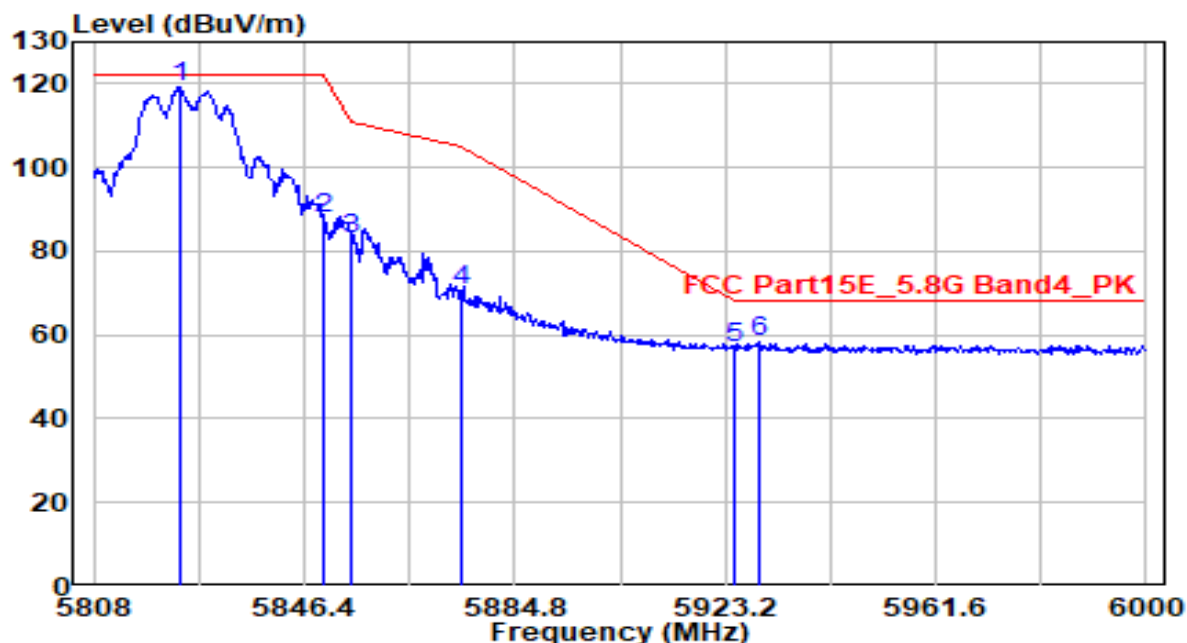


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.552        | 117.64         | 1.72       | 119.37               | N/A         | N/A            | 255         | 15          | Peak              |
| 2  | 5850.000        | 86.08          | 1.75       | 87.82                | -34.38      | 122.20         | 255         | 15          | Peak              |
| 3  | 5855.000        | 81.12          | 1.75       | 82.87                | -27.93      | 110.80         | 255         | 15          | Peak              |
| 4  | 5875.000        | 69.02          | 1.77       | 70.79                | -34.41      | 105.20         | 255         | 15          | Peak              |
| 5  | 5925.000        | 55.11          | 1.81       | 56.92                | -11.28      | 68.20          | 255         | 15          | Peak              |
| 6  | * 5929.536      | 56.38          | 1.81       | 58.19                | -10.01      | 68.20          | 255         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Module                         | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11a_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

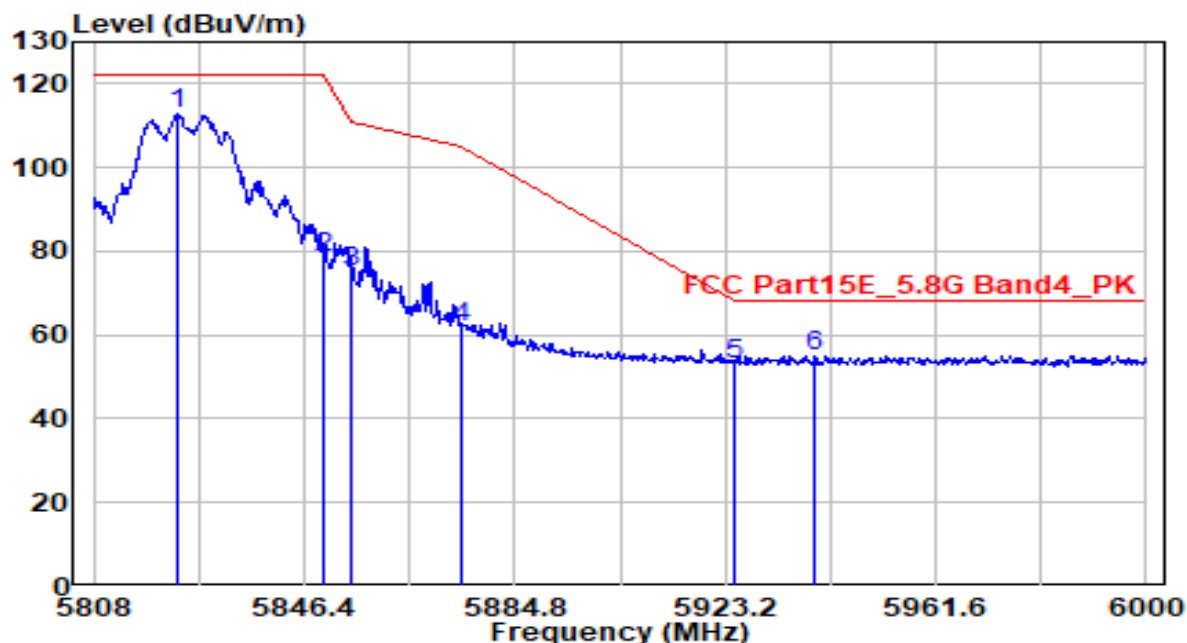


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.360        | 110.89         | 1.72       | 112.61               | N/A         | N/A            | 330         | 255         | Peak              |
| 2  | 5850.000        | 76.53          | 1.75       | 78.28                | -43.92      | 122.20         | 330         | 255         | Peak              |
| 3  | 5855.000        | 73.18          | 1.75       | 74.93                | -35.87      | 110.80         | 330         | 255         | Peak              |
| 4  | 5875.000        | 60.04          | 1.77       | 61.81                | -43.39      | 105.20         | 330         | 255         | Peak              |
| 5  | 5925.000        | 51.20          | 1.81       | 53.01                | -15.19      | 68.20          | 330         | 255         | Peak              |
| 6  | * 5939.520      | 53.30          | 1.82       | 55.12                | -13.08      | 68.20          | 330         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | Module                                      | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

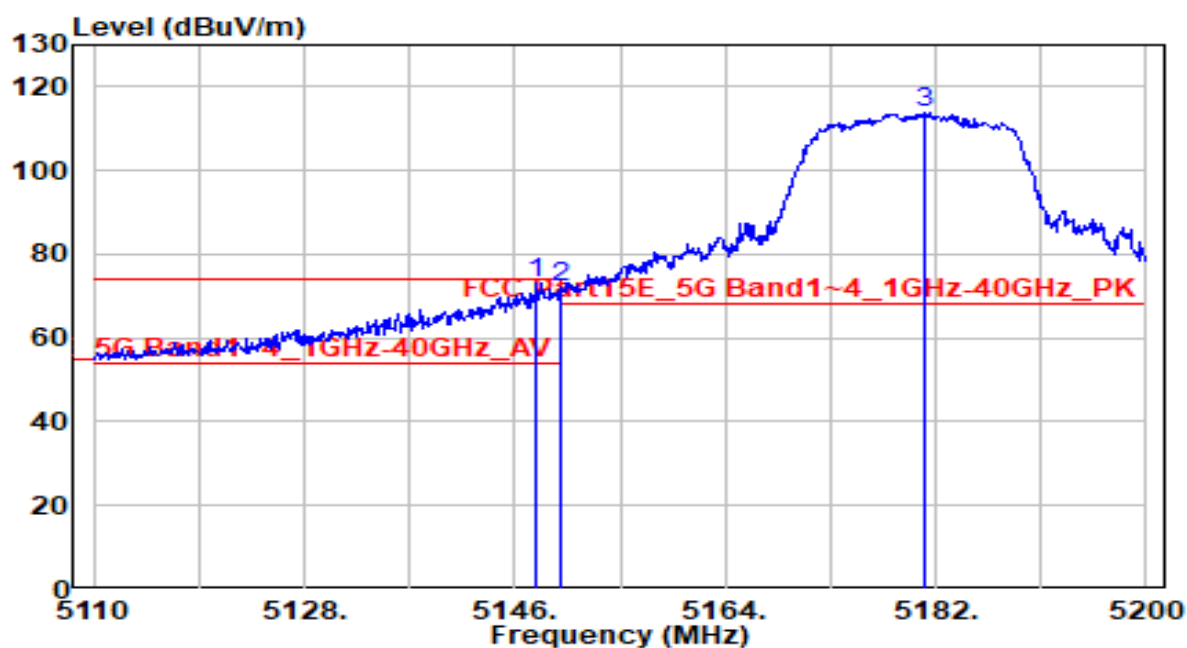


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5147.800      | 72.90          | 0.30       | 73.20                | -0.80       | 74.00          | 300         | 7           | Peak              |
| 2  | 5150.000        | 71.92          | 0.30       | 72.22                | -1.78       | 74.00          | 300         | 7           | Peak              |
| 3  | 5181.010        | 113.74         | 0.29       | 114.03               | N/A         | N/A            | 300         | 7           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | Module                                      | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

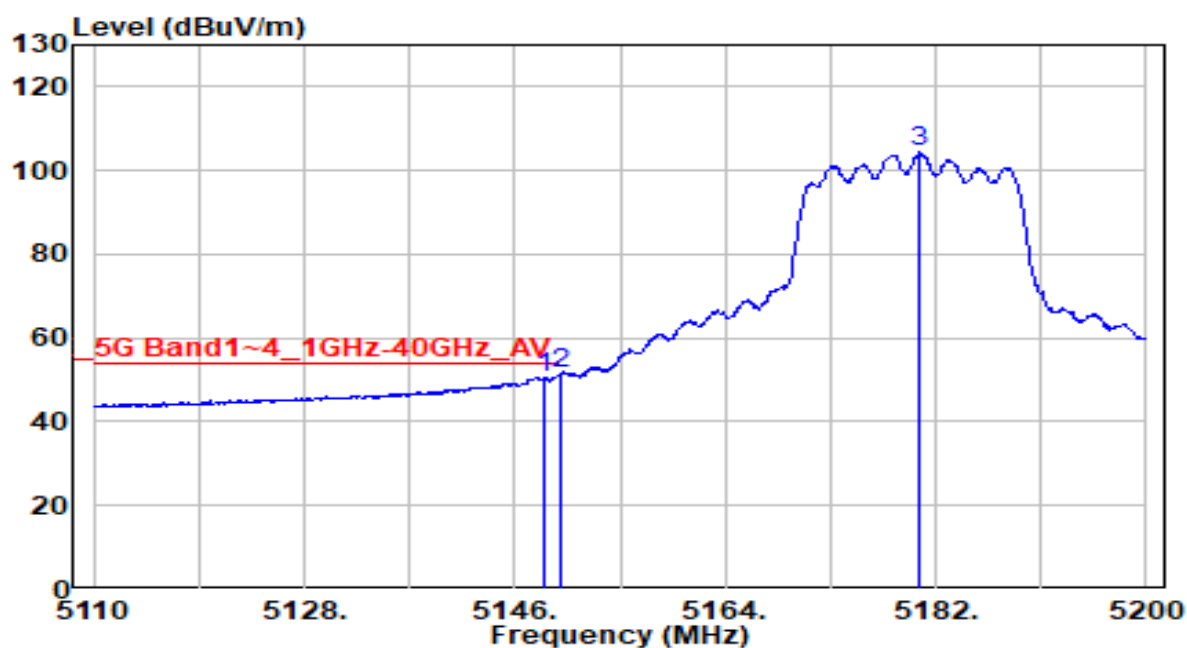


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.430        | 50.19          | 0.30       | 50.49                | -3.51       | 54.00          | 300         | 5           | Average           |
| 2  | * 5150.000      | 51.07          | 0.30       | 51.37                | -2.63       | 54.00          | 300         | 5           | Average           |
| 3  | 5180.650        | 104.10         | 0.29       | 104.39               | N/A         | N/A            | 300         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | Module                                      | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

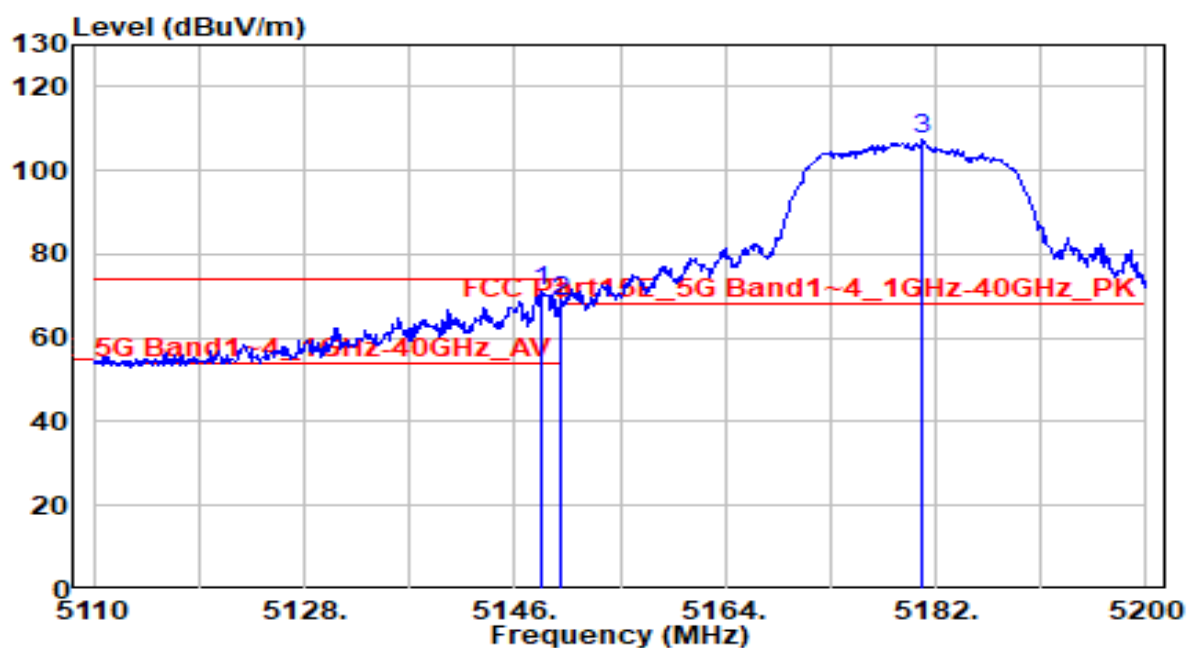


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5148.340        | 70.92          | 0.30       | 71.22                | -2.78       | 74.00          | 305         | 75          | Peak              |
| 2  |   | 5150.000        | 68.50          | 0.30       | 68.80                | -5.20       | 74.00          | 305         | 75          | Peak              |
| 3  |   | 5180.920        | 106.99         | 0.29       | 107.28               | N/A         | N/A            | 305         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | Module                                      | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_FCC | Test Voltage         | AC 120V/60Hz |

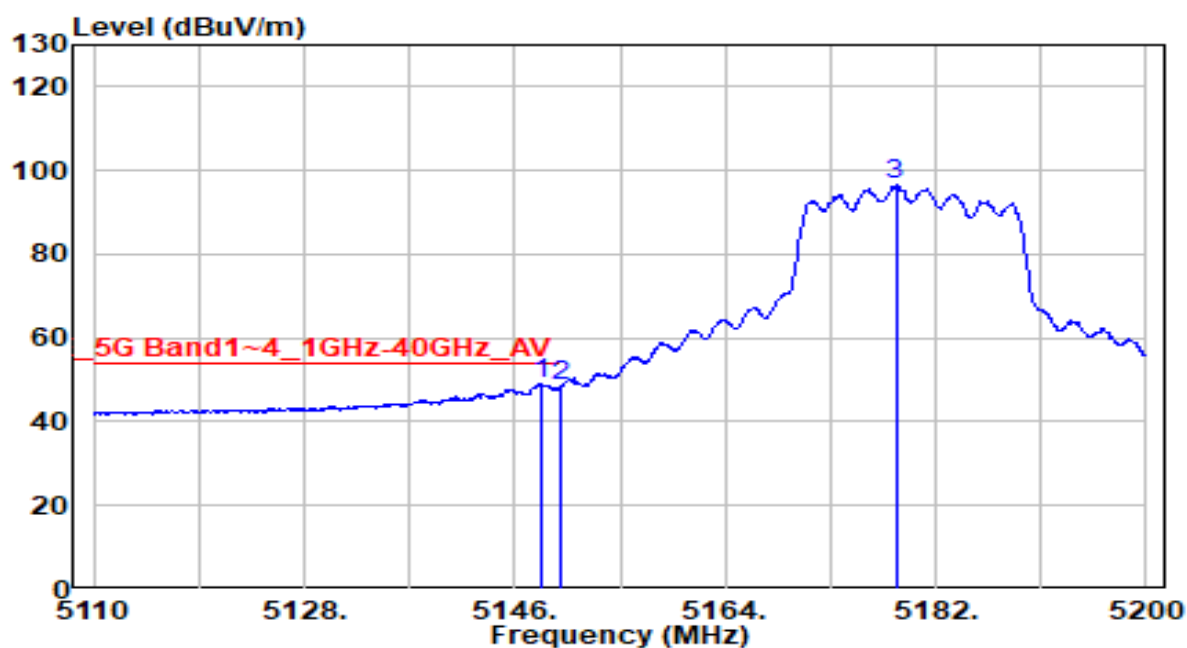


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5148.340      | 48.77          | 0.30       | 49.07                | -4.93       | 54.00          | 305         | 75          | Average           |
| 2  | 5150.000        | 48.32          | 0.30       | 48.62                | -5.38       | 54.00          | 305         | 75          | Average           |
| 3  | 5178.580        | 96.36          | 0.29       | 96.65                | N/A         | N/A            | 305         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | Module                                     | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

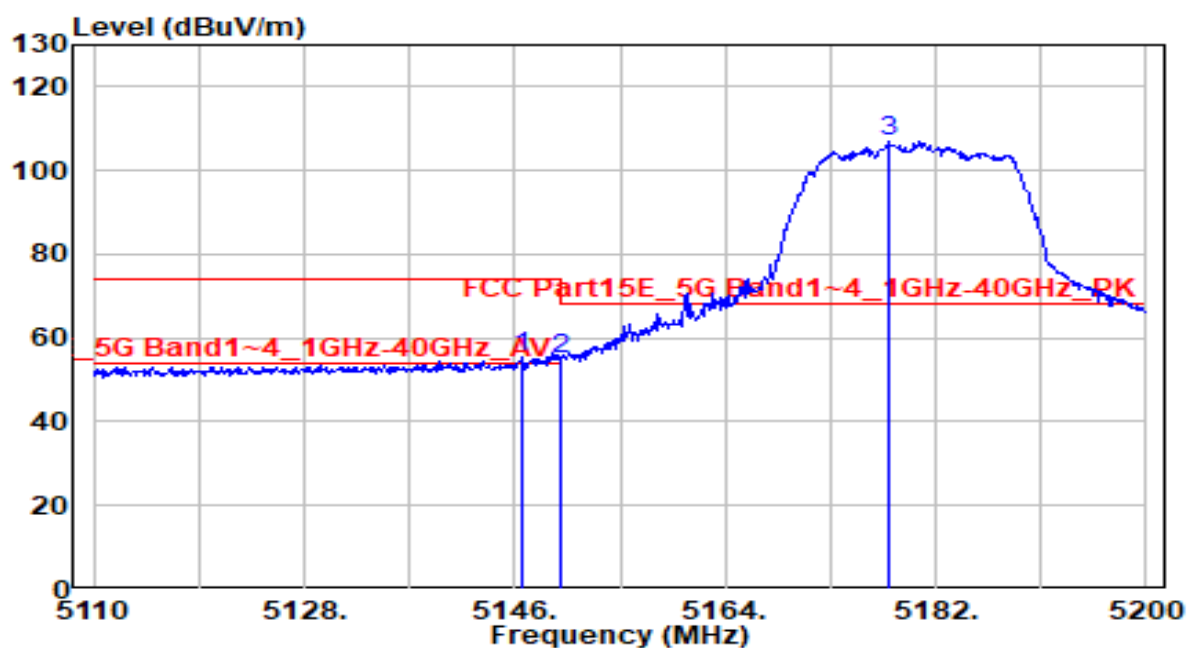


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5146.630        | 55.74          | -0.34      | 55.40                | -18.60      | 74.00          | 120         | 0           | Peak              |
| 2  | 5150.000        | 55.40          | -0.34      | 55.06                | -18.94      | 74.00          | 120         | 0           | Peak              |
| 3  | * 5178.040      | 107.18         | -0.35      | 106.84               | 38.64       | 68.20          | 120         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | Module                                     | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

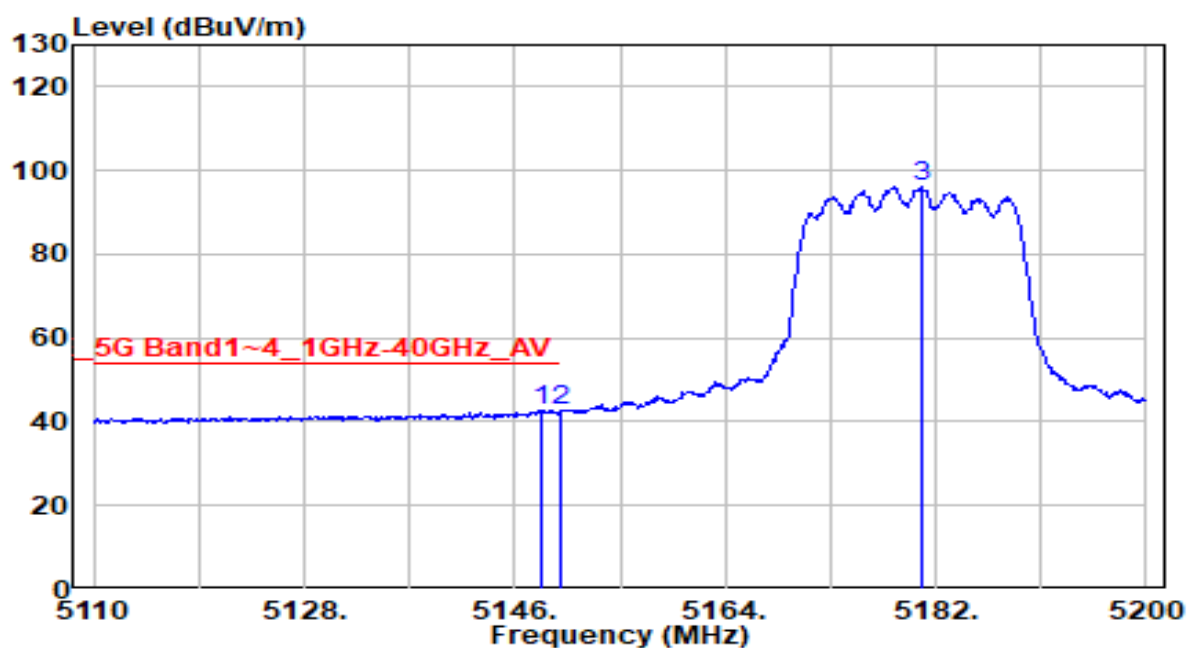


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.340        | 42.85          | -0.34      | 42.51                | -11.49      | 54.00          | 120         | 0           | Average           |
| 2  | * 5150.000      | 43.06          | -0.34      | 42.72                | -11.28      | 54.00          | 120         | 0           | Average           |
| 3  | 5180.740        | 96.52          | -0.35      | 96.18                | -403.82     | 500.00         | 120         | 0           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | Module                                     | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

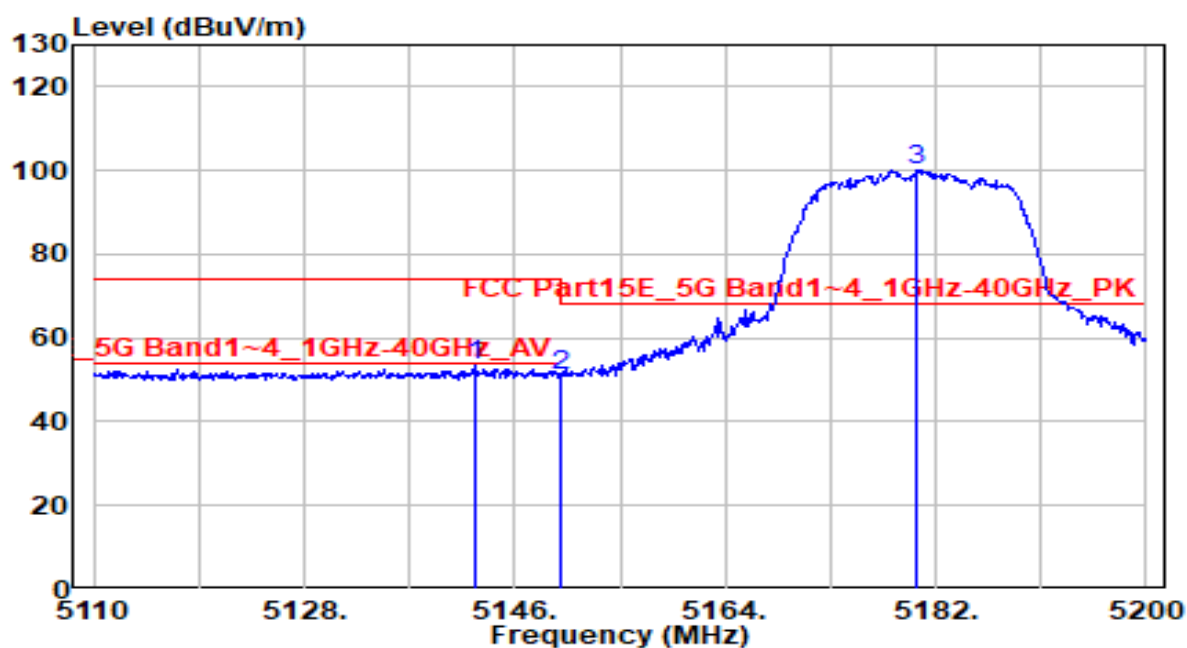


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5142.580        | 53.74          | -0.34      | 53.40                | -20.60      | 74.00          | 345         | 230         | Peak              |
| 2  | 5150.000        | 51.23          | -0.34      | 50.88                | -23.12      | 74.00          | 345         | 230         | Peak              |
| 3  | * 5180.290      | 100.38         | -0.35      | 100.03               | 31.83       | 68.20          | 345         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | Module                                     | Date of Test         | 2022-03-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 17.1°C /56%  |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band1_<br>CH36 ANT 0+1_IC | Test Voltage         | AC 120V/60Hz |

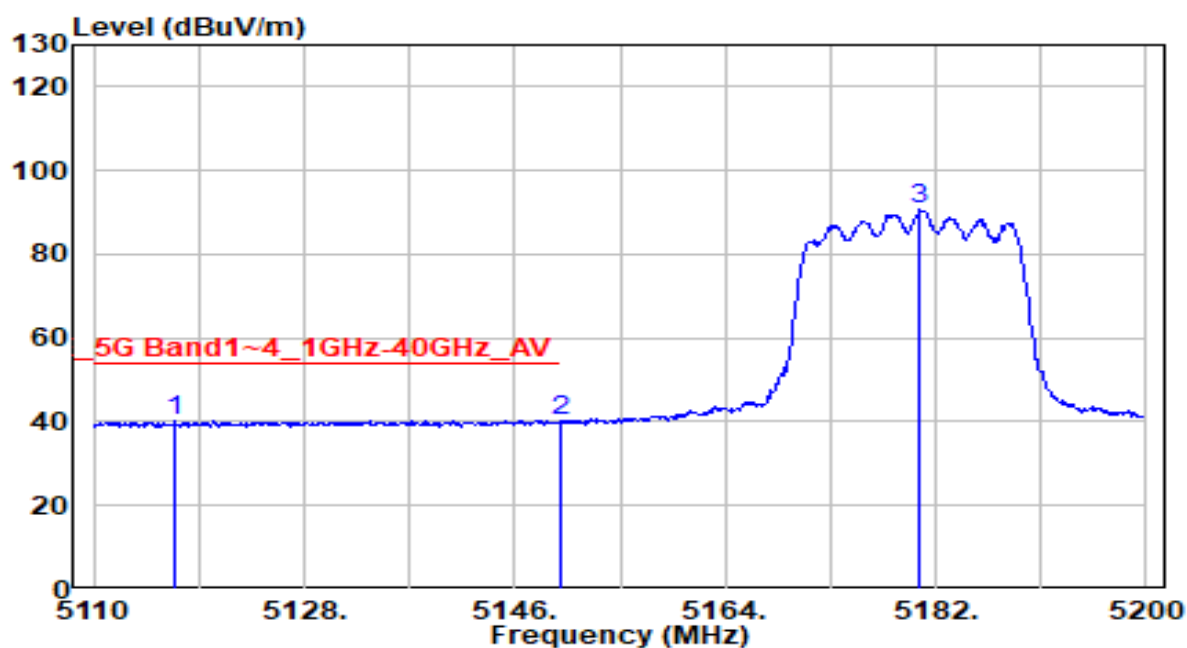


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5117.020        | 40.53          | -0.34      | 40.19                | -13.81      | 54.00          | 345         | 230         | Average           |
| 2  |   | 5150.000        | 40.36          | -0.34      | 40.02                | -13.98      | 54.00          | 345         | 230         | Average           |
| 3  |   | 5180.560        | 90.92          | -0.35      | 90.57                | -409.43     | 500.00         | 345         | 230         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

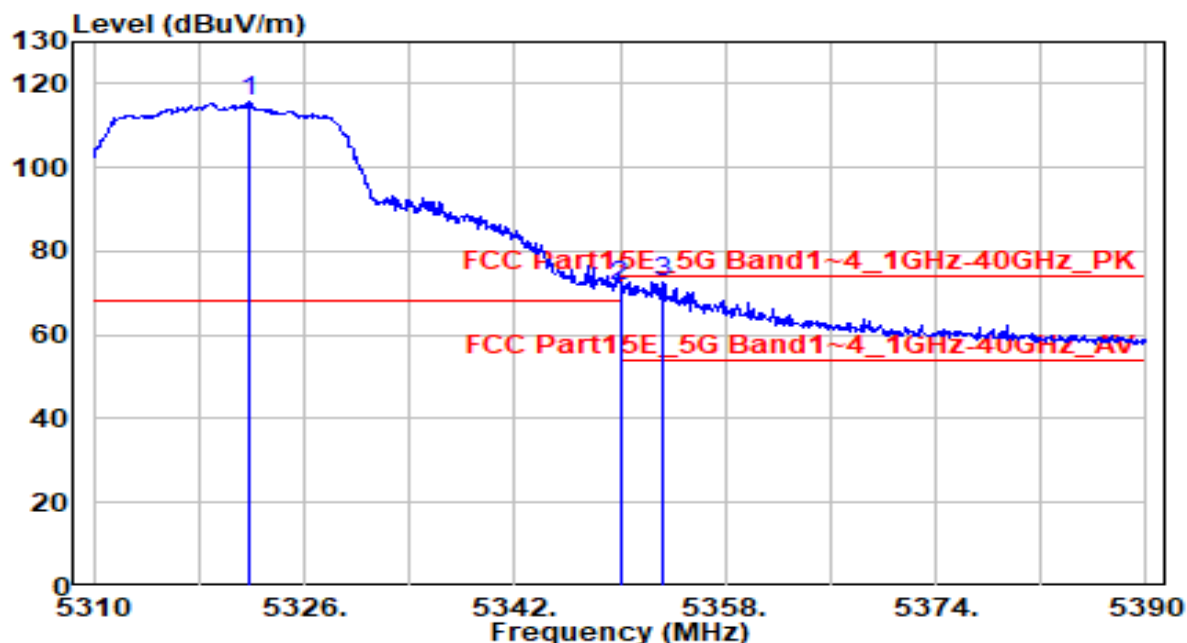


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.760        | 115.40         | 0.26       | 115.65               | N/A         | N/A            | 265         | 15          | Peak              |
| 2  | 5350.000        | 71.25          | 0.25       | 71.50                | -2.50       | 74.00          | 265         | 15          | Peak              |
| 3  | * 5353.200      | 72.40          | 0.25       | 72.65                | -1.35       | 74.00          | 265         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

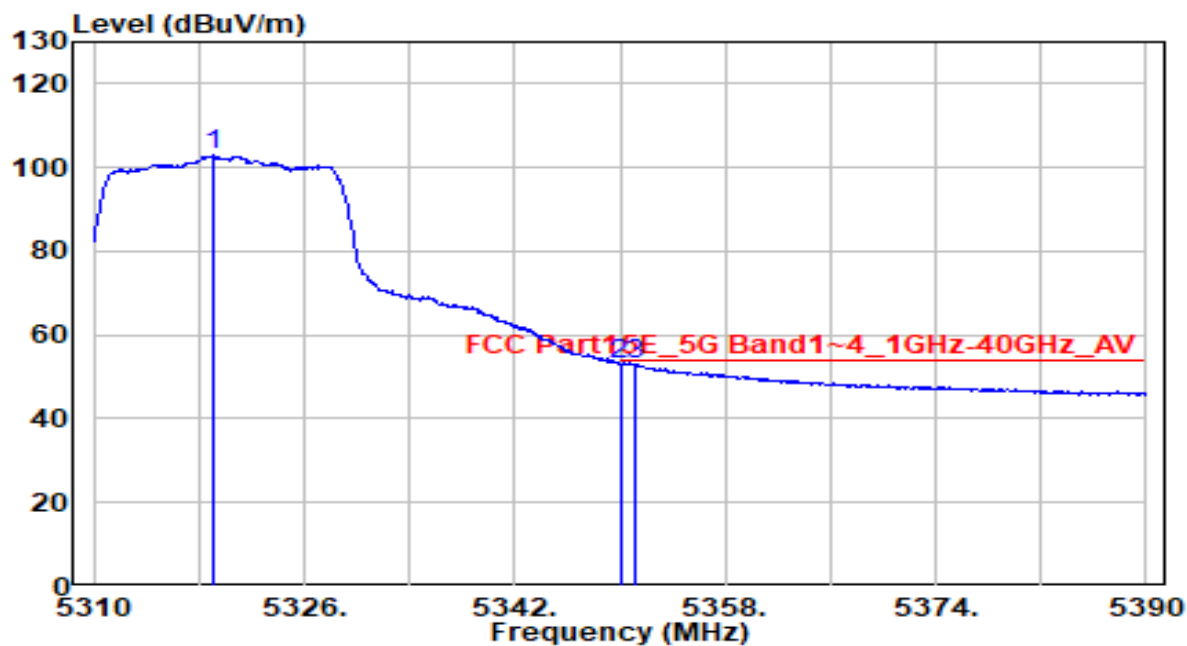


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5319.040        | 102.68         | 0.26       | 102.94               | N/A         | N/A            | 265         | 15          | Average           |
| 2  | * 5350.000      | 52.86          | 0.25       | 53.11                | -0.89       | 54.00          | 265         | 15          | Average           |
| 3  | 5351.120        | 52.77          | 0.25       | 53.02                | -0.98       | 54.00          | 265         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

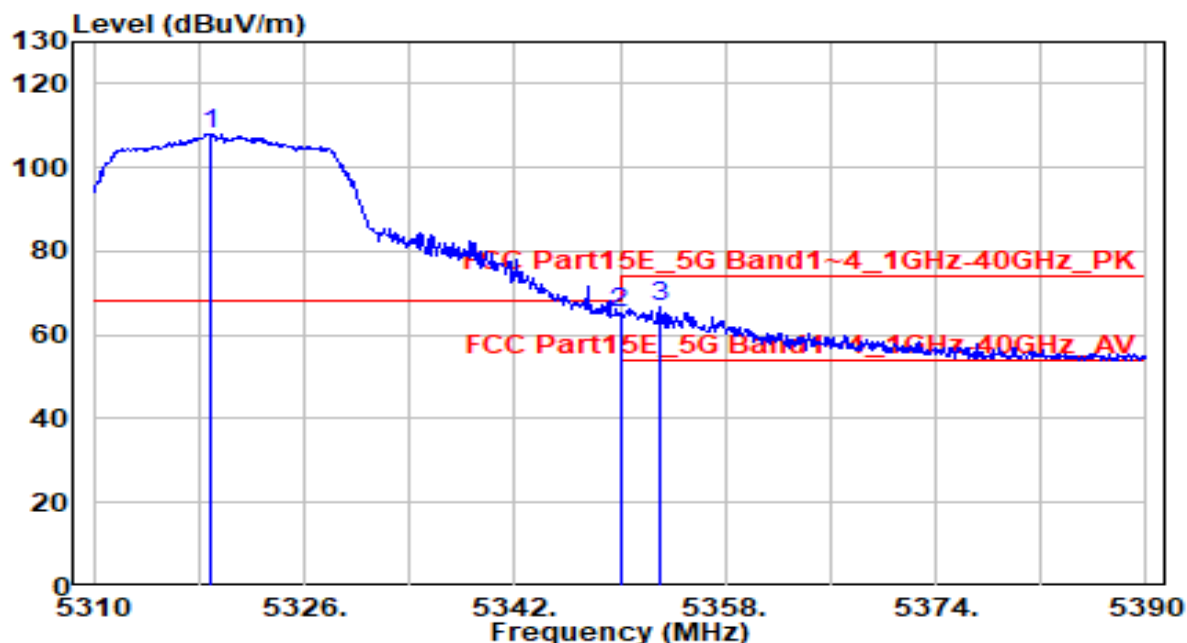


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5318.800        | 107.82         | 0.26       | 108.08               | N/A         | N/A            | 350         | 55          | Peak              |
| 2  | 5350.000        | 64.90          | 0.25       | 65.15                | -8.85       | 74.00          | 350         | 55          | Peak              |
| 3  | * 5352.960      | 66.34          | 0.25       | 66.59                | -7.41       | 74.00          | 350         | 55          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band2_CH64 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

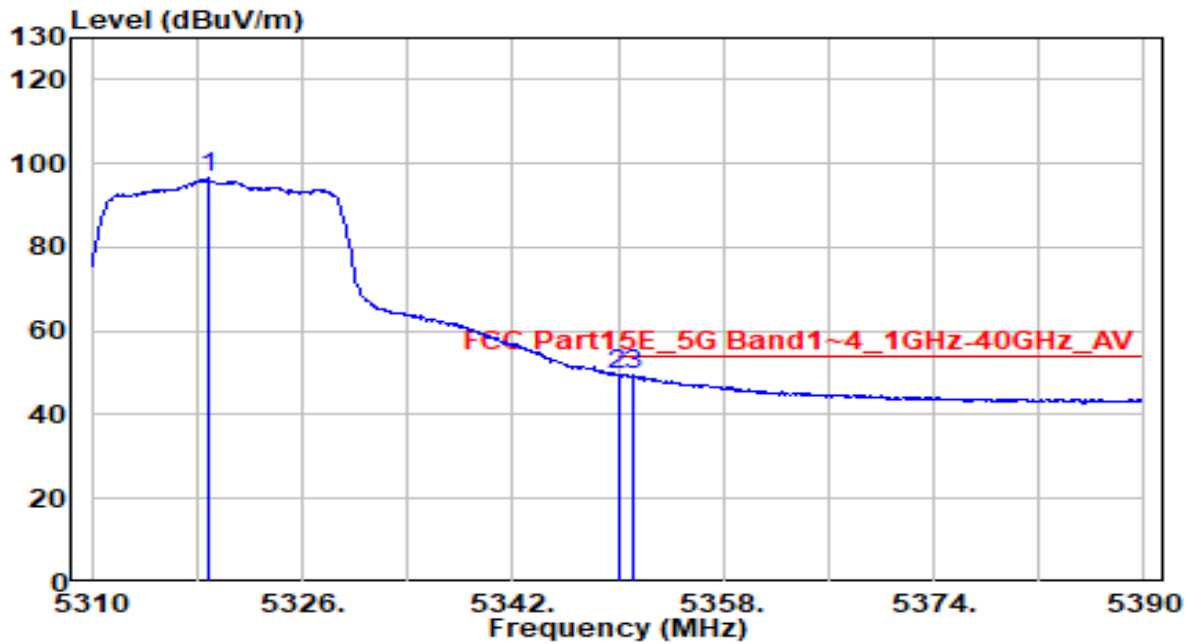


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5318.880        | 96.29          | 0.26       | 96.54                | N/A         | N/A            | 350         | 55          | Average           |
| 2  | * 5350.000      | 49.48          | 0.25       | 49.73                | -4.27       | 54.00          | 350         | 55          | Average           |
| 3  | 5351.200        | 49.23          | 0.25       | 49.48                | -4.52       | 54.00          | 350         | 55          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

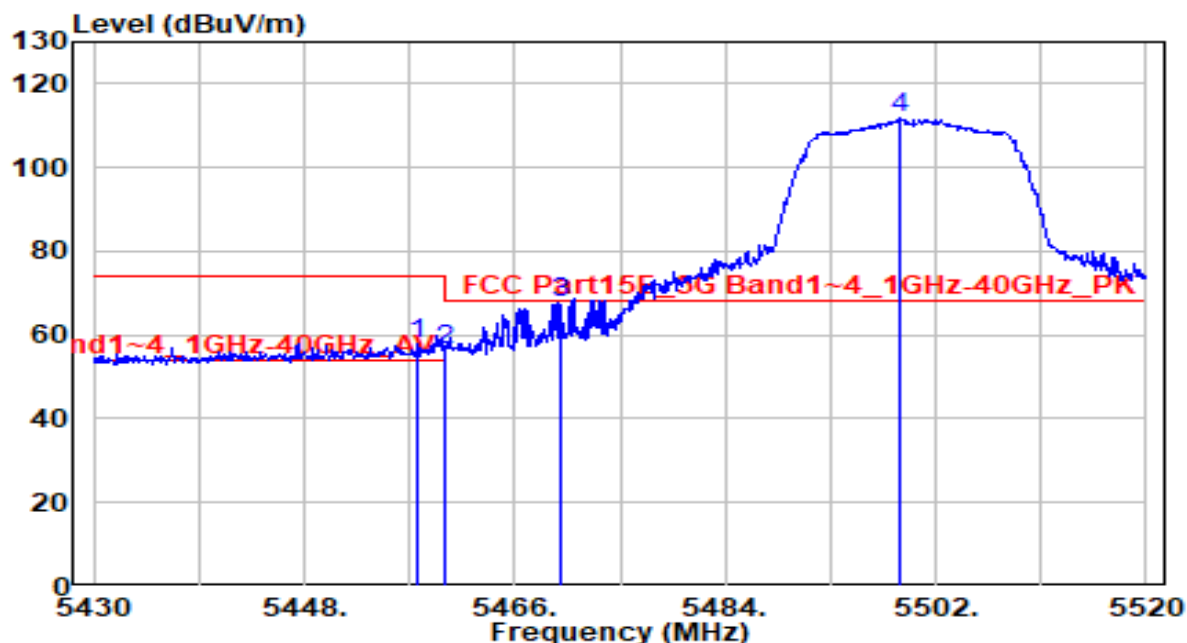


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5457.720        | 57.45          | 0.44       | 57.89                | -16.11      | 74.00          | 235         | 15          | Peak              |
| 2  | 5460.000        | 55.94          | 0.45       | 56.38                | -11.82      | 68.20          | 235         | 15          | Peak              |
| 3  | * 5470.000      | 67.26          | 0.48       | 67.74                | -0.46       | 68.20          | 235         | 15          | Peak              |
| 4  | 5498.940        | 111.05         | 0.58       | 111.62               | N/A         | N/A            | 235         | 15          | Peak              |

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

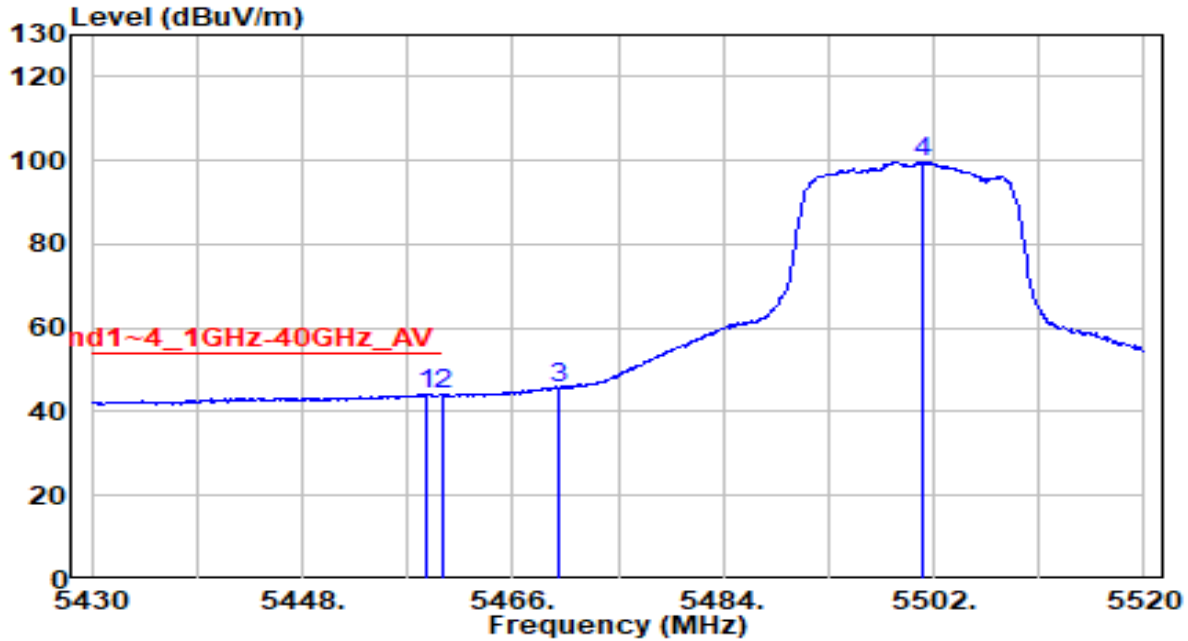


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5458.710      | 43.85          | 0.44       | 44.29                | -9.71       | 54.00          | 235         | 15          | Average           |
| 2  | 5460.000        | 43.55          | 0.45       | 43.99                | -10.01      | 54.00          | 235         | 15          | Average           |
| 3  | 5470.000        | 45.07          | 0.48       | 45.55                | N/A         | N/A            | 235         | 15          | Average           |
| 4  | 5501.010        | 99.19          | 0.58       | 99.78                | N/A         | N/A            | 235         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

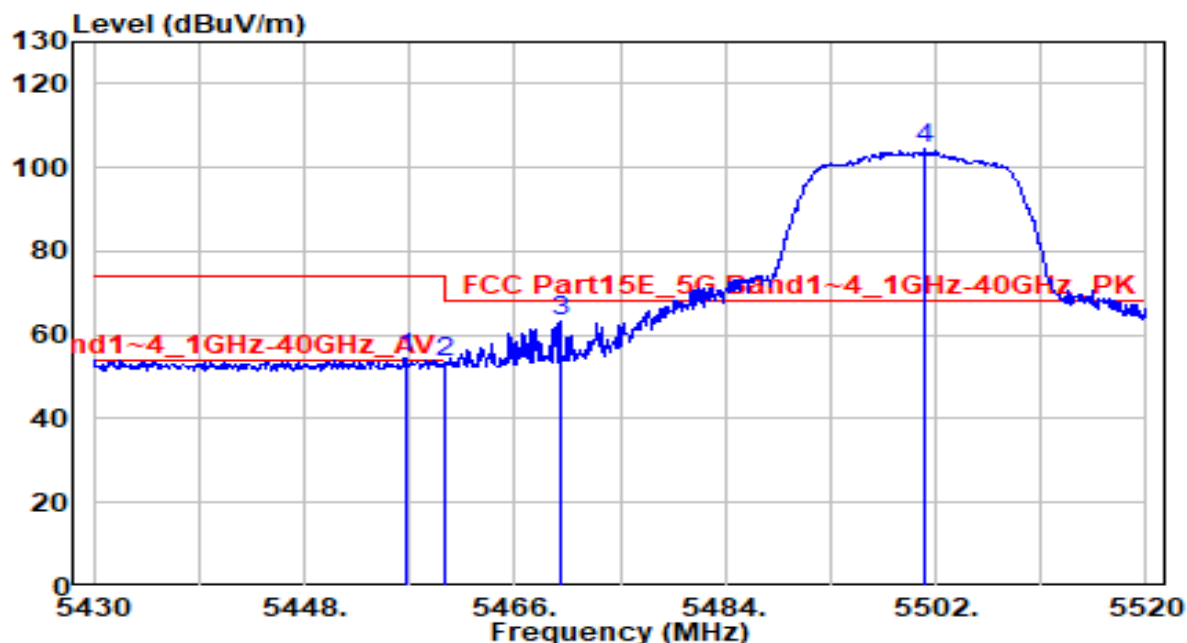


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5456.640        | 54.11          | 0.43       | 54.54                | -19.46      | 74.00          | 345         | 45          | Peak              |
| 2  | 5460.000        | 52.96          | 0.45       | 53.41                | -14.79      | 68.20          | 345         | 45          | Peak              |
| 3  | * 5470.000      | 62.80          | 0.48       | 63.28                | -4.92       | 68.20          | 345         | 45          | Peak              |
| 4  | 5501.010        | 103.77         | 0.58       | 104.35               | N/A         | N/A            | 345         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH100 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

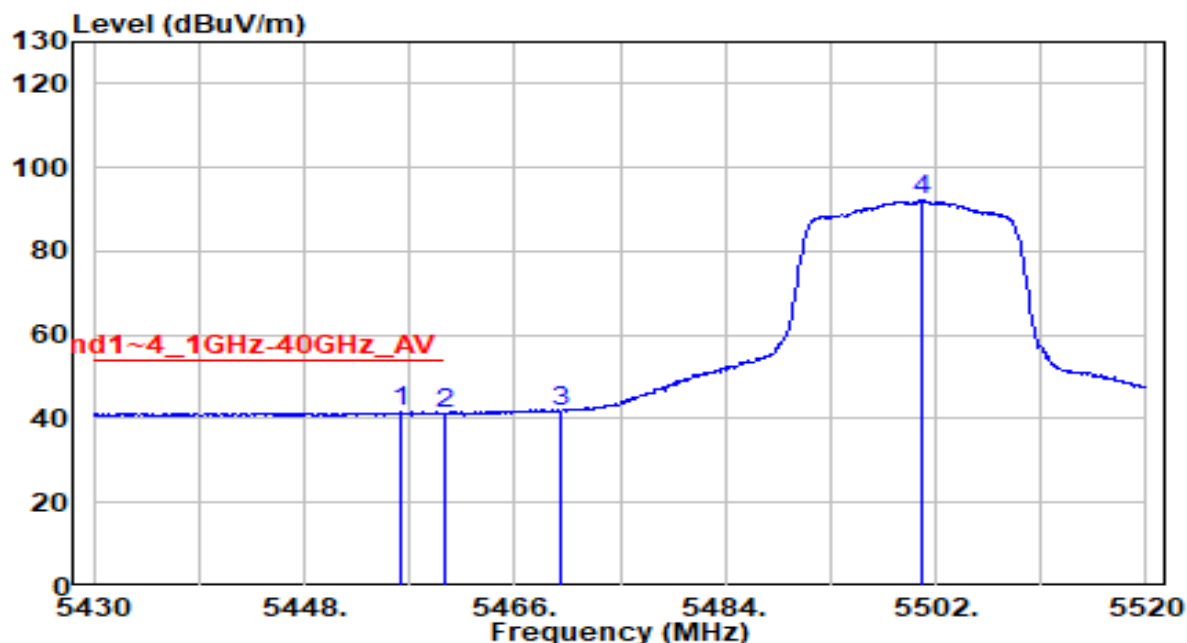


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5456.370      | 41.09          | 0.43       | 41.52                | -12.48      | 54.00          | 345         | 45          | Average           |
| 2  | 5460.000        | 40.71          | 0.45       | 41.15                | -12.85      | 54.00          | 345         | 45          | Average           |
| 3  | 5470.000        | 41.41          | 0.48       | 41.89                | N/A         | N/A            | 345         | 45          | Average           |
| 4  | 5500.740        | 91.79          | 0.58       | 92.38                | N/A         | N/A            | 345         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

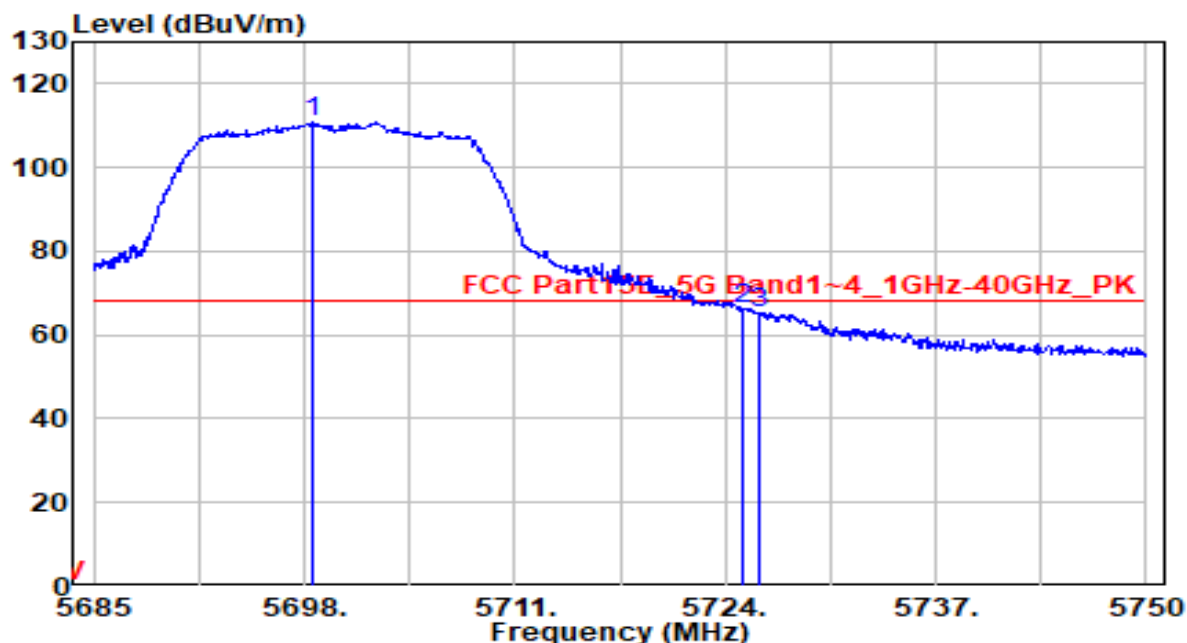


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5698.455        | 109.42         | 1.31       | 110.72               | N/A         | N/A            | 230         | 10          | Peak              |
| 2  | * 5725.000      | 64.93          | 1.41       | 66.34                | -1.86       | 68.20          | 230         | 10          | Peak              |
| 3  | 5726.080        | 63.87          | 1.42       | 65.28                | -2.92       | 68.20          | 230         | 10          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band3_CH140 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

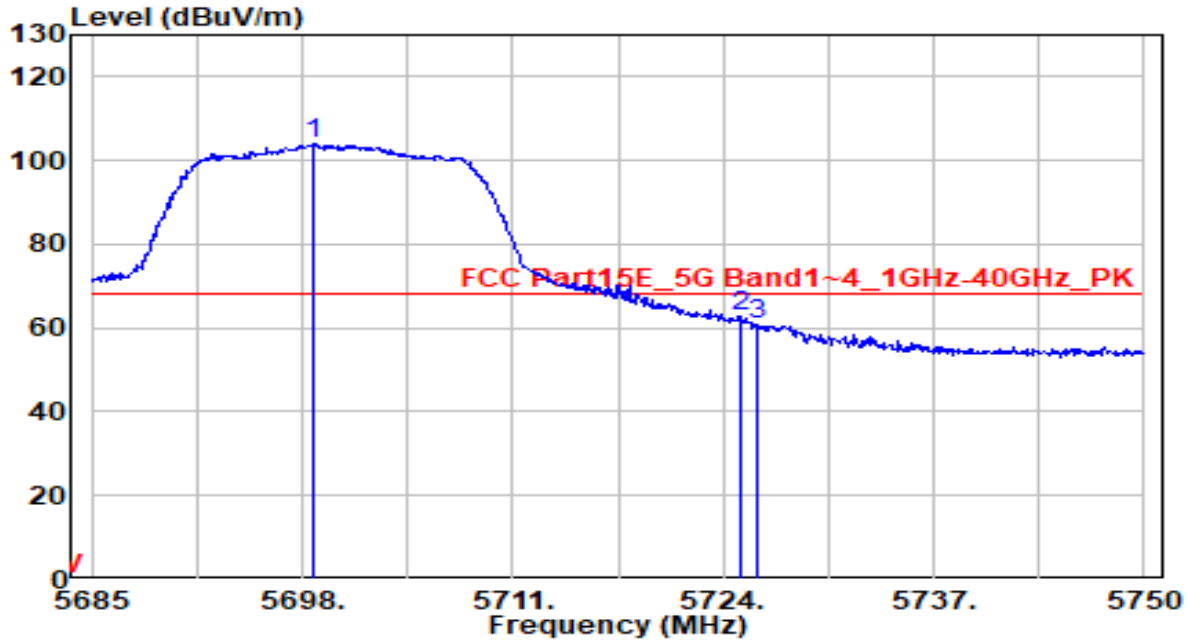


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5698.715        | 102.49         | 1.31       | 103.80               | N/A         | N/A            | 305         | 265         | Peak              |
| 2  | * 5725.000      | 61.39          | 1.41       | 62.80                | -5.40       | 68.20          | 305         | 265         | Peak              |
| 3  | 5726.080        | 59.61          | 1.42       | 61.02                | -7.18       | 68.20          | 305         | 265         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

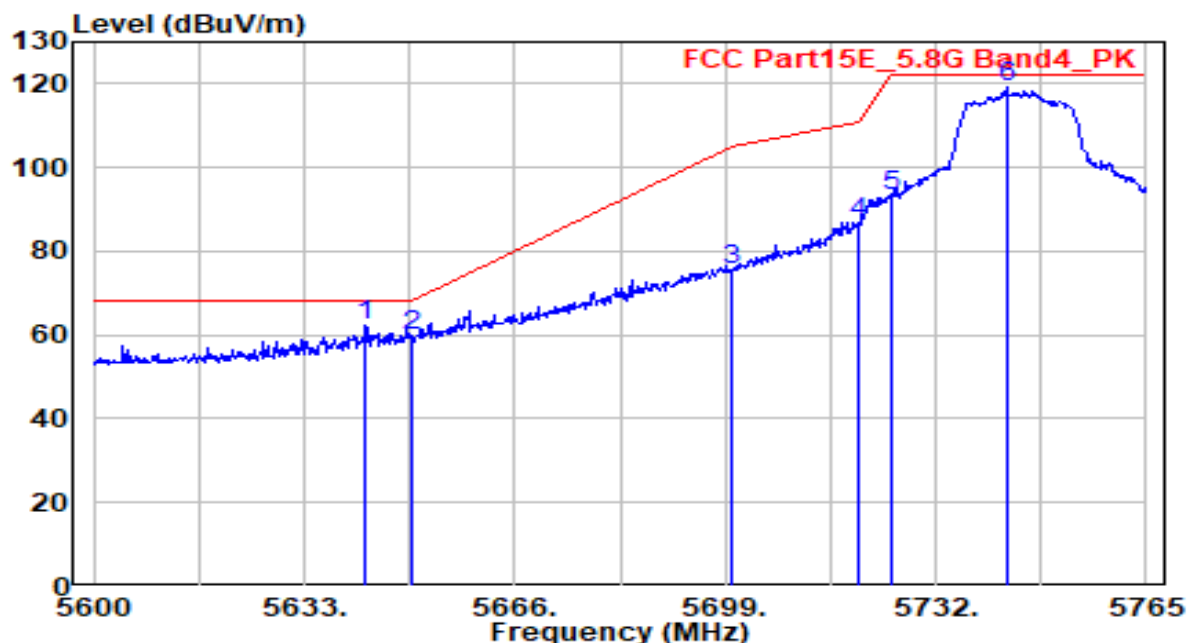


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5642.570      | 61.28          | 1.09       | 62.37                | -5.83       | 68.20          | 230         | 10          | Peak              |
| 2  | 5650.000        | 58.57          | 1.12       | 59.69                | -8.51       | 68.20          | 230         | 10          | Peak              |
| 3  | 5700.000        | 74.35          | 1.31       | 75.66                | -29.54      | 105.20         | 230         | 10          | Peak              |
| 4  | 5720.000        | 85.28          | 1.39       | 86.67                | -24.13      | 110.80         | 230         | 10          | Peak              |
| 5  | 5725.000        | 92.02          | 1.41       | 93.43                | -28.77      | 122.20         | 230         | 10          | Peak              |
| 6  | 5743.055        | 117.62         | 1.48       | 119.10               | N/A         | N/A            | 230         | 10          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH149 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

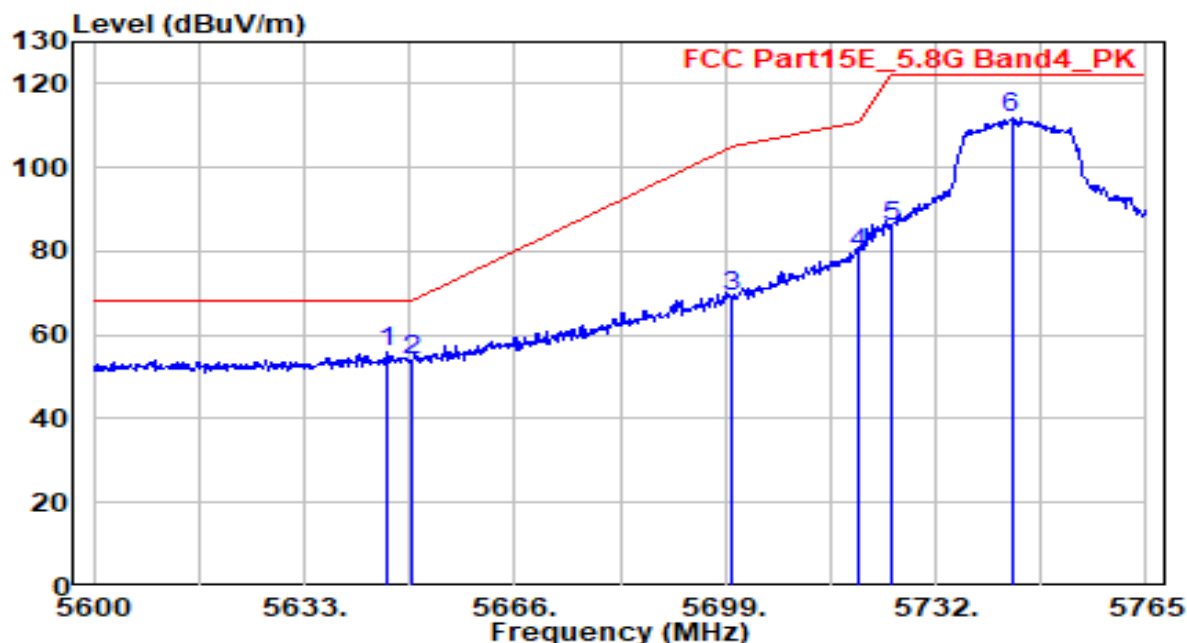


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5645.870      | 54.77          | 1.10       | 55.87                | -12.33      | 68.20          | 330         | 255         | Peak              |
| 2  | 5650.000        | 52.70          | 1.12       | 53.82                | -14.38      | 68.20          | 330         | 255         | Peak              |
| 3  | 5700.000        | 68.00          | 1.31       | 69.31                | -35.89      | 105.20         | 330         | 255         | Peak              |
| 4  | 5720.000        | 78.24          | 1.39       | 79.63                | -31.17      | 110.80         | 330         | 255         | Peak              |
| 5  | 5725.000        | 84.36          | 1.41       | 85.77                | -36.43      | 122.20         | 330         | 255         | Peak              |
| 6  | 5743.880        | 110.49         | 1.48       | 111.97               | N/A         | N/A            | 330         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

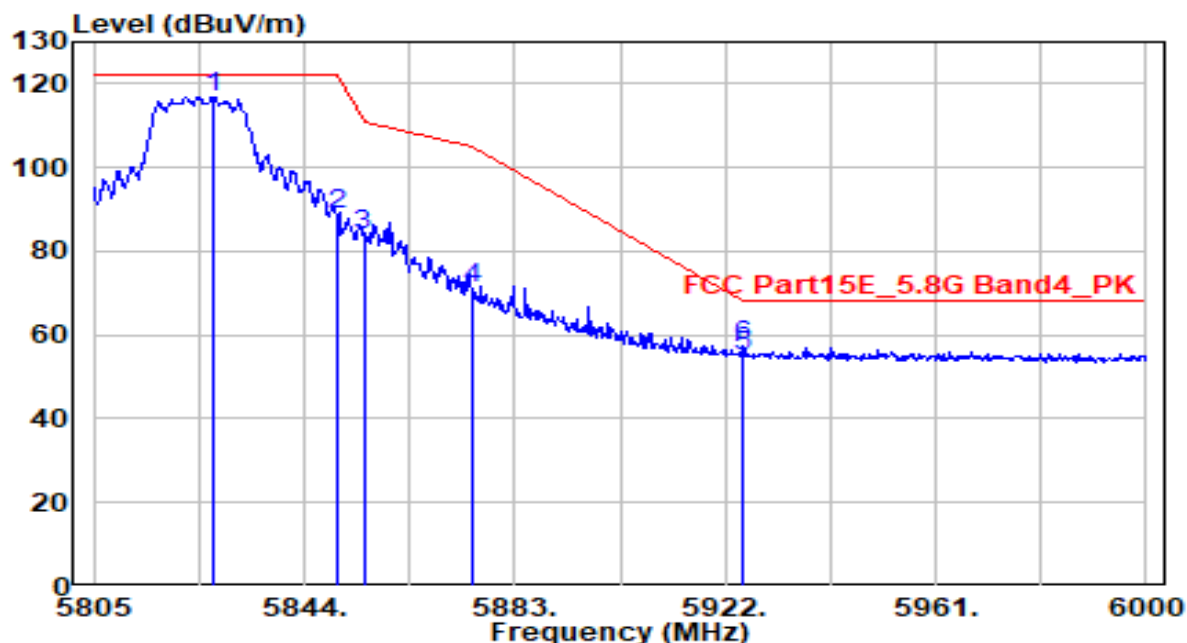


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5827.230        | 115.23         | 1.73       | 116.96               | N/A         | N/A            | 245         | 20          | Peak              |
| 2  | 5850.000        | 87.05          | 1.75       | 88.80                | -33.40      | 122.20         | 245         | 20          | Peak              |
| 3  | 5855.000        | 82.32          | 1.75       | 84.08                | -26.72      | 110.80         | 245         | 20          | Peak              |
| 4  | 5875.000        | 69.58          | 1.77       | 71.35                | -33.85      | 105.20         | 245         | 20          | Peak              |
| 5  | 5925.000        | 53.33          | 1.81       | 55.14                | -13.06      | 68.20          | 245         | 20          | Peak              |
| 6  | * 5925.315      | 55.41          | 1.81       | 57.22                | -10.98      | 68.20          | 245         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                             | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-20MHz_TX_Band4_CH165 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

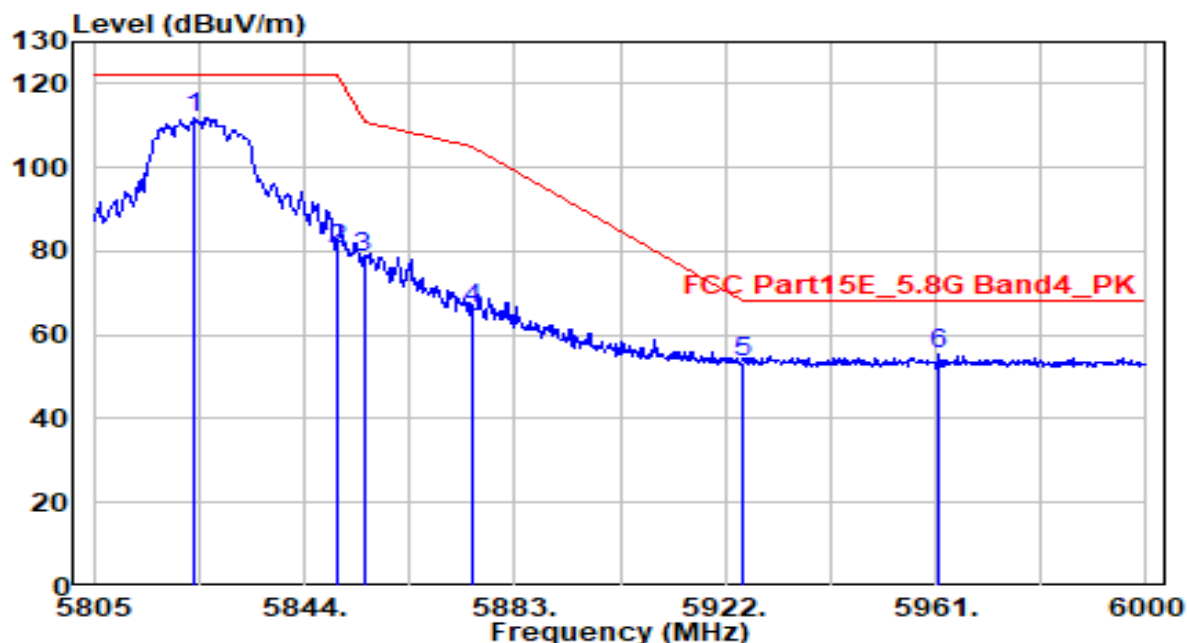


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.525        | 110.07         | 1.72       | 111.79               | N/A         | N/A            | 300         | 255         | Peak              |
| 2  | 5850.000        | 78.83          | 1.75       | 80.57                | -41.63      | 122.20         | 300         | 255         | Peak              |
| 3  | 5855.000        | 76.58          | 1.75       | 78.33                | -32.47      | 110.80         | 300         | 255         | Peak              |
| 4  | 5875.000        | 64.28          | 1.77       | 66.05                | -39.15      | 105.20         | 300         | 255         | Peak              |
| 5  | 5925.000        | 51.90          | 1.81       | 53.71                | -14.49      | 68.20          | 300         | 255         | Peak              |
| 6  | * 5961.390      | 53.79          | 1.84       | 55.62                | -12.58      | 68.20          | 300         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

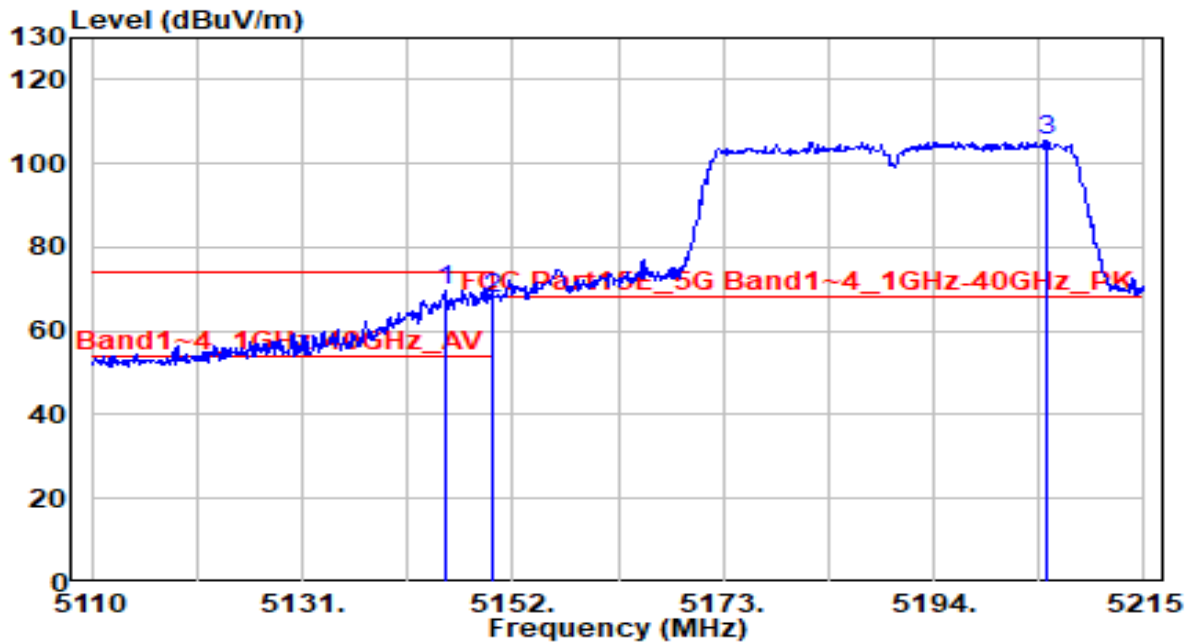


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5145.385        | 69.32          | 0.30       | 69.63                | -4.37       | 74.00          | 235         | 5           | Peak              |
| 2  |   | 5150.000        | 67.18          | 0.30       | 67.48                | -6.52       | 74.00          | 235         | 5           | Peak              |
| 3  |   | 5205.340        | 105.31         | 0.28       | 105.59               | N/A         | N/A            | 235         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

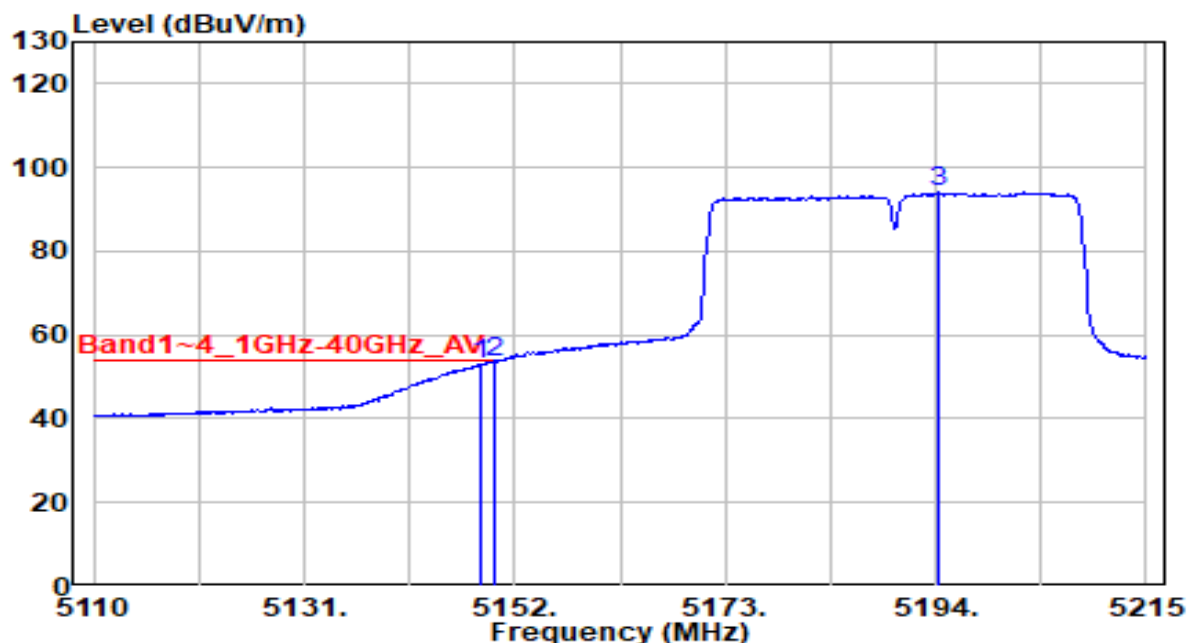


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.745        | 52.79          | 0.30       | 53.09                | -0.91       | 54.00          | 235         | 5           | Average           |
| 2  | * 5150.000      | 53.34          | 0.30       | 53.64                | -0.36       | 54.00          | 235         | 5           | Average           |
| 3  | 5194.315        | 93.72          | 0.29       | 94.00                | N/A         | N/A            | 235         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

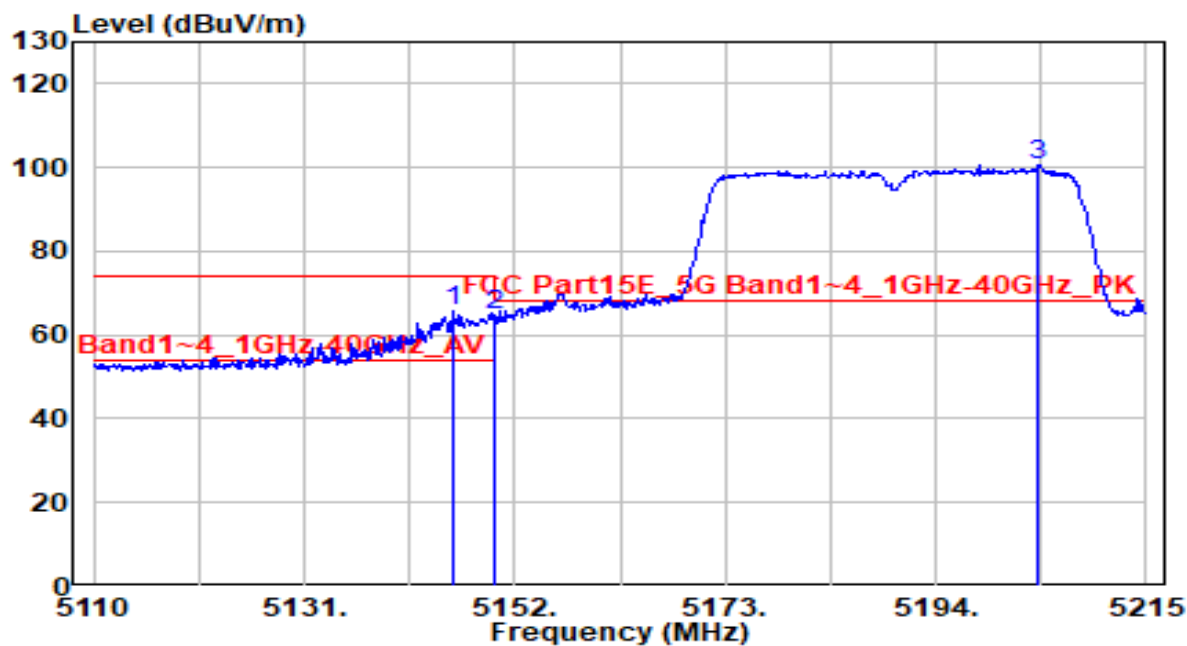


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5145.805        | 65.46          | 0.30       | 65.76                | -8.24       | 74.00          | 300         | 75          | Peak              |
| 2  |   | 5150.000        | 64.55          | 0.30       | 64.85                | -9.15       | 74.00          | 300         | 75          | Peak              |
| 3  |   | 5204.185        | 100.20         | 0.28       | 100.49               | N/A         | N/A            | 300         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band1_CH38 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

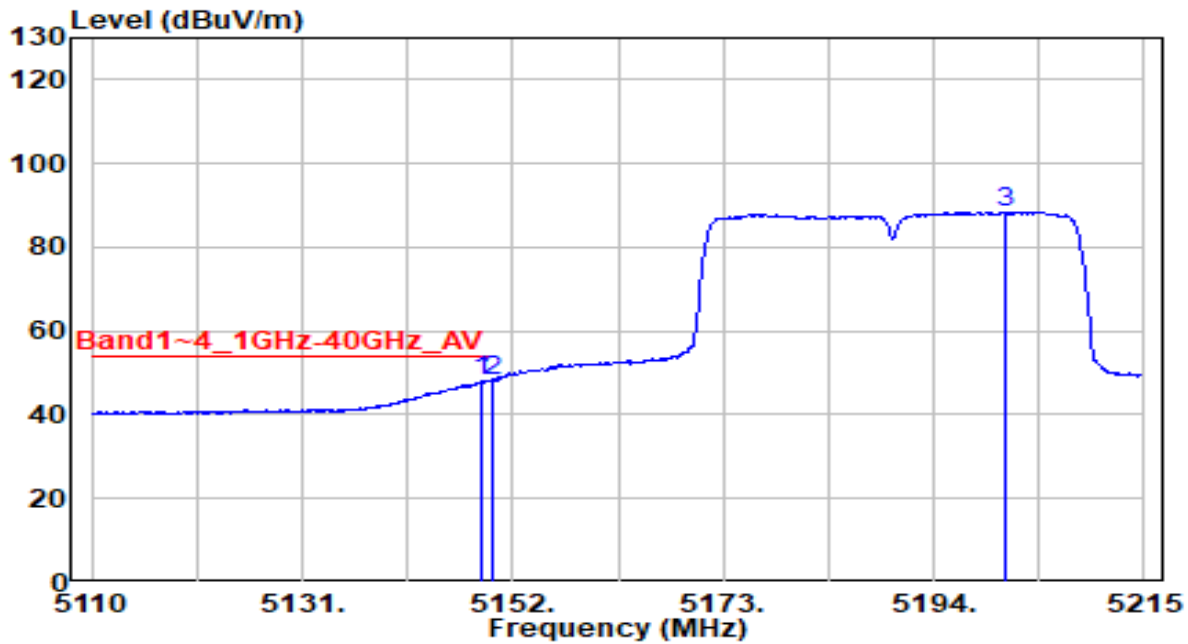


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.850        | 47.84          | 0.30       | 48.14                | -5.86       | 54.00          | 300         | 75          | Average           |
| 2  | * 5150.000      | 47.92          | 0.30       | 48.22                | -5.78       | 54.00          | 300         | 75          | Average           |
| 3  | 5201.035        | 88.10          | 0.28       | 88.38                | N/A         | N/A            | 300         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

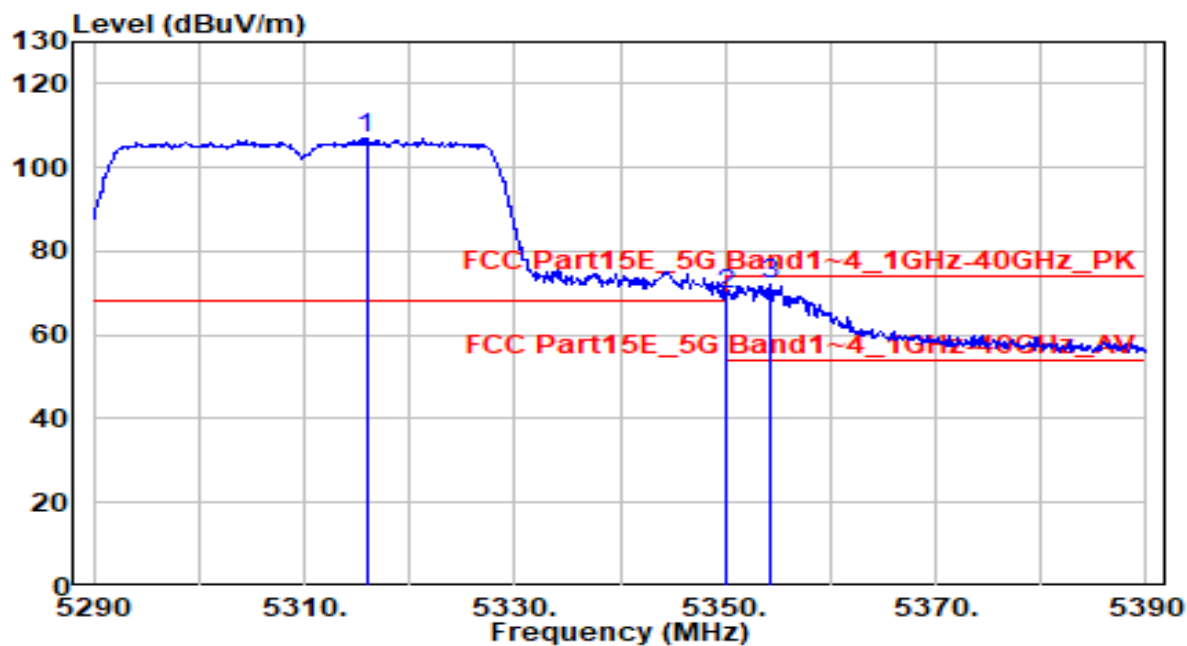


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5315.900        | 106.60         | 0.26       | 106.85               | N/A         | N/A            | 260         | 15          | Peak              |
| 2  | 5350.000        | 69.46          | 0.25       | 69.71                | -4.29       | 74.00          | 260         | 15          | Peak              |
| 3  | * 5354.200      | 71.80          | 0.25       | 72.05                | -1.95       | 74.00          | 260         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                          | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

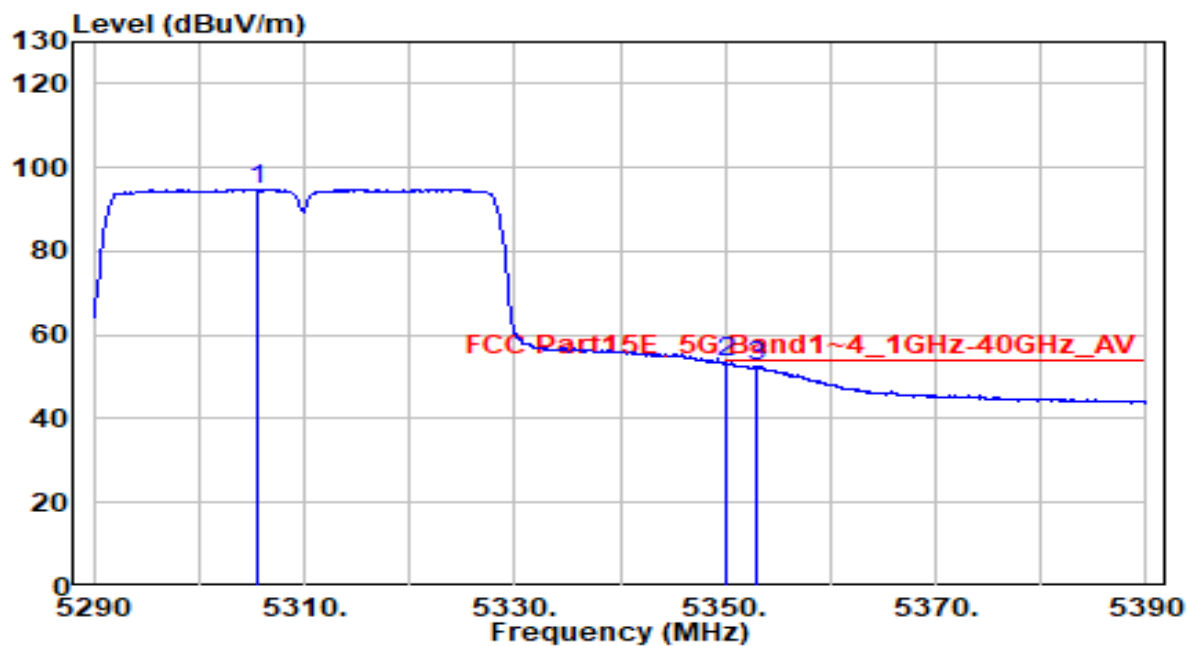


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5305.500        | 94.60          | 0.26       | 94.86                | N/A         | N/A            | 260         | 15          | Average           |
| 2  | * 5350.000      | 53.02          | 0.25       | 53.27                | -0.73       | 54.00          | 260         | 15          | Average           |
| 3  | 5353.000        | 52.47          | 0.25       | 52.72                | -1.28       | 54.00          | 260         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

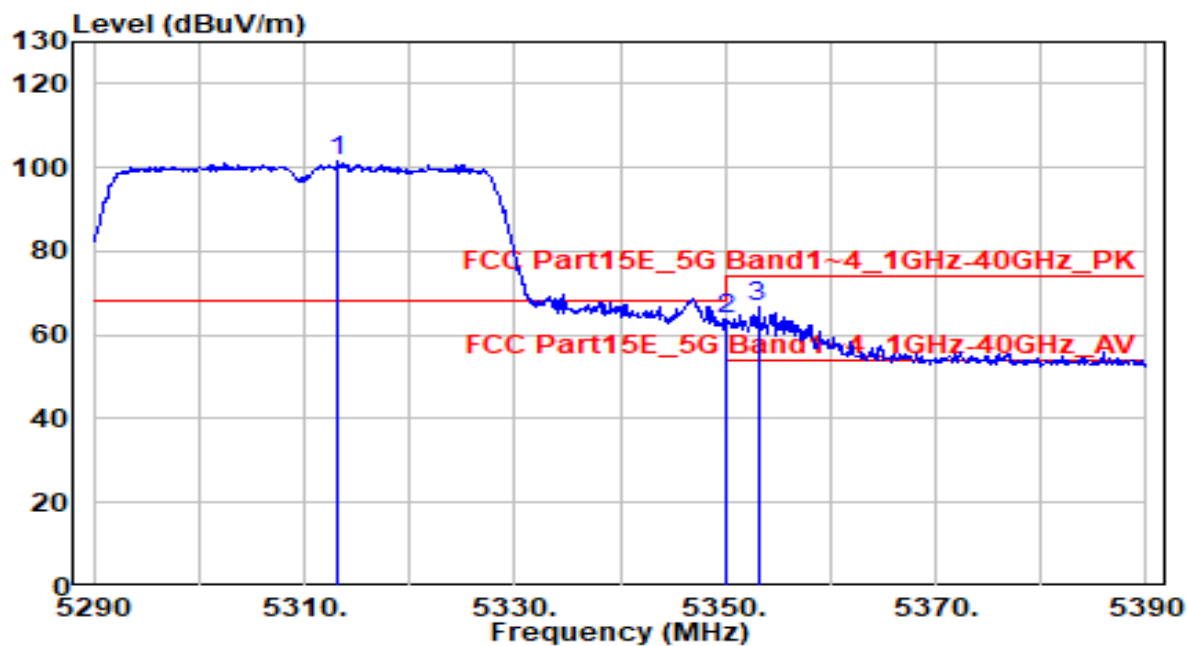


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5313.200        | 101.42         | 0.26       | 101.68               | N/A         | N/A            | 365         | 90          | Peak              |
| 2  | 5350.000        | 63.39          | 0.25       | 63.64                | -10.36      | 74.00          | 365         | 90          | Peak              |
| 3  | * 5353.100      | 66.53          | 0.25       | 66.78                | -7.22       | 74.00          | 365         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | Module                              | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Vertical                            | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band2_CH62 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

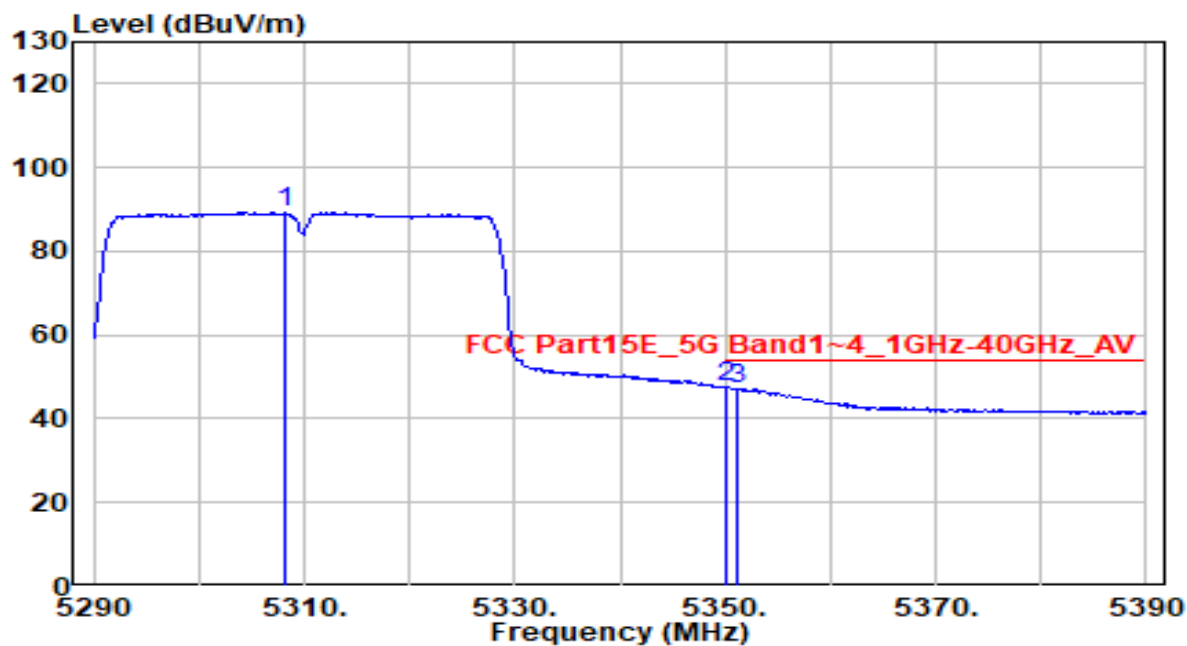


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5308.200        | 88.97          | 0.26       | 89.22                | N/A         | N/A            | 365         | 90          | Average           |
| 2  | * 5350.000      | 47.21          | 0.25       | 47.46                | -6.54       | 54.00          | 365         | 90          | Average           |
| 3  | 5351.100        | 46.92          | 0.25       | 47.17                | -6.83       | 54.00          | 365         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH102 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

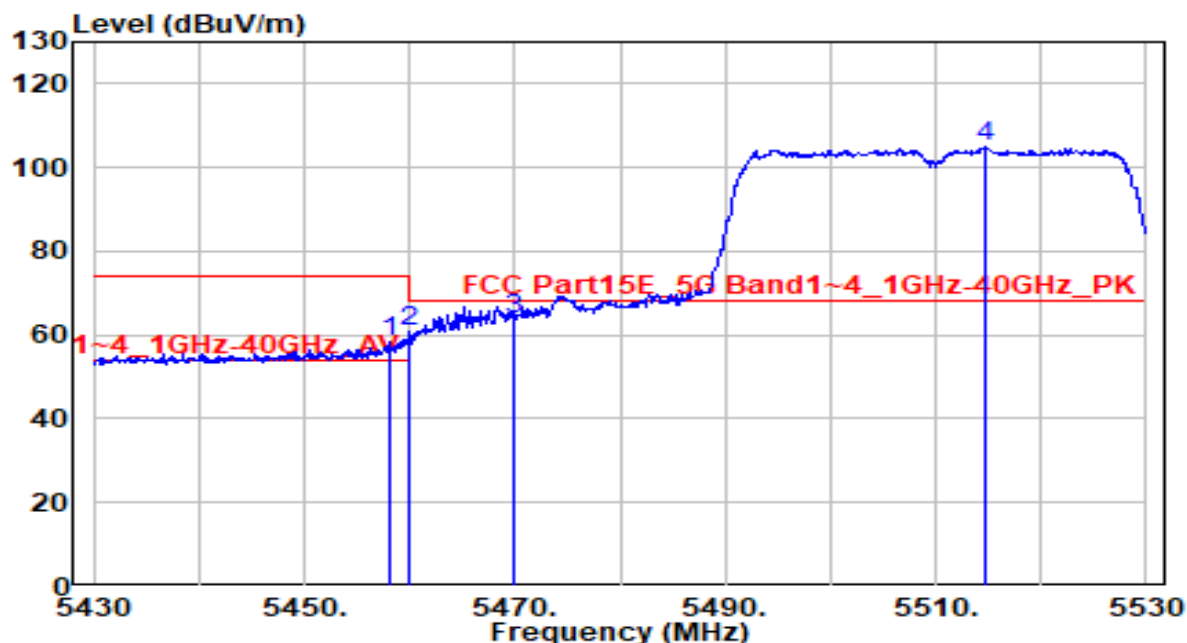


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5458.100        | 58.14          | 0.44       | 58.58                | -15.42      | 74.00          | 240         | 15          | Peak              |
| 2  | 5460.000        | 60.39          | 0.45       | 60.83                | -13.17      | 74.00          | 240         | 15          | Peak              |
| 3  | * 5470.000      | 63.17          | 0.48       | 63.65                | -4.55       | 68.20          | 240         | 15          | Peak              |
| 4  | 5514.800        | 104.18         | 0.63       | 104.81               | N/A         | N/A            | 240         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | Module                               | Date of Test         | 2022-01-18   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 20.2°C /56%  |
| Polarity  | Horizontal                           | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11n-40MHz_TX_Band3_CH102 ANT 0+1 | Test Voltage         | AC 120V/60Hz |

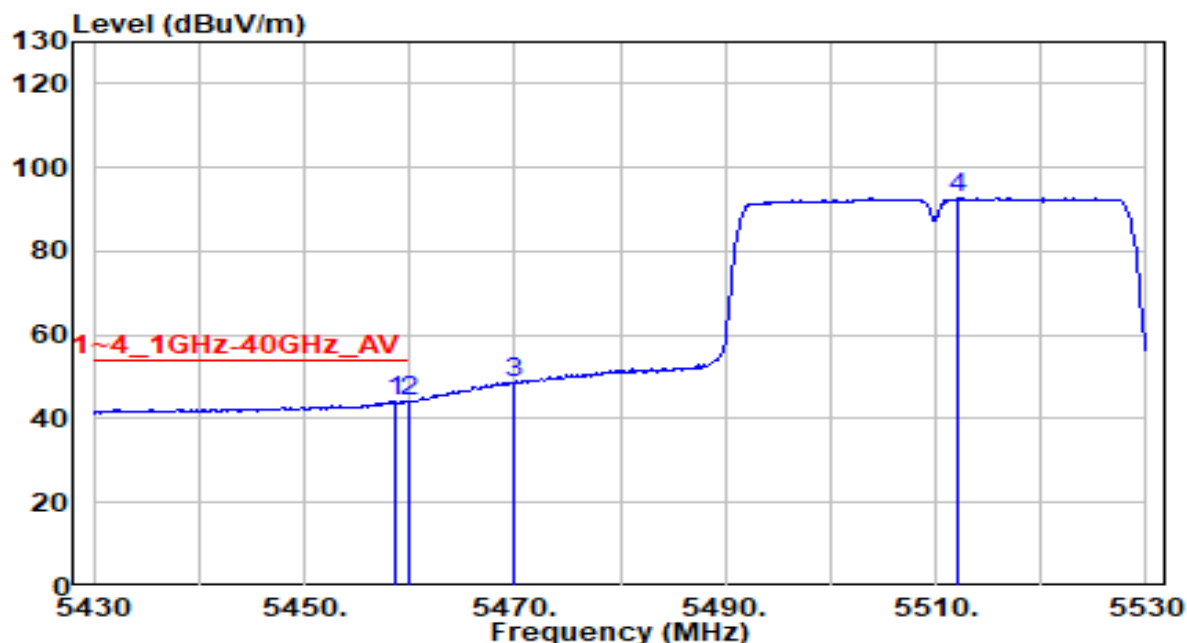

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5458.600        | 43.73          | 0.44       | 44.17                | -9.83       | 54.00          | 240         | 15          | Average           |
| 2  |   | 5460.000        | 43.54          | 0.45       | 43.99                | -10.01      | 54.00          | 240         | 15          | Average           |
| 3  |   | 5470.000        | 48.16          | 0.48       | 48.64                | N/A         | N/A            | 240         | 15          | Average           |
| 4  |   | 5512.200        | 92.02          | 0.62       | 92.64                | N/A         | N/A            | 240         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.