

Zhongshan Longde S&T Technology Co., Ltd

TEST REPORT

SCOPE OF WORK

FCC TESTING—LD-BT-FMP2017

ADDITIONAL MODELS: 1002760, 1007254, 1008251

REPORT NUMBER

GZHH00329256-001

ISSUE DATE

August 13, 2019

[REVISED DATE]

[-----]

PAGES

27

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Zhongshan Longde S&T Technology Co., Ltd

Application
For
Certification

FCC ID: ZWPFMP19A**Musical Microphone Bluetooth Vintage****Model: LD-BT-FMP2017****Additional Models: 1002760, 1007254, 1008251****Brand Name: FAO Schwarz****2.4GHz Transceiver****Report No.: GZHH00329256-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-18]

Prepared and Checked by:

Approved by:

Sign on file

Terry Tang
Senior Engineer

Kidd Yang
Technical Supervisor
Date: August 13, 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhanbkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one): Original Grant Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date
of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-18 Edition] provision.

Report prepared by:

Terry Tang
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict,
LongHua District, ShenZhen, P.R. China
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

Table of Contents

1.0 Summary of Test Result	4
2.0 General Description.....	5
2.1 Product Description	5
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology.....	5
2.4 Test Facility	5
3.0 System Test Configuration	6
3.1 Justification.....	6
3.2 EUT Exercising Software	6
3.3 Special Accessories	6
3.4 Equipment Modification	6
3.5 Measurement Uncertainty	7
3.6 Support Equipment List and Description.....	7
4.0 Emission Results	8
4.1 Radiated Test Results.....	8
4.1.1 Field Strength Calculation	8
4.1.2 Radiated Emission Configuration Photograph.....	9
4.1.3 Radiated Emissions	9
4.1.4 Transmitter Spurious Emissions	12
4.2 Conducted Emission Configuration Photograph	16
4.2.1 Conducted Emission	16
5.0 Equipment Photographs	19
6.0 Product Labelling.....	19
7.0 Technical Specifications.....	19
8.0 Instruction Manual.....	19
9.0 Miscellaneous Information	20
9.1 Bandedge Plot	20
9.2 20dB Bandwidth	23
9.3 Discussion of Pulse Desensitization.....	24
9.4 Calculation of Average Factor	24
9.5 Emissions Test Procedures.....	25
10.0 Test Equipment List.....	27

1.0 Summary of Test Result

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Applicant Address: No. 33 middle industry AV, xiaolan zhongshan city China

Manufacturer: Zhongshan Longde S&T Technology Co., Ltd

Manufacturer Address: No. 33 middle industry AV, xiaolan zhongshan city China

MODEL: LD-BT-FMP2017

FCC ID: ZWPFMP19A

Test Specification	Reference	Results
Transmitter Radiated Emission	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
Bandedge	15.249 &15.209 &15.205	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a Musical Microphone Bluetooth Vintage with Bluetooth function operating in 2402-2480MHz. The EUT is powered by DC 3.7V by rechargeable battery or DC 5V by USB port. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

Antenna Gain: 0dBi Max

Bluetooth Version: 4.2 (Single Mode EDR)

The Additional Models: 1002760, 1007254, 1008251 are the same as the Model: LD-BT-FMP2017 in hardware and electrical aspect. The difference in model number, production name and trade name serve as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the Musical Microphone Bluetooth Vintage which has Bluetooth function, and related report for FCC SDOC is subjected to report number: GZHH00329256-002.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC 3.7V full rechargeable battery and charged by DC 5V through adapter during the test, only the worst data was reported in this report.

All packets DH1, DH3 & DH5 mode in modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by applicant) used during testing was designed to exercise the various system components in a manner similar to a typical use.

Test software: FCCAssist V2.4

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Zhongshan Longde S&T Technology Co., Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
Channel Bandwidth	±3.46%
Conducted Unwanted Emission	±0.55dB
Spurious emission (6GHz to 18GHz)	±5.1dB
Radiated emission (1GHz to 6GHz)	±4.8dB
Radiated emission (Up to 1GHz)	±4.8dB
AC Conducted emission	±3.6 dB
Temperature	±1°C
Humidity	±5%

3.6 Support Equipment List and Description

Description	Manufacturer	Remark
Adaptor (Provided by applicant)	Apple	Mode: A1399 Input: AC100-240V, 50/60Hz, 0.15A; Output DC 5.0V, 1A
USB Cable (Provided by Applicant)	N/A	Unshielded, Length 50cm
Auxiliary Cable (Provided by Applicant)	N/A	Unshielded, Length 103cm
Earphone (Provided by Intertek)	Qilive	Q2103
iPhone (Provided by Intertek)	Apple	A1586

4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V}/\text{m})/20] = 125.9 \mu\text{V}/\text{m}$$

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
671.984000 MHz

Judgement: Passed by 0.6 dB

TEST PERSONNEL:

Sign on file

Terry Tang, Senior Engineer
Typed/Printed Name

June 26, 2019

Date

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Date of Test: June 26, 2019

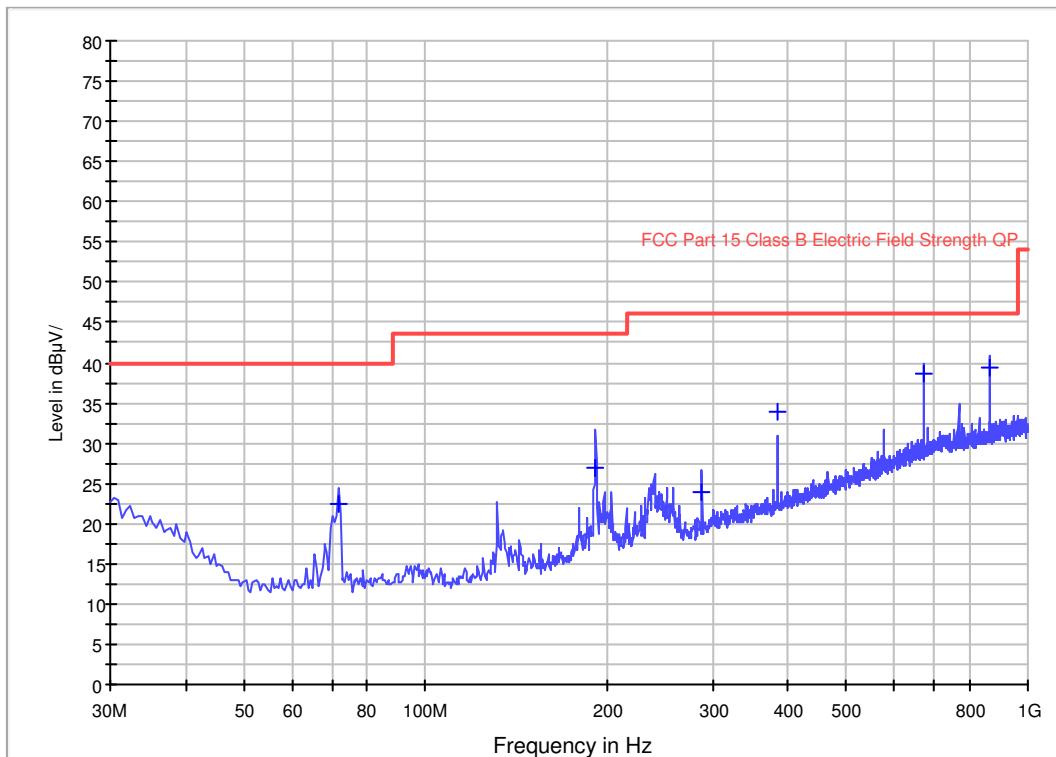
Model: LD-BT-FMP2017

Worst Case Operating Mode:

BT Link

ANT Polarity: Horizontal

FCC Part 15

**Limit and Margin**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
71.710000	22.4	1000.0	120.000	H	8.5	17.6	40.0
191.990000	27.0	1000.0	120.000	H	12.3	16.5	43.5
288.020000	23.8	1000.0	120.000	H	15.6	22.2	46.0
384.050000	33.8	1000.0	120.000	H	18.4	12.2	46.0
672.140000	38.7	1000.0	120.000	H	24.8	7.3	46.0
864.200000	39.5	1000.0	120.000	H	26.6	6.5	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line(dB μ V/m) – Level (dB μ V/m)

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Date of Test: June 26, 2019

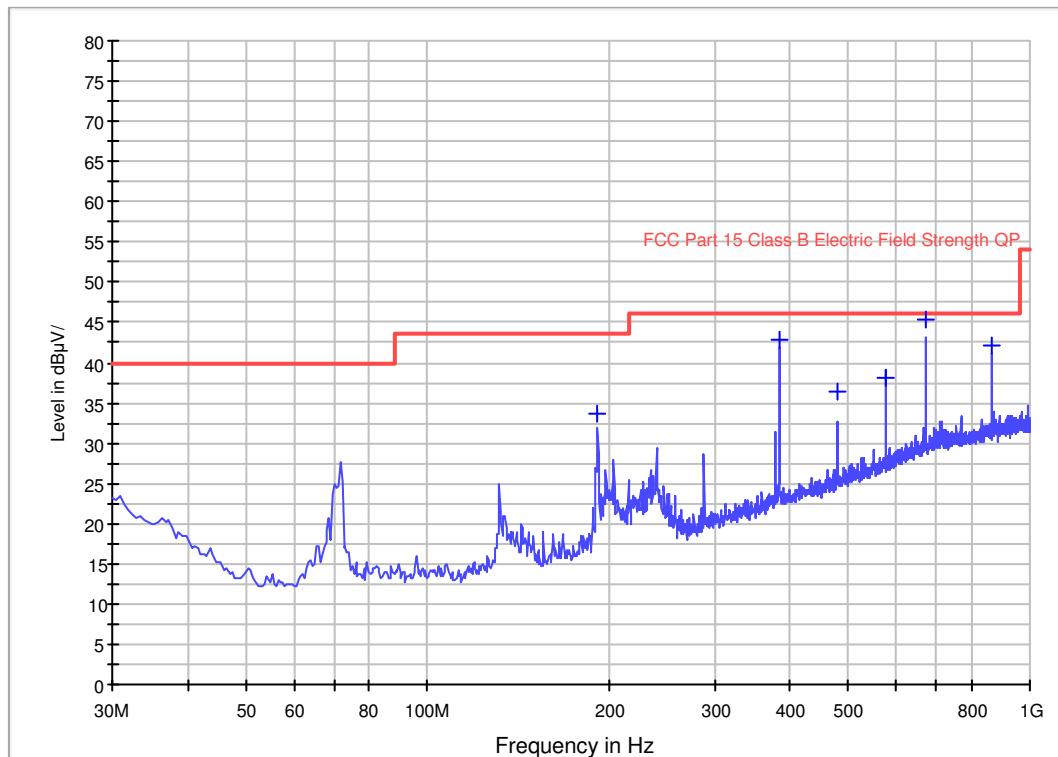
Model: LD-BT-FMP2017

Worst Case Operating Mode:

BT Link

ANT Polarity: Vertical

FCC Part 15

**Limit and Margin**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
191.990000	33.6	1000.0	120.000	V	12.3	9.9	43.5
383.994875	42.9	1000.0	120.000	V	18.4	3.1	46.0
480.080000	36.5	1000.0	120.000	V	20.8	9.5	46.0
576.017750	38.0	1000.0	120.000	V	22.7	8.0	46.0
671.984000	45.4	1000.0	120.000	V	24.8	0.6	46.0
864.015875	42.1	1000.0	120.000	V	26.6	3.9	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line(dB μ V/m) – Level (dB μ V/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
9920.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 13.8 dB

TEST PERSONNEL:

Sign on file

Terry Tang, Senior Engineer
Typed/Printed Name

June 26, 2019

Date

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Date of Test: June 26, 2019

Model: LD-BT-FMP2017

Worst Case Operating Mode:

Transmitting

Table 1

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2402.000	90.2	36.7	28.1	81.6	114.0	-32.4
Vertical	4804.000	45.6	36.7	35.5	44.4	74.0	-29.6
Vertical	7206.000	57.0	36.1	36.5	57.4	74.0	-16.6
Vertical	9608.000	58.5	36.2	37.0	59.3	74.0	-14.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2402.000	90.2	36.7	28.1	22.5	59.1	94.0	-34.9
Vertical	4804.000	45.6	36.7	35.5	22.5	21.9	54.0	-32.1
Vertical	7206.000	57.0	36.1	36.5	22.5	34.9	54.0	-19.1
Vertical	9608.000	58.5	36.2	37.0	22.5	36.8	54.0	-17.2

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Date of Test: June 26, 2019

Model: LD-BT-FMP2017

Worst Case Operating Mode:

Transmitting

Table 2

Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2441.000	92.6	36.7	28.1	84.0	114.0	-30.0
Vertical	4882.000	45.4	36.7	35.5	44.2	74.0	-29.8
Vertical	7323.000	56.5	36.1	37.2	57.6	74.0	-16.4
Vertical	9764.000	57.3	36.2	38.0	59.1	74.0	-14.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2441.000	92.6	36.7	28.1	22.5	61.5	94.0	-32.5
Vertical	4882.000	45.4	36.7	35.5	22.5	21.7	54.0	-32.3
Vertical	7323.000	56.5	36.1	37.2	22.5	35.1	54.0	-18.9
Vertical	9764.000	57.3	36.2	38.0	22.5	36.6	54.0	-17.4

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zhongshan Longde S&T Technology Co., Ltd

Date of Test: June 26, 2019

Model: LD-BT-FMP2017

Worst Case Operating Mode:

Transmitting

Table 3

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2480.000	93.3	36.7	28.1	84.7	114.0	-29.3
Vertical	4960.000	45.8	36.7	35.5	44.6	74.0	-29.4
Vertical	7440.000	57.6	36.1	37.2	58.7	74.0	-15.3
Vertical	9920.000	57.6	36.3	38.9	60.2	74.0	-13.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2480.000	93.3	36.7	28.1	22.5	62.2	94.0	-31.8
Vertical	4960.000	45.8	36.7	35.5	22.5	22.1	54.0	-31.9
Vertical	7440.000	57.6	36.1	37.2	22.5	36.2	54.0	-17.8
Vertical	9920.000	57.6	36.3	38.9	22.5	37.7	54.0	-16.3

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.698MHz

Judgement: Passed by 7.4dB margin

TEST PERSONNEL:

Sign on file

Terry Tang, Senior Engineer
Typed/Printed Name

June 26, 2019
Date

Applicant: Zhongshan Longde S&T Technology Co., Ltd

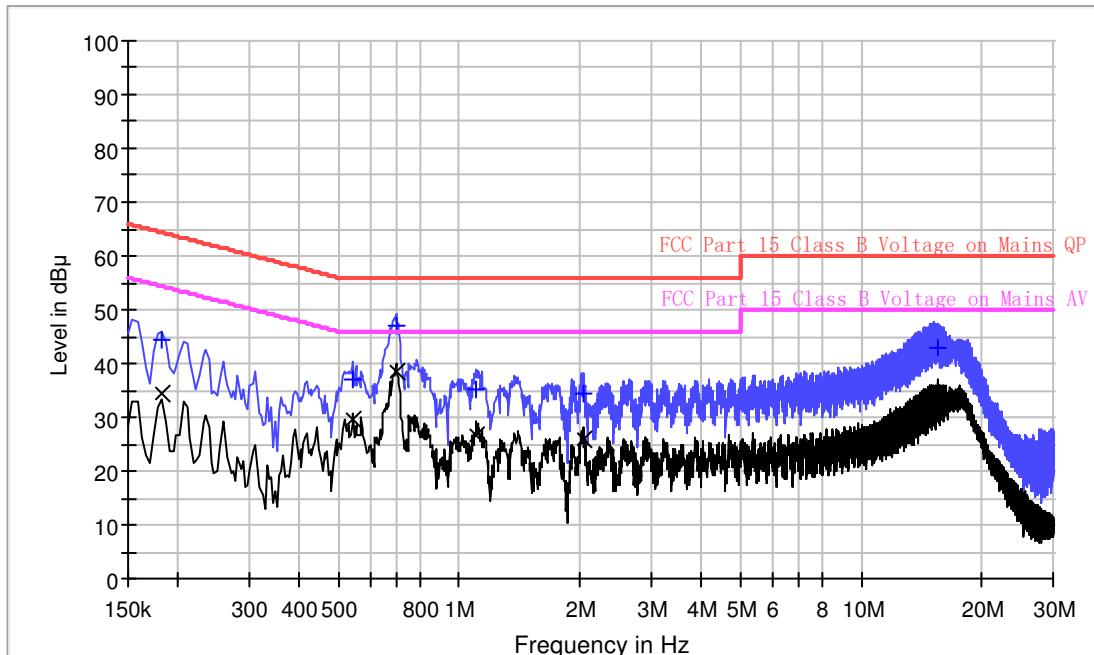
Date of Test: June 26, 2019

Model: LD-BT-FMP2017

Worst Case Operating Mode: BT Link

Phase: Live

Graphic / Data Table
Conducted Emissions
Pursuant to FCC 15.207: Emissions Requirement

**Limit and Margin QP**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.182000	44.5	9.000	L1	9.7	19.9	64.4
0.546000	37.0	9.000	L1	9.8	19.0	56.0
0.698000	47.0	9.000	L1	9.8	9.0	56.0
1.102000	35.1	9.000	L1	9.8	20.9	56.0
2.038000	34.5	9.000	L1	9.8	21.5	56.0
15.570000	42.9	9.000	L1	10.2	17.1	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.182000	34.5	9.000	L1	9.7	19.9	54.4
0.546000	29.6	9.000	L1	9.8	16.4	46.0
0.698000	38.6	9.000	L1	9.8	7.4	46.0
1.102000	26.6	9.000	L1	9.8	19.4	46.0
2.038000	26.0	9.000	L1	9.8	20.0	46.0
15.570000	33.2	9.000	L1	10.2	16.8	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – Level (dBuV)

Applicant: Zhongshan Longde S&T Technology Co., Ltd

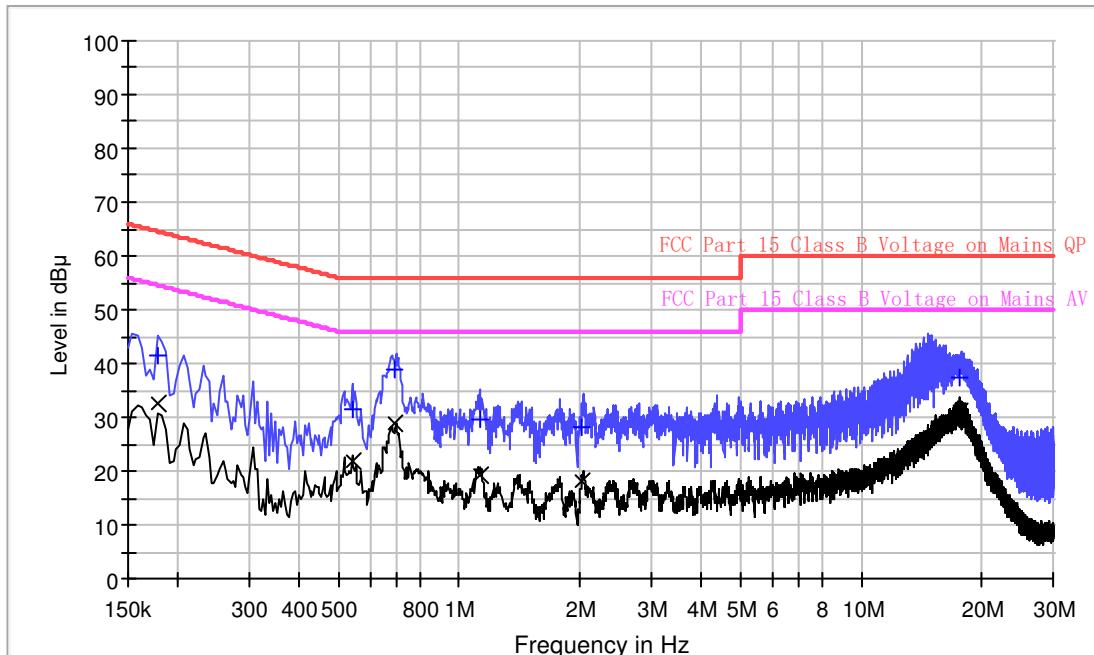
Date of Test: June 26, 2019

Model: LD-BT-FMP2017

Worst Case Operating Mode: BT Link

Phase: Neutral

Graphic / Data Table
Conducted Emissions
Pursuant to FCC 15.107: Emissions Requirement

**Limit and Margin QP**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.178000	41.5	9.000	N	9.7	23.1	64.6
0.542000	31.6	9.000	N	9.8	24.4	56.0
0.694000	38.8	9.000	N	9.8	17.2	56.0
1.130000	29.5	9.000	N	9.8	26.5	56.0
2.026000	28.1	9.000	N	9.8	27.9	56.0
17.478000	37.5	9.000	N	10.4	22.5	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.178000	32.5	9.000	N	9.7	22.1	54.6
0.542000	22.0	9.000	N	9.8	24.0	46.0
0.694000	29.0	9.000	N	9.8	17.0	46.0
1.130000	19.3	9.000	N	9.8	26.7	46.0
2.026000	18.3	9.000	N	9.8	27.7	46.0
17.478000	31.0	9.000	N	10.4	19.0	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dB μ V) – Level (dB μ V)

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

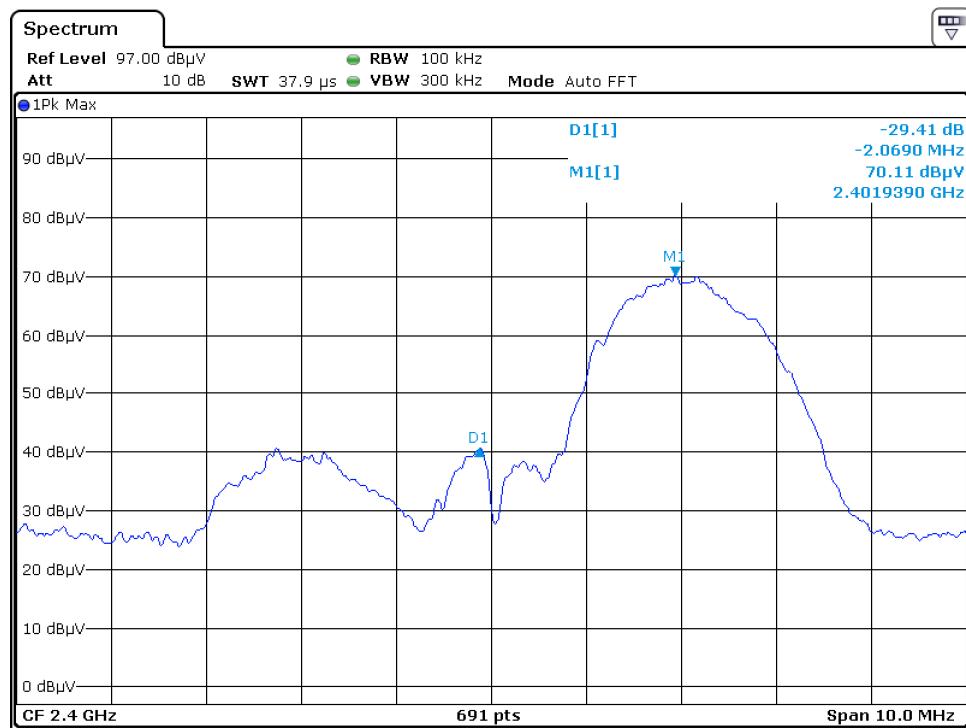
(i) Lower channel 2402.000MHz:

$$\begin{aligned}\text{Peak Resultant field strength} &= \text{Fundamental emissions (peak value)} - \\ &\quad \text{delta from the bandedge plot} \\ &= 81.6 \text{ dB}\mu\text{V/m} - 29.4 \text{ dB} \\ &= 52.2 \text{ dB}\mu\text{V/m}\end{aligned}$$

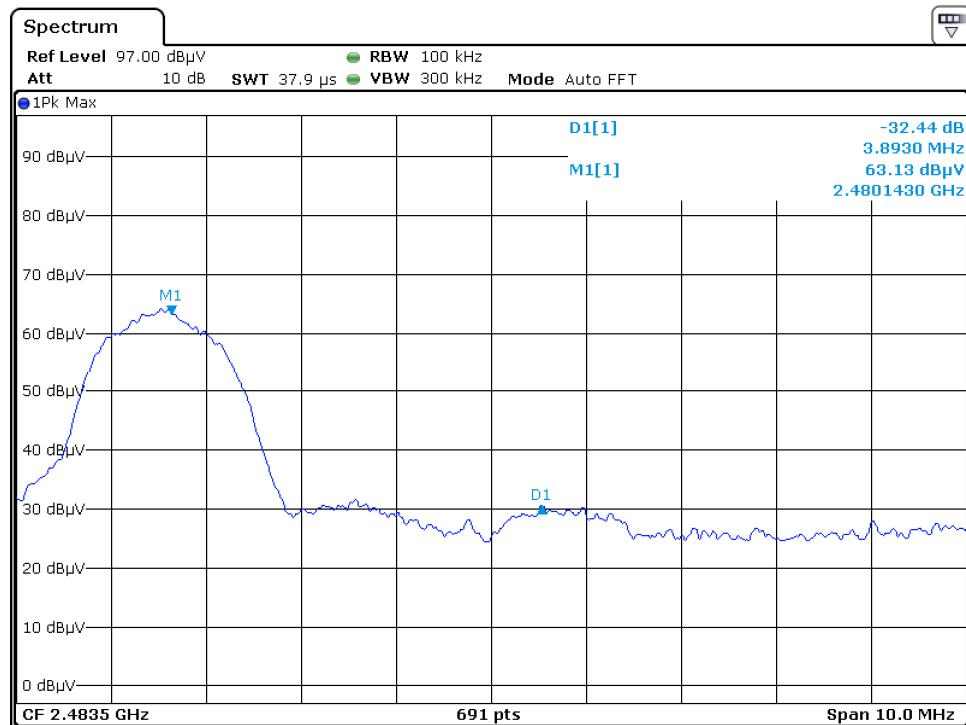
(ii) Upper channel 2480.000MHz:

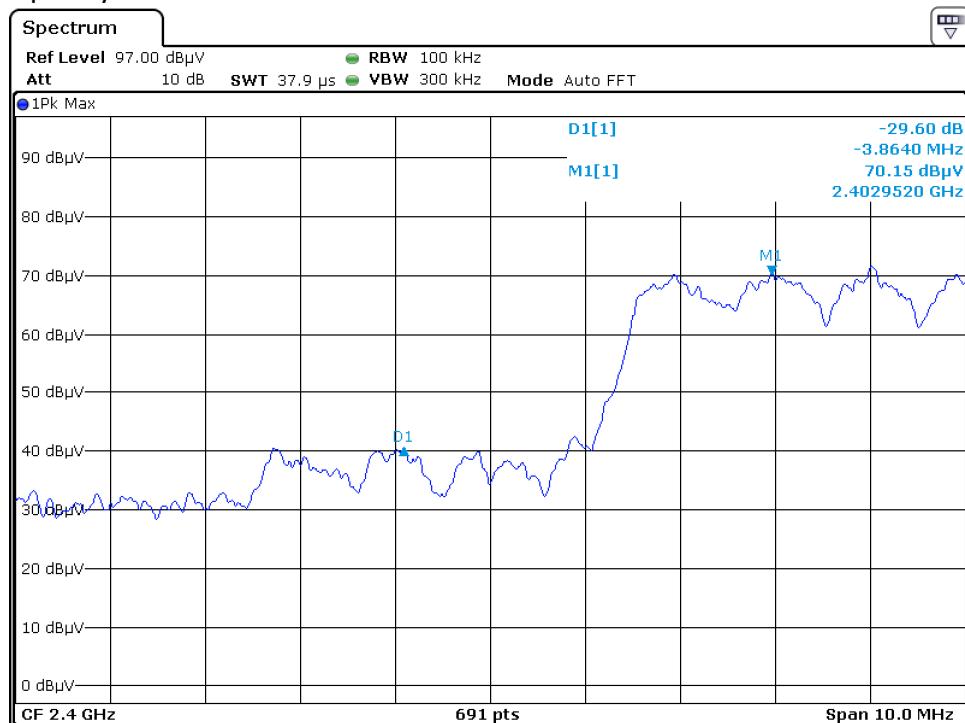
$$\begin{aligned}\text{Peak Resultant field strength} &= \text{Fundamental emissions (peak value)} - \\ &\quad \text{delta from the bandedge plot} \\ &= 84.7 \text{ dB}\mu\text{V/m} - 32.4 \text{ dB} \\ &= 52.3 \text{ dB}\mu\text{V/m}\end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ V/m (Peak Limit) and 54dB μ V/m (Average Limit).

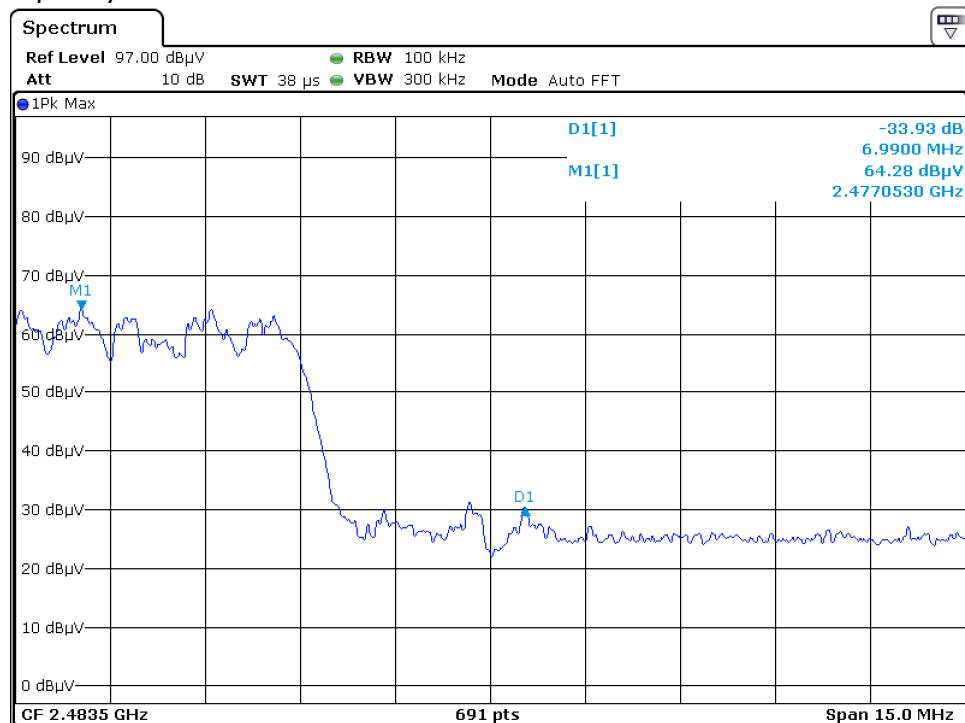
Hopping function off
 Lowest frequency Channel


Highest frequency Channel



Hopping function on
 Lowest frequency Channel


Highest frequency Channel

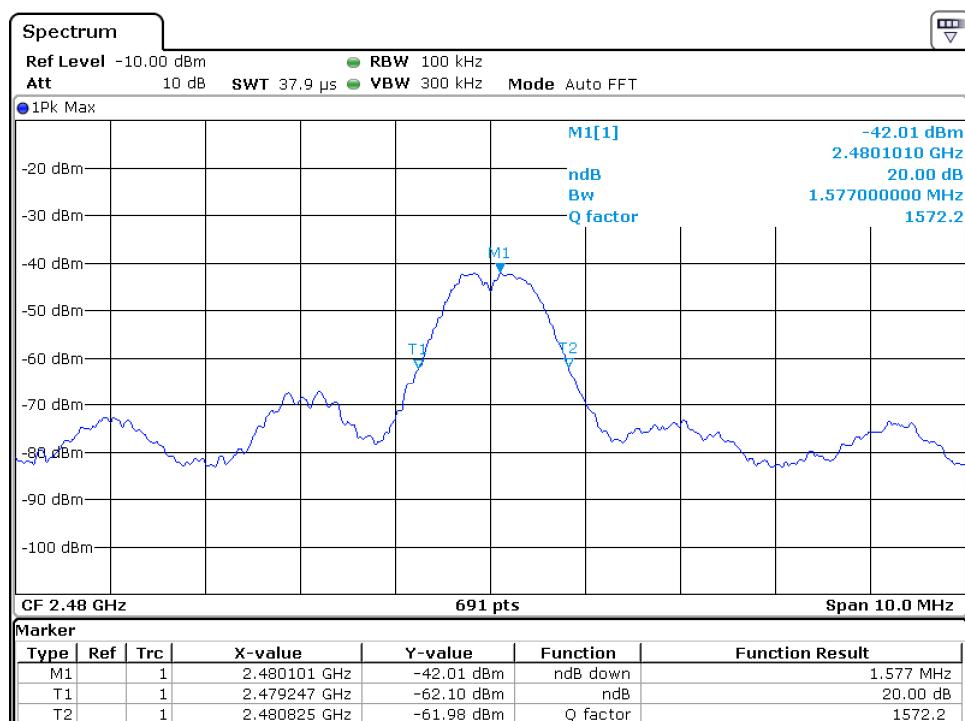
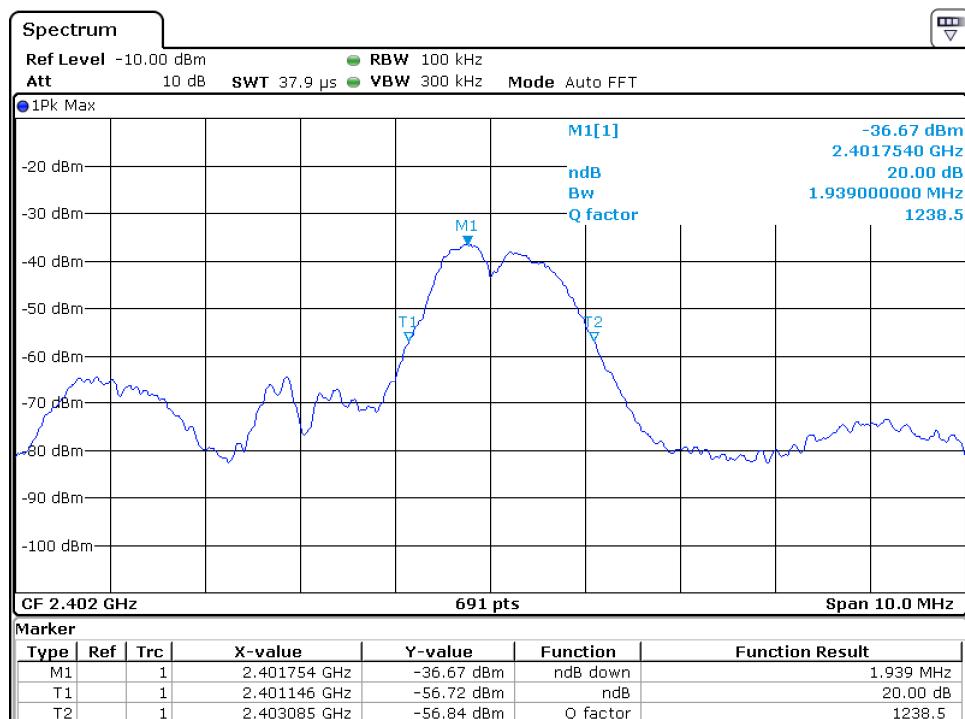


Test Report

Intertek Report No.: GZHH00329256-001

9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.



9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 625 μ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

9.4 Calculation of Average Factor

Based on the Bluetooth Specification with Version 4.2 (Single Mode EDR) and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop = 1 / 133.33 hops/second = 7.5 ms

Time to cycle through all channels = 7.5 x 20 channels = 150 ms

Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)

Worst case dwell time = 7.5 ms

Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

9.5 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	4-Jan-2019	4-Jan-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2020
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	28-May-2019	28-May-2020
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	28-May-2019	28-May-2020
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIALL	RG 213U	--	8-Jun-2019	8-Jun-2020
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	8-Jun-2019	8-Jun-2020
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	8-Jun-2019	8-Jun-2020
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	28-May-2019	28-May-2020
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	28-May-2019	28-May-2020
SZ188-03	Shielding Room	ETS	RFD-100	4100	15-Dec-2018	15-Dec-2020
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	29-Oct-2018	29-Oct-2019

***** End of Report *****