

Shenzhen Certification Technology Service Co., Ltd 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China.

TEST REPORT

FCC ID: ZX3-KB8706

Applicant

: Shenzhen Kingree Electronic Co., Ltd

Address

Bohua Tech Park, Shangwei Industrial Area, Zhangken jing, Guanlan Street,

Shenzhen, China

Equipment under Test (EUT):

Name

: Wireless Keyboard

Model

: KB8706

Standards

: FCC PART 15, SUBPART C : 2012 (Section 15.249)

Report No.

: STI130121022

Date of Test

: February 19-22, 2013

Date of Issue

: February 23, 2013

Test Result:

PASS *

Authorized Signature

(Mark Zhu) General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

FCC ID: ZX3-KB8706 Page 1 of 36

^{*} In the configuration tested, the EUT complied with the standards specified above

TABLE OF CONTENT

De	scrip	otion	Page
1 (ene	ral Information	
	1.1	Description of Device (EUT)	3
	1.2	Accessories of device (EUT)	4
	1.3	Description of Test Facility	
2	EM	C Equipment List	5
	2.1	Assistant equipment used for test	
	2.2	Block Diagram	
	2.3	Test mode	
	2.4	Test Conditions	
	2.5	Measurement Uncertainty (95% confidence levels, k=2)	6
	2.6	Test Equipment	
3		t Procedure	
4		nmary of Measurement	
5	PO	WER LINE CONDUCTED EMISSION	-
	5.1	Conducted Emission Limits(15.209&249)	
	5.2	Test Setup	
	5.3	Test Procedure	
	5.4	Test Results	
6	Rac	liation Emission	-
	6.1	Radiation Emission Limits(15.209&249 (a))	
	6.2	Test Setup	
	6.3	Test Procedure	
	6.4	Test Equipment Setting For emission test	
	6.5	Test Condition	
	6.6	Test Result	_
7	Occ	cupied bandwidth	
	7.1	Test limit	
	7.2	Method of measurement	
	7.3	Test Setup	
	7.4	Test Results	
8	Bar	ıd Edge Check	24
	8.1	Test limit	
	8.2		
	8.3	Test Setup	
	8.4	Test Result	
9	Ant	enna Requirement	
	9.1	Standard Requirement	
	9.2		
	9.3	Result	
10	Pho	otographs of Test Setup	30
11	Pho	otographs of EUT	32

1 General Information

Description of Device (EUT)

Trade Name : N/A

EUT : Wireless Keyboard

Model No. : KB8706

Type of Antenna : PCB Antenna

Antenna Specification: 0 dBi

Operation Frequency : 2402-2480MHz

Channel number : 79

Modulation type : GFSK

Power Supply : DC 3 V form battery

Applicant : Shenzhen Kingree Electronic Co., Ltd

Address : Bohua Tech Park, Shangwei Industrial Area, Zhangken

jing, Guanlan Street, Shenzhen, China

Manufacturer Shenzhen Kingree Electronic Co., Ltd

Address : Bohua Tech Park, Shangwei Industrial Area, Zhangken

jing, Guanlan Street, Shenzhen, China

FCCID: ZX3-KB8706 Page 3 of 36

1.2 Accessories of device (EUT)

Accessories 1 : N/A M/N : N/A

1.3 Description of Test Facility

Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

FCC Registered No.:197647 IC Registered No.: 8258B

FCCID: ZX3-KB8706 Page 4 of 36

2 EMC Equipment List

2.1 Assistant equipment used for test

Description : N/A

Manufacturer : N/A

Model No. : N/A

2.2 Block Diagram

EUT

2.3 Test mode

The test control to EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information						
Mode	Mode Channel					
		(MHz)				
	Low :CH1	2402				
GFSK	Middle: CH47	2448				
	High: CH79	2480				

2.4 Test Conditions

Temperature range	21-25 ℃
Humidity range	40-75%
Pressure range	86-106kPa

FCCID: ZX3-KB8706 Page 5 of 36

2.5 Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.50dB	
Uncertainty for Radiation Emission test in 3m	3.04dB	Polarize: V
chamber (30MHz to 1GHz)	3.02dB	Polarize: H
Uncertainty for Radiation Emission test in 3m	3.84dB	Polarize: H
chamber (1GHz to 25GHz)	3.56dB	Polarize: V
Uncertainty for radio frequency	1×10-9	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.6℃	
Uncertainty for humidity	3%	
Uncertainty for DC and low frequency voltages	0.06%	

FCCID: ZX3-KB8706 Page 6 of 36

2.6 Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	Nov. 16, 12	1Year
Spectrum analyzer	Agilent	E4407B	MY49510055	Oct. 31, 12	1Year
Receiver	R&S	ESCI	100492	Oct. 31, 12	1Year
Receiver	R&S	ESCI	101202	Oct. 31, 12	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	VULB9168-4 38	Feb.20, 13	1Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	Oct. 31, 12	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	Feb.20, 13	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	Feb.20, 13	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170 D(1432)	Feb.20, 13	1Year
Cable	Resenberger	N/A	No.1	Oct. 31, 12	1Year
Cable	SCHWARZBECK	N/A	No.2	Oct. 31, 12	1Year
Cable	SCHWARZBECK	N/A	No.3	Oct. 31, 12	1Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	Oct. 31, 12	1Year
Pre-amplifier	Quietek	AP-180C	CHM-060201 2	Oct. 31, 12	1Year

FCCID: ZX3-KB8706 Page 7 of 36

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a $50~\mathrm{u}$ H LISN. Both Lines were observed. The bandwidth of the receiver was $10\mathrm{kHz}$ with an appropriate sweep speed. The ambient temperature of the EUT was $25~\mathrm{C}$ with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading. Example:

Freq (MHz) METER READING + ACF + CABLE = FS 33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

FCCID: ZX3-KB8706 Page 8 of 36

4 Summary of Measurement

Test Item	Test Requirement	Stanadard Paragraph	Result
Spurious Emission	FCC PART 15: 2012	Section 15.249&15.209	Compliance
Conduction Emission	FCC PART 15: 2012	Section 15.207	Not applicable
Occupied bandwidth	FCC PART 15: 2012	Section 15.249	Compliance
Band edge Requirement	FCC PART 15: 2012	Section 15.249	Compliance
Antenna Requirement	FCC PART 15: 2012	Section 15.203	Compliance

Note: EUT can by powered with inside battery, according to exploratory test, when powered by new battery have worse emissions, and also can make sure EUT have enough power for wireless work, so all the final test were performed with new battery.

FCCID: ZX3-KB8706 Page 9 of 36

5 POWER LINE CONDUCTED EMISSION


5.1 Conducted Emission Limits(15.209&249)

Frequency	Limits dB(μV)				
MHz	Quasi-peak Level	Average Level			
0.15 -0.50	66 -56*	56 - 46*			
0.50 -5.00	56	46			
5.00 -30.00	60	50			

Notes: 1. *Decreasing linearly with logarithm of frequency.

- 2. The lower limit shall apply at the transition frequencies.
- 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

5.2 Test Setup

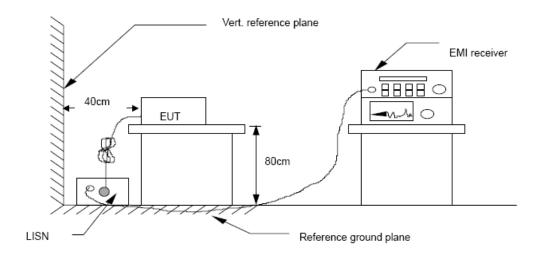

FCCID: ZX3-KB8706 Page 10 of 36

5.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 500hm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement. m

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

5.4 Test Results

EUT Power supply by battery, so the test not applicable.

FCCID: ZX3-KB8706 Page 11 of 36

6 Radiation Emission

6.1 Radiation Emission Limits(15.209&249 (a))

Frequency (MHZ)	Field Strength Limits at 3 metres (watts,e.i.r.p.)						
	uV/m	dB uV/m	Measurement distance(m)				
0.009-0.490	2400/F(kHz)	XX	300				
0.490-1.705	24000/F(kHz)	XX	30				
1.705-30	30	29.5	30				
30~88	100(3nW)	40	3				
88~216	150(6.8nW)	43.5	3				
216~960	200(12nW)	46	3				
Above960	500(75nW)	54	3				
Carrier frequency		93.97(AV)	3				
Carrier frequency		113.97(PK)	3				

NOTE:


a) The tighter limit applies at the band edges.

b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)


FCCID: ZX3-KB8706 Page 12 of 36

6.2 Test Setup

See the next page

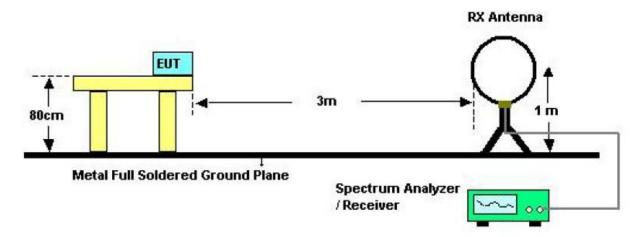


Below 30MHZ Test Setup

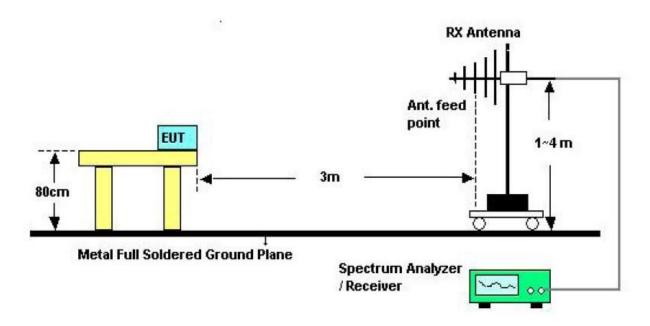

Above 30MHZ Test Setup

FCCID: ZX3-KB8706 Page 13 of 36

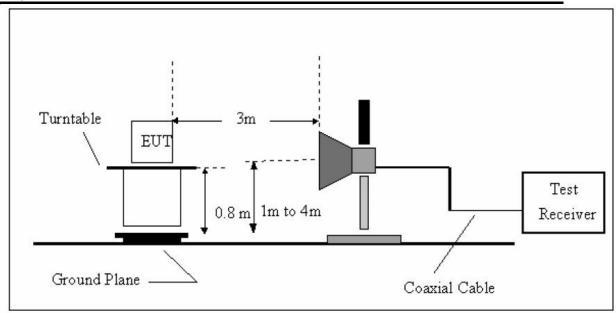

Above 1GHZ Test Setup

6.3 Test Procedure

- a) The measureing distance of 3m shall be used for measurements at frequency up to 1GHZ and above 1GHZ, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m,Both Horizontal and Vertical antenna are set of make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significent Peaks are then marked and then Qusia Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHZ. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHZ.
- e) For the actual test configuration, please see the test setup photo.

6.4 Test Equipment Setting For emission test.

For Peak setting

9KHZ~150KHZ RBW 200HZ VBW1KHZ 150KHZ~30MHZ RBW 9KHZ VBW 30KHZ 30MHZ~1GHZ RBW 120KHZ VBW 300KHZ Above 1GHZ RBW 1MHZ VBW 3MHZ

For average setting:

Above 1GHz RBW 1MHz VBW 10Hz

6.5 Test Condition

Continual Transmitting in maximum power.

6.6 Test Result

PASS.

We have scanned the 10th harmonic from 9KHz to the EUT. Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

FCCID: ZX3-KB8706 Page 15 of 36



Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China Tel: 4006786199 FAX: +86-755-26736857 Website http://www.cessz.com Email: Service@cessz.com

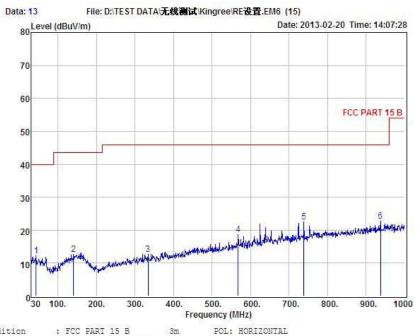

Condition : FCC PART 15 B EUT : Wireless Keyboard


Model No : KB8706 : Link Mode : DC 3V From Battery Test Mode Power

Test Engineer : Store Remark

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	43.58	26.21	13.79	27.81	0.09	12.28	40.00	-27.72	QP
2	140.58	25.69	13.51	26.90	0.27	12.57	43.50	-30.93	QP
3	333.61	25.58	13.55	27.24	0.81	12.70	46.00	-33.30	QP
4	567.38	27.33	17.67	27.74	1.44	18.70	46.00	-27.30	QP
5	738.10	28.87	20.13	27.70	1.27	22.57	46.00	-23.43	QP
6	936.95	27.44	22.05	27.62	0.89	22.76	46.00	-23.24	QP



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone.
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website

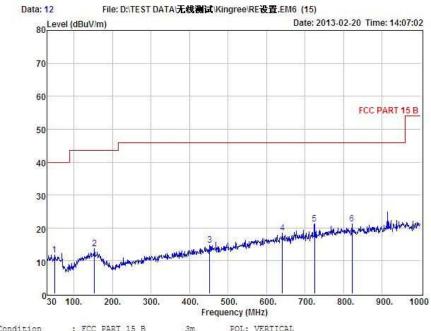

Condition : FCC PARI 15 B 3m POL: VERTICAL
EUT : Wireless Keyboard
Model No : KB8706
Test Mode : Link Mode
Power : DC 3V From Battery
Test Engineer : Store
Remark :

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
	49.40	26.03	10 54	27.82	0.10	11.85	40.00	-28.15	0.00
1			13.54						QP
2.	153.19	26.06	14.16	26.91	0.41	13.72	43.50	-29.78	QP
3	451.95	25.14	15.99	27.49	1.13	14.77	46.00	-31.23	QP
4	641.10	26.32	18.99	27.81	0.97	18.47	46.00	-27.53	QP
5	724.52	27.49	19.97	27.72	1.54	21.28	46.00	-24.72	QP
6	821.52	27.05	20.84	27.67	1.01	21.23	46.00	-24.77	QP

Radiated Emissions Result of Inside band (2402MHz)

EUT	Wireless Keyboard	Model Name	KB8706
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by Battery
Test Mode	TX Low	Antenna polarization	Horizontal/Vertical

	Channel Low(2402MHz)												
Fre.	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB				
2402	Н	86.08 (PK)	27.62	3.94	34.97	-3.41	82.67	113.97	-31.30				
2402	Н	83.24 (AV)	27.62	3.94	34.97	-3.41	79.83	93.97	-14.14				
	Н												
2402	V	90.81 (PK)	27.62	3.94	34.97	-3.41	87.40	113.97	-26.57				
2402	V	88.78(AV)	27.62	3.94	34.97	-3.41	85.37	93.97	-8.60				
	V		-			I							

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	Actual Fs		AV Limit	Margin (dB)	Remark
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		Neiliai K
1318.44	Н	53.32		-5.84	47.48		74.00	54.00	-6.52	Peak
1657.22	Н	52.86		-4.65	48.21		74.00	54.00	-5.79	Peak
2139.66	Н	52.00		-4.36	47.64		74.00	54.00	-6.36	Peak
4804.77	Н	46.37		2.76	49.13		74.00	54.00	-4.87	Peak
N/A										
1486.55	V	53.38		-5.27	48.11		74.00	54.00	-5.89	Peak
2073.22	V	51.62		-4.49	47.13		74.00	54.00	-6.87	Peak
3462.55	V	49.10		-0.95	48.15		74.00	54.00	-5.85	Peak
4804.77	V	47.08		2.76	49.84		74.00	54.00	-4.16	Peak
N/A		_		_	_					

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

- 2 -Spectrum setting:
 - a. Peak setting 30MHz-1GHz,RBW=120KHz,VBW=300KHz.
 - b. AV setting 30MHz-1GHz,RBW=1MHz,VBW=10Hz.

FCCID: ZX3-KB8706 Page 18 of 36

Radiated Emissions Result of Inside band (2448MHz)

EUT	Wireless Keyboard	Model Name	KB8706
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by Battery
Test Mode	TX Mid	Antenna polarization	Horizontal/Vertical

	Channel Mid(2448MHz)											
Fre.	Plority H/V	dBuV Factor Loss Gain Factor dBuV/m						Limit dBuV/m	Margin dB			
2448	Н	91.59 (PK)	27.60	3.97	34.97	-3.40	88.19	113.97	-25.78			
2448	Н	88.16 (AV)	27.60	3.97	34.97	-3.40	84.76	93.97	-9.21			
	Н											
2448	V	95.27 (PK)	27.60	3.97	34.97	-3.40	91.87	113.97	-22.10			
2448	V	92.43 (AV)	27.60	3.97	34.97	-3.40	89.03	93.97	-4.94			
	V					I						

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	al Fs	Peak Limit	AV Limit	Margin (dB)	
(IVIII)	11/	(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		Remark
1416.44	Н	52.71		-5.29	47.42		74.00	54.00	-6.58	Peak
1832.54	Н	52.81		-4.16	48.65		74.00	54.00	-5.35	Peak
2753.33	Н	50.26		-2.38	47.88		74.00	54.00	-6.12	Peak
4896.77	Н	45.60		2.91	48.51		74.00	54.00	-5.49	Peak
N/A										
1273.55	V	53.68		-5.96	47.72		74.00	54.00	-6.28	Peak
1678.44	V	53.92		-5.65	48.27		74.00	54.00	-5.73	Peak
2136.55	V	52.95		-4.36	48.59		74.00	54.00	-5.41	Peak
4896.77	V	46.81		2.91	49.72		74.00	54.00	-4.28	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

- a. Peak setting 30MHz-1GHz,RBW=120KHz,VBW=300KHz.
- b. AV setting 30MHz-1GHz,RBW=1MHz,VBW=10Hz.

FCCID: ZX3-KB8706 Page 19 of 36

Radiated Emissions Result of Inside band (2480MHz)

Tradiated Eiii	oolollo i toodit ol illolao ba	114 (E 1001111 12)	
EUT	Wireless Keyboard	Model Name	KB8706
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by Battery
Test Mode	TX High	Antenna polarization	Horizontal/Vertical

	Channel High(2480MHz)											
Fre.	Plority Reading Antenna Cable Amplifier Correct Measure Result H/V dB dB dB dB dB						Limit dBuV/m	Margin dB				
IVITIZ	□/ V		ub	ub	uБ	иь						
2480	Н	93.34 (PK)	27.59	4.00	34.97	-3.38	89.96	113.97	-24.01			
2480	Н	90.52 (AV)	27.59	4.00	34.97	-3.38	87.14	93.97	-6.83			
	Н											
2480	V	96.97 (PK)	27.59	4.00	34.97	-3.38	93.59	113.97	-20.38			
2480	V	92.84 (AV)	27.59	4.00	34.97	-3.38	89.46	93.97	-4.51			
	V					-						

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	al Fs	Peak Limit	AV Limit	Margin (dB)	D 1
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	` '	(dBuV/m)	,	Remark
1566.77	Н	52.71		-5.07	47.64		74.00	54.00	-6.36	Peak
2354.33	Н	52.72		-4.59	48.13		74.00	54.00	-5.87	Peak
3658.22	Н	48.14		-0.38	47.76		74.00	54.00	-6.24	Peak
4960.44	Н	45.95		3.48	49.43		74.00	54.00	-4.57	Peak
N/A										
1289.22	V	54.14		-5.96	48.18		74.00	54.00	-5.82	Peak
1963.55	V	52.23		-4.64	47.59		74.00	54.00	-6.41	Peak
2675.33	V	48.70		-0.94	47.76		74.00	54.00	-6.24	Peak
4960.44	V	45.55		3.48	49.03		74.00	54.00	-4.97	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 –Spectrum setting:

a. Peak setting 30MHz-1GHz,RBW=120KHz,VBW=300KHz.

b. AV setting 30MHz-1GHz,RBW=1MHz,VBW=10Hz.

FCCID: ZX3-KB8706 Page 20 of 36

7 Occupied bandwidth

7.1 Test limit

Please refer section 15.249

7.2 Method of measurement

- a)The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b)The test receiver RBW set 30KHZ,VBW set 30KHZ,Sweep time set auto.

7.3 Test Setup




7.4 Test Results

Detailed information please see the following page.


Frequency	20dB bandwidth
Low:CH1: 2402MHz	600.0KHz
Middle: CH47: 2448MHz	550.0KHz
High: CH79:2480MHz	637.5KHz

FCCID: ZX3-KB8706 Page 21 of 36

CH Low:

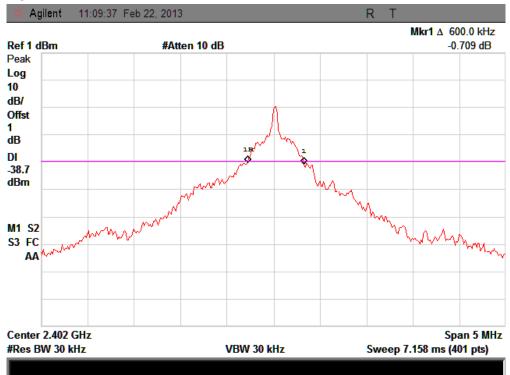

CH Mid:

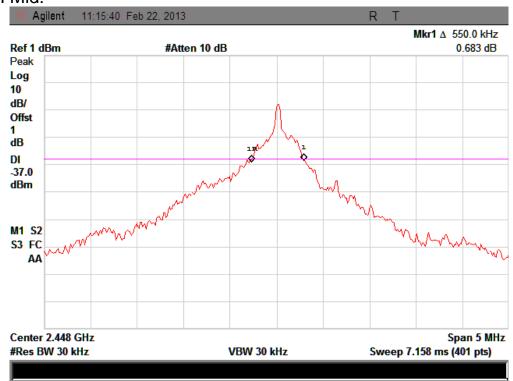

CH High:



8 Band Edge Check

8.1 Test limit

Please refer section 15.249 and section 15.205.


249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As show in section 15.35(b), for frequencies above 1000MHz,the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak filed strength shall not exceed 2500 millivolts/meter at 3meters along the antenna azimuth.

8.2 Test Procedure

- 8.2.1. The measuring distance of 3m shall be used for measurements at frequency above 1GHZ, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation.
- 8.2.2. The Test antenna shall vary between 1m and 4m,Both Horizontal and Vertical antenna are set of make measurement.
- 8.2.3. The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then AVG Detector mode premeasured
- 8.2.4. For the actual test configuration, please see the test setup photo.

8.3 Test Setup

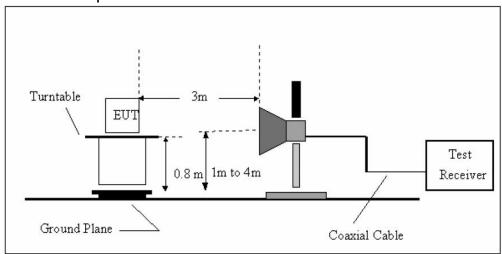

8.4 Test Result PASS.


Detailed information please see the following page.

FCCID: ZX3-KB8706

CH Low:



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone.
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website

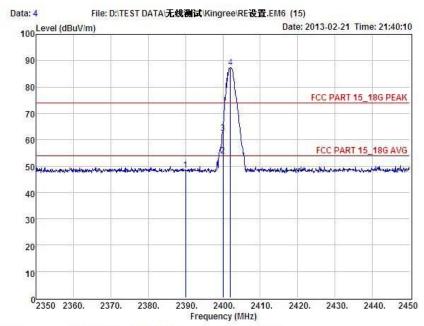

: FCC PART 15_18G PEAK 3m : Wireless Keyboard : KB8706 POL: VERTICAL

Condition EUI Model No

Test Mode

: TX 2402MHz : DC 3V From Battery


Test Engineer : Store

Remark

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	51.96	27.62	34.97	3.92	48.53	74.00	-25.47	Peak
2	2400.00	57.20	27.62	34.97	3.94	53.79	54.00	-0.21	Average
3	2400.00	65.82	27.62	34.97	3.94	62.41	74.00	-11.59	Peak
4	2402.00	90.81	27.62	34.97	3.94	87.40	74.00	13.40	Peak



Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China Tel: 4006786199 FAX: +86-755-26736857 Website http://www.cessz.com Email: Service@cessz.com

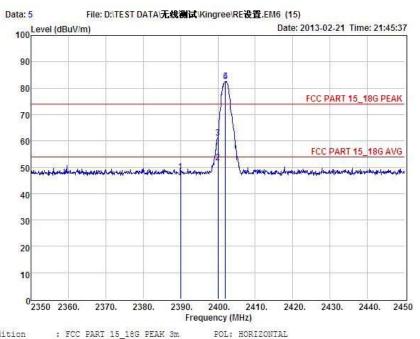

Condition : FCC PART 15_18G PEAK 3m

: Wireless Keyboard

Model No : KB8706 : TX 2402MHz : DC 3V From Battery Test Mode

Power Test Engineer : Store


Remark

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	51.63	27.62	34.97	3.92	48.20	74.00	-25.80	Peak
2	2400.00	55.11	27.62	34.97	3.94	51.70	54.00	-2.30	Average
3	2400.00	64.64	27.62	34.97	3.94	61.23	74.00	-12.77	Peak
4	2402.00	86.08	27.62	34.97	3.94	82.67	74.00	8.67	
5	2402.00	86.08	27.62	34.97	3.94	82.67	74.00	8.67	Peak

CH High:



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone.
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website

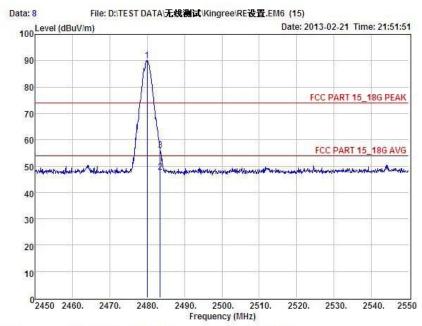

: FCC PARI 15_18G PEAK 3m : Wireless Keyboard : KB8706 POL: HORIZONTAL

Condition EUT Model No

Test Mode

: TX 2480MHz : DC 3V From Battery


Test Engineer : Store

Remark

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2480.00	93.34	27.59	34.97	4.00	89.96	74.00	15.96	Peak
2	2483.50	50.97	27.59	34.97	4.00	47.59	54.00	-6.41	Average
3	2483.50	59.38	27.59	34.97	4.00	56.00	74.00	-18.00	Peak



Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China Tel: 4006786199 FAX: +86-755-26736857 Website http://www.cessz.com Email: Service@cessz.com

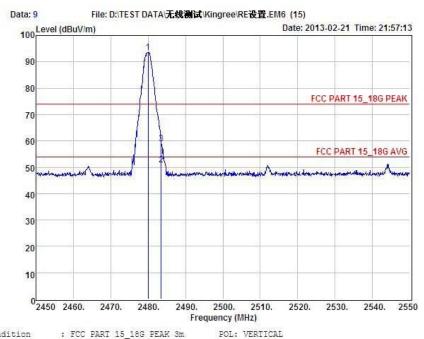

Condition : FCC PART 15_18G PEAK 3m

: Wireless Keyboard

Model No : KB8706 : TX 2480MHz : DC 3V From Battery Test Mode Power

Test Engineer : Store

Remark

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2480.00	96.97	27.59	34.97	4.00	93.59	74.00	19.59	Peak
2	2483.50	54.41	27.59	34.97	4.00	51.03	54.00	-2.97	Average
3	2483.50	62.23	27.59	34.97	4.00	58.85	74.00	-15.15	Peak

9 Antenna Requirement

9.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 0 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

9.3 Result

The EUT antenna is PCB Antenna. It comply with the standard requirement.

FCCID: ZX3-KB8706 Page 29 of 36

10 Photographs of Test Setup


Photographs-Radiated Emission Test Setup in Chamber






FCCID: ZX3-KB8706 Page 30 of 36

Above 1G

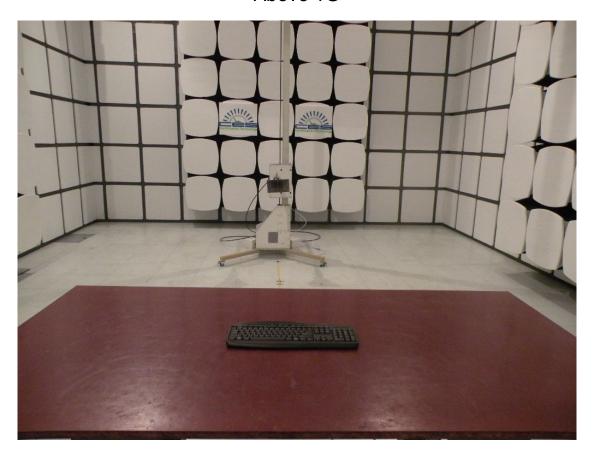

11 Photographs of EUT



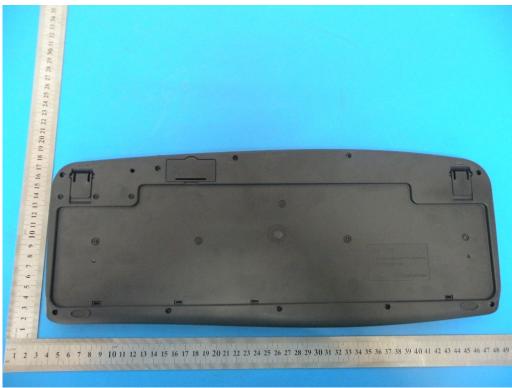


FCCID: ZX3-KB8706 Page 32 of 36











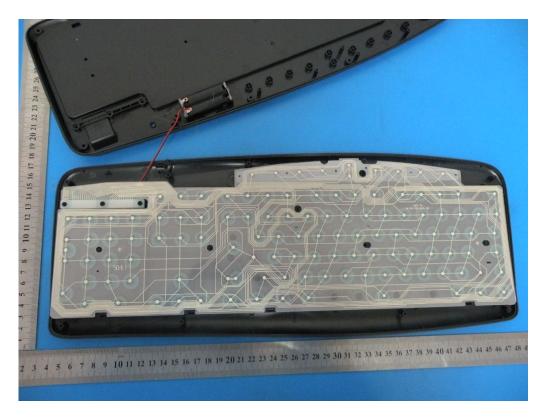

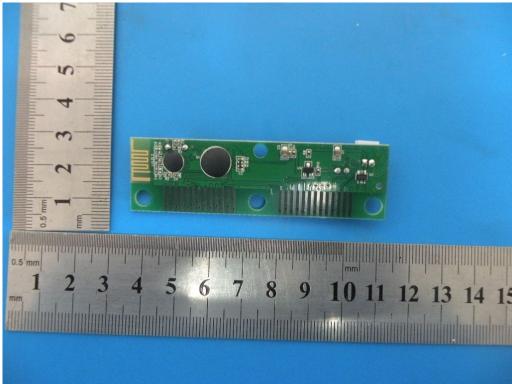

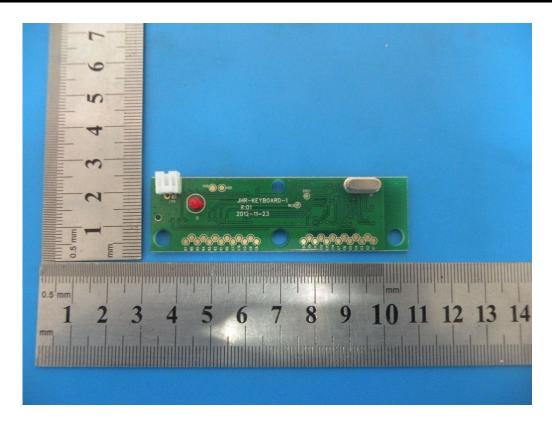

-----END OF THE REPORT-----