

**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-3585/11-01-02-A

**DAkkS**
Deutsche
Akreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited test laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Transrex AG
Bösch 41
6331 Hünenberg ZG / SWITZERLAND
Phone: +41 (0)41 784 24 24
Contact: Stephan Bühler
e-mail: sb@transrex.ch
Phone: +41 41-7842494

Manufacturer

Transrex AG
Bösch 41
6331 Hünenberg ZG / SWITZERLAND

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item:	Alarmwatch
Model name:	T-997
FCC ID:	ZX4-T997
IC:	9872A-T997
Frequency:	914 MHz
Power supply:	3.00 V by Lithium battery CR2032
Temperature range:	-20 °C to +55 °C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Marco Bertolino
Testing Manager

Test performed:

Stefan Bös
Senior Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements	6
8.1.2	Conducted measurements	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Timing of the transmitter	9
9.2	Switch off time	11
9.3	Emission bandwidth	12
9.4	Field strength of the fundamental	13
9.5	Field strength of the harmonics and spurious	14
9.6	Receiver spurious emission (radiated)	20
10	Test equipment and ancillaries used for tests	25
11	Observations	26
Annex A	Photographs of the test setup	27
Annex B	External photographs of the EUT	28
Annex C	Internal photographs of the EUT	32
Annex D	Document history	36
Annex E	Further information	36
Annex F	Accreditation Certificate	37

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronical signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2011-06-06
Date of receipt of test item:	2011-05-25
Start of test:	2011-05-25
End of test:	2011-11-04
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Version	Test standard description
47 CFR Part 15	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+23 °C during room temperature tests
	T_{max}	+55 °C during high temperature test
	T_{min}	-20 °C during low temperature test
Relative humidity content:		54 %
Air pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.00 V by Lithium battery CR2032
	V_{max}	3.00 V
	V_{min}	2.55 V

5 Test item

Kind of test item :	Alarmwatch
Type identification :	T-997
S/N serial number :	-
HW hardware status :	unknown
SW software status :	unknown
Frequency band [MHz] :	914 MHz
Type of radio transmission :	Single carrier
Use of frequency spectrum :	
Type of modulation :	FSK
Number of channels :	1
Antenna :	Integrated PCB antenna
Power supply :	3.00 V by Lithium battery CR2032
Temperature range :	-20°C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 1	Passed	2012-01-13	-/-

Test Specification Clause	Test Case	Temperature Conditions	Power Source Voltages	Pass	Fail	NA	NP	Results (max.)
§ 15.35 (c)/ RSS-GEN Issue 2 Section 4.5	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (a) (1)/ RSS-210 Issue 8 Section A1.1.1	Switch off time	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (3) (c)/ RSS-210 Issue 8 Section A1.1.3	Emission Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (b)/ RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	Fieldstrength of Fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209/ RSS-210 Issue 8 Section 2.7 Table 4	Fieldstrength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209/ RSS-GEN Issue 8 Section 6	Receiver spurious emissions (radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

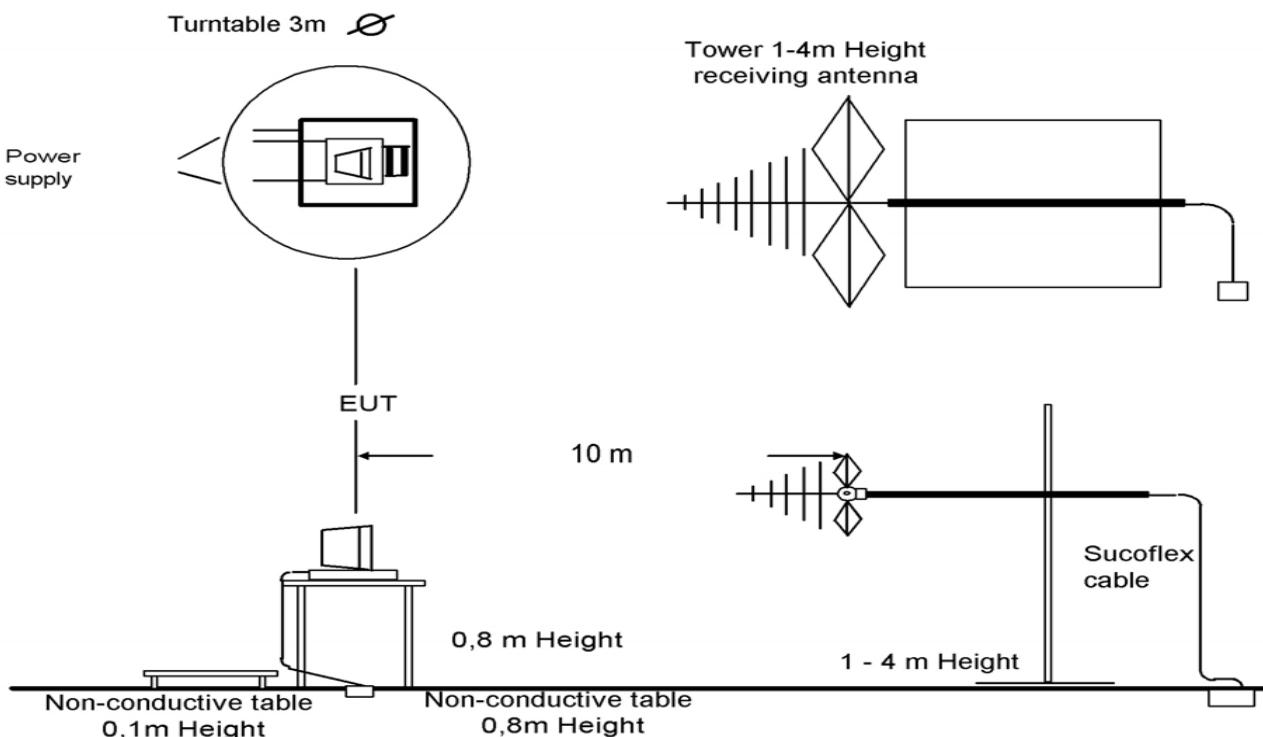


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

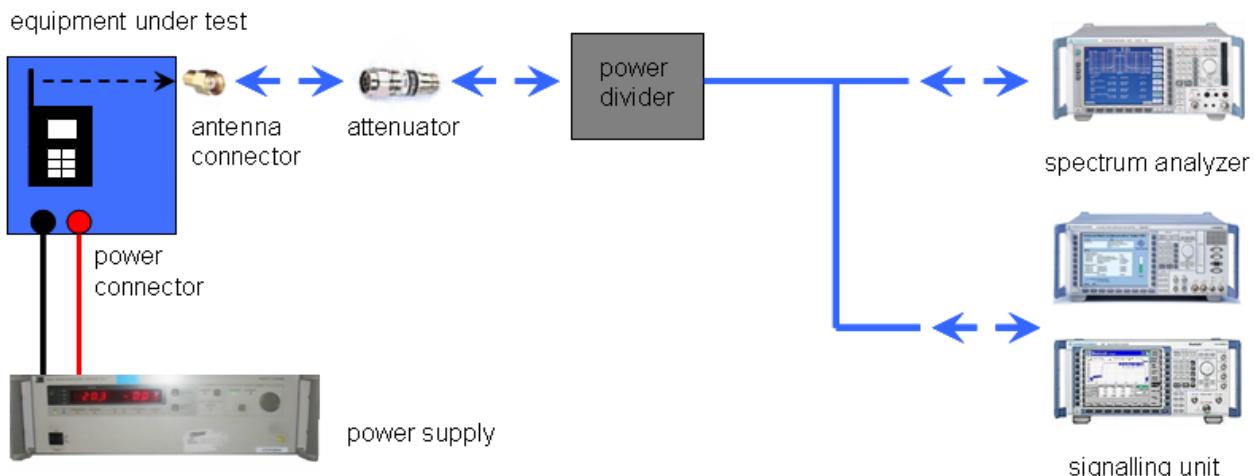

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

8.3 RSP100 test report cover sheet / performance test data

Test Report Number	:	1-3585/11-01-02-A
Equipment Model Number	:	T-997
Certification Number	:	9872A-T997
Manufacturer (complete Address)	:	Transrex AG Bösch 41 6331 Hünenberg ZG / SWITZERLAND
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 1
Open Area Test Site IC No.	:	IC 3462C-1
Frequency Range or fixed frequency	:	914 MHz
Field Strength [dBμV/m] (at which distance)	:	78.7 dB μ V/m @ 3m
Occupied bandwidth (99%-BW) [kHz]	:	63.4 kHz
Type of modulation	:	FSK
Emission Designator (TRC-43)	:	63K4F1D
Antenna Information	:	Integrated PCB-antenna
TX Spurious (worst case) [μV/m @ 3m]	:	431.5 μ V/m @ 5484.7 MHz
RX Spurious (worst case) [μV/m @ 3m]	:	178 μ V/m @ 12 GHz (noise floor)

ATTESTATION:
DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2012-01-13

Stefan Bös

Date

Name



Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	2 s
Resolution bandwidth:	300 kHz
Video bandwidth:	1 MHz
Span:	Zero
Trace-Mode:	Single sweep

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.35 (c)	RSS-GEN Issue 2 Section 4.5
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Result:

Plot 1: Transmit burst

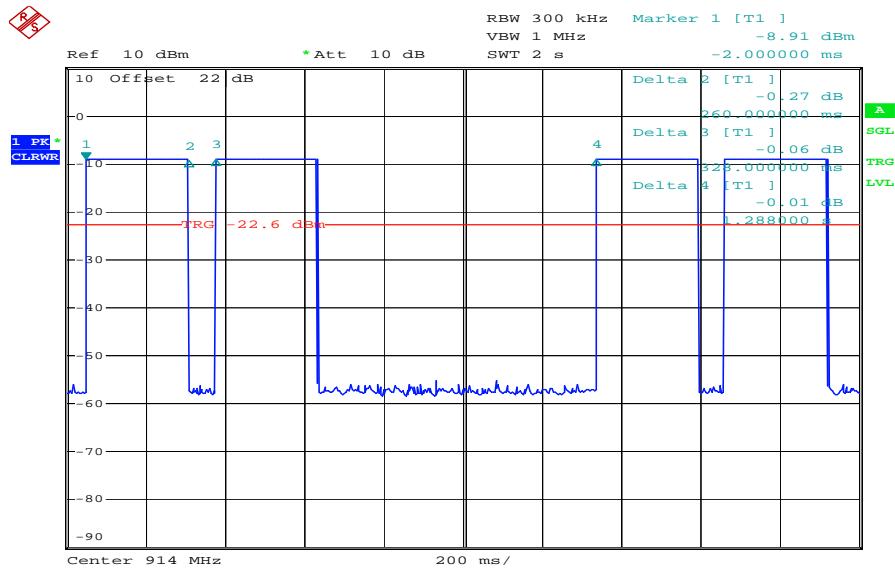

Date: 26.MAY.2011 11:22:26

Transmit time (Tx on) = 260 ms (Plot 1)

The peak-to-average correction factor is calculated with $20\log [Tx\ on/100ms]$.

Hereby the peak-to-average correction factor is 0.0 dB.

Result: The result of the measurement is passed.

9.2 Switch off time

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Resolution bandwidth:	300 kHz
Video bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold / Single Sweep

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.231 (a) (1)	RSS-GEN Issue 2 Section 4.5
Switch off time	
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	

Results:

Plot 1:

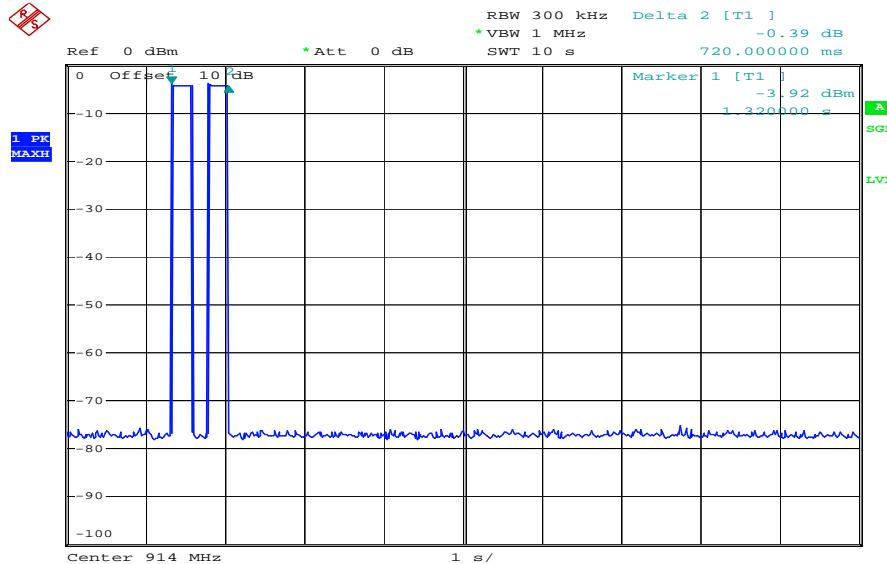

Date: 4.NOV.2011 10:10:42

The EUT only transmits one pulse chain by pressing the button. The maximum transmit time for one pulse train is 720 ms. Therefore the maximum transmit time is not more than 720 ms after releasing the switch.

Result: The result of the measurement is passed.

9.3 Emission bandwidth

Measurement:

Measurement of the 20 dB bandwidth of the modulated signal


Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 kHz
Video bandwidth:	3 kHz
Span:	100 kHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.231 (c)	RSS-210 Issue 8 Section A1.1.3
Emission bandwidth	
The OBW shall not be wider than 0.5% of the centre frequency, here maximum 4570 kHz.	

Result:

Plot 1:

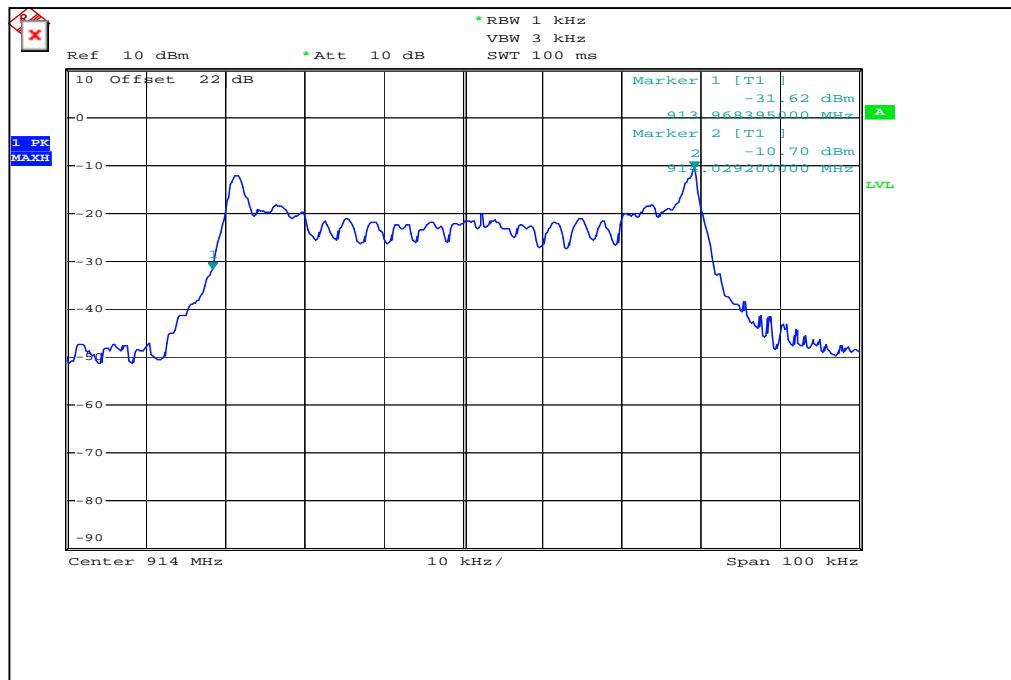

The emission bandwidth at 20 dB is 63.4 kHz

Result: The result of the measurement is passed.

9.4 Field strength of the fundamental

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC	
CFR Part SUBCLAUSE § 15.231 (b)	RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of Fundamental (μ V/m)	Measurement distance (m)
40.66 – 40.70	2,250	3
70-130	1,250	3
130-174	1,250 to 3,750	3
174-260	3,750	3
260-470	3,750 to 12,500	3
Above 470	12,500	3

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- for the band 130-174 MHz, μ V/m at 3 meters = $56.81818(F) - 6136.3636$;
- for the band 260-470 MHz, μ V/m at 3 meters = $41.6667(F) - 7083.3333$.

Result:

TEST CONDITIONS		MAXIMUM POWER (dB μ V/m at 3 m distance)			
Frequency		914 MHz		914 MHz	
Mode		Peak		Average	
		@ 10 m	@ 3m	@ 10 m	@ 3m
T _{nom}	V _{nom}	68.2	78.7	68.2*	78.7*
Measurement uncertainty		± 3 dB			

*Value recalculated from Peak-to-Average correction factor described in 9.1 and from 10 m to 3 m measurement distance with 20dB per decade (here +10.5 dB from 10 m to 3 m)

Result: The result of the measurement is passed.

9.5 Field strength of the harmonics and spurious

Measurement:

Measurement parameter	
Detector:	Average / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC	
CFR Part SUBCLAUSE § 15.231 (b)	RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of spurious (μ V/m)	Measurement distance (m)
40.66 – 40.70	225	3
70-130	125	3
130-174	125 to 375	3
174-260	375	3
260-470	375 to 1,250	3
Above 470	1,250	3

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

FCC	IC	
SUBCLAUSE § 15.209		
Field strength of the harmonics and spurious.		
Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
above 960	500	3

Results:


EMISSION LIMITATIONS				
f [MHz]	Detector	Limit max. allowed [dB μ V/m]	Amplitude of emission [dB μ V/m]	Results
See tables below plots				

Result: The result of the measurement is passed.

Plots of the measurements

Plot 1: 9 kHz – 30 MHz;


Part 15.209 Magnetics, Measurement distance 3 m

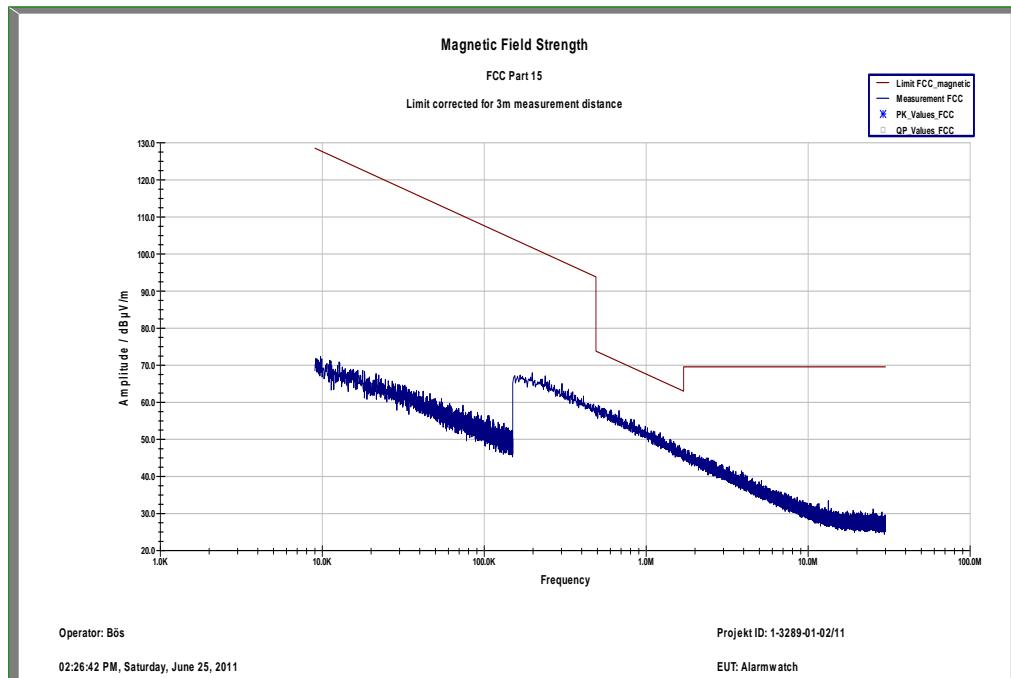

Plot 2: 30 MHz – 1000 MHz, Measurement distance 10 m

Common Information

EUT: Alarm watch 914
 Serial Number: ---
 Test Description: FCC Part 15.231
 Operating Conditions: cont TX
 Operator Name: Kraus
 Comment: bat powered (with -6dB power reduction)

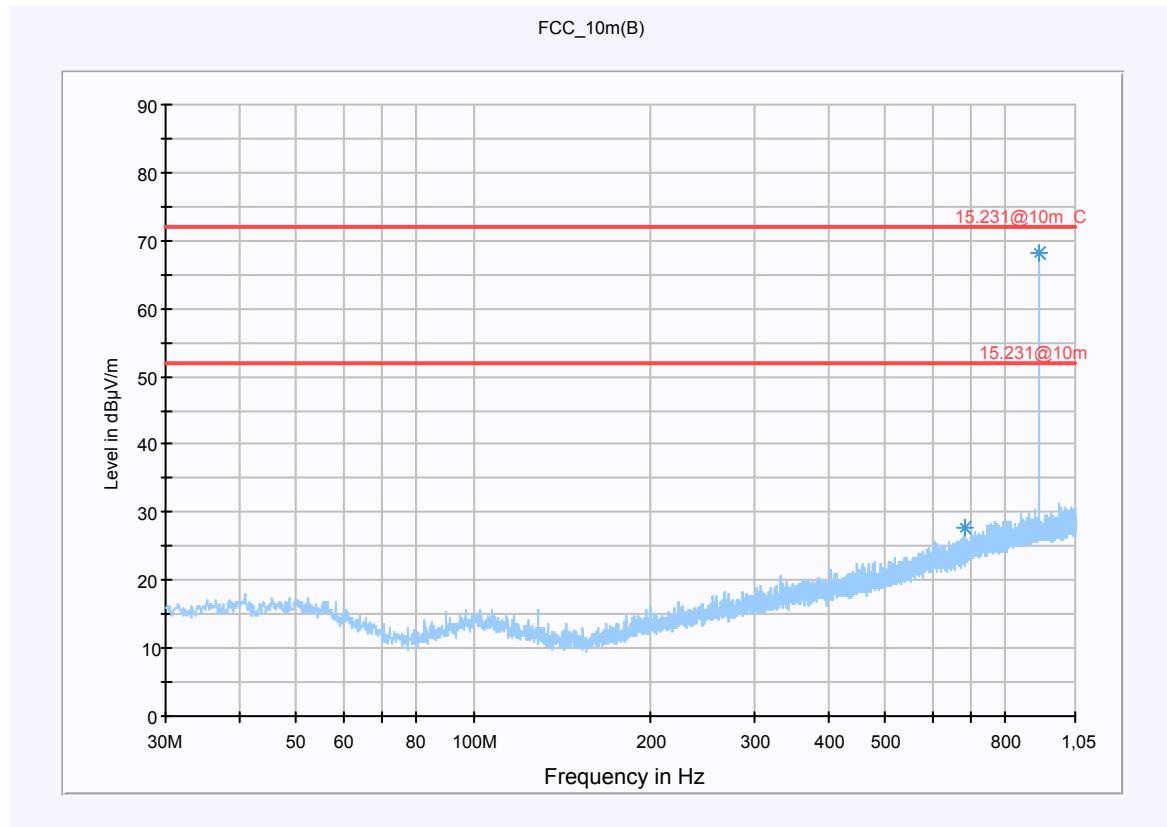

Data Reduction 1 [1]

Frequency (MHz)	MaxPeak-MaxHold (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
682.162500	27.6	100.0	V	-2.0	22.0	
914.085000	68.2	100.0	H	137.0	25.2	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch
FW 1.0

Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113

Correction Table (horizontal): VULP6113

Correction Table: Cable_EN_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 2: 1 GHz – 10 GHz, Measurement distance 3 m

Common Information

EUT: Alarm watch 914
 Serial Number: ---
 Test Description: FCC Part 15.231
 Operating Conditions: cont TX
 Operator Name: Kraus
 Comment: bat powered

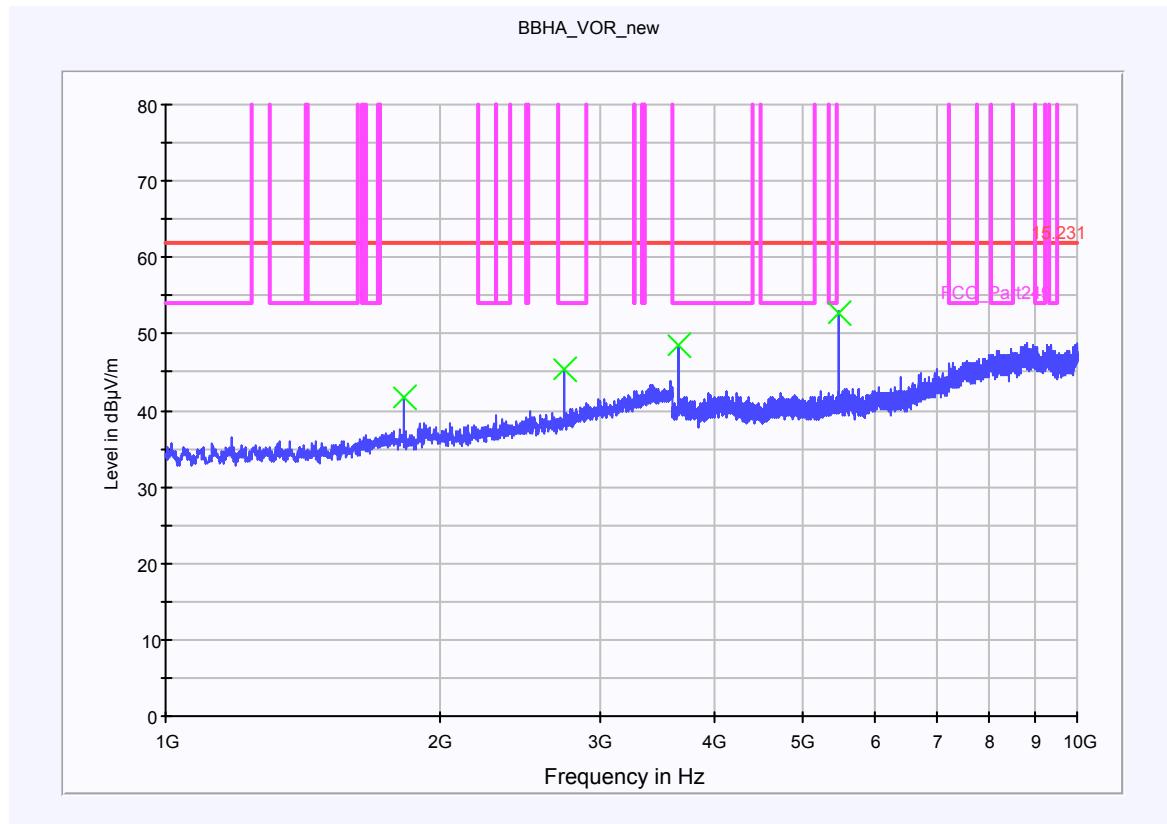

Peaks

Frequency (MHz)	MaxPeak-MaxHold (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1828.000000	41.6	155.0	H	154.0	-4.2	
3655.900000	48.5	155.0	V	32.0	1.6	
5484.700000	52.7	155.0	V	118.0	4.2	
2742.400000	45.4	155.0	V	208.0	-1.1	

9.6 Receiver spurious emission (radiated)


Measurement:

Measurement parameter	
Detector:	Average / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC	
SUBCLAUSE § 15.109	RSS-GEN Issue Section 6	
Receiver Spurious Emission (radiated)		
Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

Plot 1: 9 kHz – 30 MHz;
Part 15.209 Magnetics, Measurement distance 3m

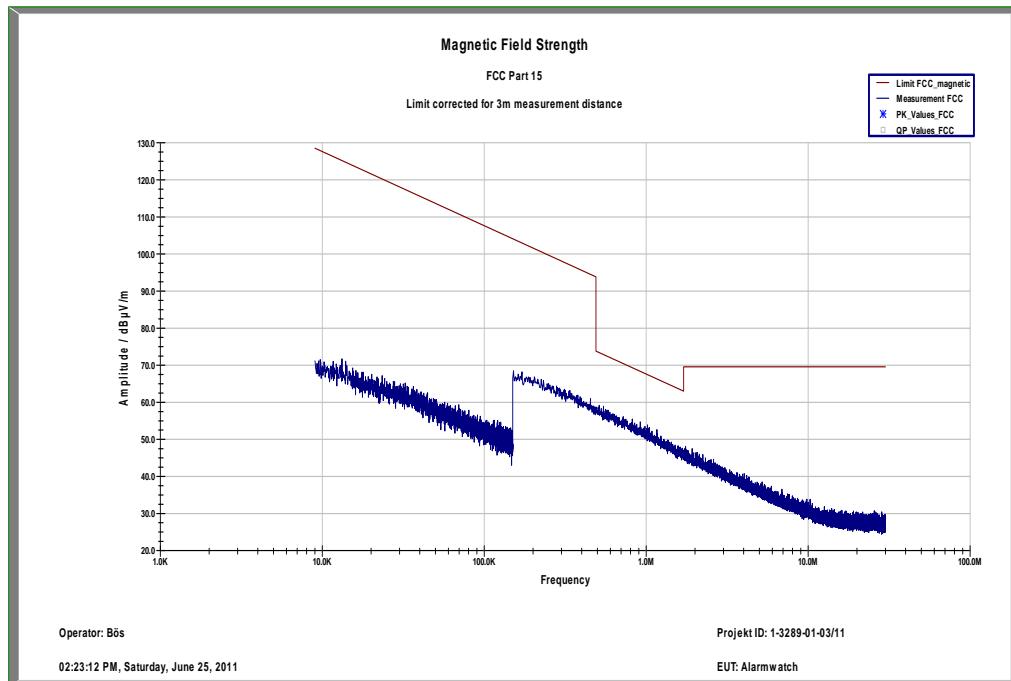

Plot 2: 30 MHz – 1000 MHz


Common Information

EUT: Alarm watch 914
 Serial Number: ---
 Test Description: FCC Part 15
 Operating Conditions: idle
 Operator Name: KRA
 Comment: bat powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)			
Level Unit:	dB μ V/m			
Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

FCC_10m(B)

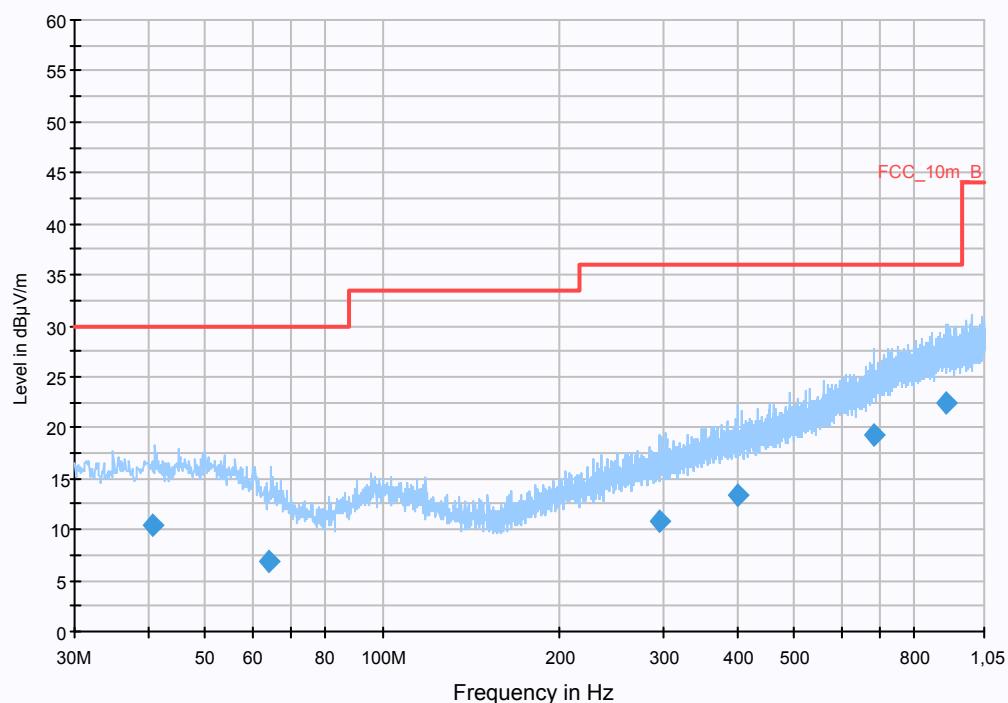

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.743300	10.5	15000.000	120.000	291.0	V	135.0	13.4	19.5	30.0	
64.132650	6.9	15000.000	120.000	169.0	V	-3.0	10.6	23.1	30.0	
296.219100	10.8	15000.000	120.000	148.0	H	80.0	14.4	25.2	36.0	
401.869350	13.4	15000.000	120.000	200.0	V	210.0	16.9	22.6	36.0	
682.587600	19.2	15000.000	120.000	108.0	V	191.0	22.0	16.8	36.0	
901.732050	22.4	15000.000	120.000	400.0	H	1.0	25.2	13.6	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]

@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch

FW 1.0

Antenna: VULB 9163

SN 9163-295, FW ---

Correction Table (vertical): VULP6113

Correction Table (horizontal): VULP6113

Correction Table: Cable_EN_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]


@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]


@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 3: 1 GHz – 12.75 GHz, Antenna vertical

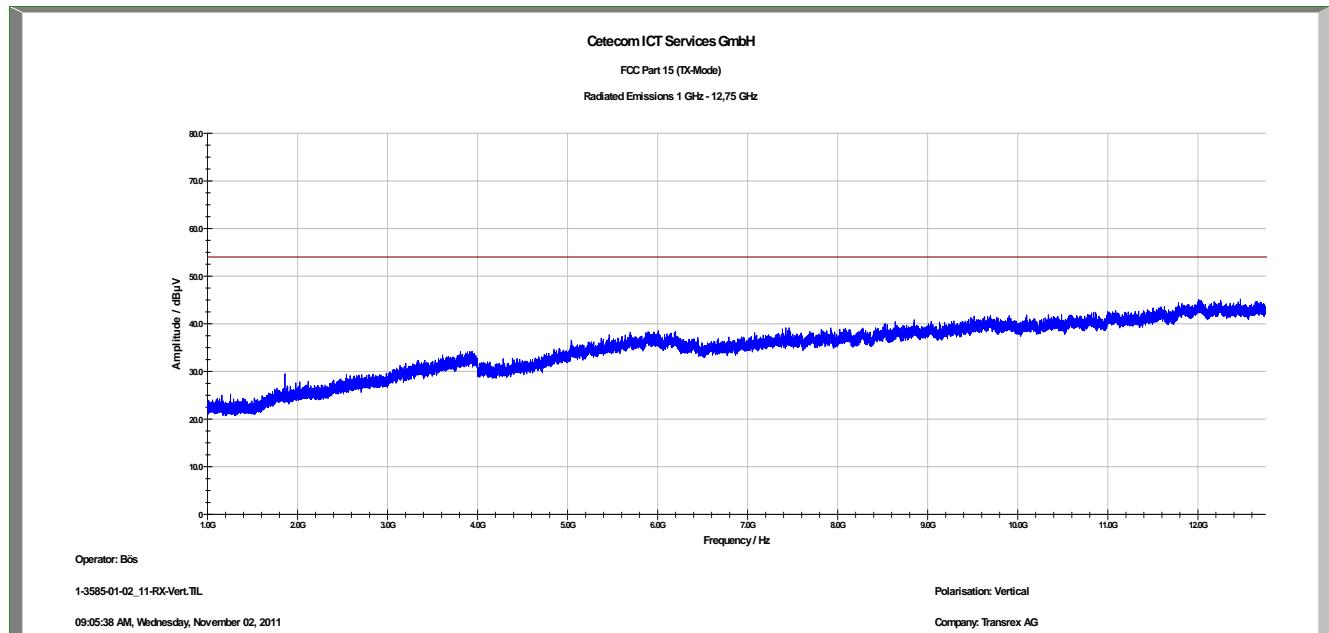

Plot 4: 1 GHz – 12.75 GHz, Antenna horizontal

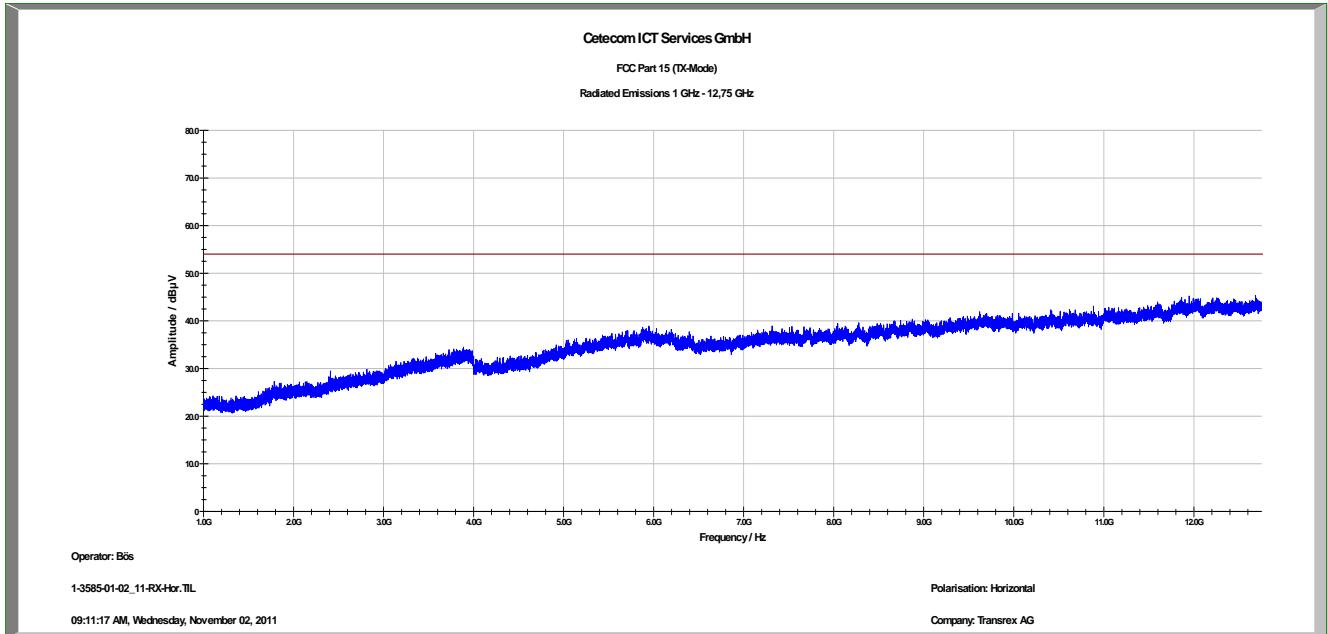

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
2	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
3	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
4	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
5	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
6	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIKI!	08.09.2010	08.09.2012
7	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	17.12.2008	17.12.2011
8	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
9	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
10	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
11	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
12	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	05.03.2009	05.09.2011
13	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
14	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
15	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
16	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
17	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
18	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
19	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
20	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
21	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
22	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
23	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		

24	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
25	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
26	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
27	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	31.07.2009	31.07.2011
28	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
29	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
30	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
31	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
32	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
33	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
34	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
35	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vlk! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress


11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Photographs of the test setup

Photo documentation:

Photo 1:

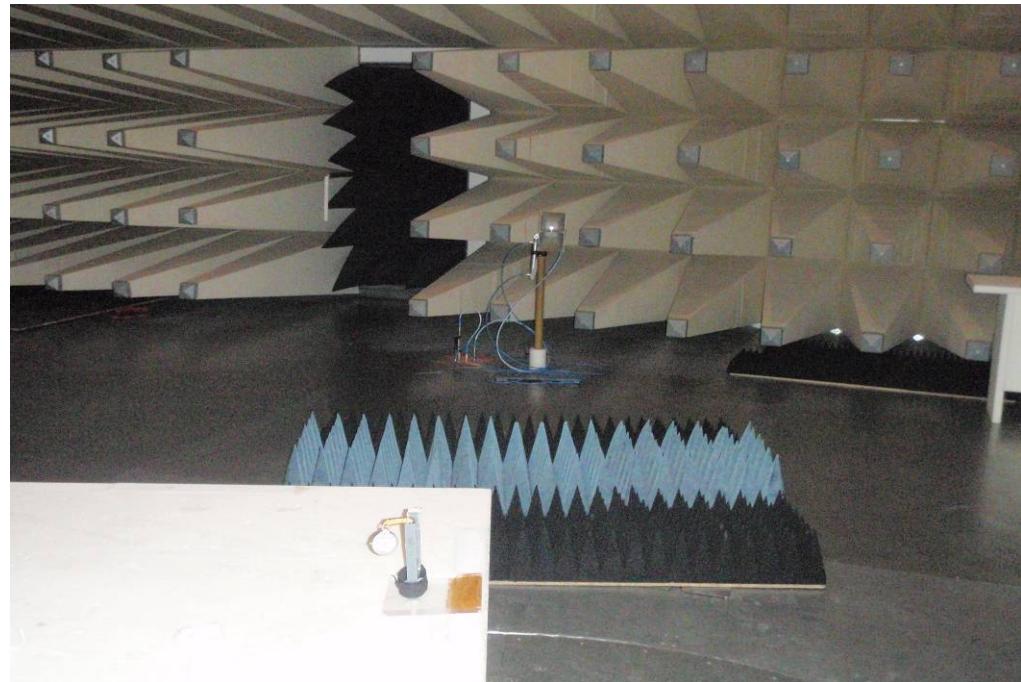

Annex B External photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Photo 6:



Photo 7:



Annex C Internal photographs of the EUT

Photo documentation:

Photo 1:

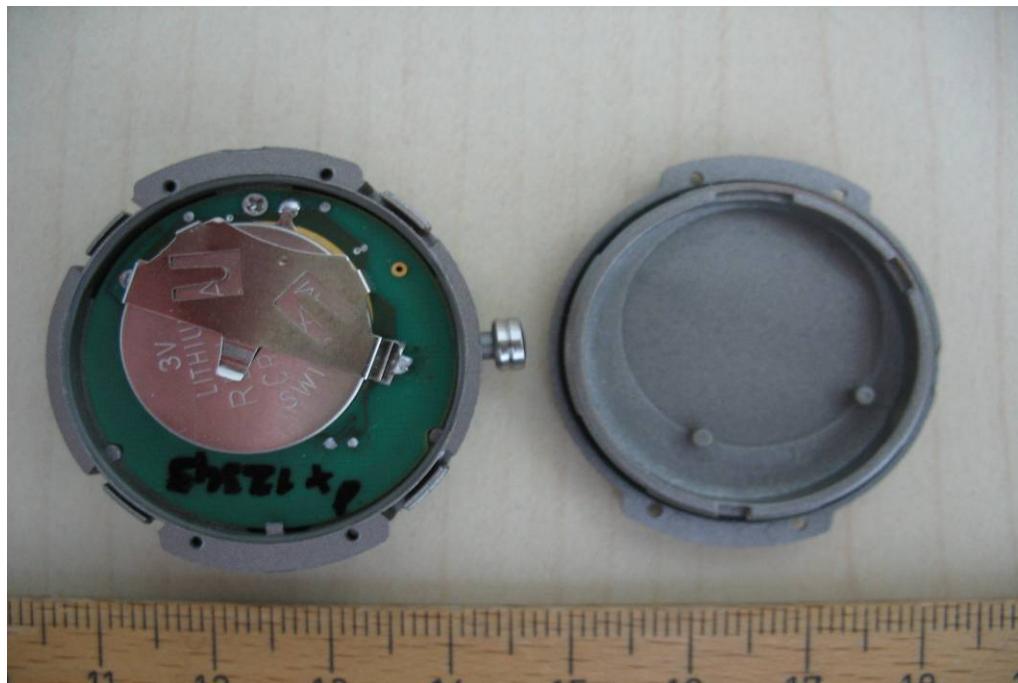


Photo 2:

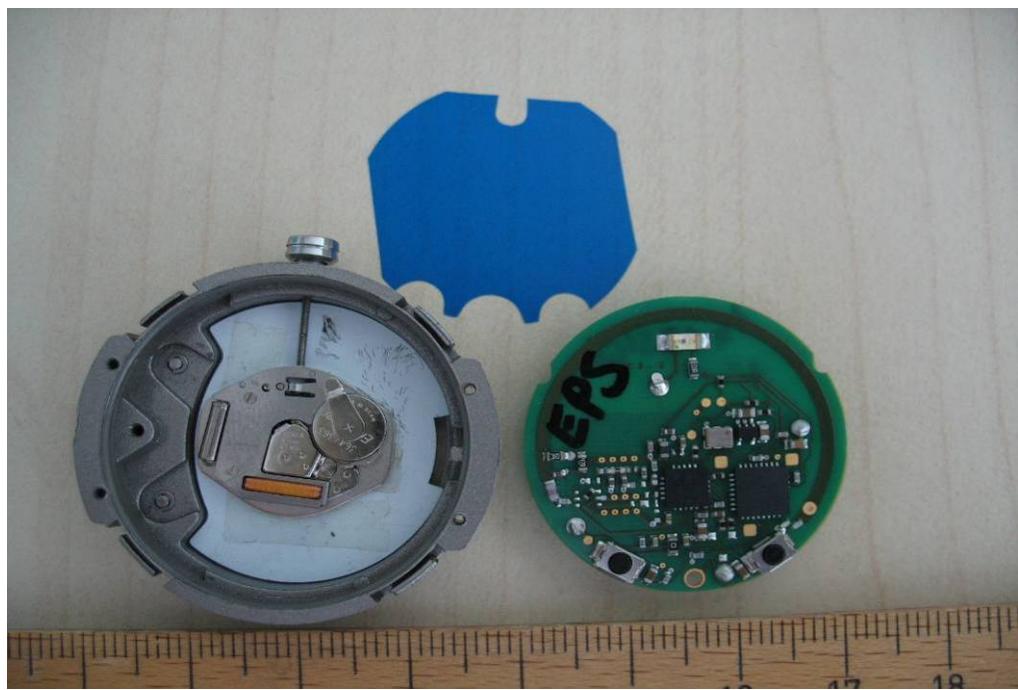


Photo 3:



Photo 4:

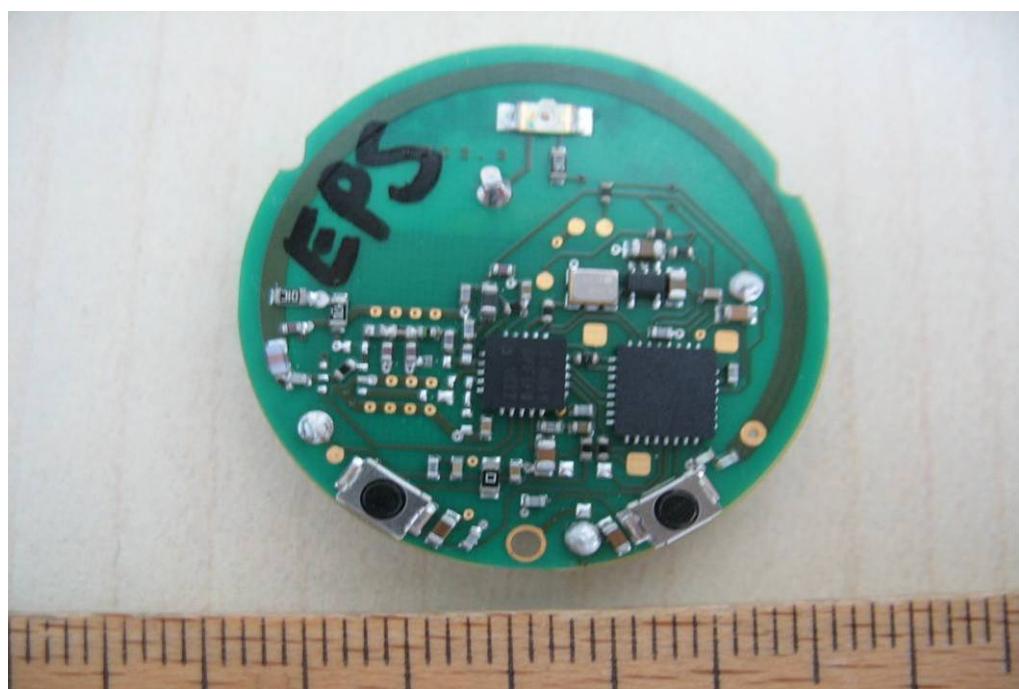


Photo 5:

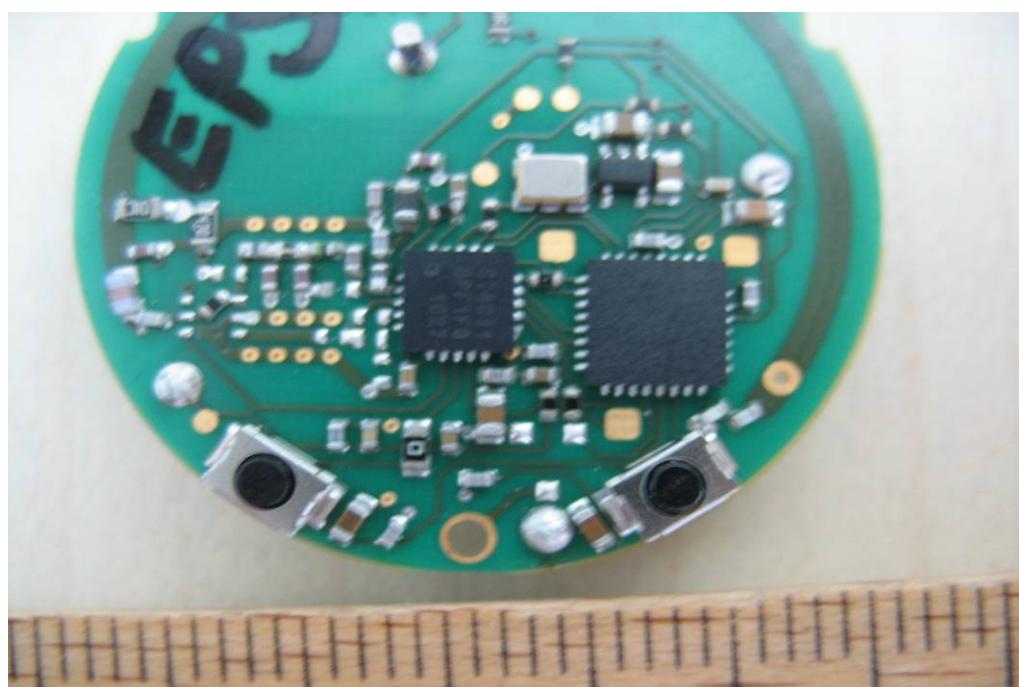


Photo 6:

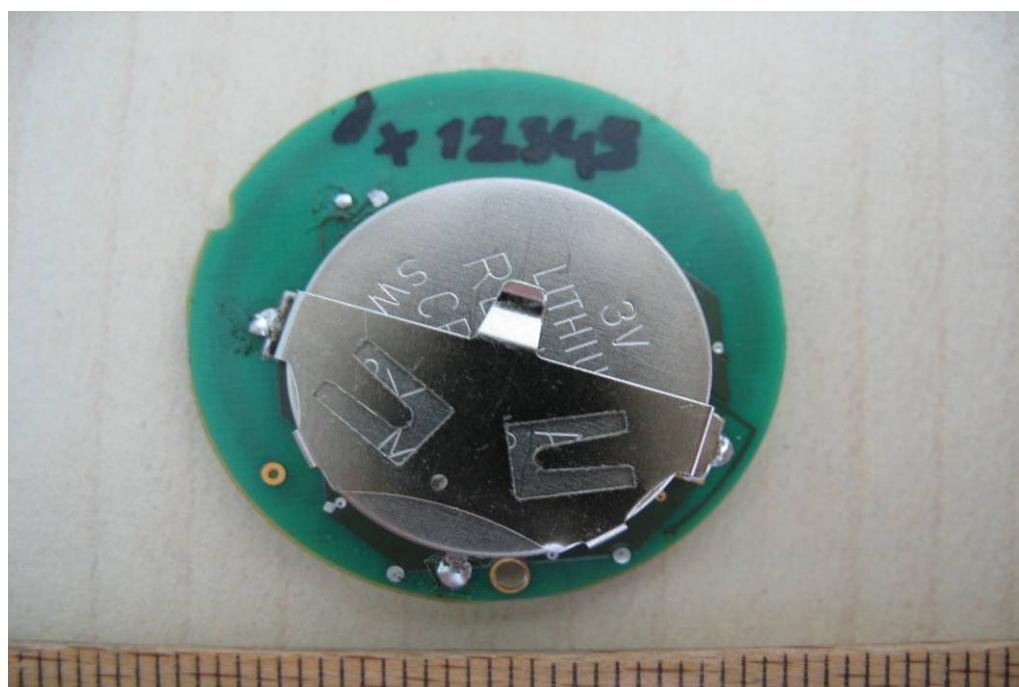


Photo 7:



Photo 8:



Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2011-11-07
-A	Correction of Model Name and IC-certification number. This test report replaces the report 1-3585/11-01-02 dated from 2011-11-07.	2012-01-13

Annex E Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex F Accreditation Certificate

Deutsche Akkreditierungsstelle GmbH
German Accreditation Body

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1
subsection 1 AkkStelleGBV
Signatory to the Multilateral Agreements of
EA, ILAC and IAF for Mutual Recognition

Accreditation



The Deutsche Akkreditierungsstelle GmbH (German Accreditation Body) attests that the testing laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10
66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields:

Wired communications and DECT
Acoustic
Radio
Short Range Devices (SRD)
RFID
WiMax and Richtfunk
Mobile radio (GSM / DCS), Over the Air (OTA) Performance
Electromagnetic Compatibility (EMC) incl. Automotive
Product safety
SAR and Hearing Aid Compatibility (HAC)
Environmental simulation
Smart Card Terminals
Bluetooth
Wi-Fi-Services

The accreditation certificate shall only apply in connection with the notice of accreditation of 13.04.2011 with the accreditation number D-PL-12076-01 and is valid until 03.09.2014. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 82 pages.

Registration number of the certificate: D-PL-12076-01-01

Frankfurt am Main, 13.04.2011

Dipl.-Ing. (FH) Michael Eppen

Head of Division 2

This document is a translation. The definitive version is the original German accreditation certificate.
See notes overleaf.

Deutsche Akkreditierungsstelle GmbH

Office Berlin
Spittelmarkt 10
10117 Berlin

Office Frankfurt am Main
Gartenstraße 6
60594 Frankfurt am Main

Office Braunschweig
Bundesallee 100
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:

EA: www.european-accreditation.org

ILAC: www.ilac.org

IAF: www.iaf.nu

Front side of the certificate

Back side of the certificate

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKs_Akkrediturk_Urk_EN17025-En_incl_Annex.pdf