# **FCC Test Report**

Report No.: AGC124110801F2

FCC ID : ZXAHK-0861

**PRODUCT DESIGNATION**: Bluetooth Keyboard

**BRAND NAME** : HUAKEDA

TEST MODEL : HK-0861

GUANGDONG SHANTOU GAOXIN BOROUGH HUAKEDA

industry co., Ltd.

**DATE OF ISSUE** : Aug. 18, 2011

**STANDARD(S)** : FCC Part 15 Rules

### Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 37

#### **VERIFICATION OF COMPLIANCE**

Applicant	GUANGDONG SHANTOU GAOXIN BOROUGH HUAKEDA INDUSTRY CO., LTD.
Applicant	HENGZE BUILDING 4 FLOOR, SCIENCE AND TECHNOLOGY SOUTH ONE STREET NO 5, GAOXIN SHANTOU GUANGDONG
Manufacturer	GUANGDONG SHANTOU GAOXIN BOROUGH HUAKEDA INDUSTRY CO., LTD.
Manufacturer	HENGZE BUILDING 4 FLOOR, SCIENCE AND TECHNOLOGY SOUTH ONE STREET NO 5, GAOXIN SHANTOU GUANGDONG
Product Designation	Bluetooth Keyboard
Brand Name	HUAKEDA
Model Name	HK-0851, HK-0861, HK-0881, HK-0891, KBAG, HK-0800, HK-0898.
Difference Description	All the same except for the size and appearance, and the main test model is HK-0861.
FCC ID	ZXAHK-0861
Report Number	AGC124110801F2
Date of Test	Aug. 16, 2011 to Aug. 17, 2011

#### **WE HEREBY CERTIFY THAT:**

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By:

Curoky Chen Aug. 18, 2011

Curoky chen

Reviewed By:

Forrest Lei

Aug. 18, 2011

Approved By:

Solger Zhang

Aug. 18, 2011

### **TABLE OF CONTENTS**

1. GENERAL INFORMATION	
1.1 PRODUCT DESCRIPTION	
1.2 TABLE OF CARRIER FREQUENCYS	
1.3 RECEIVER INPUT BANDWIDTH 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
1.6 RELATED SUBMITTAL(S) / GRANT (S)	
1.7 TEST METHODOLOGY	
1.8 TEST FACILITY	
1.9 SPECIAL ACCESSORIES	
1.10 EQUIPMENT MODIFICATIONS	
2. SYSTEM TEST CONFIGURATION	
2.1 CONFIGURATION OF EUT SYSTEM	
2.2 EQUIPMENT USED IN EUT SYSTEM	
3. SUMMARY OF TEST RESULTS	
4. DESCRIPTION OF TEST MODES	
5. PEAK OUTPUT POWER	
5.1 MEASUREMENT PROCEDURE	
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED	
5.4 LIMITS AND MEASUREMENT RESULT	
6 20 DB BANDWIDTH	
6.1 MEASUREMENT PROCEDURE	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
6.3 MEASUREMENT EQUIPMENT USED	
7 CONDUCTED SPURIOUS EMISSION	
7.1 MEASUREMENT PROCEDURE7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3 MEASUREMENT EQUIPMENT USED	
7.4 LIMITS AND MEASUREMENT RESULT	
8 RADIATED EMISSION	1
8.1 MEASUREMENT PROCEDURE	13
8.2 TEST SETUP	18
8.4 TEST RESULT	20
9 BAND EDGE EMISSION	24
9.1 MEASUREMENT PROCEDURE	
9.2 TEST SET-UP	
9.3 TEST RESULT	
10 NUMBER OF HOPPING FREQUENCY	28
10.1 MEASUREMENT PROCEDURE	
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	
10.7 ENVILLO AND IVILACONLIVILIVI INLUULI	

Page 3 of 37

11 TIME OF OCCUPANCY (DWELL TIME)	
11.1 MEASUREMENT PROCEDURE	
12. FREQUENCY SEPARATION	32
12.1 MEASUREMENT PROCEDURE	
APPENDIX I	33
PHOTOGRAPHS OF THE EUT	33
APPENDIX II	37
PHOTOGRAPHS OF THE TEST SETUP	37

Page 4 of 37

#### 1. GENERAL INFORMATION

#### 1.1 PRODUCT DESCRIPTION

The EUT is a **Bluetooth Keyboard** designed as an "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
Rated Output Power	2.68 dBm	
Bluetooth Version:	V2.0 without EDR	
Modulation	GFSK	
Number of channels	79	
Antenna Designation	Integrated Antenna	
Antenna Gain	0.8dBi	
Power Supply	DC3.7V by Built-in Li-ion Battery	
**note: it can't communicate information with PC through USB.		

#### 1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	:	:	
2400~2483.5MHZ	38	2440 MHZ	
	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

#### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Page 5 of 37

#### 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and Is never turned off. For synchronisation with other units only offset are used. It has no relation to the time Of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate te

Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZXAHK-0861** filling to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Page 6 of 37

#### 1.8 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance Co., Ltd.

1&2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, XiXiang, Baoan District, Shenzhen The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

#### 1.9 SPECIAL ACCESSORIES

Refer to section 2.2.

#### 1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 7 of 37


#### 2. SYSTEM TEST CONFIGURATION

### 2.1 CONFIGURATION OF EUT SYSTEM

Configure 1: Normal Hopping



Configure 2: Control by PC to continuous TX.



#### 2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Keyboard	N/A	HK-0861	EUT
2	PC	Lenovo	SL410K	A.E

Page 8 of 37

### 3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

### 4. DESCRIPTION OF TEST MODES

The following operating modes were applied for the related test items.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Hopping

**Note:** All test modes were performed during the testing with configure in section 2.1, but only recording the worst mode test data in the test Report.


Page 9 of 37

#### **5. PEAK OUTPUT POWER**

#### **5.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### **5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

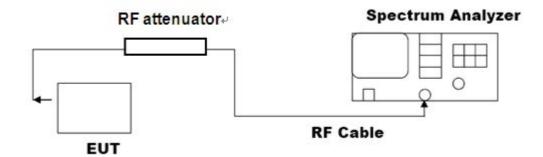

Page 10 of 37

### **5.3 MEASUREMENT EQUIPMENT USED**

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

### **5.4 LIMITS AND MEASUREMENT RESULT**

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.402	2.68	30	Pass	
2.441	2.63	30	Pass	
2.480	2.51	30	Pass	

Page 11 of 37

#### 6 20 DB BANDWIDTH

#### **6.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### **6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

The Same as described in Section 5.2


#### **6.3 MEASUREMENT EQUIPMENT USED**

The same as described in Section 5.3

#### **6.4 LIMITS AND MEASUREMENT RESULTS**

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data (MHz)		Criteria	
	Low Channel	0.976	PASS	
N/A	Middle Channel	0.970	PASS	
	High Channel	0.988	PASS	

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

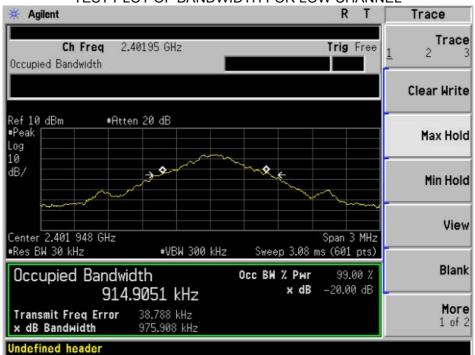

Page 12 of 37





#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Page 13 of 37

#### **7 CONDUCTED SPURIOUS EMISSION**

#### 7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

#### 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

#### 7.3 MEASUREMENT EQUIPMENT USED


The Same as described in section 5.3


#### 7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Report No.: AGC124110801F2 Page 14 of 37


TEST PLOT OF OUT OF BAND EMISSIONS FOR LOW CHANNEL

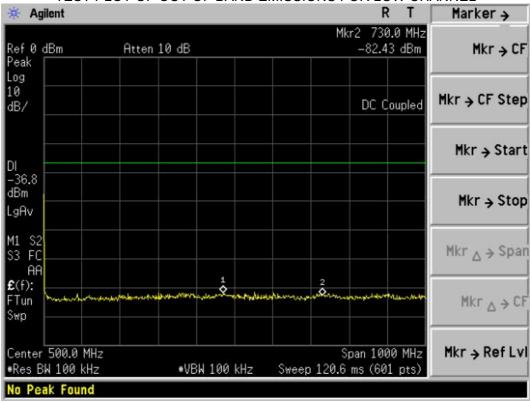


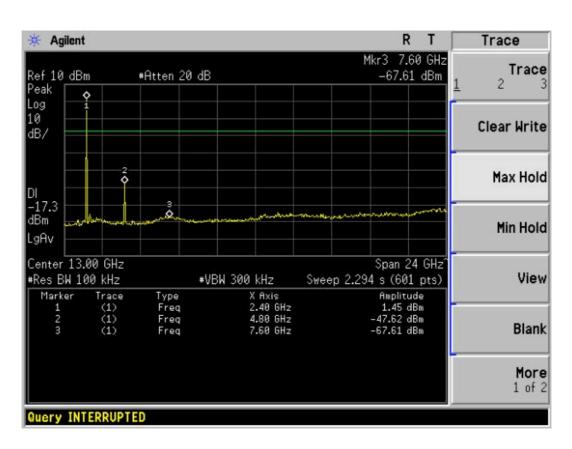

Report No.: AGC124110801F2 Page 15 of 37


TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL

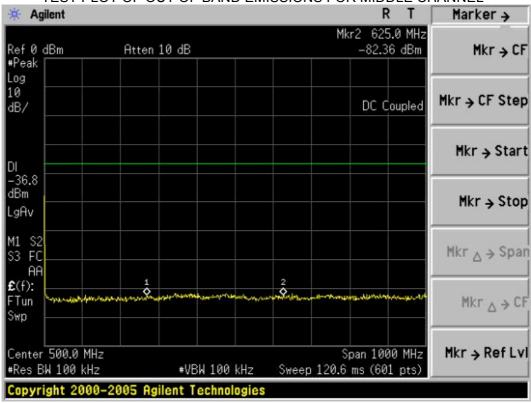


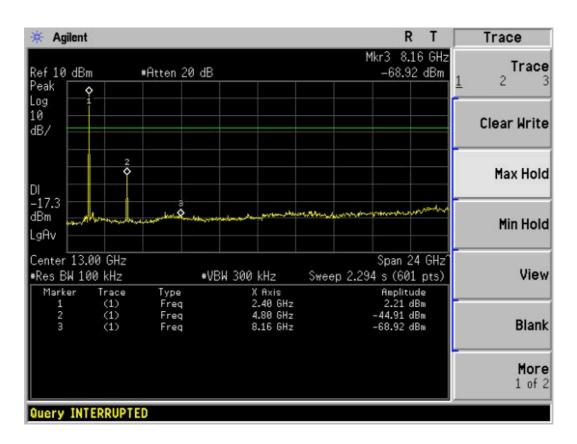

Report No.: AGC124110801F2 Page 16 of 37

TEST PLOT OF OUT OF BAND EMISSIONS FOR HIGH CHANNEL

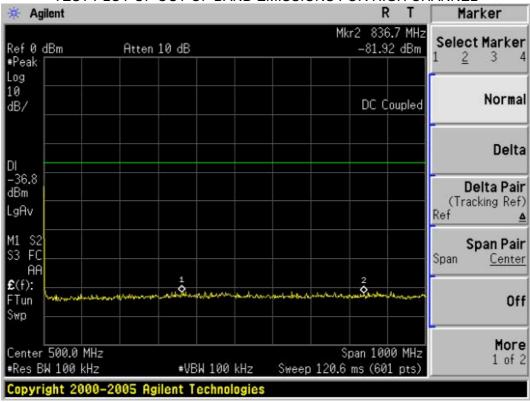

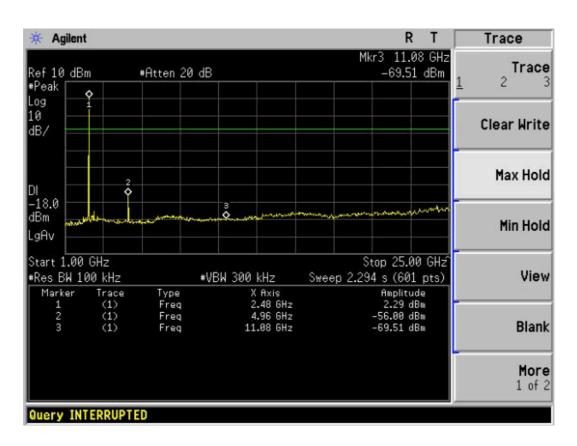

Page 17 of 37

#### 8 RADIATED EMISSION

#### **8.1 MEASUREMENT PROCEDURE**

 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.


Page 18 of 37

The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


### **8.2 TEST SETUP**

### RADIATED EMISSION TEST SETUP BELOW 30MHz

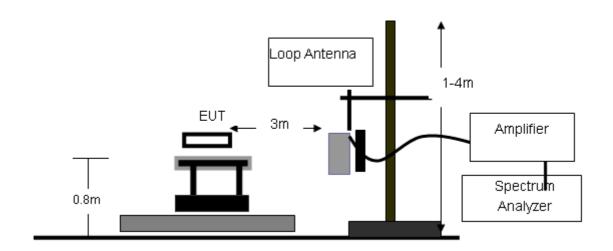


Page 19 of 37

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

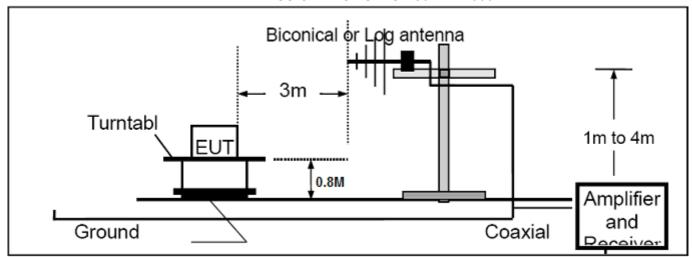

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

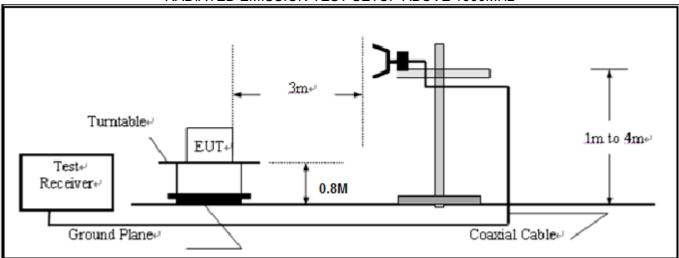

#### **8.3 TEST EQUIMENT LIST**

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	0607030	06/27/2011	06/26/2012
Horn Antenna	EM	EM-AH-10180	N/A	06/27/2011	06/26/2012
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	N/A	06/27/2011	06/26/2012
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/27/2011	06/26/2012
Loop Antenna	Daze	ZN30900N	SEL0097	06/27/2011	06/26/2012
Isolation Transformer	LETEAC	LTBK		06/27/2011	06/26/2012


Page 20 of 37

#### **8.4 TEST RESULT**

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequency to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

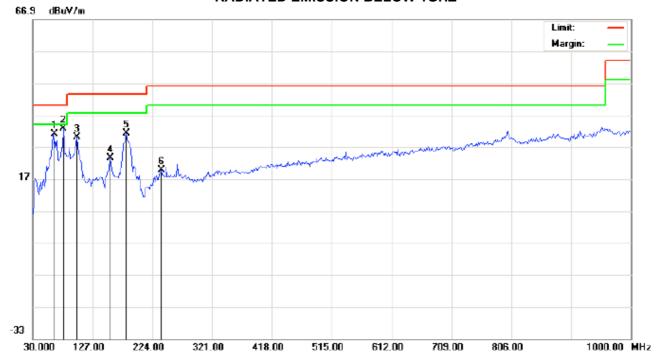

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance: 3m


EUT: Bluetooth Keyboard

M/N: HK-0861

Mode: Normal Hopping

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	.	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		65.5667	27.88	3.26	31.14	40.00	-8.86	peak			
2	*	80.1167	27.53	5.27	32.80	40.00	-7.20	peak			
3		101.1333	19.26	10.71	29.97	43.50	-13.53	peak			
4		156.1000	10.16	13.49	23.65	43.50	-19.85	peak			
5		181.9667	12.87	18.36	31.23	43.50	-12.27	peak			
6		238.5500	2.89	16.98	19.87	46.00	-26.13	peak			

Page 21 of 37

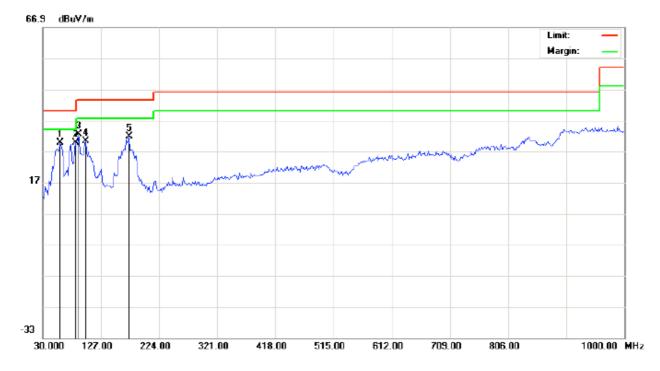

Polarization: Horizontal Site: site #1 Temperature: 26 Limit: FCC Class B 3M Radiation AC 120V/60Hz Humidity: 60 % Power:

EUT: Bluetooth Keyboard Distance: 3m


M/N: HK-0861

Mode: Normal Hopping

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		59.1000	19.09	10.64	29.73	40.00	-10.27	peak			
2	*	84.9666	18.55	11.25	29.80	40.00	-10.20	peak			
3		89.8167	20.14	12.28	32.42	43.50	-11.08	peak			
4		101.1333	14.45	15.77	30.22	43.50	-13.28	peak			
5		173.8833	14.95	16.78	31.73	43.50	-11.77	peak			

Page 22 of 37

### RADIATED EMISSION ABOVE 1GHZ(1-10<sup>th</sup> Harmonics)

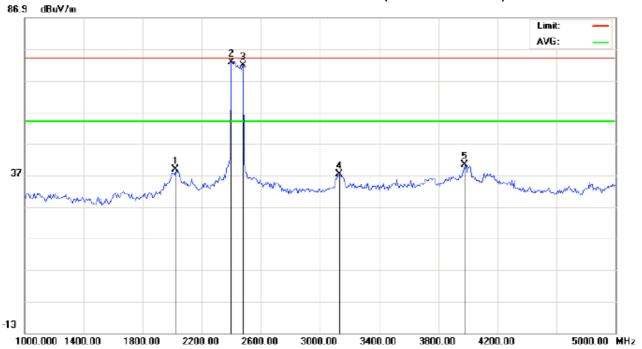

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Bluetooth Keyboard Distance: 3m

M/N: HK-0861

Mode: Normal Hopping

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2020.000	38.88	-0.10	38.78	74.00	-35.22	peak			
2	*	2402.000	72.35	0.32	72.67	74.00	-1.33	peak			
3		2480.000	71.32	0.41	71.73	74.00	-2.27	peak			
4		3133.333	35.53	1.76	37.29	74.00	-36.71	peak			
5		3980.000	35.20	5.07	40.27	74.00	-33.73	peak			

Page 23 of 37

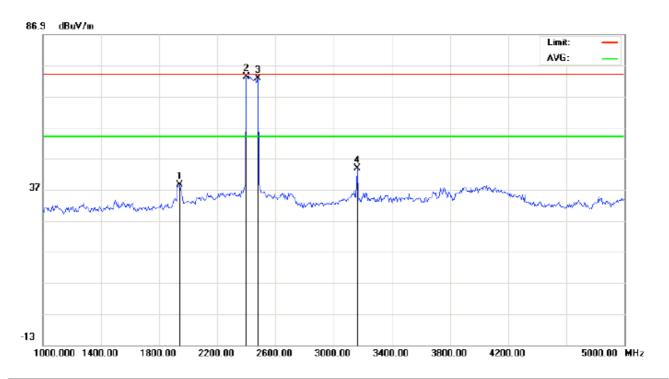

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Keyboard Distance: 3m

M/N: HK-0861

Mode: Normal Hopping

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1940.000	39.22	-0.75	38.47	74.00	-35.53	peak			
2	*	2402.000	72.85	0.32	73.17	74.00	-0.83	peak			
3		2480.000	72.32	0.41	72.73	74.00	-1.27	peak			
4		3160.000	42.08	1.79	43.87	74.00	-30.13	peak			

**Note:** 5~25GHz at leat have 20dB margin. no recording in the test report. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 24 of 37

#### 9 BAND EDGE EMISSION


#### 9.1 MEASUREMENT PROCEDURE

- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>1%Span, VBW>= RBW.
- 3. The band edges was measured and recorded.

#### 9.2 TEST SET-UP

Radiated same as 8.2

#### 9.3 TEST RESULT

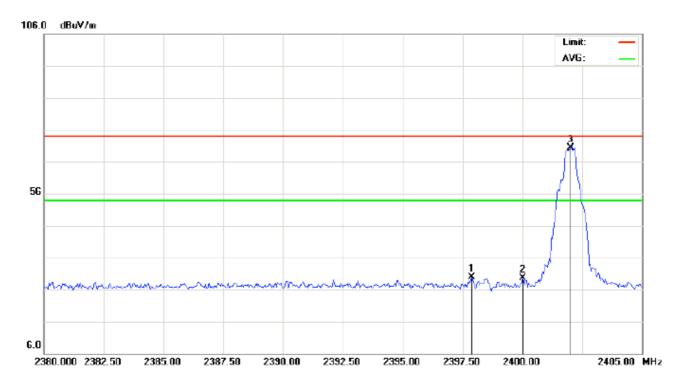


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Bluetooth Keyboard Distance: 3m

M/N: HK-0861 Mode: 2042TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2397.875	29.52	0.32	29.84	74.00	-44.16	peak			
2		2400.000	29.28	0.32	29.60	74.00	-44.40	peak			
3	*	2402.000	70.09	0.32	70.41	74.00	-3.59	peak			

Page 25 of 37

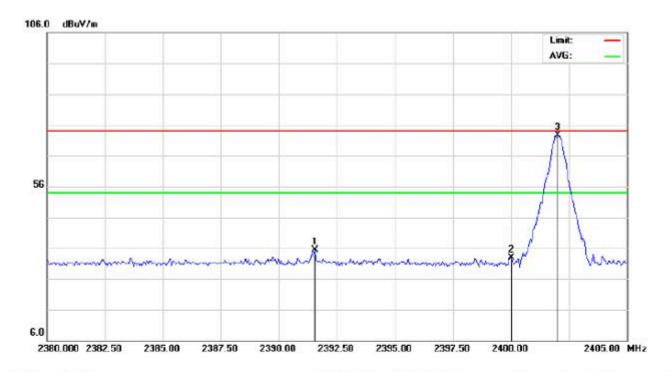

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %


Distance: 3m

EUT: Bluetooth Keyboard

M/N: HK-0861 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2391.542	35.19	0.31	35.50	74.00	-38.50	peak		11	
2		2400.000	32.62	0.32	32.94	74.00	-41.06	peak			
3	*	2402.000	72.42	0.32	72.74	74.00	-1.26	peak			

Page 26 of 37

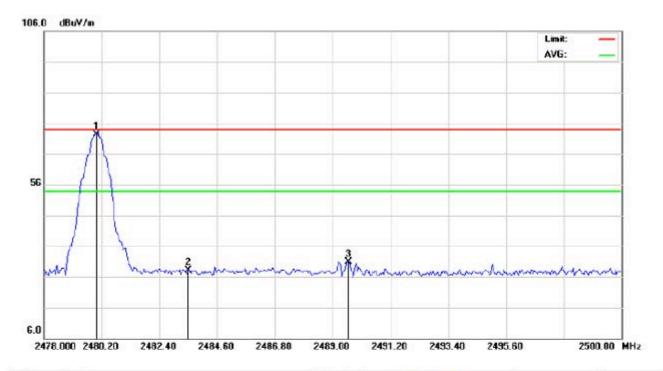


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Bluetooth Keyboard Distance: 3m

M/N: HK-0861 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	72.01	0.41	72.42	74.00	-1.58	peak			
2		2483.500	27.81	0.41	28.22	74.00	-45.78	peak			
3		2489.587	30.47	0.42	30.89	74.00	-43.11	peak			

Page 27 of 37

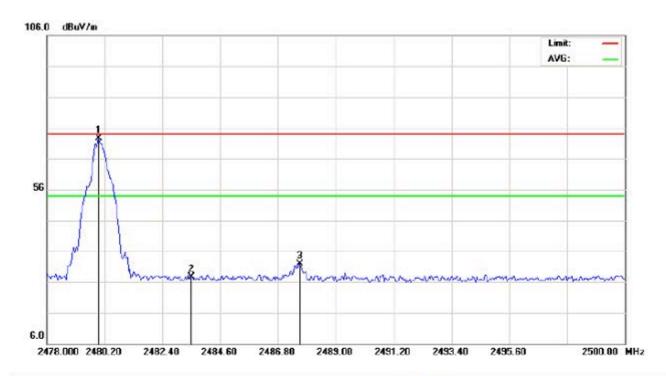

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Bluetooth Keyboard Distance: 3m

M/N: HK-0861 Mode: 2480TX

No. Mk	Mk		Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree		
1	*	2479.980	72.20	0.41	72.61	74.00	-1.39	peak			
2		2483.500	27.10	0.41	27.51	74.00	-46.49	peak			
3		2487.643	31.48	0.42	31.90	74.00	-42.10	peak			

Page 28 of 37

#### 10 NUMBER OF HOPPING FREQUENCY

#### **10.1 MEASUREMENT PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW >=1%Span,VBW=RBW

#### 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2


#### **10.3 MEASUREMENT EQUIPMENT USED**

The Same as described in section 5.3

#### **10.4 LIMITS AND MEASUREMENT RESULT**

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS



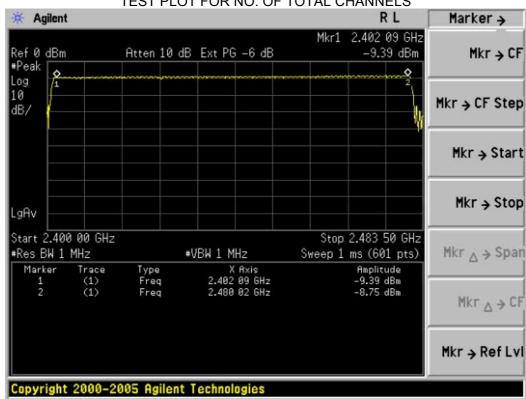

Page 29 of 37

#### 11 TIME OF OCCUPANCY (DWELL TIME)

#### 11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set center frequency of spectrum analyzer = Operating frequency
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

#### 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

#### 11.3 MEASUREMENT EQUIPMENT USED


The same as described in section 5.3

#### 11.4 LIMITS AND MEASUREMENT RESULT


Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.9	31.6	309.33	400
Middle	2.883	31.6	307.52	400
High	2.9	31.6	309.33	400

Low Channel Time 2.9\*(1600/6)/79\*31.6=309.33ms Middle Channel Time 2.883\*(1600/6)/79\*31.6=307.52ms High Channel Time 2.9\*(1600/6)/79\*31.6=309.33ms

Report No.: AGC124110801F2 Page 30 of 37

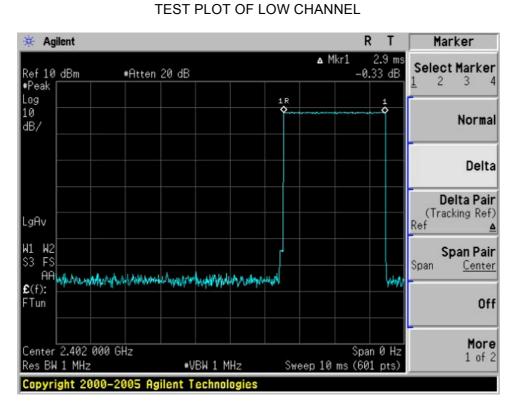


TEST PLOT OF MIDDLE CHANNEL

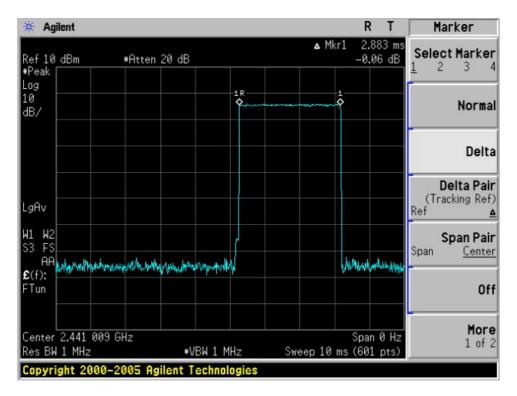

Page 31 of 37

#### TEST PLOT OF HIGH CHANNEL

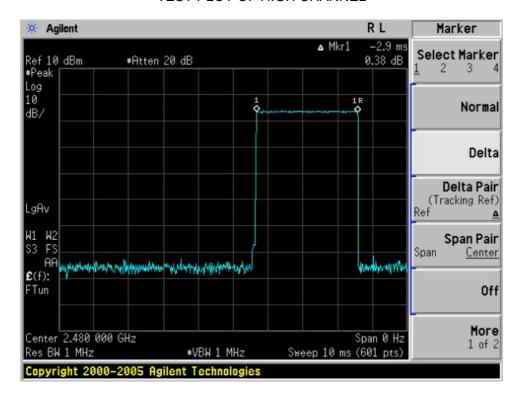

Page 32 of 37

## 12. FREQUENCY SEPARATION 12.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth
  (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function =
  peak; Trace = max hold.

#### 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2

#### 12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3


#### 12.4 LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass

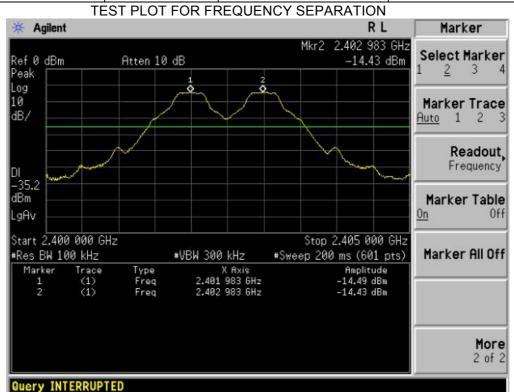

Page 33 of 37

APPENDIX I
PHOTOGRAPHS OF THE EUT
TOP VIEW OF SAMPLE-1

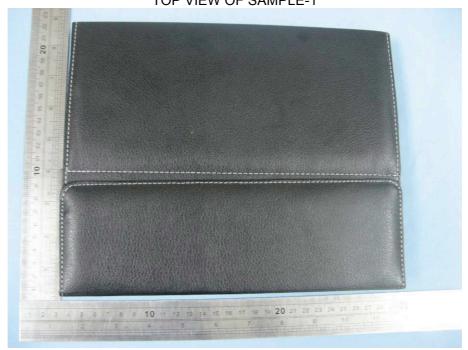

TOP VIEW OF SAMPLE-2




Report No.: AGC124110801F2 Page 34 of 37

TOP VIEW OF SAMPLE




**BOTTOM VIEW OF SAMPLE** 

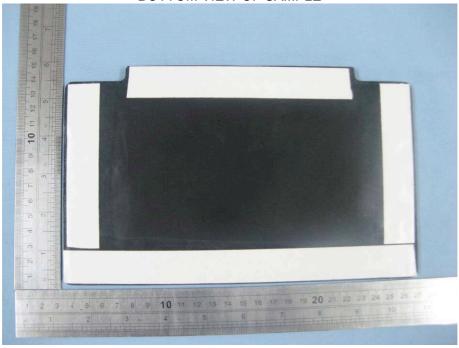



Page 35 of 37



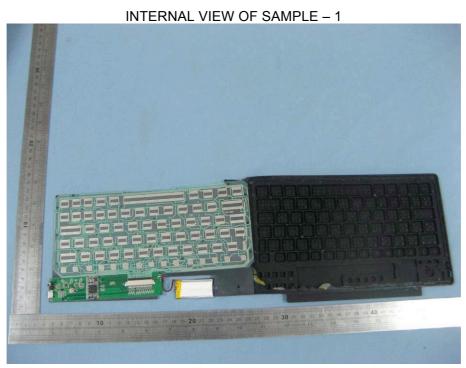


Page 36 of 37



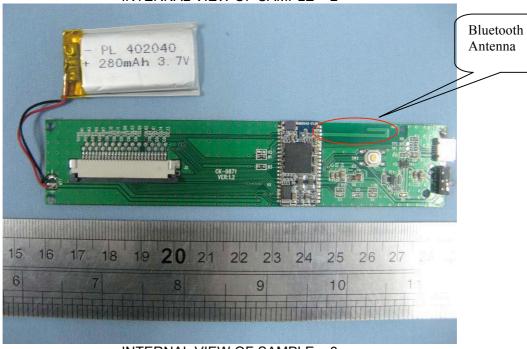



### INTERNAL VIEW OF SAMPLE - 3

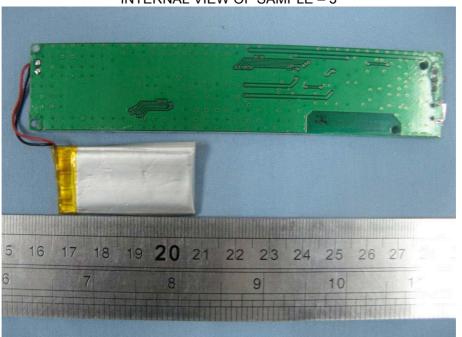

Page 37 of 37

APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP

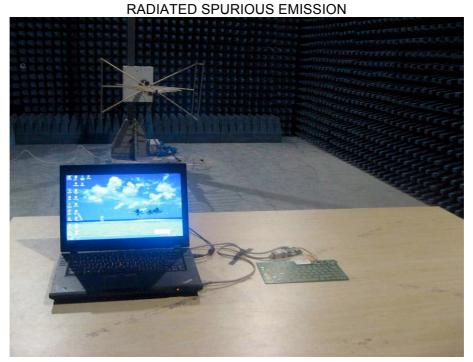

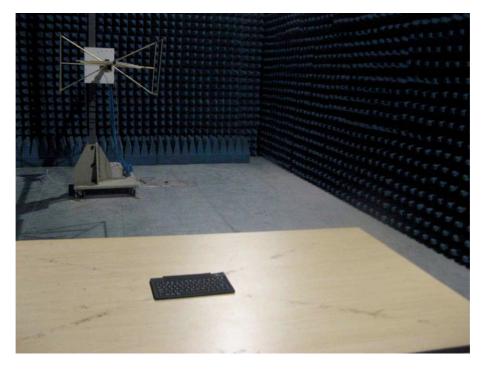

----END OF REPORT----