

# TEST REPORT

of

## FCC Part 15 Subpart C §15.207, §15.249

FCC ID : ZXETP-140B

Equipment Under Test : 2.4 GHz Touch Pointer  
Model Name : TP-140B  
Serial No. : N/A  
Applicant : HuinTech  
Manufacturer : HuinTech  
Date of Test(s) : 2011.08.16 ~ 2011.08.21  
Date of Issue : 2011.09.29

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Grant Lee

Date

2011.09.29

Approved By:



Feel Jeong

Date

2011.09.29

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## Table of contents

<b>1. General information -----</b>	<b>3</b>
<b>2. Fundamental, Spurious emission and edge band radiated emission --</b>	<b>6</b>
<b>3. RF Exposure evaluation -----</b>	<b>12</b>
<b>4. Transmitter AC Power Line Conducted Emission -----</b>	<b>14</b>

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

*SGS Korea Co., Ltd. (Gyeonggi Laboratory)*

*18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040*

*Tel. +82 31 428 5700 / Fax. +82 31 427 2371*

*[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)*

## 1. General information

### 1.1 Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)  
Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040  
[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)  
Telephone : +82 31 428 5700  
FAX : +82 31 427 2371

### 1.2 Details of applicant

Applicant : HuinTech  
Address : 306, Seoul Business Incubation Center, 72, Digital-ro 26-gil, Guro-gu, Seoul, Korea  
Contact Person : Kwak, Hee Soo  
Phone No. : +82 2 6745 6800  
Fax No. : +82 2 6745 6801

### 1.3. Description of EUT

<b>Kind of Product</b>	2.4 GHz Touch Pointer
<b>Model Name</b>	TP-140B
<b>Serial Number</b>	N/A
<b>Power Supply</b>	DC 3.8 V (Battery type)
<b>Frequency Range</b>	2 420 MHz ~ 2 480 MHz
<b>Modulation Technique</b>	GFSK
<b>Number of Channels</b>	4
<b>Antenna Type</b>	PCB Antenna
<b>Antenna Gain</b>	-5.23 dBi

### 1.4 Details of modification

-N/A

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)**

**18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040**

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)

**1.5. Test equipment list**

Equipment	Manufacturer	Model	Serial Number	Cal Due.
Signal Generator	Agilent	E4438C	MY42082477	Mar 31, 2012
Spectrum Analyzer	R & S	FSV30	100955	Apr. 01, 2012
Power Meter	Agilent	E4416A	GB4129123	Mar. 31, 2012
Power Sensor	Agilent	E9327A	US40441371	Mar. 30, 2012
Attenuator	Agilent	8495B	MY42141937	Apr. 01, 2012
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Sep. 29, 2011
DC power Supply	Agilent	U8002A	MY48490027	Jan. 01, 2012
Preamplifier	H.P.	8447F	2944A03909	Jul. 04, 2012
Preamplifier	R & S	SCU18	10117	Mar. 23, 2012
Test Receiver	R & S	ESU26	100109	Feb. 21, 2012
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	390	Apr. 27, 2013
Horn Antenna	Rohde & Schwarz	HF 906	100326	Oct. 08, 2011
Antenna Master	EMCO	1050	1228	N.C.R.
Turn Table	Daeil EMC	DI-1500	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170223	Jun. 30, 2012
Preamplifier	SCHWARZBECK MESSELEKTRONIK	JS44-18004000-35-8P	1546891	Jul. 03, 2012

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.6. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part15		
Section in FCC 15	Test Item	Result
15.209(a) 15.249(a) 15.249(d) 15.205	Fundamental, Spurious emission and edge band radiated emission	Complied
1.1307(b)(1)	Maximum Permissible Exposure (Exposure of Humans to RF Fields)	Complied
15.207	Transmitter AC Power Line Conducted Emission	Complied

## 1.7. Test report revision


Revision	Report number	Description
0	F690501/RF-RTL004911	Initial
1	F690501/RF-RTL004911-1	Add Test equipment Horn antenna & Preamplifier

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. Fundamental, Spurious emission and edge band radiated emission

### 2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

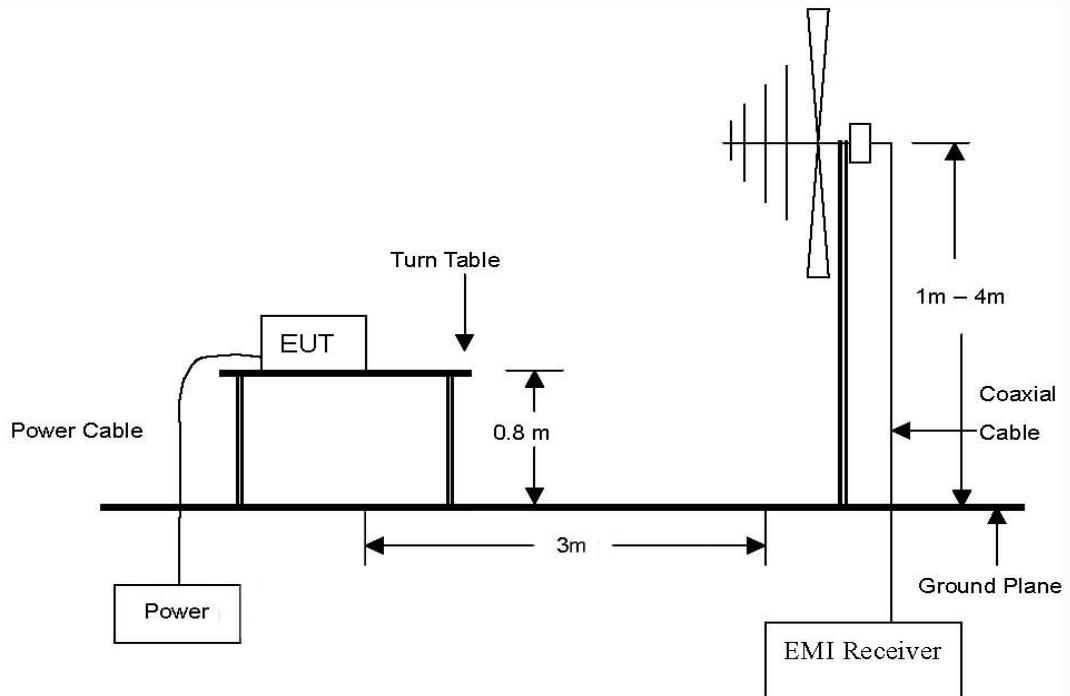

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

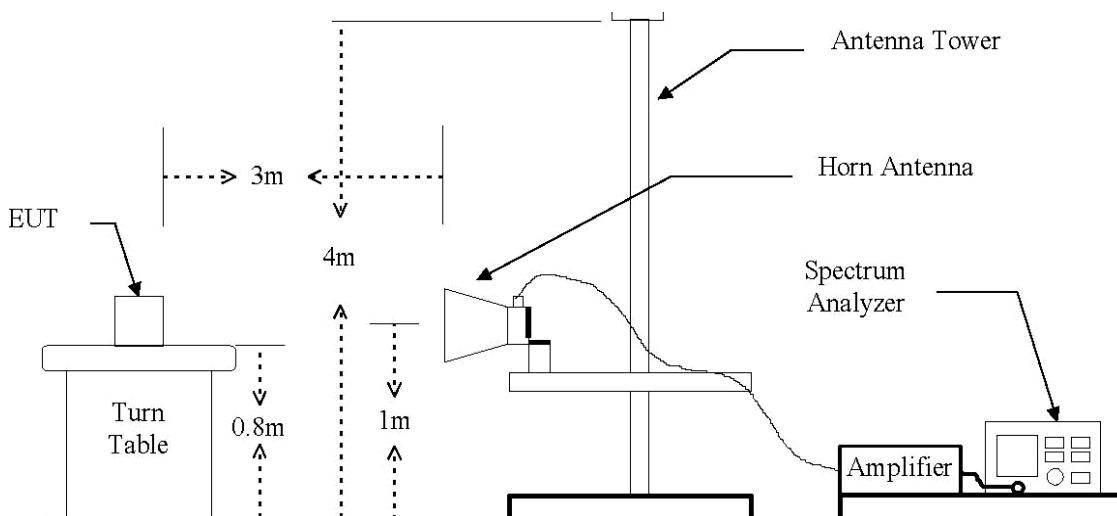

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.2. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic Chamber The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 2.3. Limit

In the section 15.249(a) :

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (mV/m)	Field strength of harmonics ( $\mu$ V/m)
902 ~ 928 MHz	50	500
2 400 ~ 2 483.5 MHz	50	500
5 725 ~ 5 875 MHz	50	500
24.0 ~ 24.25 GHz	250	2 500

In the section 15.209(a) :

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Fundamental frequency (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (m)
30 ~ 88	100*	3
88 ~ 216	150*	3
216 ~ 960	200*	3
Above 960	500	3

Remark:

Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the above emission table, the tighter limit applies at the band edges.

Fundamental frequency (MHz)	Field strength ( $\mu$ V/m at 3 meter)	Field strength (dB $\mu$ V/m at 3 meter)
30 ~ 88	100	40
88 ~ 216	150	43.5
216 ~ 960	200	46
Above 960	500	54

(e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test result

Ambient temperature : (23 ± 2) °C

Relative humidity : 47 % R.H.

### 2.4.1. Below 1 GHz

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Below 100.000	Not Detected	-	-	-	-	-	-	-
114.471	35.50	Peak	H	11.50	-26.60	20.40	43.50	23.10
126.232	32.50	Peak	H	10.90	-26.50	16.90	43.50	26.60
176.874	30.90	Peak	H	10.30	-25.90	15.30	43.50	28.20
195.708	30.10	Peak	H	9.50	-25.80	13.80	43.50	29.70
Above 200.000	Not Detected	-	-	-	-	-	-	-

#### Remark

1. To get a maximum emission level from the EUT, the EUT was moved throughout the X, Y and Z planes.(Worst case is X-plane)
2. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test.

**2.4.2. Above 1 GHz**

## A. Low Channel (2 420 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 419.70	64.55	Peak	V	28.03	5.29	97.87	114.00	16.13
2 419.70	36.48	Average	V	28.03	5.29	69.80	94.00	24.20
2 390.00	24.45	Peak	V	28.09	5.23	57.77	74.00	16.23
2 390.00	16.11	Average	V	28.09	5.23	49.43	54.00	4.57

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 840.00	53.92	Peak	V	32.72	-36.79	49.85	74.00	24.15
7 259.92	52.71	Peak	V	35.89	-31.40	57.20	74.00	16.80
7 259.92	33.44	Average	V	35.89	-31.40	37.93	54.00	16.07
Above 7 300.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## B. Middle Channel (2 440 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 440.10	62.33	Peak	V	28.00	5.18	95.51	114.00	18.49
2 440.10	35.59	Average	V	28.00	5.18	68.77	94.00	25.23

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 880.56	52.37	Peak	V	32.90	-36.66	48.61	74.00	25.39
7 320.00	49.01	Peak	V	35.95	-30.70	54.26	74.00	19.74
7 320.00	33.65	Average	V	35.95	-30.70	38.90	54.00	15.10
Above 7 400.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## C. High Channel (2 480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 480.20	61.43	Peak	V	28.08	5.35	94.86	114.00	19.14
2 480.20	35.18	Average	V	28.08	5.35	68.61	94.00	25.39
2 483.50	36.74	Peak	V	28.09	5.37	70.20	74.00	3.80
2 483.50	17.34	Average	V	28.09	5.37	50.80	54.00	3.20

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 960.48	50.55	Peak	V	33.22	-36.35	47.42	74.00	26.58
7 440.40	45.56	Peak	V	35.94	-28.46	53.04	74.00	20.96
Above 7 500.00	Not Detected	-	-	-	-	-	-	-

**Remarks :**

- “\*\*” means the restricted band.
- To get a maximum emission level from the EUT, the EUT was moved throughout the X, Y and Z planes. (Worst case is X-lane)
- Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental Frequency.
- Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
- Average test would be performed if the peak result were greater than the average limit.
- Actual = Reading + AF - Amp Gain + CL

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 5. RF Exposure Evaluation

### 5.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time
(A) Limits for Occupational /Control Exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300 – 1 500	--	--	F/1500	6
<u>1 500 – 100 000</u>	--	--	<u>1</u>	<u>30</u>

#### 5.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where  $P_d$  = power density in  $\text{mW/cm}^2$

$P_{out}$  = output power to antenna in  $\text{mW}$

$G$  = gain of antenna in linear scale

$\pi = 3.1416$

$R$  = distance between observation point and center of the radiator in  $\text{cm}$

$P_d$  the limit of MPE,  $1 \text{ mW/cm}^2$ . If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 5.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

### 5.1.3. Output Power into Antenna & RF Exposure Evaluation Distance


Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	LIMITS (mW/cm <sup>2</sup> )
Low	2 420	-1.63	-5.23	0.000 04	1
Middle	2 440	-1.83	-5.23	0.000 04	1
High	2 480	-2.91	-5.23	0.000 03	1

Note :

1. The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup> .

## 6. Transmitter AC Power Line Conducted Emission

### 6.1. Test Setup

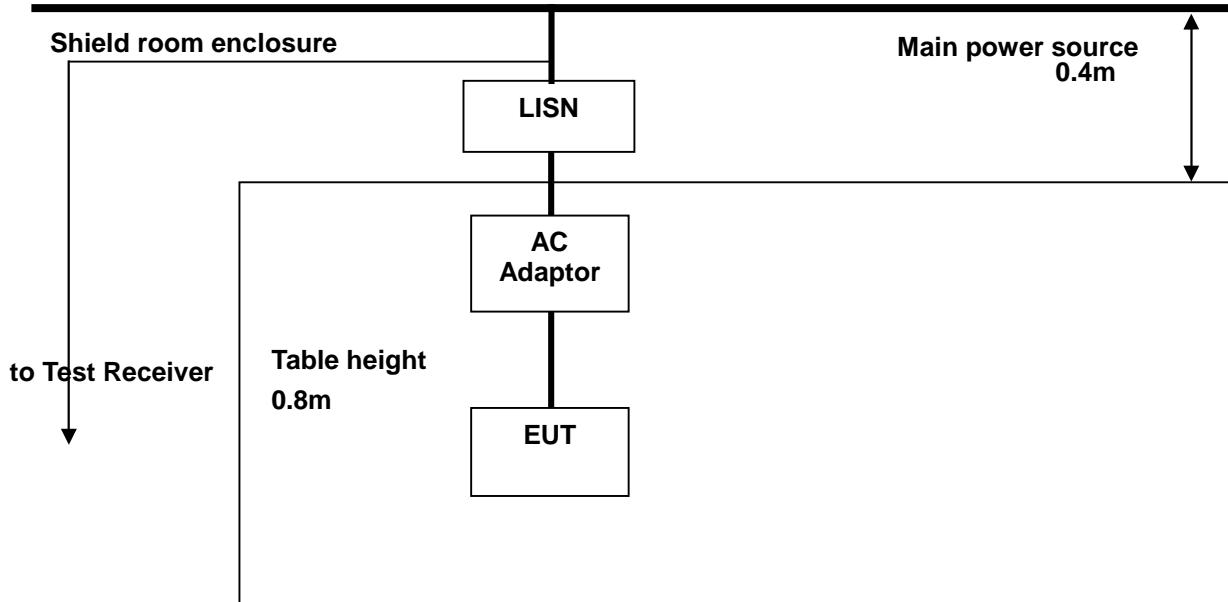

### 6.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

\* Decreases with the logarithm of the frequency.

### 6.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5 m x 3.6 m x 3.6 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) x 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 6.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line. The conducted emission was measured in three channels of EUT. Worst case is high channel.


Ambient temperature : (23 ± 2) °C  
Relative humidity : 47 % R.H.  
Frequency range : 0.15 MHz – 30 MHz  
Measured Bandwidth : 9 kHz

### A. Low Channel (2 420 MHz)


FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE	LIMIT(dB $\mu$ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.15	55.00	34.70	H	66.00	56.00	11.00	21.30
0.20	50.10	37.20	H	63.61	53.61	13.51	16.41
0.35	40.10	26.50	H	59.08	49.08	18.98	22.58
0.50	35.40	21.40	H	56.08	46.08	20.68	24.68
3.23	31.20	22.50	H	56.00	46.00	24.80	23.50
0.15	53.10	33.30	N	66.00	56.00	12.90	22.70
0.19	48.60	32.10	N	64.04	54.04	15.44	21.94
0.33	38.80	23.70	N	59.45	49.45	20.65	25.75
0.50	32.90	18.30	N	56.08	46.08	23.18	27.78
3.16	24.70	13.10	N	56.00	46.00	31.30	32.90

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Hot)

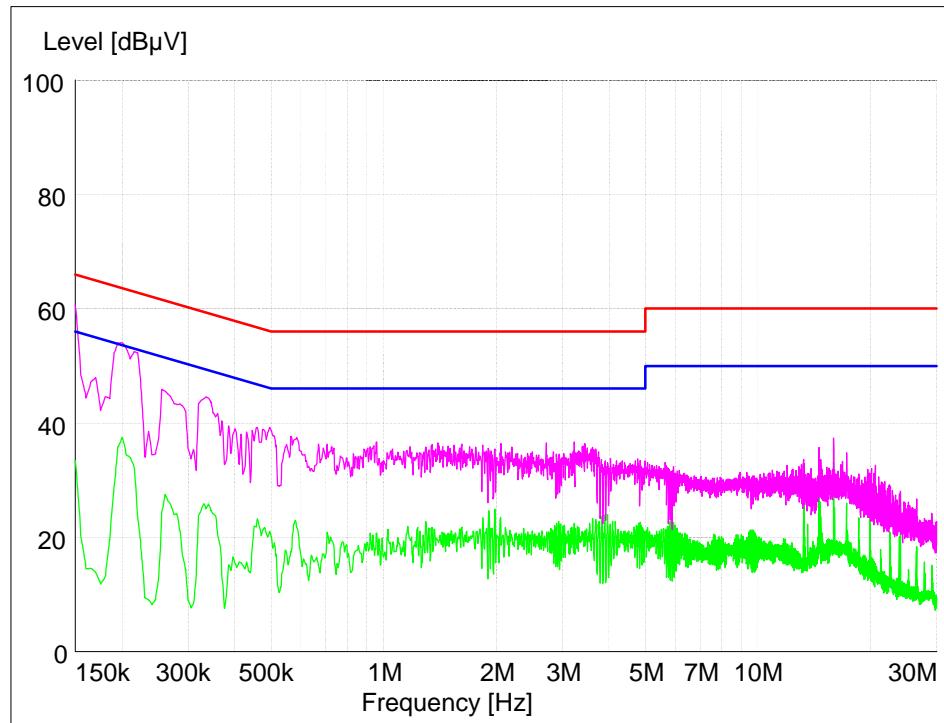

Test mode : (Neutral)

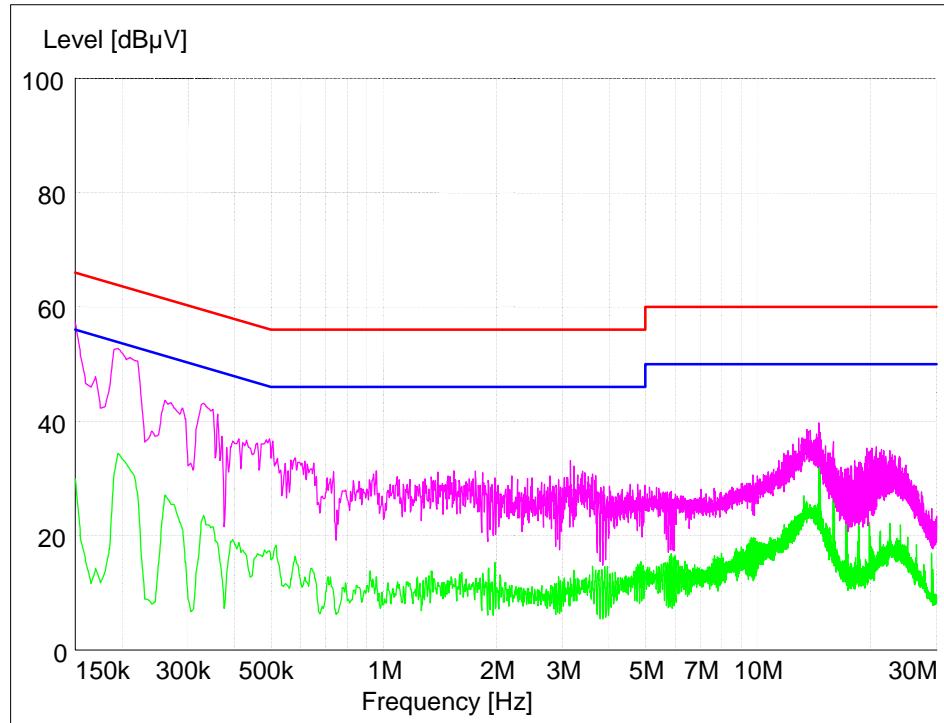

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*