

# **FCC RADIO TEST REPORT**

**FCC ID: ZXL-EZTWOB1** 

Of

Product Name: 3G senior feature phone

Brand Name: Snapfon

Model No.: EZ TWO-B1

Series Model: N/A

Test Report Number: STS140737F01

Issued for

SeniorTech LLC

100 Cherokee Blvd, Suite 216, Chattanooga, TN 37405

Issued by

Shenzhen STS Test Services Co., Ltd.

1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong,
Baoan District, Shenzhen, China

TEL: +86-755 6119 6328

FAX: +86-755 6119 6328

E-mail:sts@stsapp.com

This test report may be reproduced in full only.

All Test Data Presented in this report is only applicable to presented Test sample.

# **TEST RESULT CERTIFICATION**

Applicant's name .....: SeniorTech LLC

Address.....: 100 Cherokee Blvd, Suite 216, Chattanooga, TN 37405

Manufacture's Name .....: ENJOY GROUP(HK) CO,LIMITED

Address..... : Rm.1305A, Fujian dasha Caitian road, Futian District, Shenzhen,

Guangdong, China

Product name.....: 3G senior feature phone

Band name .....: Snapfon

Model and/or type reference : EZ TWO-B1

Standards..... FCC Part 22H and 24E

Test procedure .....: ANSI C63.4-2009

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test .....

Date (s) of performance of tests ... July 20, 2014 ~ July 28, 2014

Date of Issue ...... July 29, 2014

Test Result......Pass

Testing Engineer :

(Tony Liu)

Technical Manager:

Authorized Signatory:

(Vita Li)

(Bovey Yang)

# **TABLE OF CONTENTS**

1.1 PRODUCT DESCRIPTION4
1.2 RELATED SUBMITTAL(S) / GRANT (S)
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY
1.5 MEASUREMENT INSTRUMENTS5
1.6 SPECIAL ACCESSORIES5
1.7 EQUIPMENT MODIFICATIONS5
2. SYSTEM TEST CONFIGURATION6
2.1 EUT CONFIGURATION6
2.2 EUT EXERCISE
2.3 GENERAL TECHNICAL REQUIREMENTS
2.4 CONFIGURATION OF EUT SYSTEM7
3. SUMMARY OF TEST RESULTS8
4. DESCRIPTION OF TEST MODES8
5. OUTPUT POWER
5. OUTPUT POWER9
5. OUTPUT POWER
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15         6.2 RADIATED SPURIOUS EMISSION       17
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15         6.2 RADIATED SPURIOUS EMISSION       17         7. FREQUENCY STABILITY       23
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15         6.2 RADIATED SPURIOUS EMISSION       17         7. FREQUENCY STABILITY       23         7.1 MEASUREMENT METHOD       23
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15         6.2 RADIATED SPURIOUS EMISSION       17         7. FREQUENCY STABILITY       23         7.1 MEASUREMENT METHOD       23         7.2 PROVISIONS APPLICABLE       23
5. OUTPUT POWER       9         5.1 CONDUCTED OUTPUT POWER       9         5.2 RADIATED OUTPUT POWER       12         6. SPURIOUS EMISSION       15         6.1 CONDUCTED SPURIOUS EMISSION       15         6.2 RADIATED SPURIOUS EMISSION       17         7. FREQUENCY STABILITY       23         7.1 MEASUREMENT METHOD       23         7.2 PROVISIONS APPLICABLE       23         7.3 MEASUREMENT RESULT       24

8.3 MEASUREMENT RESULT27	
9. EMISSION BANDWIDTH28	
9.1 MEASUREMENT METHOD	
9.2 PROVISIONS APPLICABLE	
9.3 MEASUREMENT RESULT	
10. BAND EDGE	
10.1 MEASUREMENT METHOD29	
10.2 PROVISIONS APPLICABLE	
10.3 MEASUREMENT RESULT	
APPENDIX I	
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION30	
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)38	
EMISSION BANDWIDTH (-26DBC)38	
APPENDIX III47	
TEST PLOTS FOR BAND EDGES47	
APPENDIX IV52	
PHOTOGRAPHS OF TEST SETUP52	

# 1. GENERAL INFORMATION

## 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	3G senior feature phone		
Hardware version:	W57C_MB_REV1.1		
Software version:			
FCC ID:	ZXL-EZTWOB1		
Frequency Bands:	☐GSM 850 ☐PCS 1900 (U.S. Bands) ☐GSM 900 ☐DCS 1800 (Non-U.S. Bands) U.S. Bands: ☐UMTS FDD Band II ☐UMTS FDD Band V Non-U.S. Bands:		
	UMTS FDD Band I UMTS FDD Band VIII		
Bluetooth	Frequency:2402 – 2480 MHz Modulation: GFSK(1Mbps),π/4-DQPSK(2Mbps),8-DPSK(3Mbps)		
Antenna:	Integrated Antenna		
Antenna gain:	0 dBi		
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter		
Battery parameter:	DC 3.7V/1000mAh		
Adapter Input:	AC100-240V, 50-60Hz, 150mA		
Adapter Output:	DC 5.0V, 500mA		
GPRS/EDGE Class	Multi-Class12		
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Nominal DC3.7 V)		
Extreme Temp. Tolerance	-10℃ to +50℃		
** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer. The FUT			

<sup>\*\*</sup> Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

#### 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZXL-EZTWOB1** filing to comply with the FCC Part 22H&24E.

#### 1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

#### 1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

BZT Testing Technology Co.,Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC Registration No.: 701733

#### 1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2015.6.26
TEST RECEIVER	R&S	ESCI	A0304218	2015.6.26
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2015.7.21
COMMUNICATION TESTER	R&S	CMU200	A0304247	2015.7.21
TEST RECEIVER	R&S	FCKL1528	A0304230	2015.6.26
LISN	SCHWARZBECK	NSLK8127	A0304233	2015.6.26
CLIMATE CHAMBER	ALBATROSS			2015.6.26
Loop Antenna	Daze	ZN30900N	SEL0097	2015.6.26
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2015.4.26
Horn Antenna	EM	EM-AH-10180	N/A	2015.4.26

#### 1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

#### 1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

# 2. SYSTEM TEST CONFIGURATION

#### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
4	Output	Conducted output power	22 012(a) / 24 222 (b)
1	Power	Radiated output power	22.913(a) / 24.232 (b)
Courieus		Conducted	
2 Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238	
	Emission	Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

## 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

EUT

Table 2-1 Equipment Used in EUT System

		1 1	,	
Item	Equipment	Model No.	ID or Specification	Note
1	3G senior feature phone	EZ TWO-B1	FCC ID: ZXL-EZTWOB1	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.

# 3. SUMMARY OF TEST RESULTS

Item Number	Item	n Description	FCC Rules	Result
1	Output Power	Conducted Output Power Radiated Output Power	22.913(a) / 24.232 (b)	Pass
2	Spurious Emission	Conducted Spurious Emission Radiated Spurious Emission	2.1051 / 22.917 / 24.238	Pass
3	Mains Conducted Emission		15.107 / 15.207	Pass
4	Frequency Stability		2.1055 /24.235	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
7	Band Edge	9	22.917(b) / 24.238 (b)	Pass

# 4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band. **Note:** GSM/GPRS/EDGES850, GSM/GPRS/EDGE1900, HSDPA band V, HSUPA band V And HSDPA band II, HSUPA band II modes have been tested during the test.

the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.

# **5. OUTPUT POWER**

# **5.1 CONDUCTED OUTPUT POWER**

### **5.1.1 MEASUREMENT METHOD**

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### **5.1.2 MEASUREMENT RESULT**

Conducted Output Power Limits for GSM 850 MHZ			
Mode Nominal Peak Power Tolerance(dB)			
GSM850	32 dBm	+/- 1	

Conducted Output Power Limits for PCS 1900 MHZ			
Mode Nominal Peak Power Tolerance(dB)			
GSM1900	29 dBm	+/- 1	

Conducted Output Power Limits for WCDMA band V /II				
Mode Nominal Peak Power Tolerance(dB)				
WCDMA band V	22 dBm	+/-1		
WCDMA band II	22 dBm	+/-1		

#### **GSM 850:**

Mode	Frequency (MHz)	Peak Power
	824.2	32.53
GSM850	836.6	32.66
	848.8	32.54

#### PCS 1900:

Mode	Frequency (MHz)	Peak Power
	1850.2	29.54
GSM1900	1880	29.56
	1909.8	29.65

#### **UMTS BAND V**

Mode	Frequency (MHz)	Peak Power
WCDMA 850 RMC	826.4	22.68
	836.6	22.87
	846.6	22.83

#### **UMTS BAND II**

Mode	Frequency (MHz)	Peak Power
WCDMA 1900 RMC	1852.4	22.76
	1880	22.90
KIVIC	1907.6	22.96

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

For all combinations of ,DPDCH,DPCCH 0≤ CM≤3.5	MPR(db)
HS-DPDCH,E-DPDCH and E-DPCCH	MAX(CM-1,0)

Note: CM=1 for  $\beta_c/\beta_d$ =12/15,  $\beta_{hs}/\beta_c$ =24/15.For all other combinations of DPDCH, DPCCH,

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.
The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.
The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

#### **5.2 RADIATED OUTPUT POWER**

#### **5.2.1 MEASUREMENT METHOD**

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...
- 9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### **5.2.2 PROVISIONS APPLICABLE**

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BAND V	<=38.45 dBm (7W)
UMTS BAND II	<=33 dBm (2W)

# **5.2.3 MEASUREMENT RESULT**

Radiated Power (ERP) for GSM 850 MHZ				
		Re	sult	
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion
		(dBm)	Of Max. ERP	
	824.2	28.58	Horizontal	Pass
	824.2	29.38	Vertical	Pass
CCMOTO	836.6	28.05	Horizontal	Pass
GSM850	836.6	26.89	Vertical	Pass
	848.8	29.06	Horizontal	Pass
	848.8	30.15	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
		Res	ult	
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	25.57	Horizontal	Pass
	1850.2	26.35	Vertical	Pass
PCS1900	1880.0	25.86	Horizontal	Pass
	1880.0	27.54	Vertical	Pass
	1909.8	25.65	Horizontal	Pass
	1909.8	27.65	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band ∨				
		1	Result	
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	826.4	20.74	Horizontal	Pass
	836.4	18.89	Vertical	Pass
RMC	846.6	19.57	Horizontal	Pass
12.2kbps	826.4	20.65	Vertical	Pass
	836.4	19.68	Horizontal	Pass
	846.6	20.62	Vertical	Pass

NOTE 1: in the part, result the worst case 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band V.

Radiated Power (E.I.R.P) for UMTS band II				
		Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1852.4	20.12	Horizontal	Pass
	1880	18.43	Vertical	Pass
RMC	1907.6	19.12	Horizontal	Pass
12.2kbps	1852.4	20.54	Vertical	Pass
	1880	19.33	Horizontal	Pass
	1907.6	20.25	Vertical	Pass

## 6. SPURIOUS EMISSION

## **6.1 CONDUCTED SPURIOUS EMISSION**

#### **6.1.1 MEASUREMENT METHOD**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz		
Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS 1900 MHz		
Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

Typical Channels for testing of UMTS band V		
Channel	Frequency (MHz)	
4132	826.4	
4183	836.6	
4233	846.6	

Typical Channels for testing of UMTS band II		
Channel	Frequency (MHz)	
9262	1852.4	
9400	1880	
9538	1907.6	

#### **6.1.2 PROVISIONS APPLICABLE**

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### **6.1.3 MEASUREMENT RESULT**

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.


#### **6.2 RADIATED SPURIOUS EMISSION**

#### **6.2.1 MEASUREMENT METHOD**


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx (dBuV) +CL (dB) +SA (dB) +Gain (dBi) -107 (dBuV to dBm) The SA is calibrated using following setup.

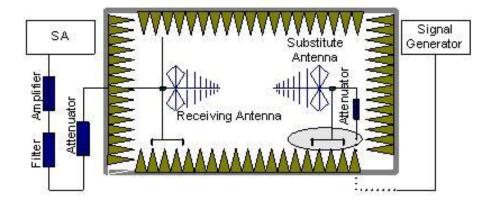

b) EUT was placed on a 1.0 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

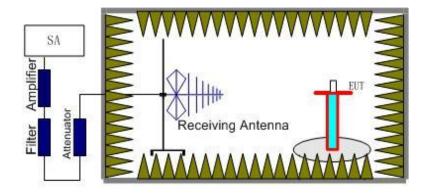

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of

the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band V (4132 (826.4MHz), 4183(835MHz) and 4233 (846.6MHz)). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A<sub>Rpl</sub> is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P<sub>Mea</sub>+A<sub>Rpl</sub>

#### **6.2.2 PROVISIONS APPLICABLE**

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

# **6.2.3 MEASUREMENT RESULT**

GSM 850:

	The Worst Test Results Channel 128/824.2 MHz				
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1648.379	-35.35	-4.65	-40	-13.00	Horizontal
2471.322	-36.57	-2.1	-38.67	-13.00	Horizontal
4118.454	-31.48	11.8	-19.68	-13.00	Horizontal
1648.379	-38.68	-4.65	-43.33	-13.00	Vertical
2471.322	-41.24	-2.1	-43.34	-13.00	Vertical
4118.454	-40.58	11.8	-28.78	-13.00	Vertical
	The Worst T	est Results	Channel 190/8	36.6 MHz	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	Р <sub>меа</sub> (dВm)	Limit (dBm)	Polarity
1673.317	-36.67	-4.97	-41.64	-13.00	Horizontal
2506.234	-42.28	-2.1	-44.38	-13.00	Horizontal
3339.401	-36.29	3.46	-32.83	-13.00	Horizontal
1673.317	-37.68	-4.97	-42.65	-13.00	Vertical
2506.234	-32.48	-2.1	-34.58	-13.00	Vertical
3339.401	-36.29	3.46	-32.83	-13.00	Vertical
	The Worst T	est Results	Channel 251/8	48.8 MHz	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1698.254	-35.57	-4.94	-40.51	-13.00	Horizontal
2541.147	-43.46	-2.02	-45.48	-13.00	Horizontal
3384.835	-45.87	3.49	-42.38	-13.00	Horizontal
1698.254	-35.42	-4.94	-40.36	-13.00	Vertical
2541.147	-41.52	-2.02	-43.54	-13.00	Vertical
3384.835	-37.12	3.49	-33.63	-13.00	Vertical

**Note:** Below 30MHZ no Spurious found and The GSM modes is the worst condition.

# 1900:

	The Worst Test Results for Channel 512/1850.2MHz				
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1793.017	-36.69	-3.54	-40.23	-13.00	Horizontal
3720.698	-43.69	13.01	-30.68	-13.00	Horizontal
5543.641	-42.79	14.7	-28.09	-13.00	Horizontal
1793.017	-34.68	-3.54	-38.22	-13.00	Vertical
3720.698	-45.58	13.01	-32.57	-13.00	Vertical
5543.641	-41.89	14.7	-27.19	-13.00	Vertical
	The Worst	Test Results for	Channel 661	/1880.0MHz	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1822.943	-36.75	-3.48	-40.23	-13.00	Horizontal
3763.092	-52.23	13.8	-38.43	-13.00	Horizontal
5628.429	-43.57	15.4	-28.17	-13.00	Horizontal
1822.943	-31.59	-3.48	-35.07	-13.00	Vertical
3763.092	-43.06	13.8	-29.26	-13.00	Vertical
5628.429	-33.59	15.4	-18.19	-13.00	Vertical
	The Worst 7	Test Results for	Channel 810	/1909.8MHz	
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1967.581	-32.79	-3.26	-36.05	-13.00	Horizontal
3847.88	-45.56	12.4	-33.16	-13.00	Horizontal
5713.217	-37.29	15.75	-21.54	-13.00	Horizontal
1967.581	-32.84	-3.26	-36.1	-13.00	Vertical
3847.88	-45.39	12.4	-32.99	-13.00	Vertical
5713.217	-38.09	15.75	-22.34	-13.00	Vertical

 $\textbf{Note:} \ \ \textbf{Below 30MHZ no Spurious found and The GSM modes is the worst condition}.$ 

# UMTS band V

	Channel 4132/824.6MHz				
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1651.367	-34.76	-5.01	-39.77	-13.00	Horizontal
2475.997	-35.58	-2.08	-37.66	-13.00	Horizontal
1651.367	-34.68	-5.01	-39.69	-13.00	Vertical
2475.997	-31.79	-2.08	-33.87	-13.00	Vertical
	Channel 4183/836.6MHz				
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1675.329	-31.69	-4.97	-36.66	-13.00	Horizontal
2511.981	-35.68	-2.1	-37.78	-13.00	Horizontal
1675.329	-27.49	-4.97	-32.46	-13.00	Vertical
2511.981	-35.58	-2.1	-37.68	-13.00	Vertical
		Channel 4233	3/846.6MHz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1694.329	-36.68	-4.97	-41.65	-13.00	Horizontal
2541.991	-38.69	-2.1	-40.79	-13.00	Horizontal
1694.329	-27.58	-4.97	-32.55	-13.00	Vertical
2541.991	-35.04	-2.1	-37.14	-13.00	Vertical

Note: Below 30MHZ no Spurious found and The UMTS modes is the worst condition.

# UMTS band II

Channel 9262/1852.4MHz					
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3706.954	-34.74	-5.01	-39.75	-13.00	Horizontal
5559.334	-35.56	-2.08	-37.64	-13.00	Horizontal
3706.923	-34.66	-5.01	-39.67	-13.00	Vertical
5559.333	-31.77	-2.08	-33.85	-13.00	Vertical
	Channel 9400/1880MHz				
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3762.243	-31.67	-4.97	-36.64	-13.00	Horizontal
5642.224	-35.66	-2.1	-37.76	-13.00	Horizontal
3762.212	-27.47	-4.97	-32.44	-13.00	Vertical
5642.212	-35.56	-2.1	-37.66	-13.00	Vertical
	C	hannel 9538	/1907.4MHz		
Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3816.925	-36.66	-4.97	-41.63	-13.00	Horizontal
5724.324	-38.67	-2.1	-40.77	-13.00	Horizontal
3816.934	-27.56	-4.97	-32.53	-13.00	Vertical
5724.312	-35.02	-2.1	-37.12	-13.00	Vertical

Note: Below 30MHZ no Spurious found and The UMTS modes is the worst condition.

## 7. FREQUENCY STABILITY

#### 7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 . Measure the carrier frequency at room temperature.
- 2 .Subject the EUT to overnight soak at -10℃.
- 3 .With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band and channel 4183 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 .Repeat the above measurements at  $10^{\circ}$ C increments from  $-10^{\circ}$ C to  $+50^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 .Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 .Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 .Repeat the above measurements at  $10^{\circ}$ C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 .At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### 7.2 PROVISIONS APPLICABLE

#### 7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

## 7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

#### 7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.4	23	0.028	
3.7	43	0.051	
4.2	36	0.043	

Frequency Error Against Temperature for GSMS850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	23	0.028		
0	32	-0.038		
10	25	0.030		
20	13	-0.016		
30	18	-0.022		
40	10	0.012		
50	26	0.031		

Frequency Error Against Voltage for GPRS850 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.4	27	0.032	
3.7	25	0.030	
4.2	23	-0.028	

Frequency Error Against Temperature for GPRS850 band				
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)		
-10	36	-0.043		
0	19	0.023		
10	8	-0.010		
20	17	0.020		
30	23	-0.028		
40	35	0.042		
50	31	0.037		

Note: The EUT doesn't work below -10℃

Frequency Error Against Voltage for GSM1900 band			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.4	23	0.012	
3.7	19	-0.010	
4.2	25	-0.013	

Frequency Error Against Temperature for GSM1900 band			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	
-10	27	0.014	
0	9	0.005	
10	25	-0.013	
20	19	0.010	
30	32	0.017	
40	9	0.005	
50	23	-0.012	

Note: The EUT doesn't work below -10

Frequency Error Against Voltage for UMTS band V			
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.4	31	0.037	
3.7	26	0.031	
4.2	18	-0.022	

Frequency Error Against Temperature for UMTS band V		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	34	0.041
0	7	0.008
10	26	0.031
20	28	0.034
30	18	0.022
40	22	0.026
50	14	0.017

Note: The EUT doesn't work below -10  $^\circ\!\mathrm{C}$ 

Frequency Error Against Voltage for UMTS band II				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
3.4	31	0.037		
3.7	23	0.028		
4.2	31	-0.037		

Frequency Error Against Temperature for UMTS band II		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	24	0.029
0	23	0.028
10	32	0.038
20	25	0.030
30	24	0.029
40	22	0.026
50	15	0.018

Note: The EUT doesn't work below -10  $^{\circ}\mathrm{C}$ 

# 8. OCCUPIED BANDWIDTH

#### **8.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### **8.2 PROVISIONS APPLICABLE**

The occupied bandwidth (99%) shall not exceed 300 KHz.

#### **8.3 MEASUREMENT RESULT**

Occupied Bandwidth (99%) for GSM 850 band			
Mode Frequency(MHz) Occupied Bandwidth (99%)( kHz)			
Low Channel	824.2	257.78	
Middle Channel	836.6	244.18	
High Channel	848.8	239.81	

Occupied Bandwidth (99%) for GSM1900 band			
Mode Frequency(MHz) Occupied Bandwidth (99%)( kHz)			
Low Channel	1850.2	244.89	
Middle Channel	1880.0	248.15	
High Channel	1909.8	245.63	

Occupied Bandwidth (99%) for UMTS band V			
Mode Frequency(MHz) Occupied Bandwidth (99%)( MHz)			
Low Channel	826.4	4.17	
Middle Channel 836.6 4.14		4.14	
High Channel	846.6	4.15	

Occupied Bandwidth (99%) for UMTS band II			
Mode Frequency(MHz) Occupied Bandwidth (99%)( MHz)			
Low Channel	1852.4	4.15	
Middle Channel	1880	4.18	
High Channel	1907.4	4.16	

# 9. EMISSION BANDWIDTH

#### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### 9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

#### 9.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band			
Mode Frequency(MHz) Emission Bandwidth (-26dBc)( kHz)			
Low Channel	824.2	315.00	
Middle Channel	836.6	318.30	
High Channel	848.8	313.29	

Emission Bandwidth (-26dBc) for GSM1900 band			
Mode Frequency(MHz) Emission Bandwidth (-26dBc)( kHz)			
Low Channel	1850.2	315.72	
Middle Channel	1880.0	314.56	
High Channel	1909.8	308.00	

Emission Bandwidth (-26dBc) for UMTS band V			
Mode Frequency(MHz) Emission Bandwidth (-26dBc)( MHz)			
Low Channel	826.4	4.66	
Middle Channel	836.6	4.67	
High Channel	846.6	4.67	

Emission Bandwidth (-26dBc) for UMTS band II			
Mode Frequency(MHz) Emission Bandwidth (-26dBc)( MHz)			
Low Channel	1852.4	4.73	
Middle Channel 1880 4.68		4.68	
High Channel	1907.4	4.72	

# 10. BAND EDGE

#### **10.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

## **10.2 PROVISIONS APPLICABLE**


as Specified in FCC rules of 22.917(b) and 24.238(b)

#### **10.3 MEASUREMENT RESULT**


Please refers to Appendix III for compliance test plots for band edges

	Report No.:STS140737F01
APPENDIX I	
TEST PLOTS FOR CONDUCTED SPURIOUS	S EMISSION


# CONDUCTED EMISSION IN GSM 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 9 GHz

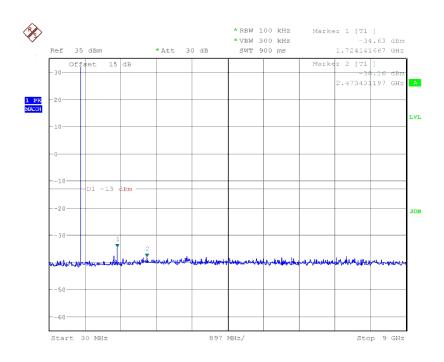


## Conducted Emission Transmitting Mode CH 190 30MHz – 9 GHz

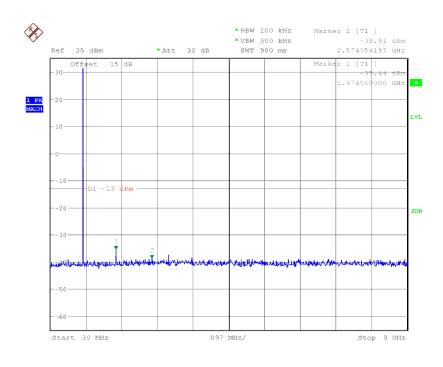


## Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

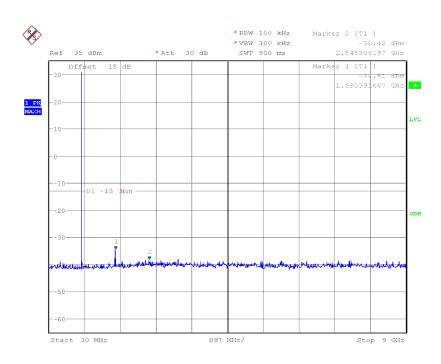


# CONDUCTED EMISSION IN GSM1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

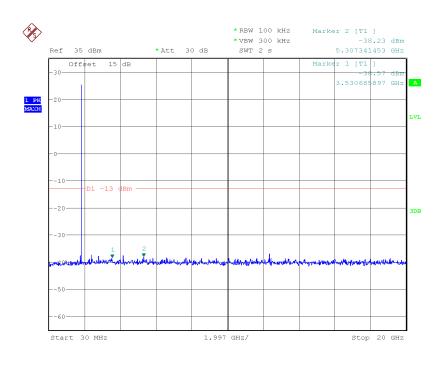


# Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

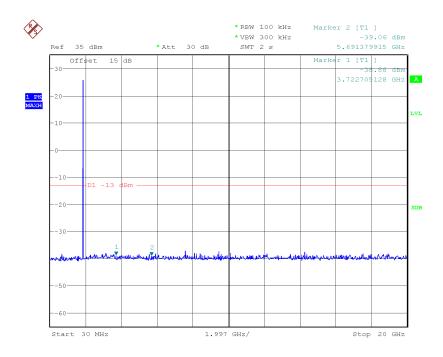


## Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

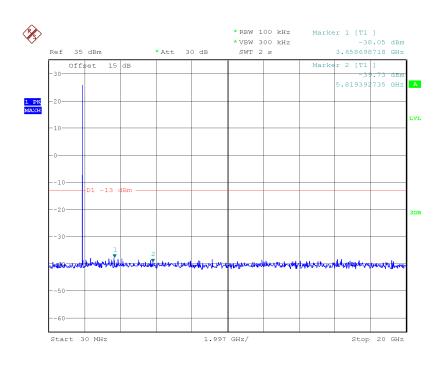


# CONDUCTED EMISSION IN UMTS band V Conducted Emission Transmitting Mode 4132 30MHz – 9 GHz

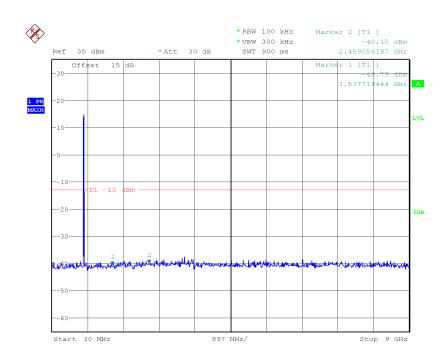


## Conducted Emission Transmitting Mode CH 4183 30MHz – 9 GHz

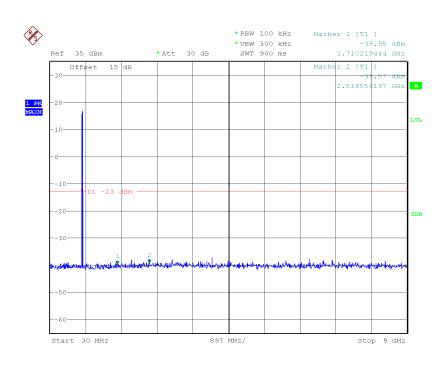


# Conducted Emission Transmitting Mode CH 4233 30MHz – 9 GHz

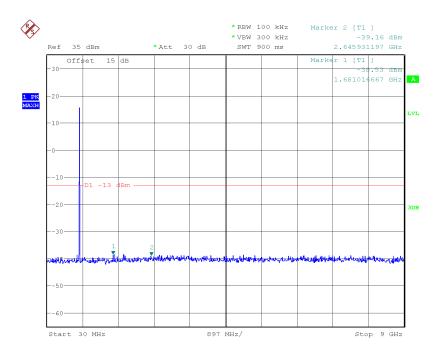


# CONDUCTED EMISSION IN UMTS band II Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

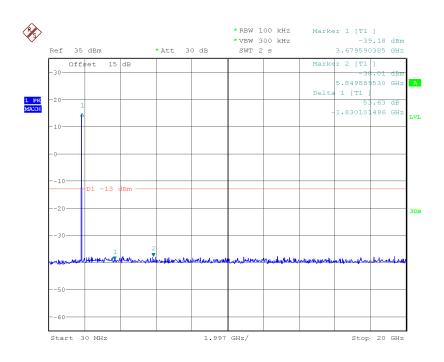


#### Conducted Emission Transmitting Mode CH 9400 30MHz - 20GHz

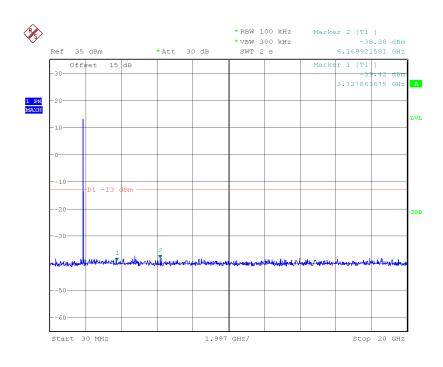


# Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

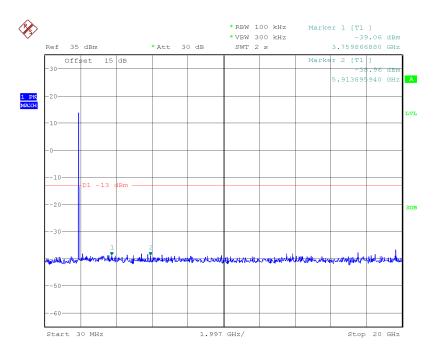

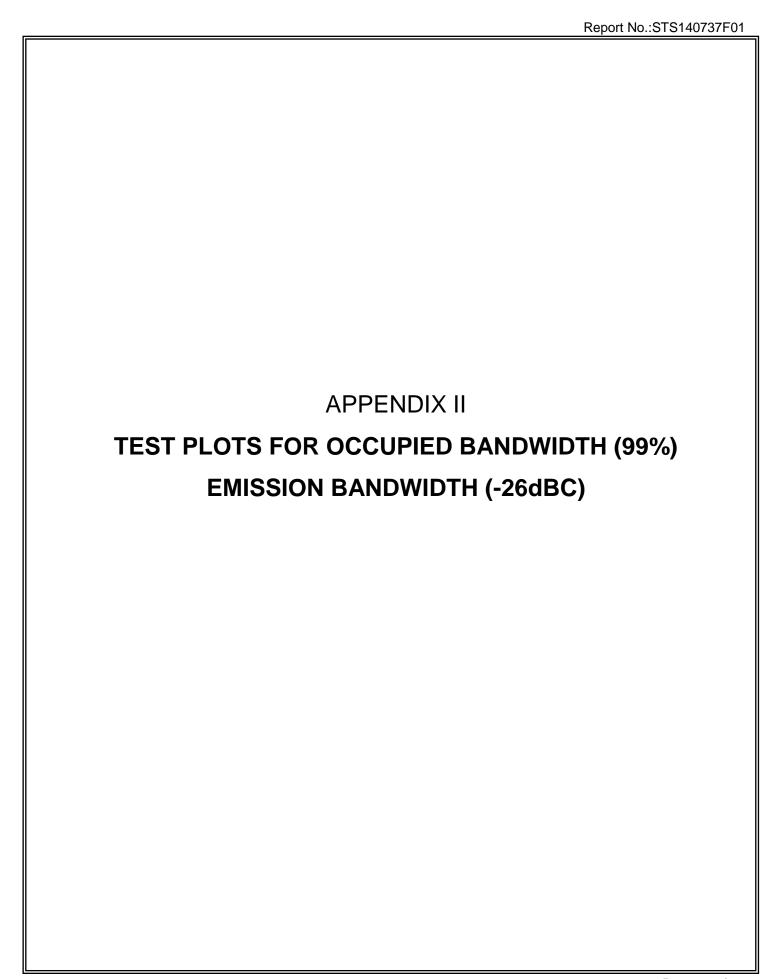

#### Occupied Bandwidth (99%) GSM 850 BAND CH 128

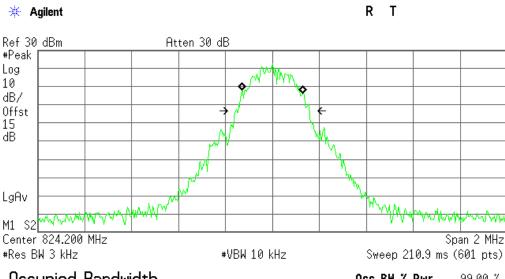


Occupied Bandwidth 257.7798 kHz

Occ BW % Pwr 99.00 % x dB -26.00 dB


Transmit Freq Error 238.217 Hz x dB Bandwidth 315.003 kHz

#### Occupied Bandwidth (99%) GSM 850 BAND CH 190

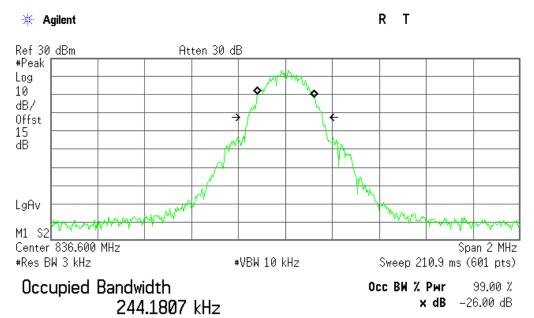

Transmit Freq Error 1.902 kHz x dB Bandwidth 318.296 kHz

# Occupied Bandwidth (99%) GSM 850 BAND CH 251

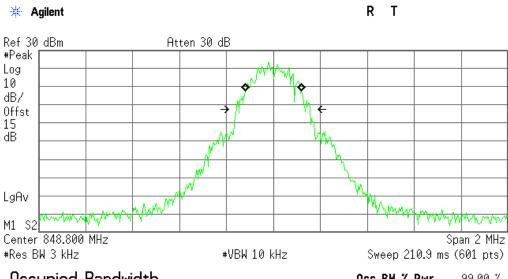


Occupied Bandwidth 239.8119 kHz

Occ BW % Pwr 99.00 % x dB -26.00 dB


Transmit Freq Error -941.991 Hz x dB Bandwidth 313.292 kHz

#### Occupied Bandwidth (99%) PCS 1900 BAND CH 512

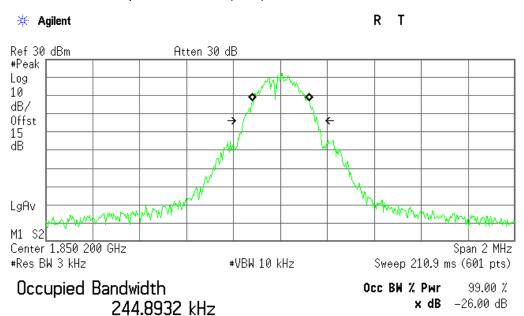


Transmit Freq Error 1.607 kHz x dB Bandwidth 315.718 kHz

## Occupied Bandwidth (99%) PCS 1900 BAND CH 661

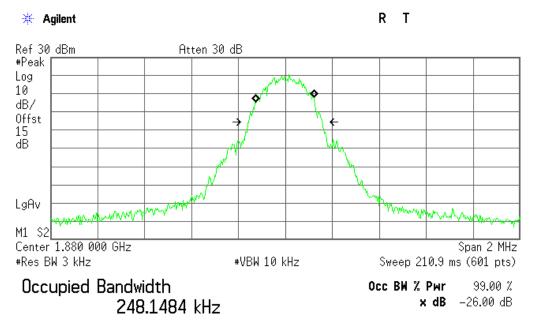

Transmit Freq Error -1.864 kHz x dB Bandwidth 314.561 kHz

# Occupied Bandwidth (99%) PCS 1900 BAND CH 810

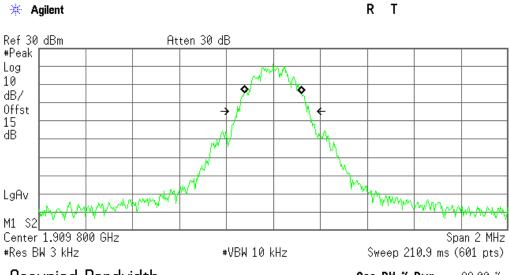


Occupied Bandwidth 245.6324 kHz

Occ BW % Pwr 99.00 % x dB -26.00 dB

Transmit Freq Error -1.603 kHz x dB Bandwidth 307.998 kHz


#### Occupied Bandwidth (99%) UMTS BAND V CH 4132

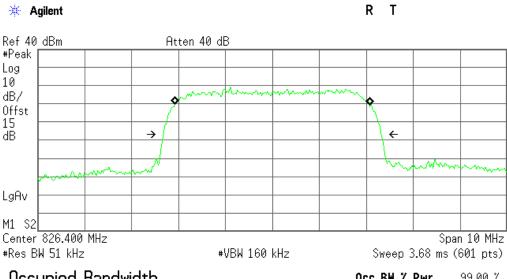

Occupied Bandwidth 4.1746 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB

Transmit Freq Error 1.971 kHz x dB Bandwidth 4.655 MHz

# Occupied Bandwidth (99%) UMTS BAND V CH 4183

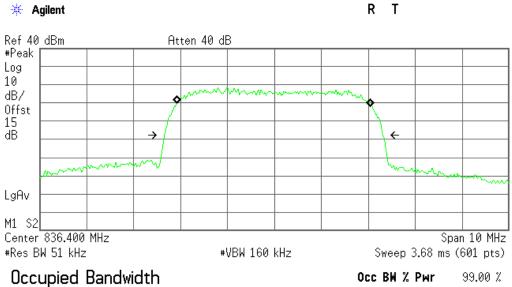


4.1434 MHz

**x dB** -26.00 dB


Transmit Freq Error -19.951 kHz x dB Bandwidth 4.668 MHz

# Occupied Bandwidth (99%) UMTS BAND V CH 4233

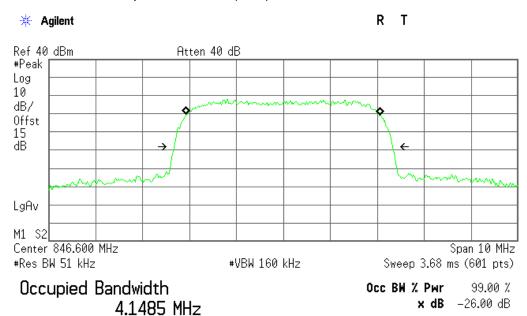

Transmit Freq Error -2.175 kHz x dB Bandwidth 4.666 MHz


#### Occupied Bandwidth (99%) UMTS BAND II CH 9264

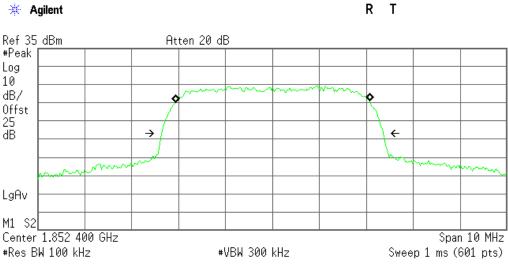

Occupied Bandwidth 4.1471 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB

Transmit Freq Error 1.722 kHz x dB Bandwidth 4.731 MHz

## Occupied Bandwidth (99%) UMTS BAND II CH 9400

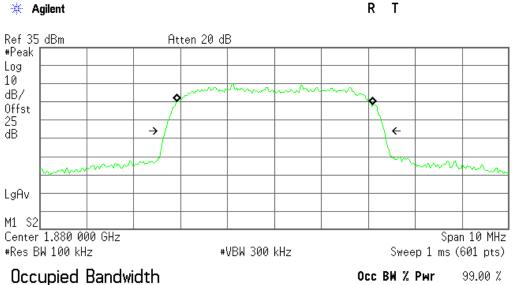


4.1820 MHz

**x dB** -26.00 dB


Transmit Freq Error 8.576 kHz x dB Bandwidth 4.678 MHz

# Occupied Bandwidth (99%) UMTS BAND II CH 9538

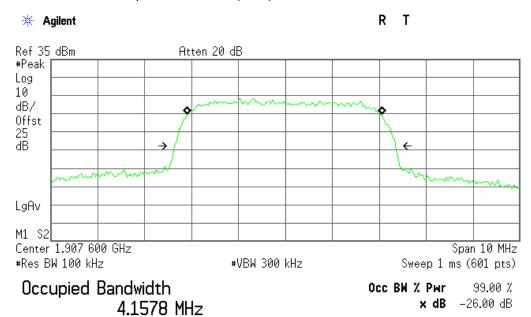



Transmit Freq Error -20.531 kHz x dB Bandwidth 4.720 MHz


	Report No.:STS140737F01
APPENDIX III	
TEST PLOTS FOR BAND EDG	SES

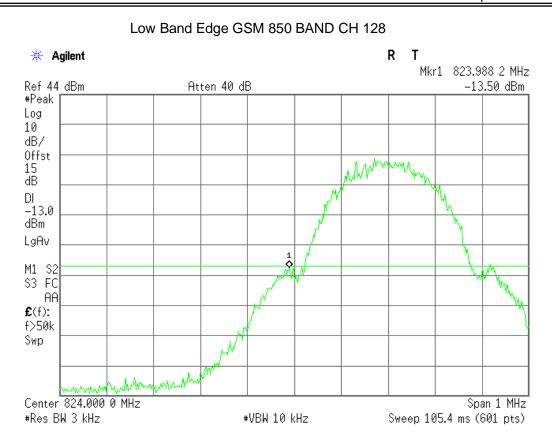



#### High Band Edge GSM 850 BAND CH 251

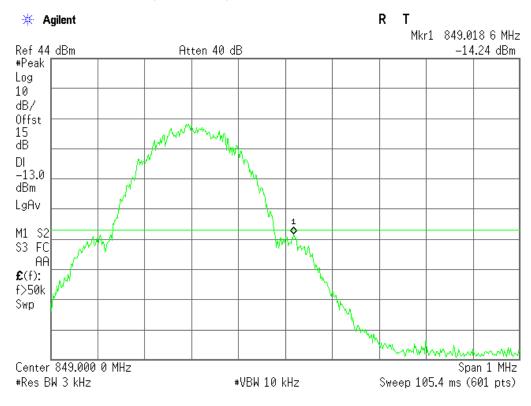

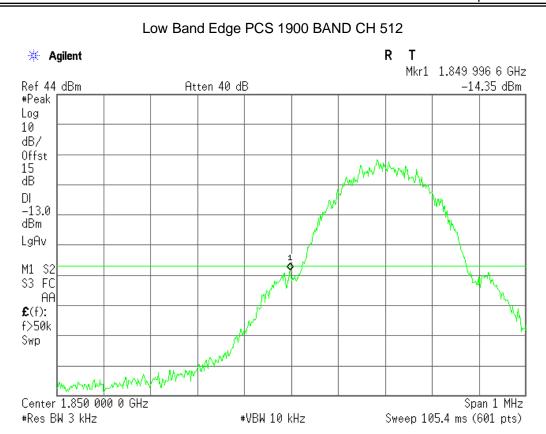





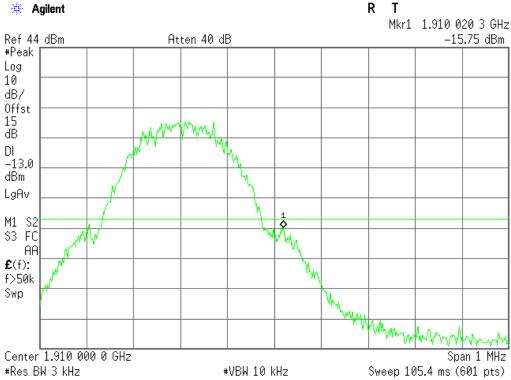

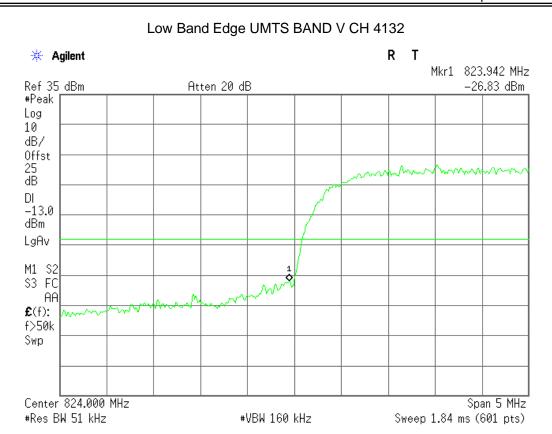




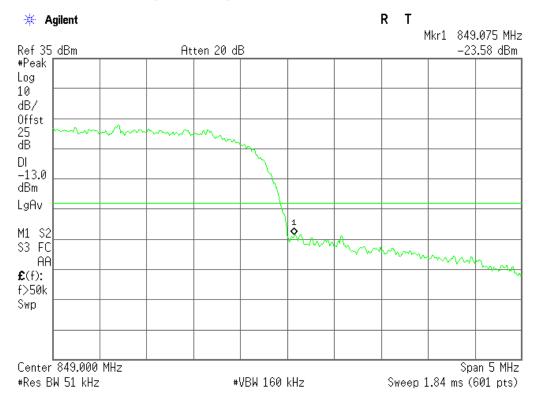

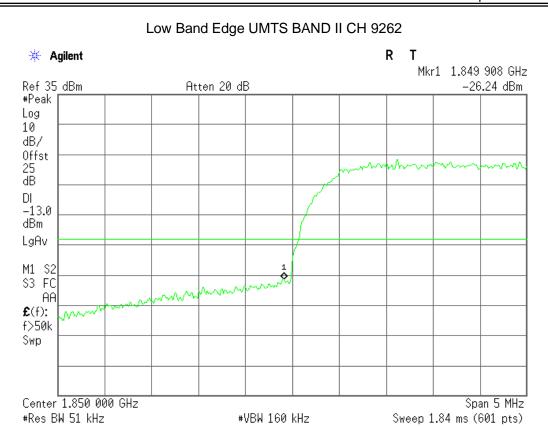





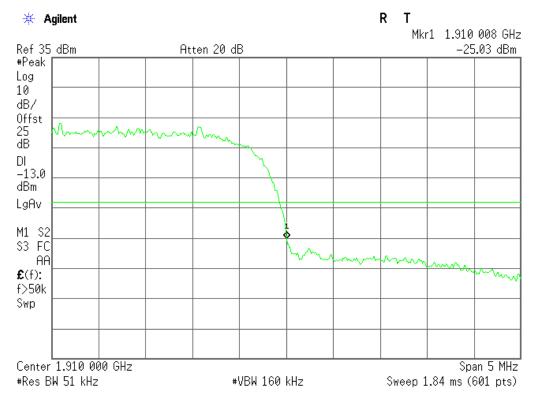

# APPENDIX IV PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

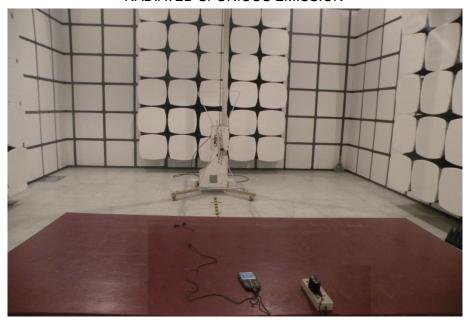

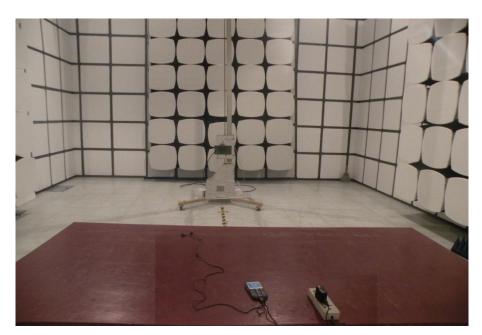

----END OF REPORT----