

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan  
District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: sgs\_internet\_operations@sgs.com

Report No.:SZEM110700253801

Page: 1 of 13


## FCC Test Report

**Application No.:** SZEM11070025381T  
**Applicant:** Ceratech Electronics Ltd  
**Address of Applicant:** Ceratech House, 1 Omega Park, Wilsom Road, Alton, Hampshire, UK.  
GU34 2QE  
**Manufacturer/Factory:** EDTAK ELECTRONIC CO LTD  
**Address of Manufacturer/** B2 Blag G zone Democratic Western Industrial Park, ShaJing Town Baoan  
**Factory:** District ShenZhen China  
**FCC ID:** ZXY-GC-LK-6620  
**Equipment Under Test (EUT):**  
EUT Name: KEYBOARD  
Item No.: Please refer to section 2 of this report which indicates which item was  
actually tested and which were electrically identical.  
Trade mark: Accuratus  
**Standards:** FCC PART15 SUBPART B:2010  
**Date of Receipt:** 2011-07-27  
**Date of Test:** 2011-07-28 to 2011-08-24  
**Date of Issue:** 2011-09-08

<b>Test Result :</b>	<b>Pass*</b>
----------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

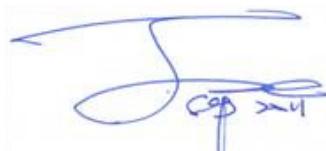

Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

## 2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz) §	FCC PART 15, SUBPART B: 2010	ANSI C63.4:2009	Class B	PASS
Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B: 2010	ANSI C63.4:2009	Class B	PASS

Remark:

§

Highest frequency generated or  
used in the device or on which the  
device operates or tunes (MHz)

Below 1.705  
1.705 - 108  
108 - 500  
500 - 1000  
Above 1000

30  
1000  
2000  
5000

5th harmonic of the highest frequency or  
40 GHz, whichever is lower

Item No.: KYB-MON2MIX-LCUH, KYB-MON2MIX-UCUH, KYB-MON2BLK-UCUH,  
KYB-MON2VIS-UCUH, KYB-MON2ELW-LCUH, KYB-MON2MIX-LCUS,  
KYB-MON2MIX-UCUS, KYB-MON2BLK-UCUS, KYB-MON2VIS-UCUS,  
KYB-MON2ELW-LCUS, KYB-MON2MIX-LCIT, KYB-MON2MIX-UCIT,  
KYB-MON2BLK-UCIT, KYB-MON2VIS-UCIT, KYB-MON2ELW-LCIT.

Only the item No. KYB-MON2MIX-LCUH was tested, since the electrical circuit design, layout, component used and internal wiring were identical for the above samples, with only difference being the item number and color.

### **3 Contents**

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 DETAILS OF E.U.T.....	4
4.2 DESCRIPTION OF SUPPORT UNITS.....	4
4.3 STANDARDS APPLICABLE FOR TESTING .....	4
4.4 TEST LOCATION.....	4
4.5 TEST FACILITY.....	5
4.6 DEVIATION FROM STANDARDS .....	5
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
<b>5 EQUIPMENTS USED DURING TEST .....</b>	<b>6</b>
<b>6 TEST RESULTS.....</b>	<b>8</b>
6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz.....	8
6.1.1 <i>E.U.T. Operation</i> .....	8
6.1.2 <i>Measurement Data</i> .....	8
6.2 RADIATED EMISSIONS, 30MHz TO 1GHz .....	11
6.2.1 <i>E.U.T. Operation</i> .....	11
6.2.2 <i>Measurement Data</i> .....	11-13

## 4 General Information

### 4.1 Details of E.U.T.

Power Supply: DC 5V from PC  
The highest frequency: 6MHz

### 4.2 Description of Support Units

The EUT has been tested with associated equipment below:

Description	Manufacturer	Model No.
PC	DELL	OPTIPLEX 755
LCD-displaying	DELL	E1909WF
MOUSE	DELL	MOC5110
PC	DELL	OPTIDLEX 330
LCD-displaying	DELL	SP2208WFPT
MOUSE	DELL	MOC5110
Coder	HengTong ELECTRON	HT4000
Printer	Canon	BJC-1000SP

### 4.3 Standards Applicable for Testing

The customer requested FCC tests for KEYBOARD.  
The standard used was FCC PART 15, SUBPART B, CLASS B.

### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

No tests were sub-contracted.

# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: SZEM110700253801  
Page: 5 of 13

## 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.6 Deviation from Standards

None.

## 4.7 Abnormalities from Standard Conditions

None.

## 5 Equipments Used during Test

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2011-06-10	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2011-03-11	2012-03-11
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2011-05-29	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2011-05-26	2012-05-26
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
9	Band filter	Amindeon	Asi 3314	SEL0094	2011-05-26	2012-05-26
10	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2010-11-09	2011-11-09

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2011-06-10	2012-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2010-10-27	2011-10-26
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2010-06-02	2011-06-02
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2011-01-17	2012-01-17
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2011-01-17	2012-01-17
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2011-01-17	2012-01-17
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2011-05-26	2012-05-26
8	Coaxial Cable	SGS	N/A	SEL0024	2011-05-29	2012-05-29

# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: SZEM110700253801  
Page: 7 of 13

<b>General used equipment</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (yyyy-mm-dd)</b>	<b>Cal.Due date (yyyy-mm-dd)</b>
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2010-11-04	2011-11-04
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2011-03-10	2012-03-10
3	Barometer	ChangChun	DYM3	SEL0088	2011-05-18	2012-05-18

## 6 Test Results

### 6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement:	FCC Part15 B
Test Method:	ANSI C63.4
Frequency Range:	150kHz to 30MHz
Class / Severity:	Class B
Limit:	
0.15M-0.5MHz	66dB(dB $\mu$ V)-56dB(dB $\mu$ V) quasi-peak, 56dB(dB $\mu$ V)-46dB(dB $\mu$ V) average
0.5M-5MHz	56dB(dB $\mu$ V) quasi-peak, 46dB(dB $\mu$ V) average
5M-30MHz	60dB(dB $\mu$ V) quasi-peak, 50dB(dB $\mu$ V) average
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)
	Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

EUT Operation: Test the EUT in PC mode, build the connection between EUT and PC, keep EUT working normally.

#### 6.1.2 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: SZEM110700253801  
Page: 9 of 13

Live Line:

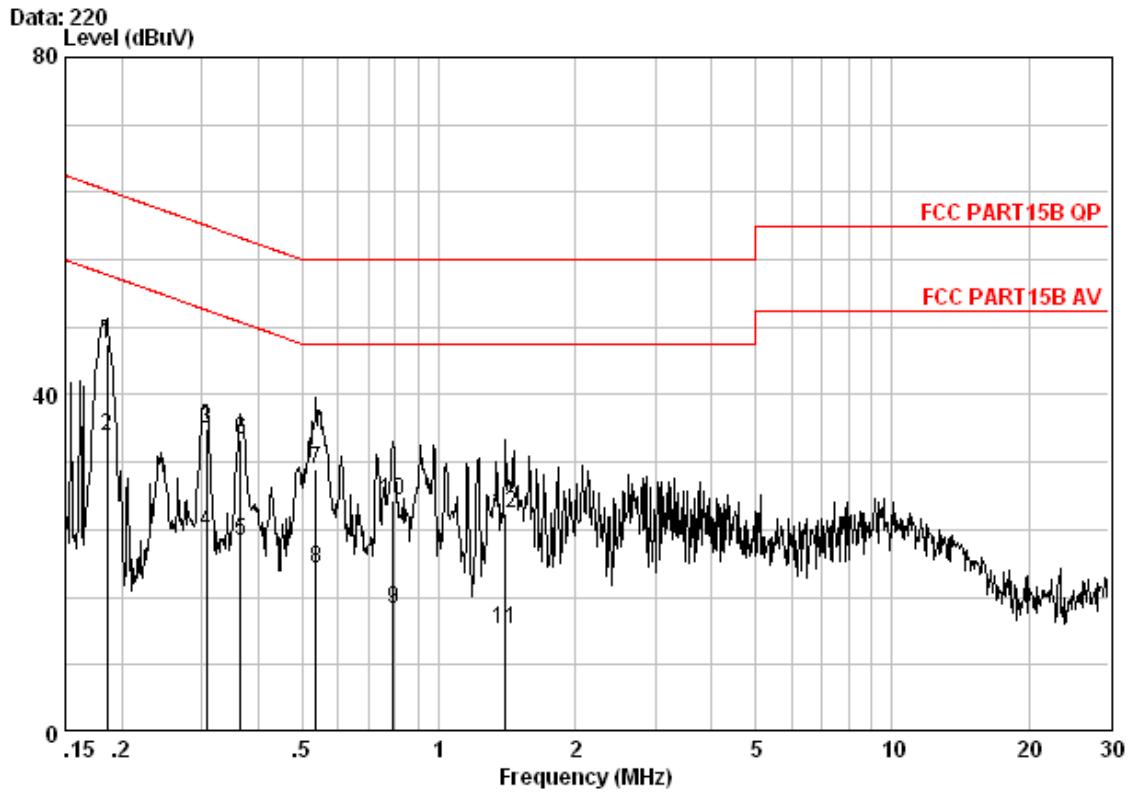


Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 LINE  
Job No. : 2538IT  
Mode : PC mode

	Freq	Cable	LISN	Read	Limit		Over	Remark
		Loss	Factor	Level	Level	Line	Limit	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18541	0.14	9.60	36.32	46.06	64.24	-18.18	QP
2	0.18541	0.14	9.60	25.32	35.06	54.24	-19.18	Average
3	0.30671	0.16	9.60	26.11	35.87	60.06	-24.19	QP
4	0.30671	0.16	9.60	14.11	23.87	50.06	-26.19	Average
5	0.36531	0.16	9.60	12.96	22.72	48.61	-25.88	Average
6	0.36531	0.16	9.60	24.96	34.72	58.61	-23.88	QP
7	0.53498	0.16	9.62	21.30	31.08	56.00	-24.92	QP
8	0.53498	0.16	9.62	9.70	19.48	46.00	-26.52	Average
9	0.79180	0.18	9.70	4.80	14.68	46.00	-31.32	Average
10	0.79180	0.18	9.70	17.60	27.48	56.00	-28.52	QP
11	1.403	0.20	9.70	2.20	12.10	46.00	-33.90	Average
12	1.403	0.20	9.70	16.10	26.00	56.00	-30.00	QP

# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: SZEM110700253801  
Page: 10 of 13

Neutral Line:

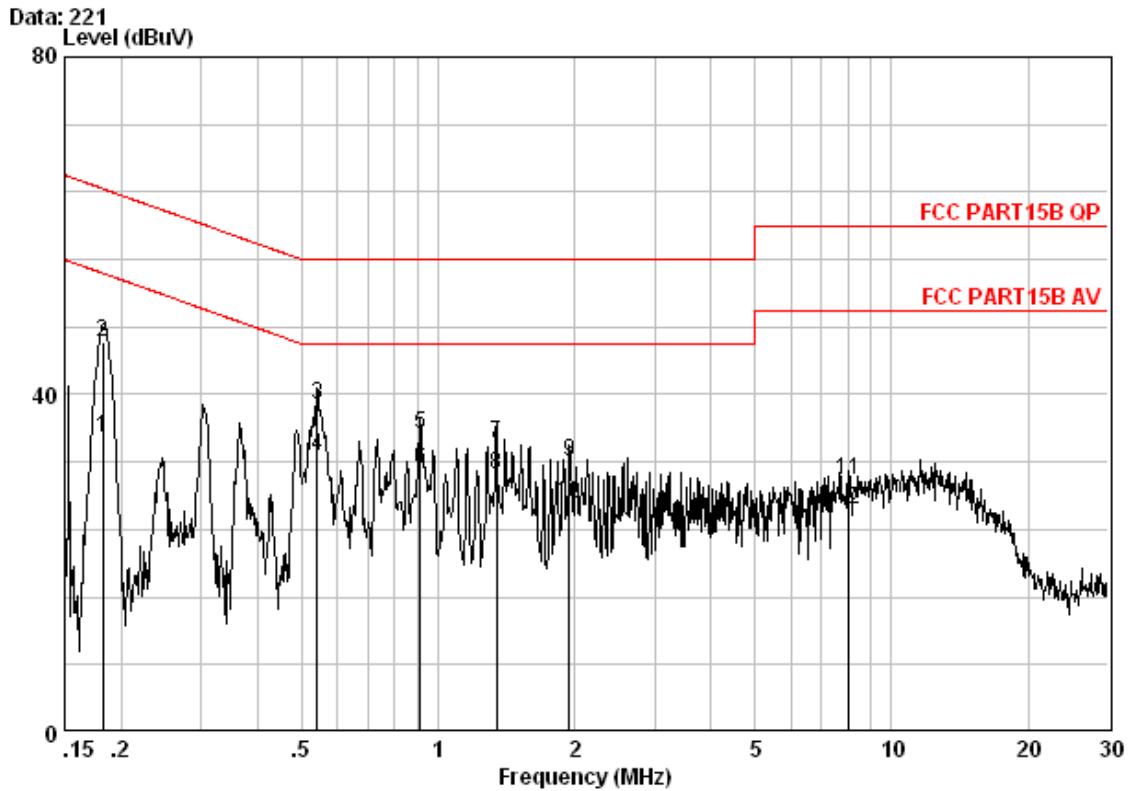

Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 NEUTRAL  
Job No. : 2538IT  
Mode : PC mode

Freq	Cable	LISN	Read	Limit	Over	Remark	
	MHz	Loss	Factor				
1	0.18249	0.14	9.60	25.24	34.98	54.37	-19.39 Average
2	0.18249	0.14	9.60	36.58	46.32	64.37	-18.05 QP
3	0.54068	0.16	9.62	29.00	38.78	56.00	-17.22 QP
4	0.54068	0.16	9.62	22.89	32.68	46.00	-13.32 Average
5	0.91357	0.19	9.70	25.42	35.32	56.00	-20.68 QP
6	0.91357	0.19	9.70	21.23	31.12	46.00	-14.88 Average
7	1.345	0.20	9.70	24.37	34.27	56.00	-21.73 QP
8	1.345	0.20	9.70	20.56	30.46	46.00	-15.54 Average
9	1.949	0.20	9.70	22.11	32.01	56.00	-23.99 QP
10	1.949	0.20	9.70	17.12	27.02	46.00	-18.98 Average
11	8.062	0.25	9.86	19.82	29.94	60.00	-30.06 QP
12	8.062	0.25	9.86	16.20	26.32	50.00	-23.68 Average

**6.2 Radiated Emissions, 30MHz to 1GHz**

Test Requirement:	FCC Part15 B
Test Method:	ANSI C63.4
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

**6.2.1 E.U.T. Operation**

Operating Environment:

Temperature: 25.0 °C      Humidity: 50% RH      Atmospheric Pressure: 1010 mbar

EUT Operation: Test the EUT in PC mode, build the connection between EUT and PC, keep EUT working normally.


**6.2.2 Measurement Data**

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: SZEM110700253801  
Page: 12 of 13


Vertical

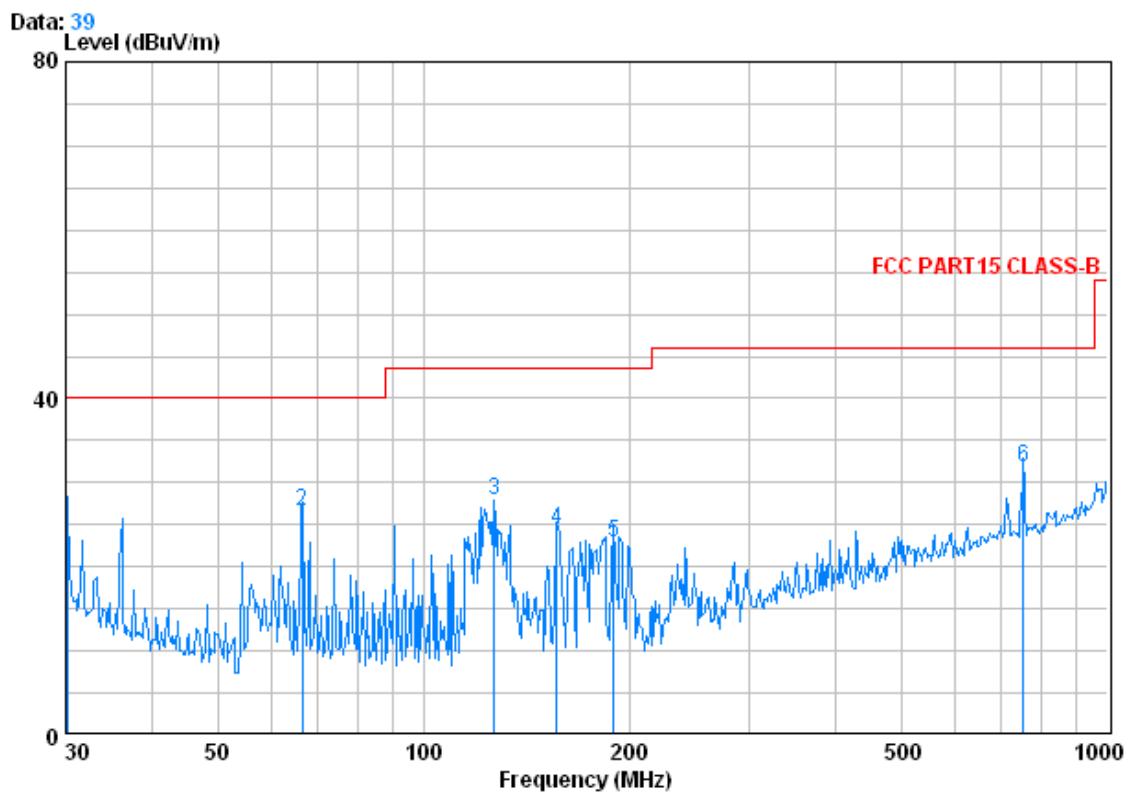

Condition : FCC PART15 CLASS-B 3m 0042673 VERTICAL  
Job No. : 2538IT  
Test mode : PC mode

	Freq	Cable		Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor		Level		
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dB
1	30.211	0.60	15.29	27.36	37.28	25.81	40.00	-14.19
2	66.499	0.80	7.00	27.25	46.14	26.69	40.00	-13.31
3	126.772	1.27	7.76	27.03	46.00	28.01	43.50	-15.49
4	156.458	1.33	9.39	26.87	40.50	24.35	43.50	-19.15
5	189.739	1.38	10.09	26.74	38.24	22.98	43.50	-20.52
6	752.743	3.07	21.73	27.35	34.46	31.92	46.00	-14.08

Horizontal

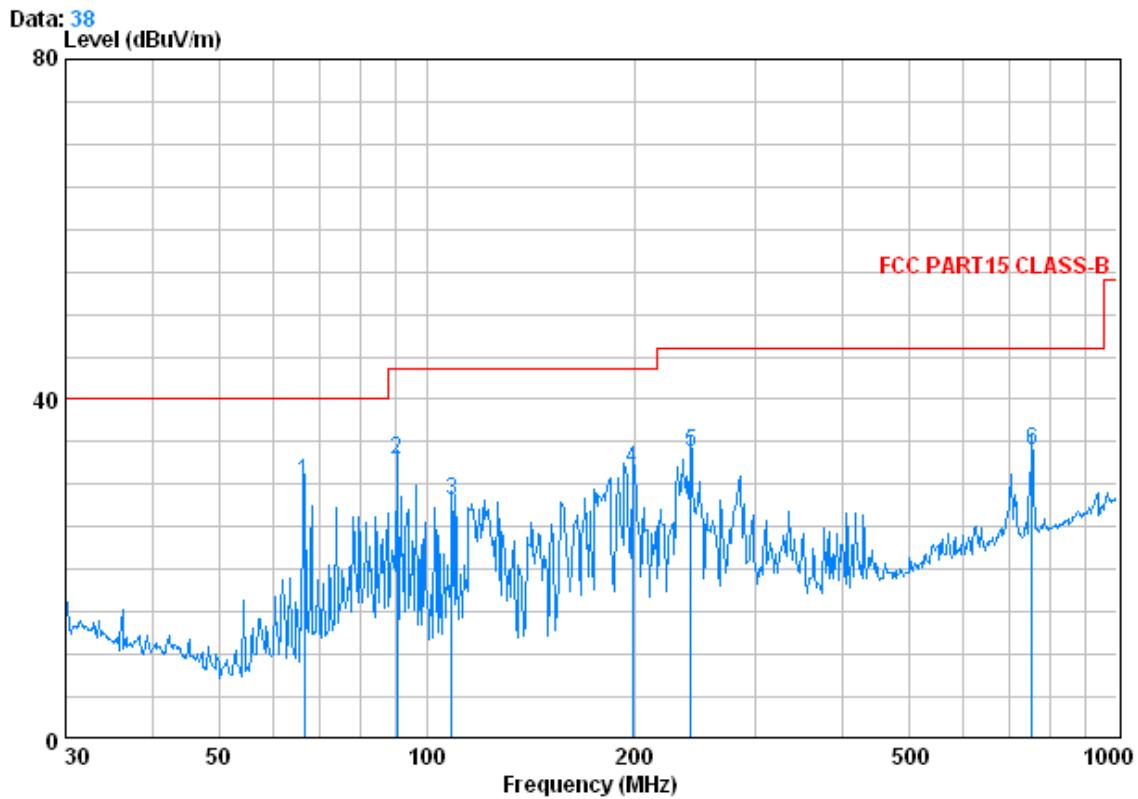

Condition : FCC PART15 CLASS-B 3m 0042673 HORIZONTAL  
 Job No. : 2538IT  
 Test mode : PC mode

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	66.499	0.80	7.00	27.25	49.73	30.28	40.00	-9.72
2 0	90.537	1.11	8.73	27.21	50.31	32.93	43.50	-10.57
3 0	108.647	1.22	8.68	27.14	45.47	28.23	43.50	-15.27
4 0	198.588	1.40	10.19	26.70	46.85	31.73	43.50	-11.77
5 0	241.676	1.63	12.04	26.56	46.63	33.75	46.00	-12.25
6 0	752.743	3.07	21.73	27.35	36.53	33.98	46.00	-12.02