



FCC/ISED - TEST REPORT

Report Number : **709502408753-00D** Date of Issue: November 15, 2024

Model : CM-03-E

Product Type : Tubular motor

Applicant : Coulisse B.V.

Address : Vonderweg 48, 7468 DC Enter,

THE NETHERLANDS

Production Facility : Ningbo Dooya Mechanical & Electronic Technology Co., Ltd.

Address : No.168 Shengguang Road, Luotuo, Zhenhai 315202 Ningbo,

Zhejiang province, People's republic of China

Test Result : Positive Negative

Total pages including Appendices : 46



TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards	6
5	Summary of Test Results	7
6	General Remarks	8
7	Test Setups	9
8	Systems test configuration.....	12
9	Technical Requirement.....	13
9.1	Conducted Emission.....	13
9.2	Conducted peak output power.....	16
9.3	6dB bandwidth and 99% Occupied Bandwidth.....	18
9.4	Power spectral density.....	21
9.5	Spurious RF conducted emissions	23
9.6	Band edge	27
9.7	Spurious radiated emissions for transmitter.....	30
10	Test Equipment List.....	43
11	System Measurement Uncertainty	44
12	Photographs of Test Set-ups.....	45
13	Photographs of EUT	46



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Telephone: +86 21 6141 0123

Fax: +86 21 6140 8600

FCC Registration No.: 820234

FCC Designation Number: CN1183

ISED CAB identifier: CN0101

IC Registration No.: 31668



3 Description of the Equipment under Test

Description of the Equipment Under Test

Product:	Tubular motor
Model no.:	CM-03-E
Hardware Version Identification No. (HVIN)	CM-03-EV2
Product Marketing Name (PMN)	CM-03-E
FCC ID:	ZY4CM03E1
IC:	28177-CM03E1
Options and accessories:	NA
Rating:	USB input: DC5V, 12W (12V for battery)
RF Transmission Frequency:	SRD transceiver: 433.92MHz; 2.4GHz BLE: 2402~2480 MHz 2.4GHz Thread: 2405~2480MHz
No. of Operated Channel:	SRD transceiver: 1; 2.4GHz BLE: 40 2.4GHz Thread: 16
Modulation:	SRD transceiver: FSK; 2.4GHz BLE: GFSK 2.4GHz Thread: OQPSK
Channel list:	SRD transceiver: 433.92MHz; 2.4GHz BLE:

Bluetooth Low Energy							
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470



5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.4GHz Thread:

Thread			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

Antenna Type:

SRD transceiver: Line Antenna;
 2.4GHz BLE: Line Antenna
 2.4GHz Thread: Line Antenna

Antenna Gain:

SRD transceiver: -4dBi;
 2.4GHz BLE: 2.2dBi
 2.4GHz Thread: 2.2dBi

Description of the EUT:

The Equipment Under Test (EUT) is a Tubular motor with BLE function (1Mbps, 2Mbps) and Thread function and SRD function (transceiver). We tested it and listed the worst data in this report.

Test sample no.:

SHA-816506-9 (Conducted sample),
 SHA-816506-10 (Radiated sample)

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Measurement Guidance v05r02 and ANSI C63.10-2013.



5 Summary of Test Results

Technical Requirements							
FCC Part 15 Subpart C & RSS-247 Issue 3/RSS-Gen Issue 5			Pages	Test Site	Test Result		
Test Condition					Pass	Fail	N/A
§15.207	RSS-GEN 8.8	Conducted emission AC power port	13-15	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (3)	RSS-247 5.4(d)	Conducted peak output power	16-17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	16-17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	RSS-247 5.1(a) & RSS-Gen 6.7	20dB bandwidth and 99% Occupied Bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	RSS-247 5.1(b)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	RSS-247 5.1(d)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	RSS-247 5.1(d)	Dwell Time - Average Time of Occupancy	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	18-20	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	RSS-247 5.2(b)	Power spectral density	21-22	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	RSS-247 5.5	Spurious RF conducted emissions	23-26	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	RSS-247 5.5	Band edge	27-29	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & §15.205	RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	30-42	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	RSS-Gen 6.8	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a Line Antenna, which gain is -4dBi for SRD transceiver and 2.2dBi for 2.4GHz BLE and Thread. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: ZY4CM03E1, IC: 28177-CM03E1, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules and RSS-247, RSS-GEN.

This report is only for the 2.4GHz Thread test report, for the 2.4GHz BLE test report please refer to 709502408753-00C, for the 433.92MHz test report please refer to 709502408753-00B.

SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: May 24, 2024

Testing Start Date: June 27, 2024

Testing End Date: October 10, 2024

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:

A handwritten signature in blue ink, appearing to read "Hui TONG".



Hui TONG
EMC Section Manager

A handwritten signature in blue ink, appearing to read "Wenqiang LU".


Wenqiang LU
EMC Project Engineer

A handwritten signature in blue ink, appearing to read "Tianji XU".

Tianji XU
EMC Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

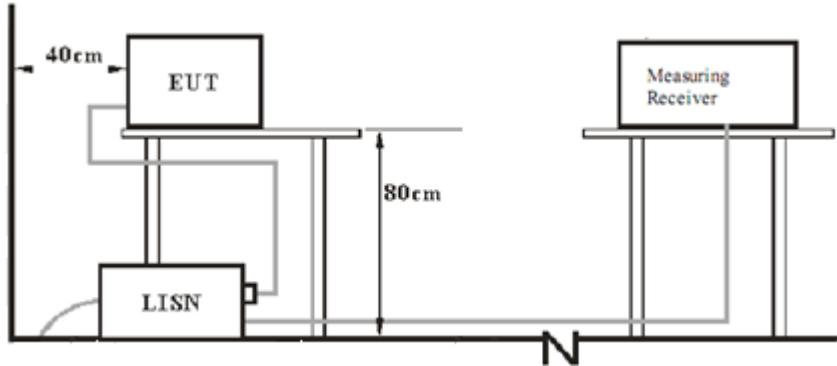


7.2 Radiated test setups

9kHz ~ 30MHz Test Setup:

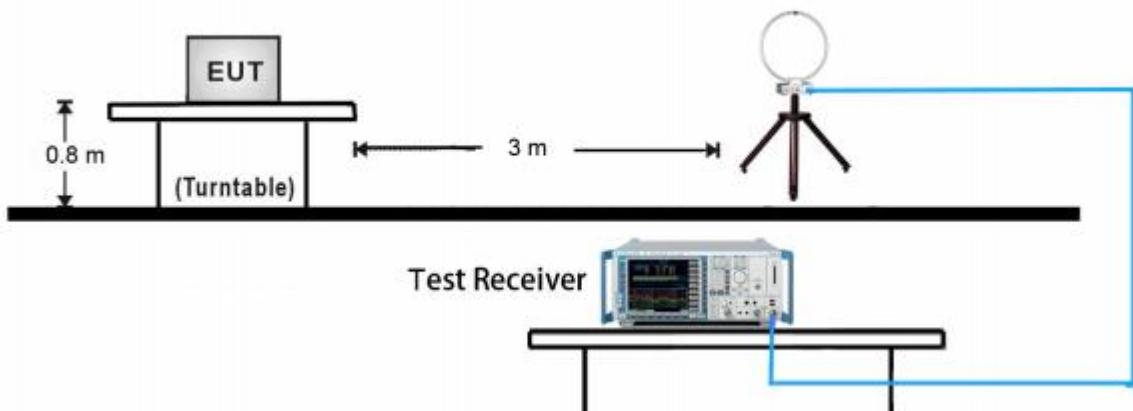





30MHz ~ 1GHz Test Setup:

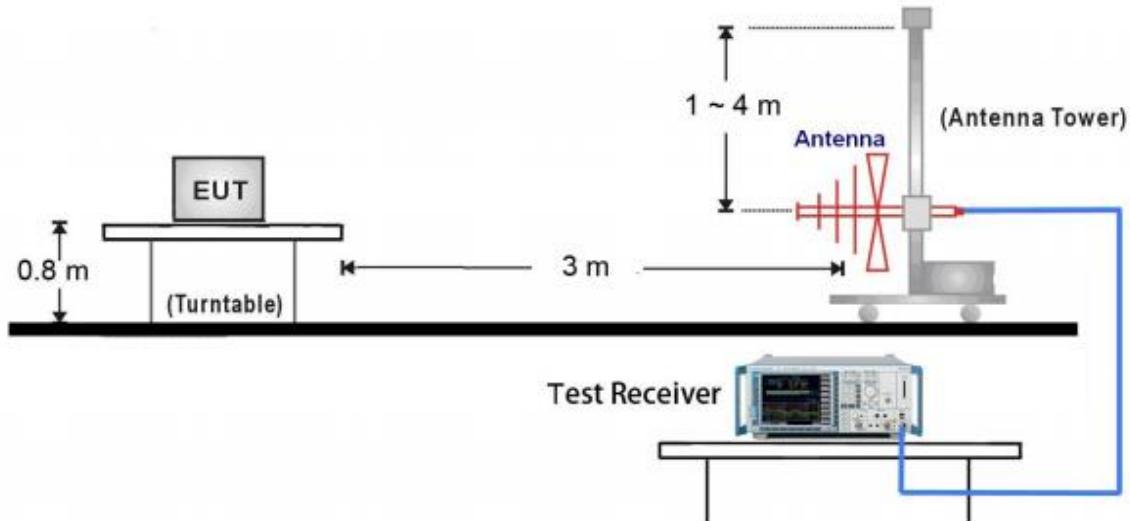

1GHz ~ 18GHz Test Setup:

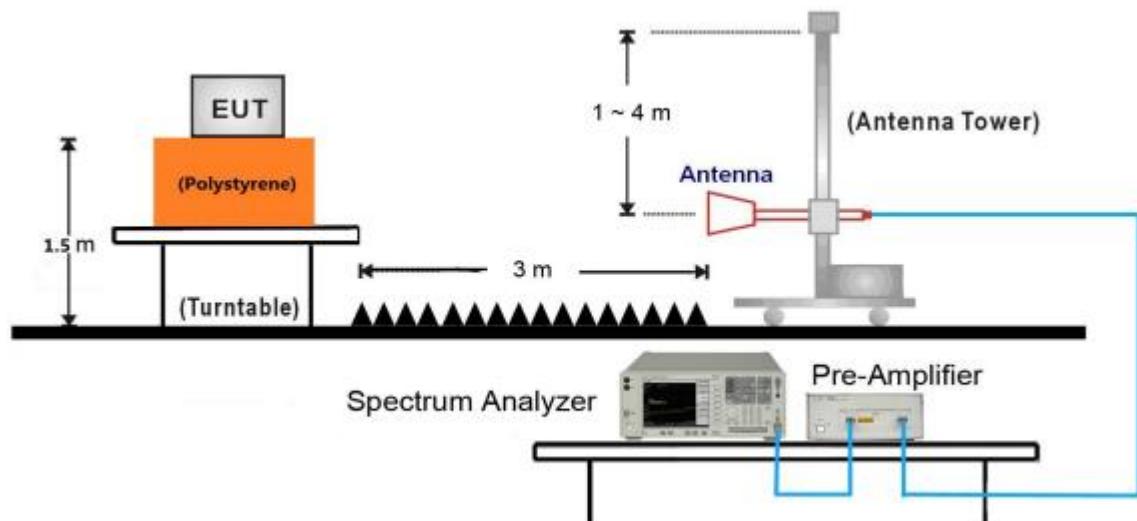

18GHz ~ 25GHz Test Setup:

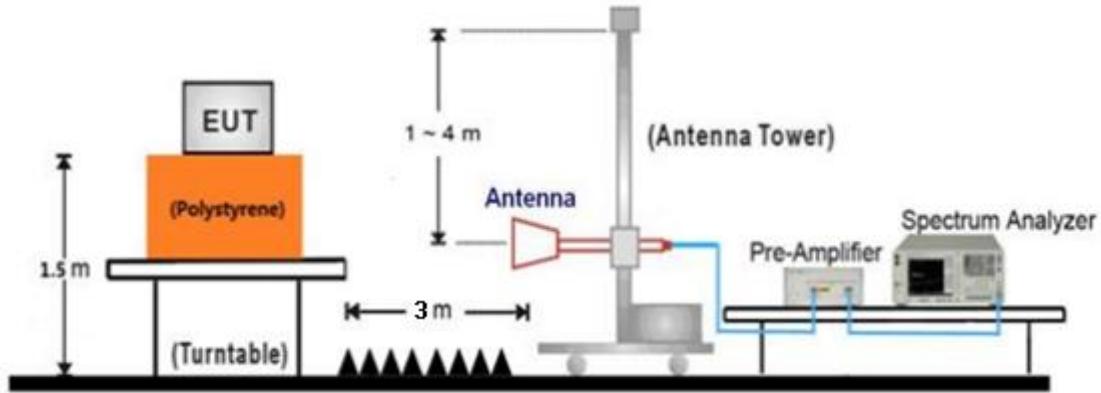

7.3 Conducted RF test setups





8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenovo	X240	Notebook

Test software: PUTTY.exe

The system was configured to channel 11, 18, and 26 for the test.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

Test Mode Applicability and Tested Channel Detail:

Mode	Tested Channel	Modulation	Index Value (Power level setting)
Thread	11	OQPSK	8
	18	OQPSK	8
	26	OQPSK	8



9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. An EMI test receiver is used to test the emissions from both sides of AC line

Limit


According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency



Product Type : Tubular motor
 M/N : CM-03-E
 Operating Condition : Mode 1: Tx_2405MHz (worst case)
 Test Specification : L-line
 Comment : 5VDC (powered by notebook whose input is 120V~, 60Hz)

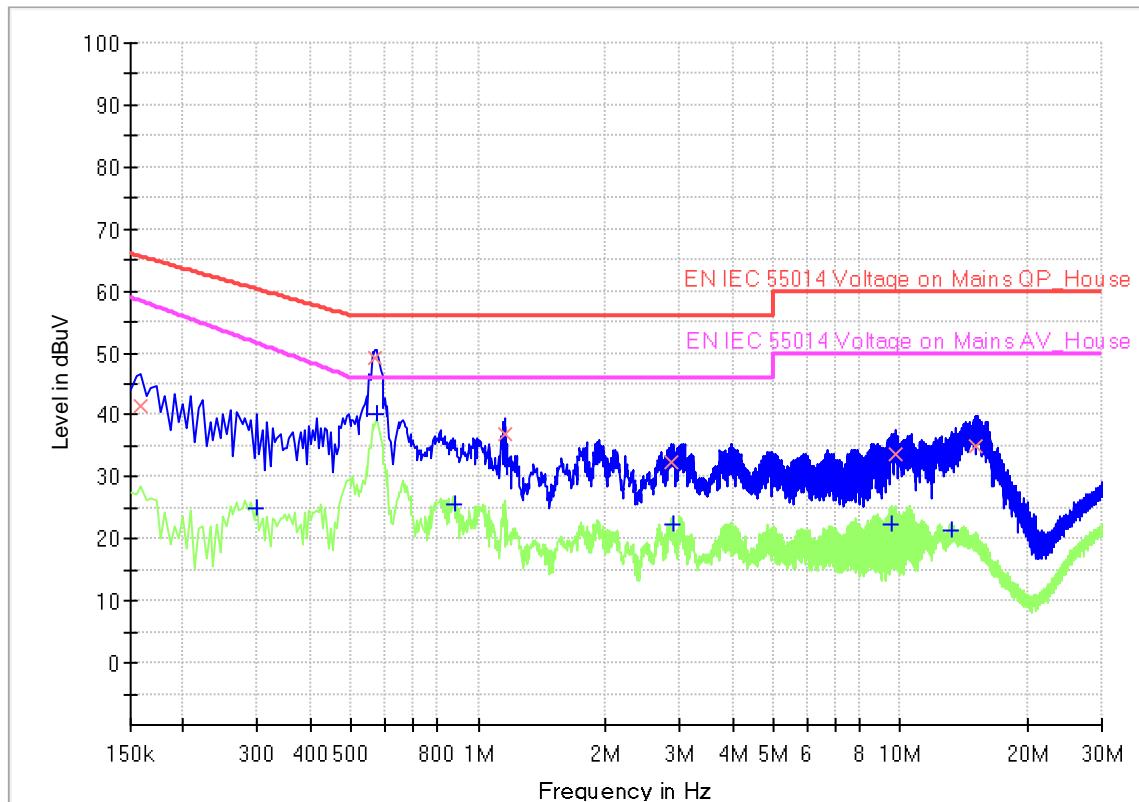


Final_Result

Frequency (MHz)	Quasi Peak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.159000	41.46	---	65.52	24.06	1000.0	9.000	L1	19.5
0.298500	---	24.91	51.57	26.66	1000.0	9.000	L1	19.5
0.568500	49.09	---	56.00	6.91	1000.0	9.000	L1	19.5
0.573000	---	40.10	46.00	5.90	1000.0	9.000	L1	19.5
0.879000	---	25.66	46.00	20.34	1000.0	9.000	L1	19.5
1.153500	37.07	---	56.00	18.93	1000.0	9.000	L1	19.5
2.859000	32.44	---	56.00	23.56	1000.0	9.000	L1	19.5
2.881500	---	22.51	46.00	23.49	1000.0	9.000	L1	19.5
9.487500	---	22.39	50.00	27.61	1000.0	9.000	L1	19.8
9.694500	33.74	---	60.00	26.26	1000.0	9.000	L1	19.8
13.258500	---	21.53	50.00	28.47	1000.0	9.000	L1	19.8
14.995500	35.07	---	60.00	24.93	1000.0	9.000	L1	19.8

Note 1: Measure Level = Reading Level + Factor
 Factor = Cable Loss + LISN Factor + 10dB Attenuator



Product Type : Tubular motor
 M/N : CM-03-E
 Operating Condition : Mode 1: Tx_2405MHz (worst case)
 Test Specification : N-line
 Comment : 5VDC (powered by notebook whose input is 120V~, 60Hz)

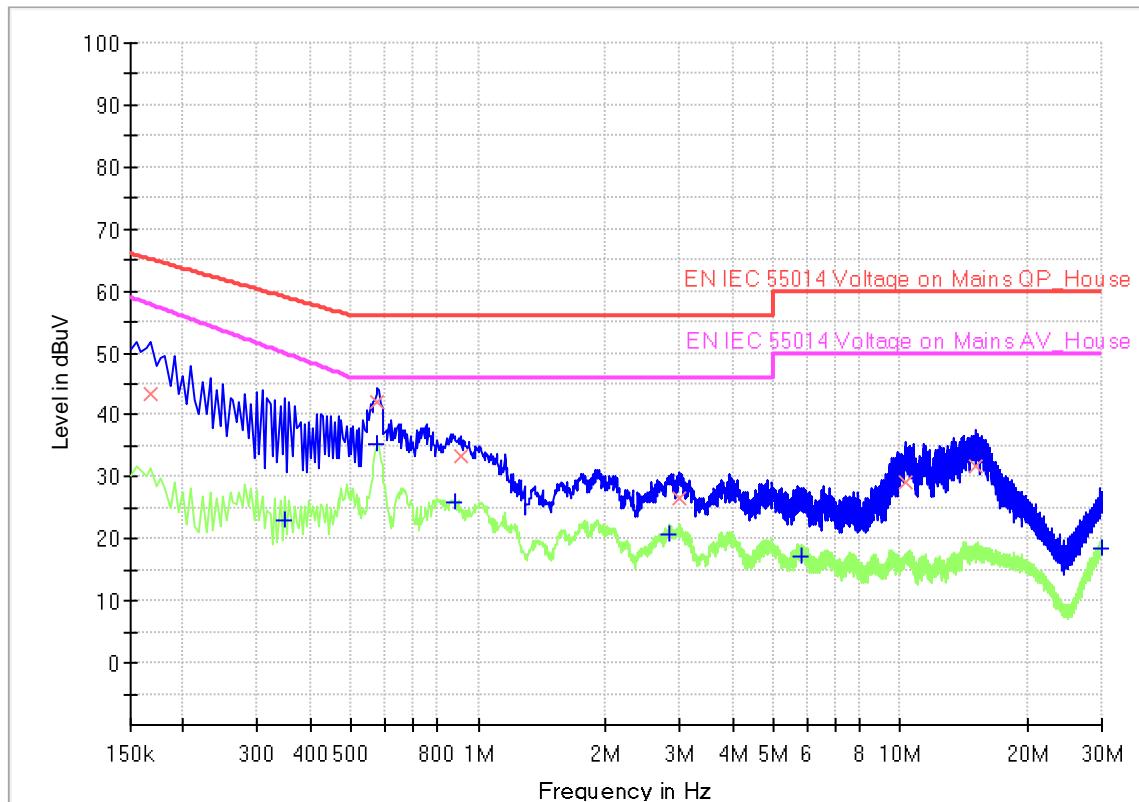

Final_Result

Frequency (MHz)	Quasi Peak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.168000	43.45	---	65.06	21.61	1000.0	9.000	N	19.5
0.348000	---	23.08	49.91	26.83	1000.0	9.000	N	19.5
0.577500	---	35.39	46.00	10.61	1000.0	9.000	N	19.5
0.577500	42.13	---	56.00	13.87	1000.0	9.000	N	19.5
0.879000	---	25.79	46.00	20.21	1000.0	9.000	N	19.5
0.906000	33.46	---	56.00	22.54	1000.0	9.000	N	19.5
2.832000	---	20.78	46.00	25.22	1000.0	9.000	N	19.5
2.980500	26.62	---	56.00	29.38	1000.0	9.000	N	19.5
5.856000	---	17.14	50.00	32.86	1000.0	9.000	N	19.6
10.275000	29.08	---	60.00	30.92	1000.0	9.000	N	19.8
15.103500	31.79	---	60.00	28.21	1000.0	9.000	N	19.9
29.899500	---	18.31	50.00	31.69	1000.0	9.000	N	21.0

Note 1: Measure Level = Reading Level + Factor
 Factor = Cable Loss + LISN Factor + 10dB Attenuator



9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
RBW > the 6 dB bandwidth of the emission being measured, VBW \geq 3RBW, Span \geq 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.


Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

	Frequency Range	Limit	Limit
	MHz	W	dBm
Conducted peak output power	2400-2483.5	≤ 1	≤ 30
e.i.r.p.	2400-2483.5	≤ 4	≤ 36

Test result as below table

Frequency MHz	Conducted Peak Output Power dBm	E.I.R.P dBm	Result
Low channel 2405MHz	7.08	9.28	Pass
Middle channel 2440MHz	6.57	8.77	Pass
High channel 2480MHz	6.6	8.8	Pass

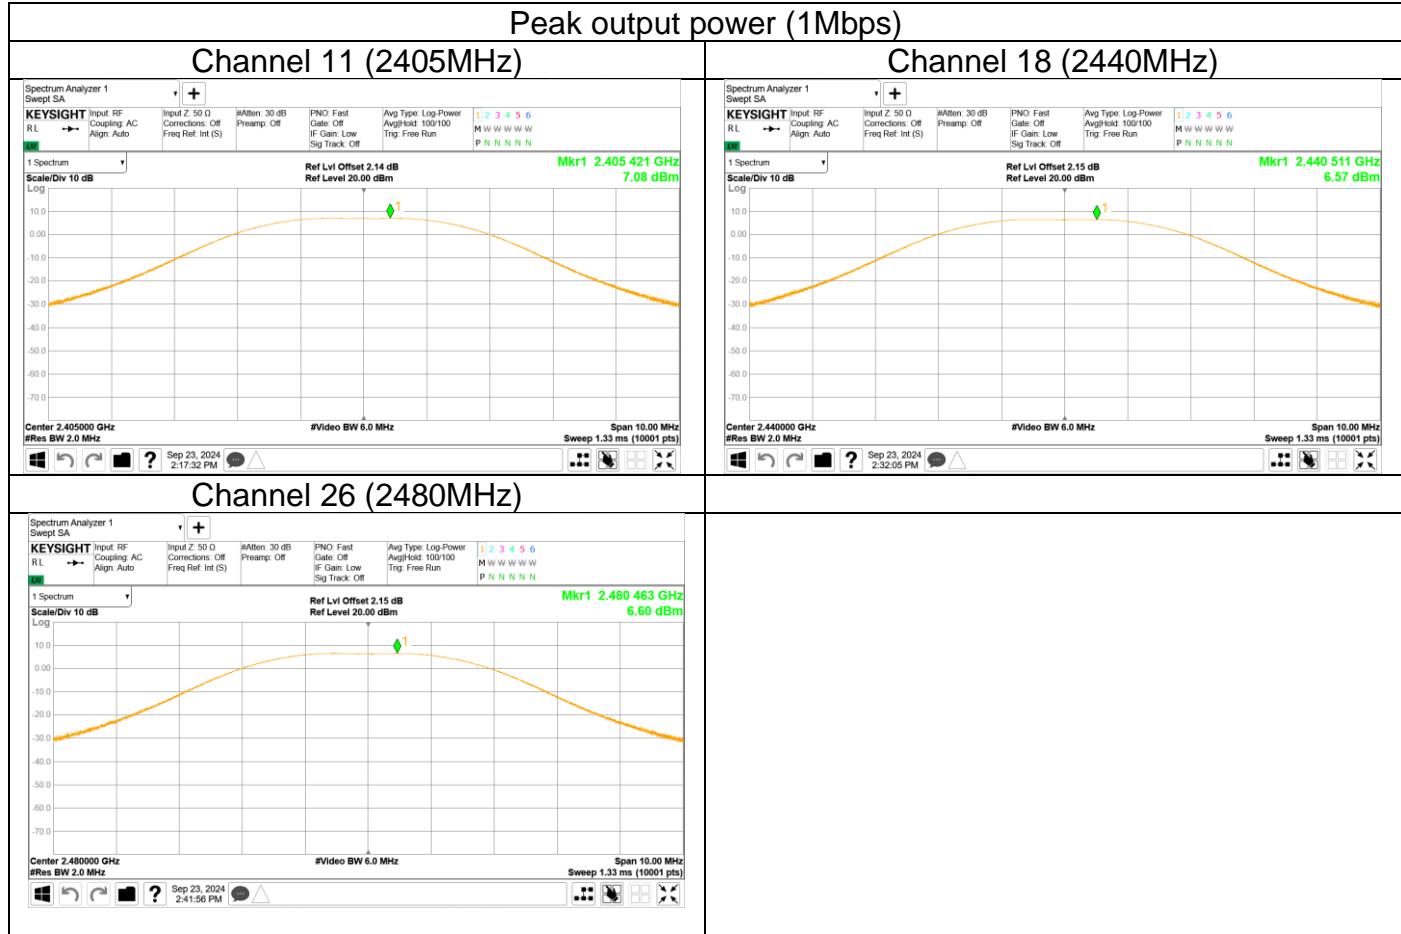



9.3 6dB bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Test Method for 99 % Bandwidth

1. Connect EUT test port to spectrum analyzer.
Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the occupied bandwidth measurement capability of test receiver.
3. Allow the trace to stabilize, record the occupied bandwidth value.

Limit

According to §15.247(a)(2), 6dB bandwidth limit as below:

6dB bandwidth Limit [kHz]	99% bandwidth Limit [kHz]
\geq 500	--

Test result

Frequency MHz	6dB bandwidth kHz	99% Bandwidth kHz	Result
Top channel 2405MHz	1018	2233	Pass
Middle channel 2440MHz	1010	2237	Pass
Bottom channel 2480MHz	1452	2243	Pass



6dB Bandwidth





99% Occupied Bandwidth





9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:


1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3KHz]
 \leq 8

Test result

Frequency MHz	Power spectral density dBm/3kHz	Result
Top channel 2405MHz	-2.05	Pass
Middle channel 2440MHz	-2.82	Pass
Bottom channel 2480MHz	-3.49	Pass

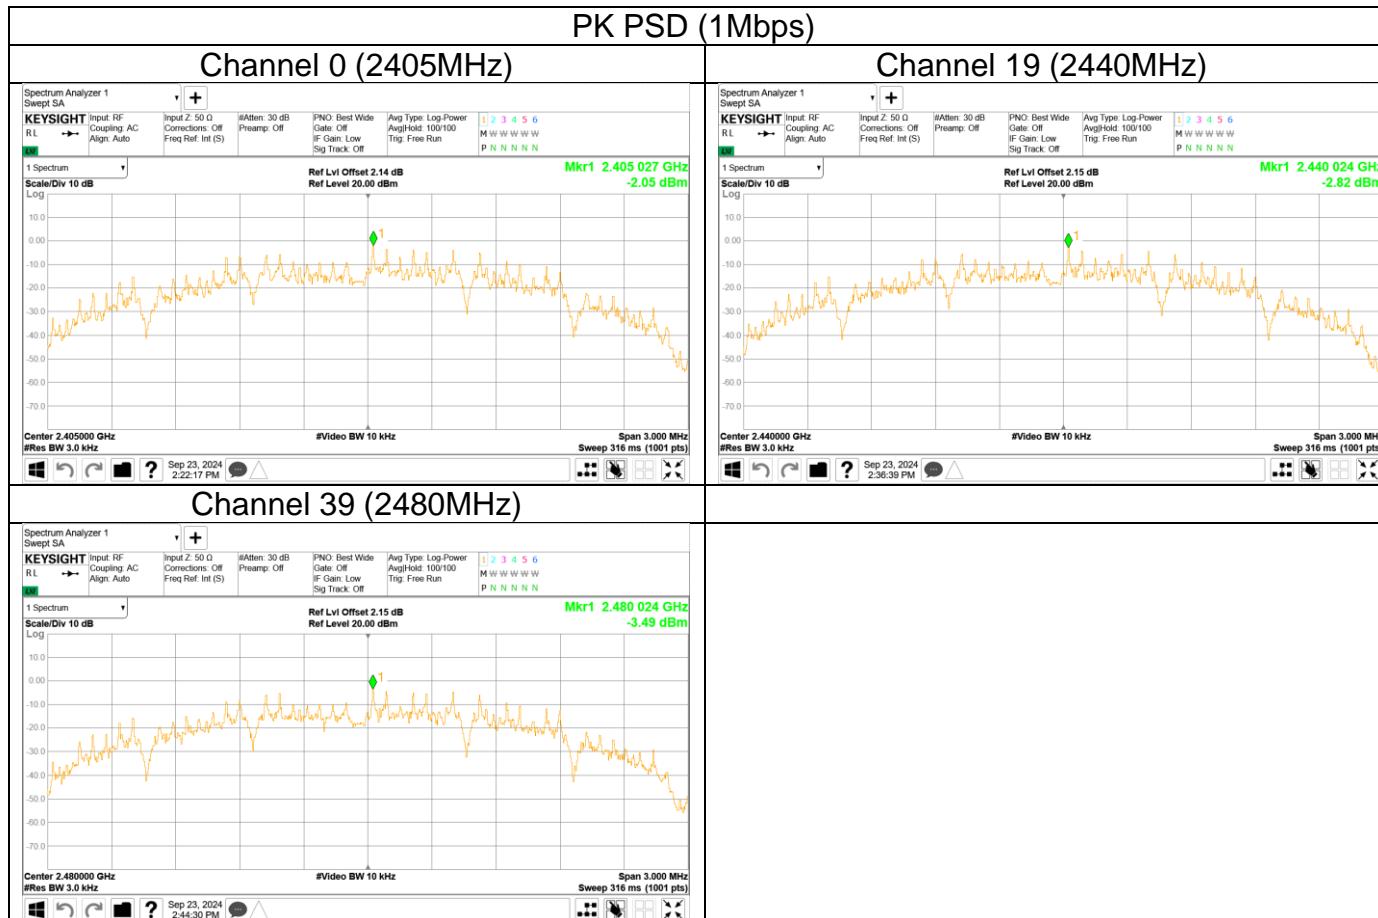



9.5 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


Limit


According to §15.247(d), spurious RF conducted emissions limit as below:

Frequency Range MHz	Limit (dBc)
30-25000	-20



Spurious RF conducted emissions

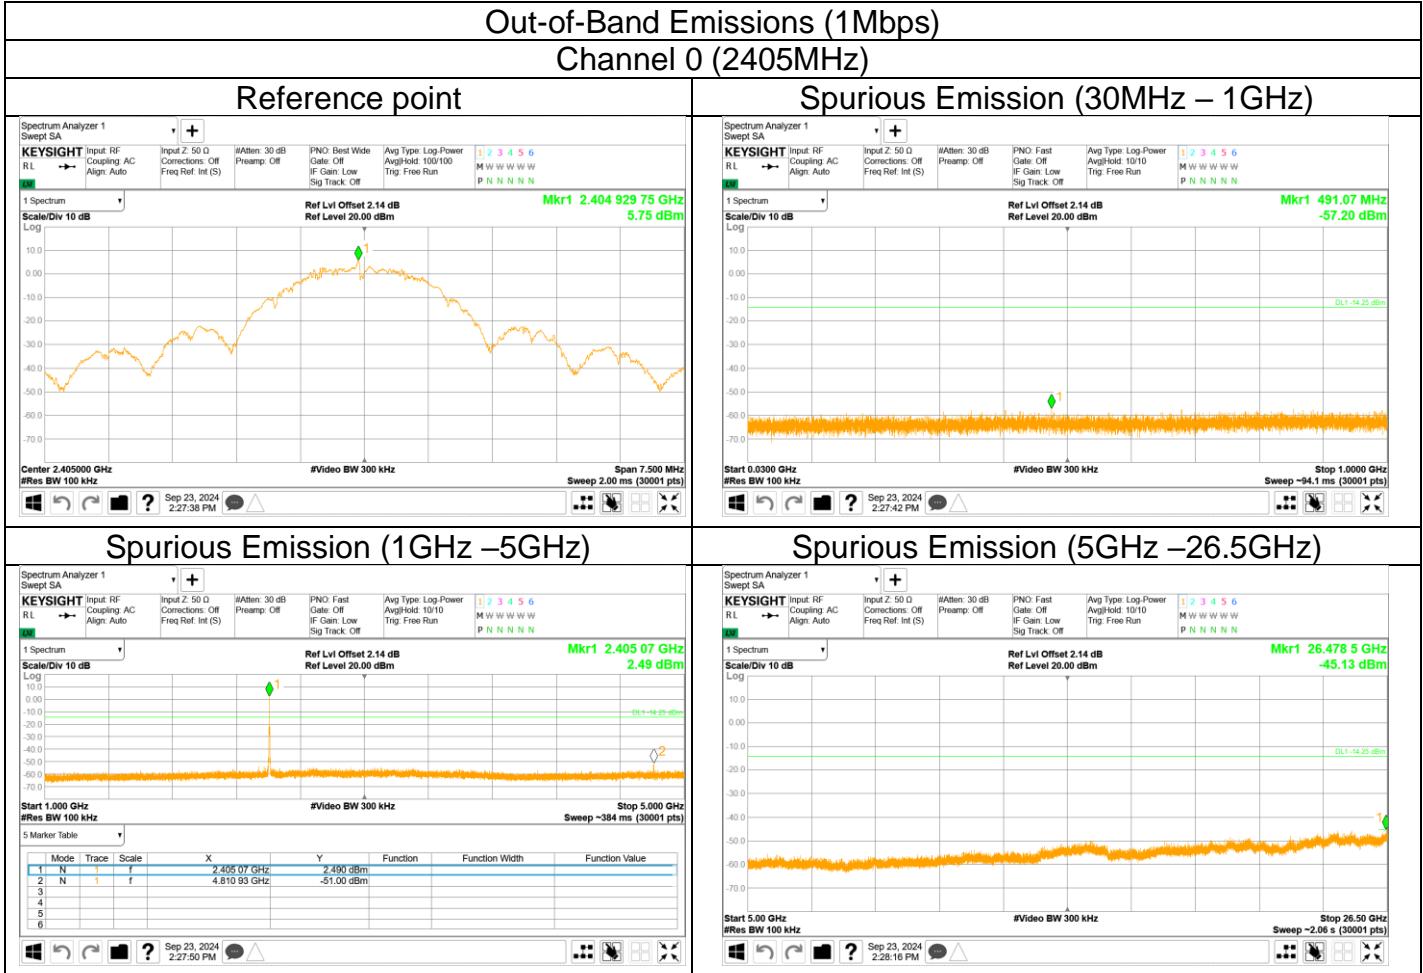

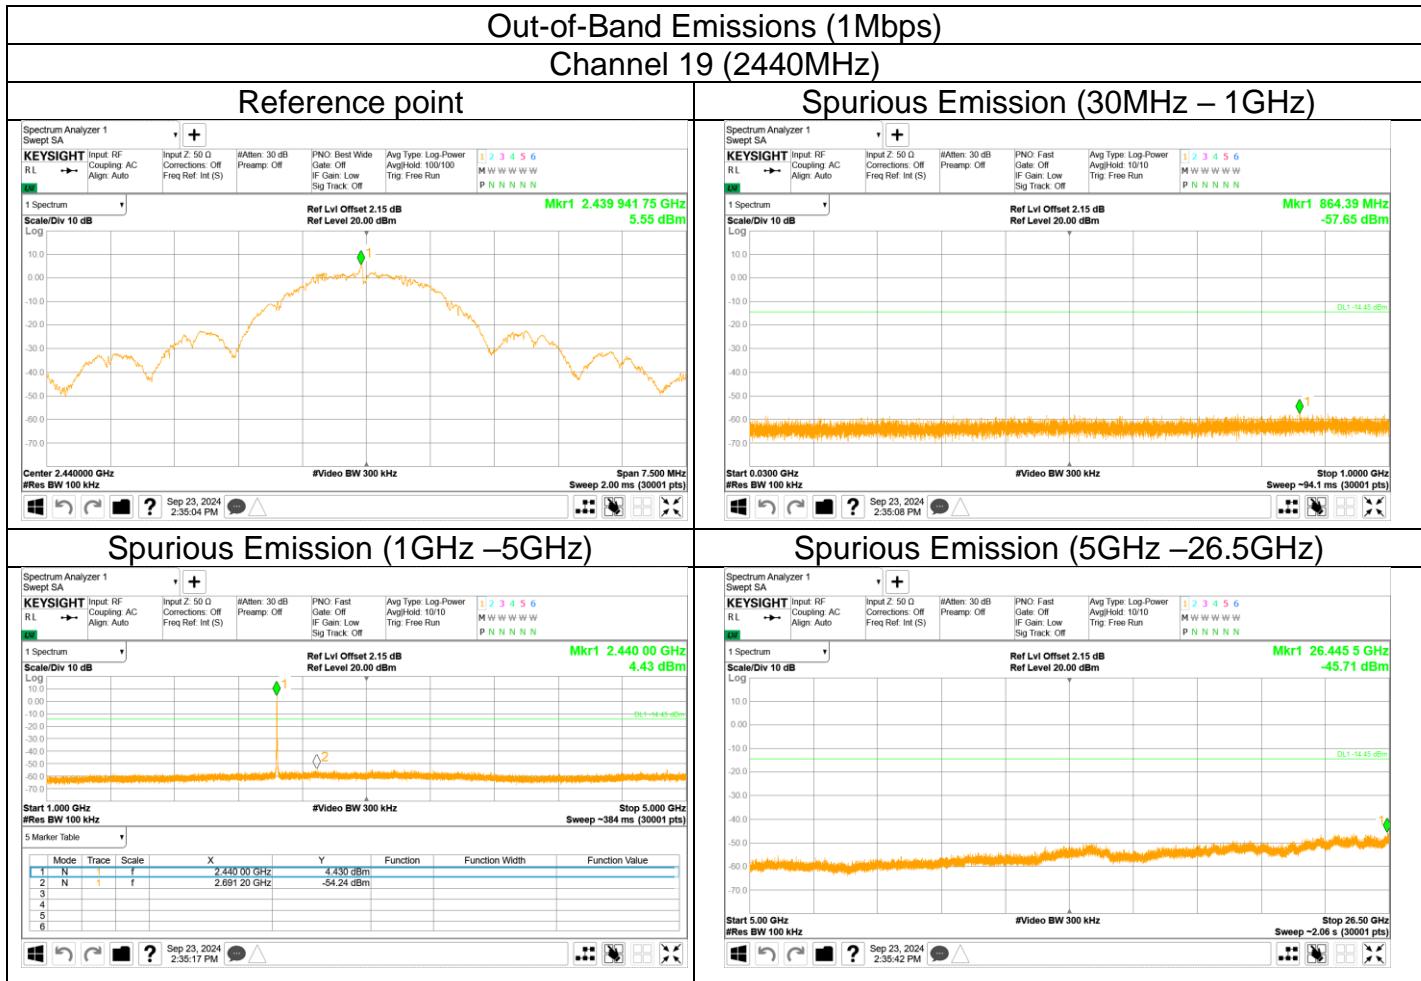




Out-of-Band Emissions (1Mbps)

Channel 39 (2480MHz)


Reference point

Spurious Emission (30MHz – 1GHz)

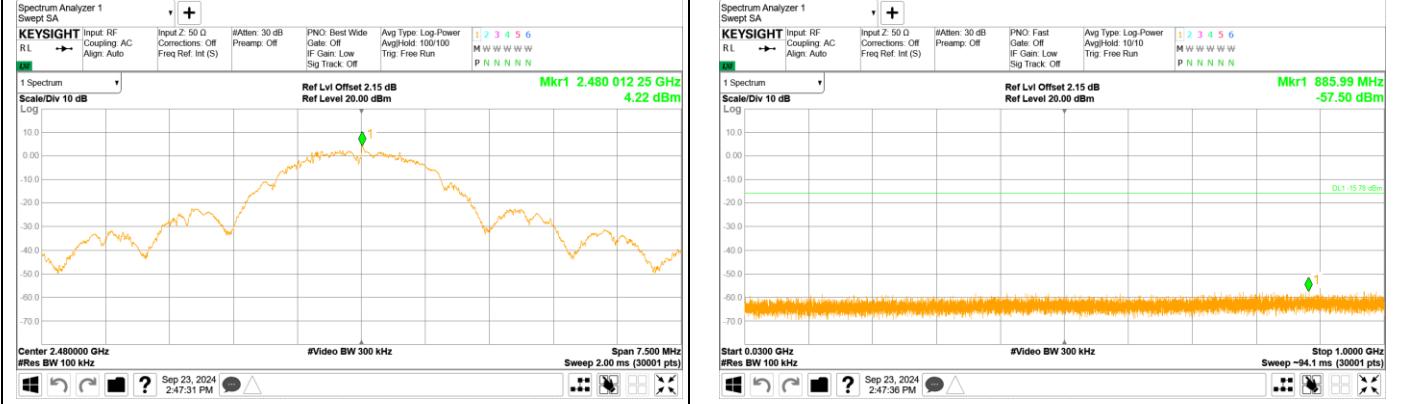

Spurious Emission (1GHz – 5GHz)

Spurious Emission (5GHz – 26.5GHz)

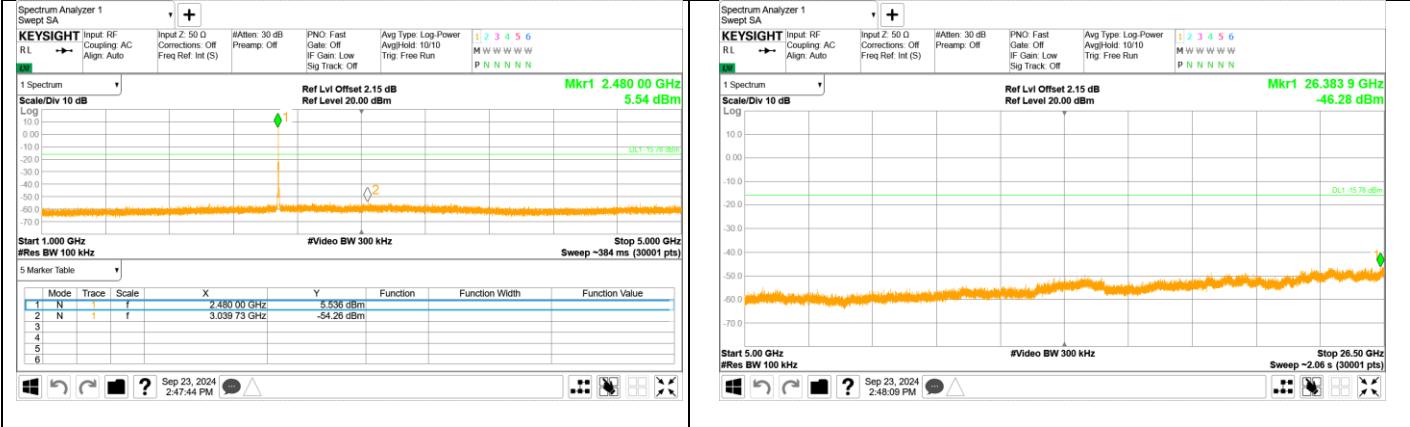



9.6 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.


According to §15.247(d), band edge limit as below:

Frequency Range MHz	Limit (dBc)
30-25000	-20



Test result

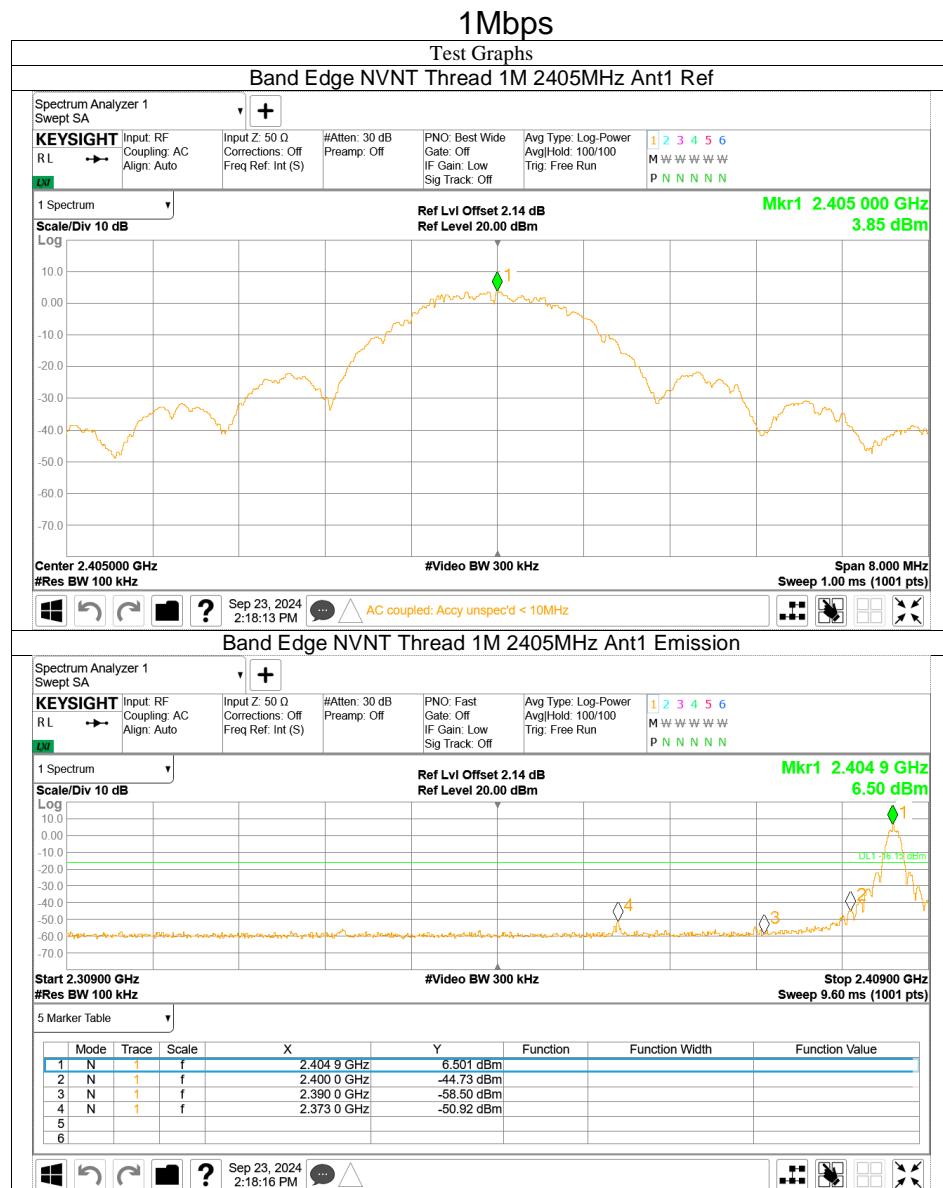

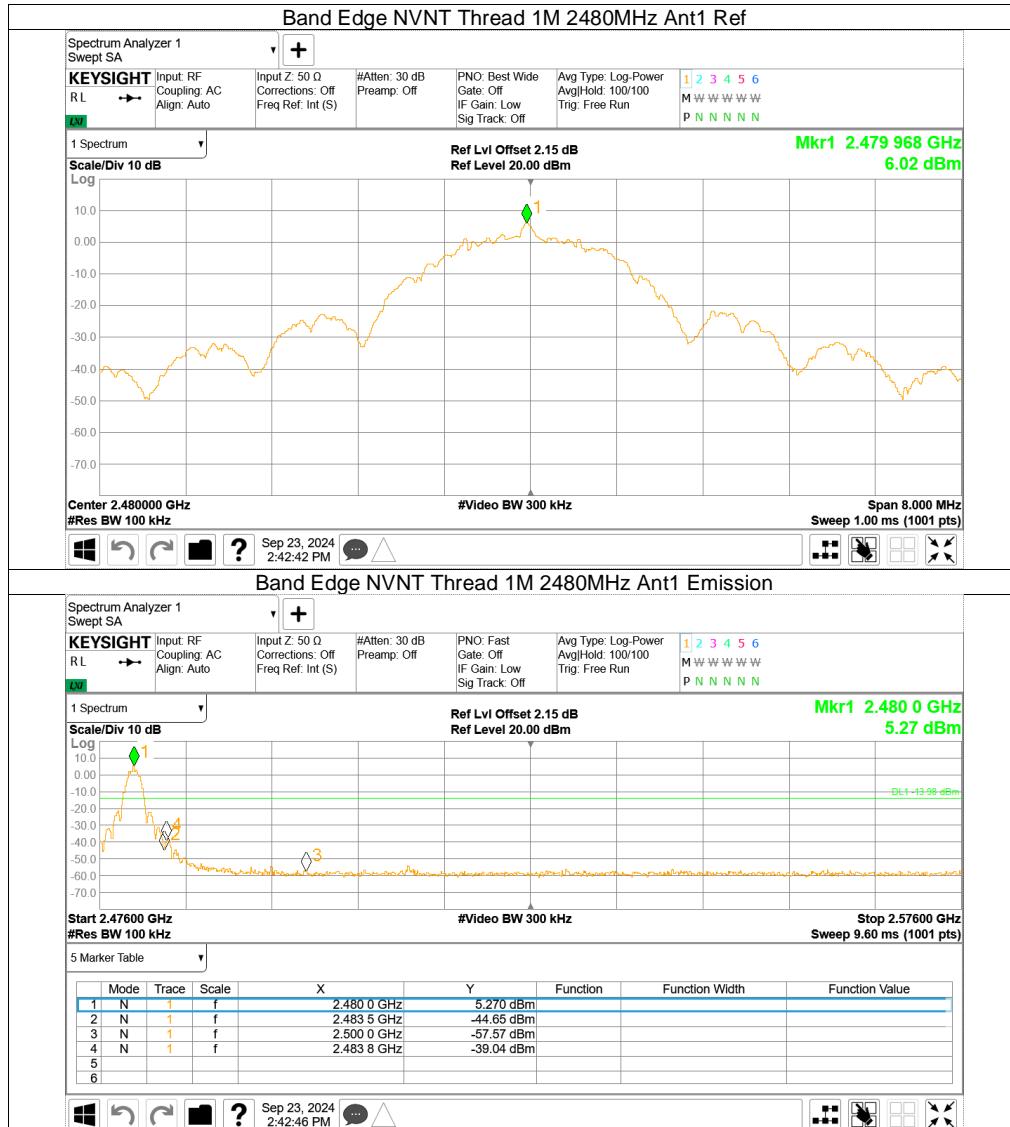



9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz to 120kHz, VBW≥RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW≥RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1GHz

 - a) RBW = 1MHz.
 - b) VBW \ [3 x RBW].
 - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.



2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength μV/m	Field Strength dBμV/m	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3m(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 300m(\text{dB}\mu\text{V}/\text{m}) + 40\log(300m/3m)$ (Below 30MHz)

Note 2: Limit $3m(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30m(\text{dB}\mu\text{V}/\text{m}) + 40\log(30m/3m)$ (Below 30MHz)

Spurious Radiated Emissions for Transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.



Test result

The worst case of Radiated Emission below 1GHz: Only the worst case listed as below.

30-1000MHz Radiated Emission

EUT Information


EUT Name:	Tubular motor
Model:	CM-03-E
Client:	Coulisse B.V.
Op Cond:	Power on and TX at 2405MHz, 1Mbps
Operator:	Tianji XU
Test Spec:	FCC Part 15.209(a)
Sample No:	SHA-816506-10

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup:	RE_VULB9168
Receiver:	[ESR 3]
Level Unit:	dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

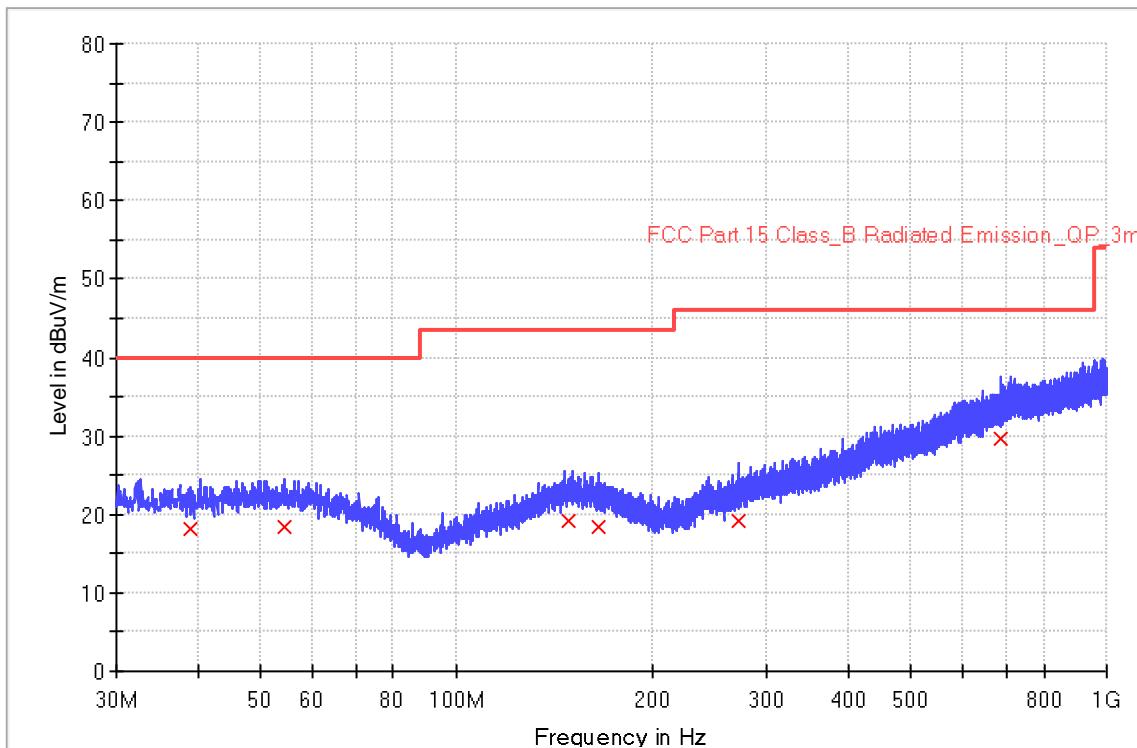



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)
38.960000	18.1	1000.0	120.000	112.0	H	135.0	19.9	21.9
54.400000	18.4	1000.0	120.000	100.0	H	228.0	20.4	21.6
148.640000	19.2	1000.0	120.000	202.0	H	307.0	21.0	24.3
164.920000	18.5	1000.0	120.000	300.0	H	196.0	20.6	25.0
271.080000	19.1	1000.0	120.000	150.0	H	285.0	20.5	26.9
687.480000	29.7	1000.0	120.000	280.0	H	177.0	30.2	16.3

(continuation of the "Limit and Margin" table from column 16 ...)

Frequency (MHz)	Limit - QPK (dBuV/m)
38.960000	40.0
54.400000	40.0
148.640000	43.5
164.920000	43.5
271.080000	46.0
687.480000	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



30-1000MHz Radiated Emission

EUT Information


EUT Name: Tubular motor
 Model: CM-03
 Client: Coulisse B.V.
 Op Cond: Power on and TX at 2405MHz, 1Mbps
 Operator: Tianji XU
 Test Spec: FCC Part 15.209(a)
 Sample No: SHA-816506-10

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
 Receiver: [ESR 3]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

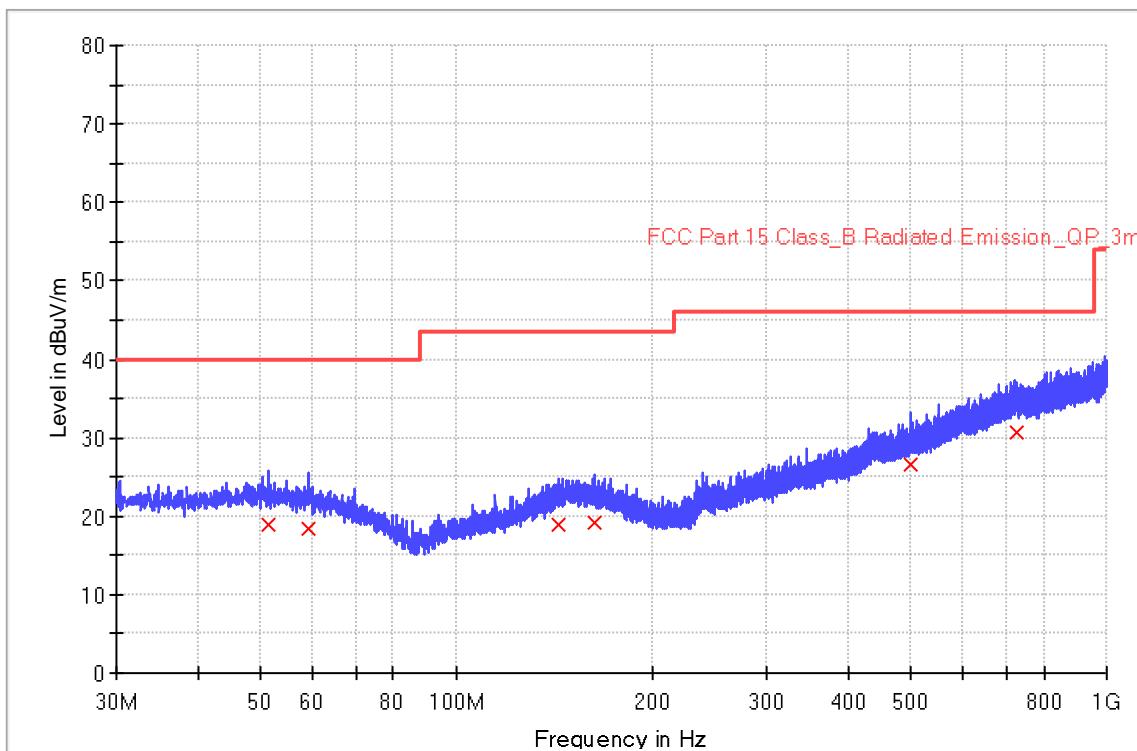



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)
51.440000	18.8	1000.0	120.000	100.0	V	217.0	20.6	21.2
59.200000	18.4	1000.0	120.000	180.0	V	196.0	20.3	21.6
143.840000	18.9	1000.0	120.000	220.0	V	228.0	20.5	24.6
163.240000	19.2	1000.0	120.000	150.0	V	307.0	20.7	24.3
500.880000	26.5	1000.0	120.000	100.0	V	196.0	26.6	19.5
725.160000	30.7	1000.0	120.000	200.0	V	225.0	31.2	15.3

(continuation of the "Limit and Margin" table from column 16 ...)

Frequency (MHz)	Limit - QPK (dBuV/m)
51.440000	40.0
59.200000	40.0
143.840000	43.5
163.240000	43.5
500.880000	46.0
725.160000	46.0


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)




Radiated Emission 1-18GHz

Frequency: 2405MHz, 1Mbps

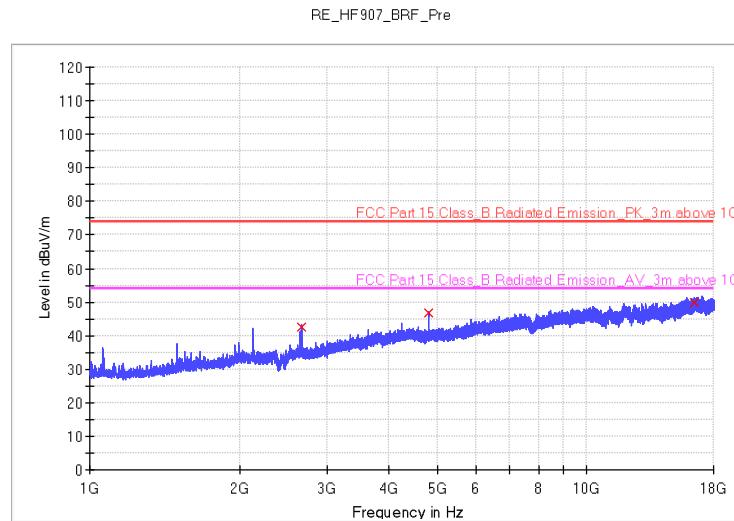


Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2664.400000	42.5	107.0	H	25.0	-9.6	31.5	74.0
4811.200000	46.8	109.0	H	214.0	-2.7	27.2	74.0
16442.500000	49.7	214.0	H	11.0	6.7	24.3	74.0

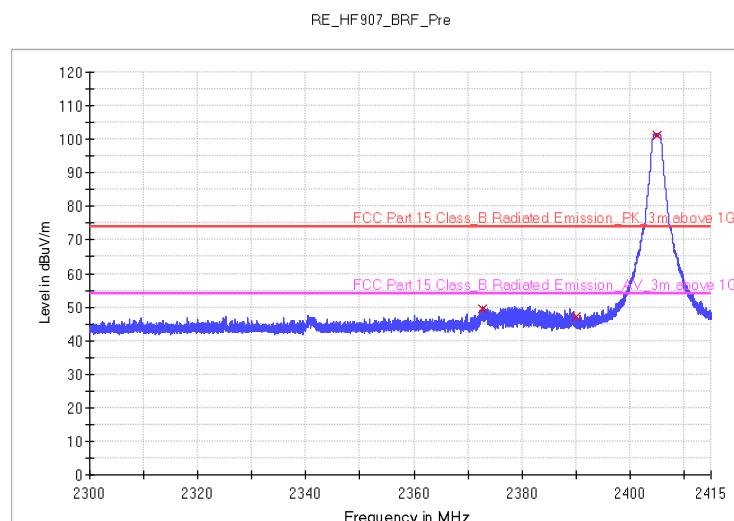

Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2372.800000	49.6	188.0	H	256.0	-0.8	24.4	74.0
2390.000000	47.2	200.0	H	13.0	-0.8	26.8	74.0
2405.000000	101.3	101.0	H	118.0	-0.8	/	/




RE_HF907_BRF_Pre

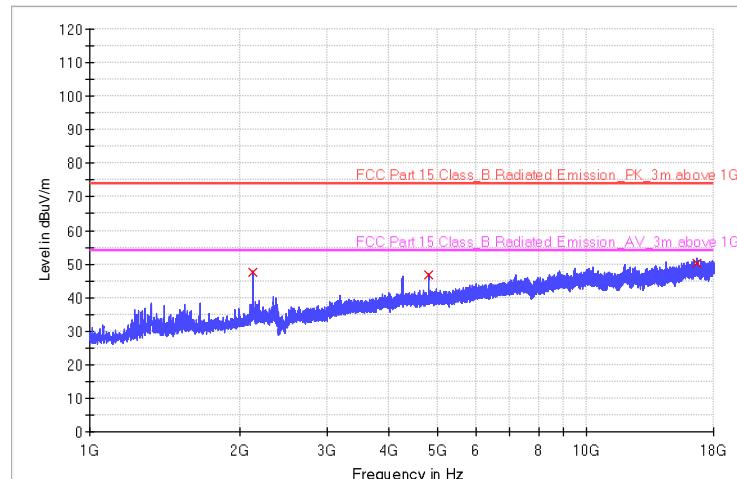

Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2129.500000	47.5	126.0	V	325.0	-11.4	26.5	74.0
4809.100000	46.7	207.0	V	14.0	-2.7	27.3	74.0
16683.100000	50.4	170.0	V	274.0	7.2	23.6	74.0

RE_HF907_BRF_Pre

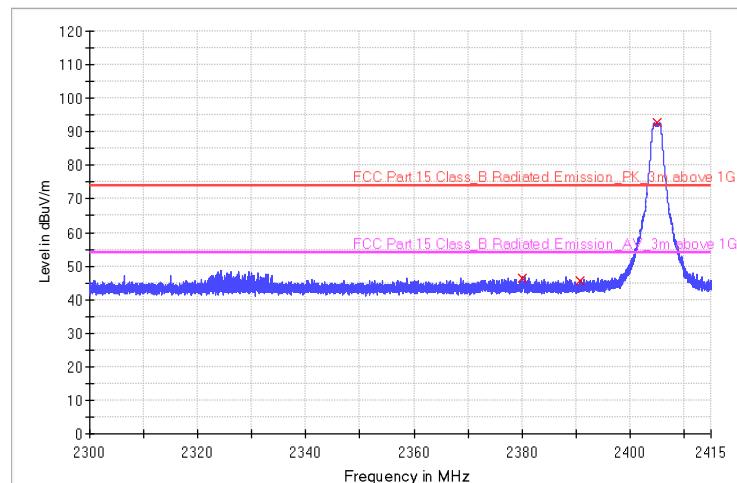


Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2380.000000	46.2	141.0	V	125.0	-0.8	27.8	74.0
2390.800000	45.7	124.0	V	244.0	-0.8	28.3	74.0
2405.000000	92.6	148.0	V	311.0	-0.8	/	/




Frequency:2440MHz

RE_HF907_BRF_Pre

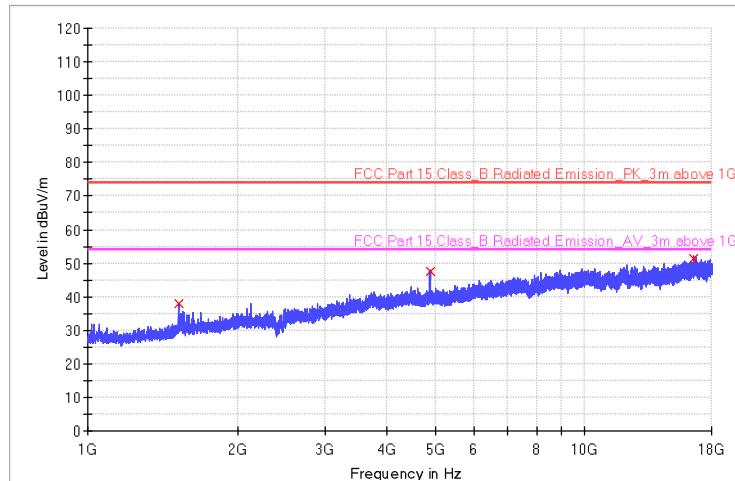

Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1521.100000	38.1	211.0	H	156.0	-14.5	35.9	74.0
4880.800000	47.5	100.0	H	224.0	-2.4	26.5	74.0
16564.600000	51.3	178.0	H	34.0	6.9	22.7	74.0

RE_HF907_BRF_Pre

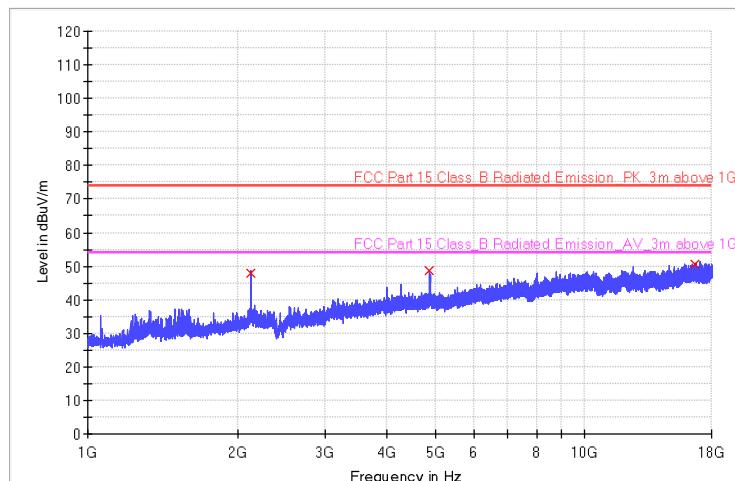


Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2132.500000	48.1	208.0	V	52.0	-11.4	25.9	74.0
4878.700000	48.6	136.0	V	135.0	-2.4	25.4	74.0
16693.000000	50.6	131.0	V	227.0	7.2	23.4	74.0




Frequency:2480MHz

RE_HF907_BRF_Pre

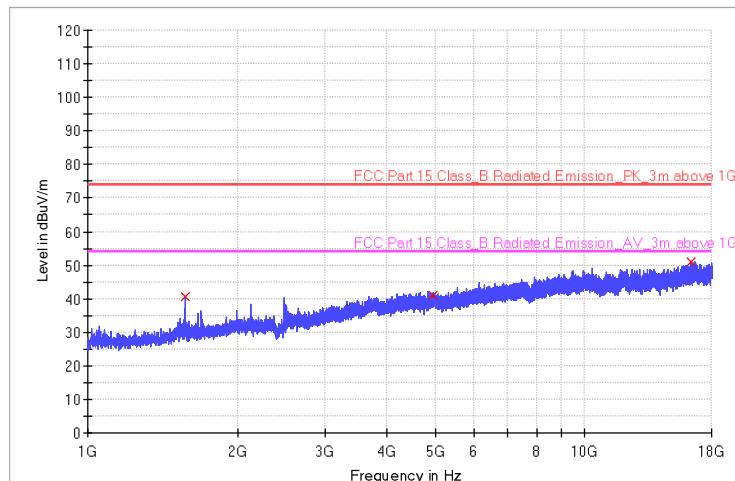

Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1570.000000	40.5	127.0	H	254.0	-14.2	33.5	74.0
4958.800000	41.1	113.0	H	135.0	-2.3	32.9	74.0
16402.000000	50.8	163.0	H	224.0	6.6	23.2	74.0


RE_HF907_BRF_Pre

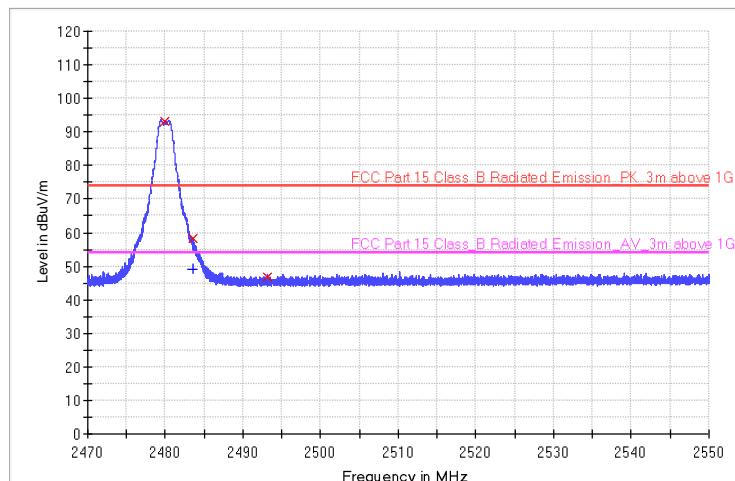

Frequency (MHz)	MaxPeak (dBuV/m)	RMS (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV)	Margin - RMS (dB)	Limit - RMS (dBuV/m)
2479.900000	93.3	---	108.0	H	321.0	-0.3	-19.3	74.0	---	---
2483.500000	---	49.2	166.0	H	227.0	-0.3	---	---	4.8	54.0
2483.500000	58.3	---	138.0	H	223.0	-0.3	15.7	74.0	---	---
2493.200000	46.7	---	164.0	H	15.0	-0.3	27.3	2493.2	74.0	---




RE_HF907_BRF_Pre

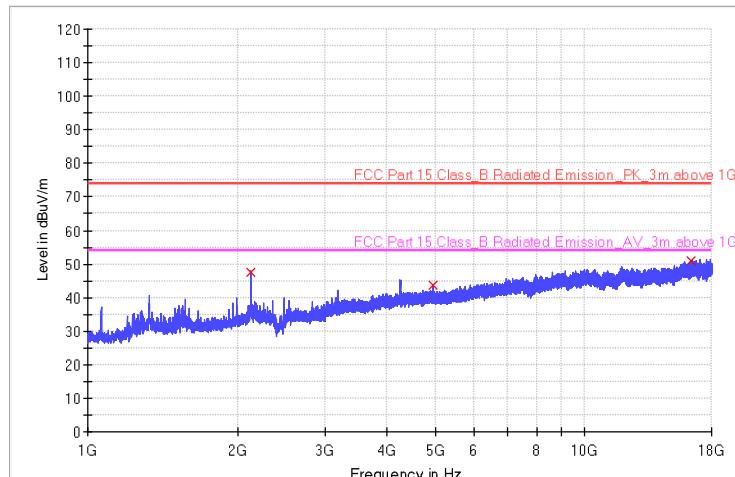

Frequency (MHz)	MaxPeak (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2131.600000	47.4	164.0	V	321.0	-11.4	26.6	74.0
4958.800000	43.6	121.0	V	117.0	-2.3	30.4	74.0
16413.700000	50.8	108.0	V	275.0	6.7	23.2	74.0

RE_HF907_BRF_Pre

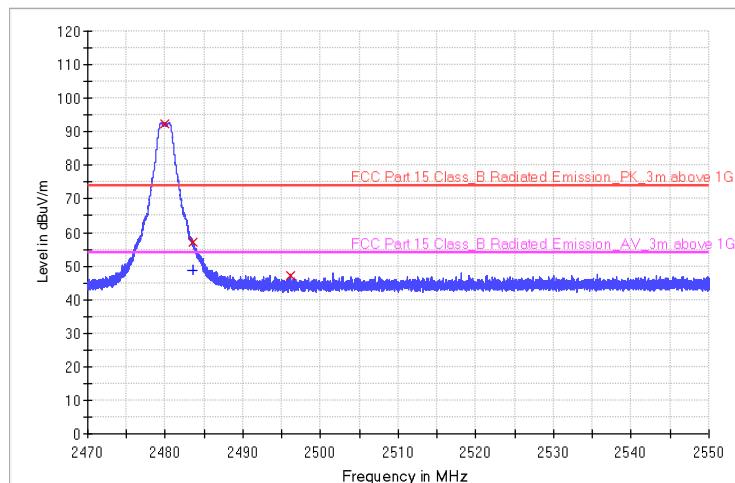


Frequency (MHz)	MaxPeak (dBuV/m)	RMS (dBuV/m)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV)	Margin - RMS (dB)	Limit - RMS (dBuV/m)
2479.900000	92.5	---	126.0	V	34.0	-0.3	-18.5	74.0	---	---
2483.500000	---	48.6	118.0	V	220.0	-0.3	---	---	5.4	54.0
2483.500000	57.2	---	220.0	V	10.0	-0.3	16.8	74.0	---	---
2496.100000	47.2	---	205.0	V	340.0	-0.3	26.8	74.0	---	---



The worst case of Radiated Emission Above 18GHz

Frequency:2405MHz

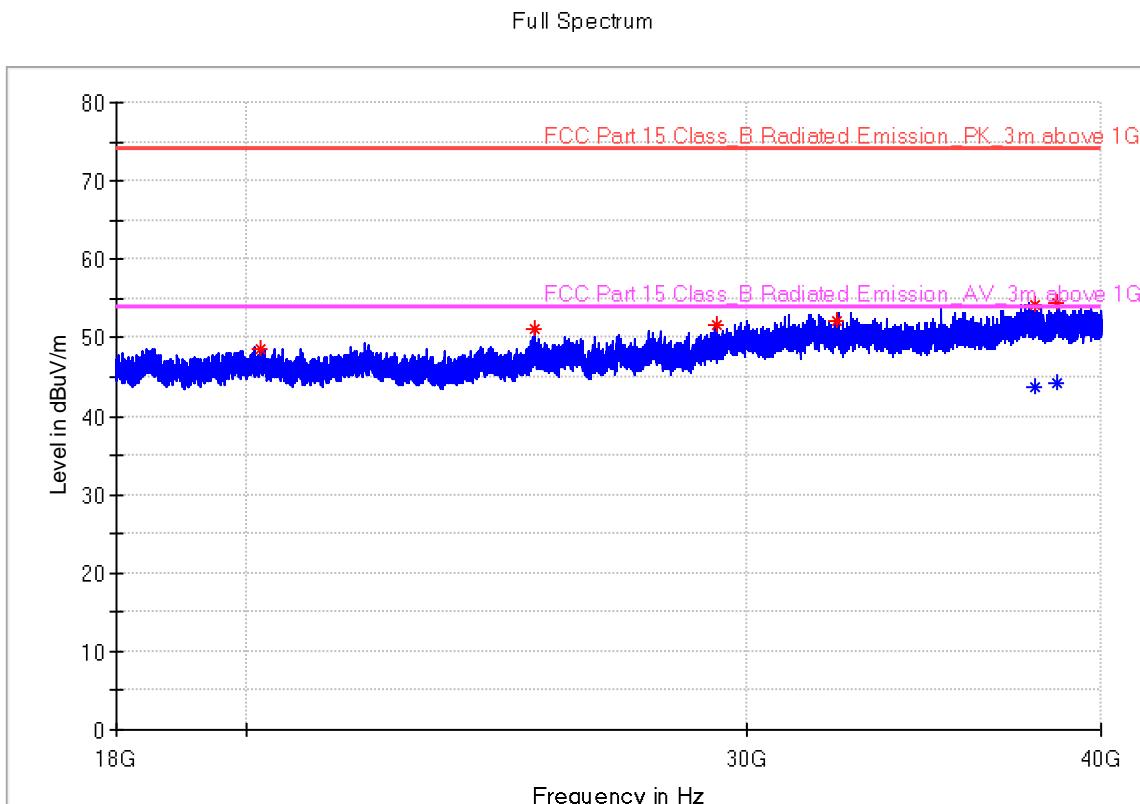


Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20231.625000	48.60	---	74.00	25.40	193	H	166.0	12.6
25266.187500	51.20	---	74.00	22.80	275	H	231.0	13.2
29292.875000	51.65	---	74.00	22.35	194	H	346.0	19.3
32298.625000	52.16	---	74.00	21.84	224	H	324.0	18.9
37915.500000	---	43.82	54.00	10.18	159	H	346.0	18.1
37915.500000	54.24	---	74.00	19.76	178	H	217.0	19.6
38585.125000	---	44.33	54.00	9.67	113	H	346.0	18.1
38585.125000	54.56	---	74.00	19.44	193	H	339.0	18.1



Full Spectrum

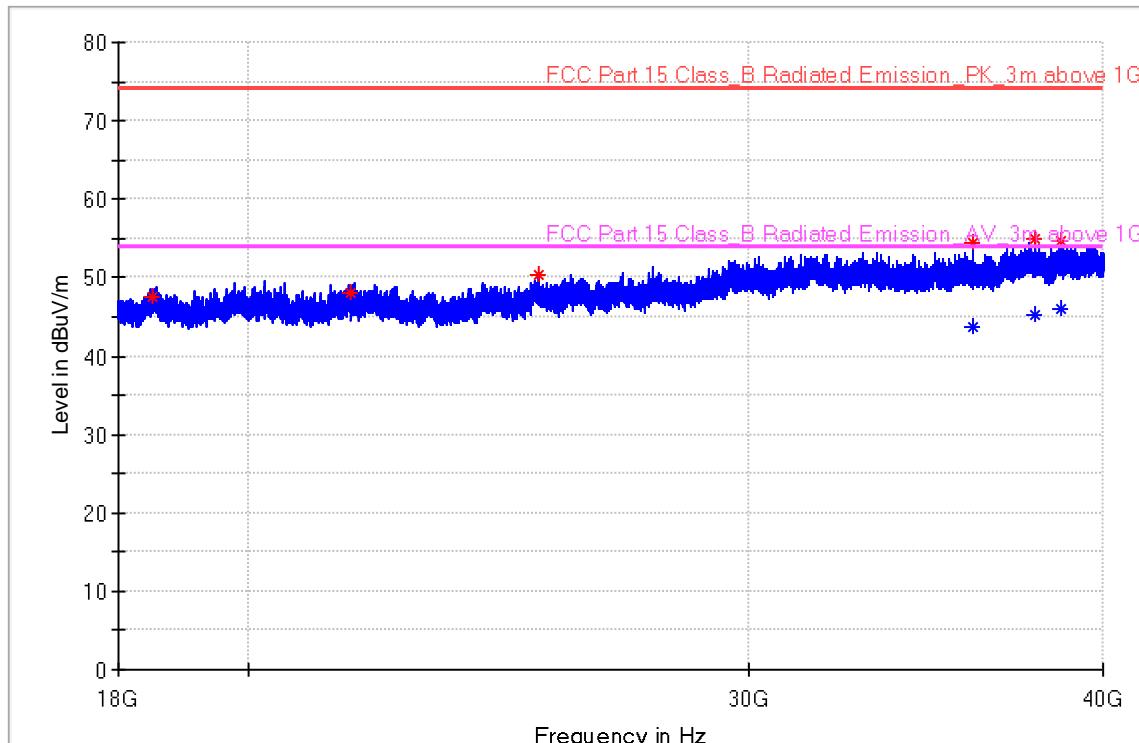

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18515.625000	47.47	---	74.00	26.53	184	V	126.0	9.7
21741.375000	48.14	---	74.00	25.86	230	V	81.0	15.4
25303.312500	50.33	---	74.00	23.67	240	V	300.0	13.8
36022.150000	54.55	---	74.00	19.45	196	V	227.0	17.5
36022.150000	---	43.75	54.00	10.25	177	V	307.0	17.5
37882.500000	---	45.24	54.00	8.76	129	V	220.0	19.7
37882.500000	54.91	---	74.00	19.09	287	V	198.0	19.6
38655.250000	---	46.17	54.00	7.83	184	V	88.0	15.6
38655.250000	54.65	---	74.00	19.35	230	V	103.0	17.9

Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading



10 Test Equipment List

List of Test Instruments
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal spectrum analyzer	Agilent	N9020B	MY59050168	2024-2-19	2025-2-18
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2023-8-1	2024-7-31
	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2024-8-1	2025-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2023-8-1	2024-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2024-8-1	2025-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2021-9-23	2024-9-22
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2024-8-30	2025-8-29
	Double-ridged waveguide horn antenna	Rohde & Schwarz	HF907	102393	2024-4-14	2025-4-13
	Pre-amplifier	Shenzhen HzEMC	HPA-081843	HYPAA23026	2024-4-16	2025-4-15
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2024-6-26	2025-6-25
	Double Ridged Horn Antenna	ETS-Lindgren	3116C	00246076	2023-7-7	2026-7-6
CE	3m Semi-anechoic chamber	TDK	9X6X6	----	2024-5-8	2027-5-7
	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2023-8-1	2024-7-31
	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2024-8-1	2025-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2023-8-1	2024-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2024-8-1	2025-7-31

Measurement Software Information

Test Item	Software	Manufacturer	Version
C	MTS 8310	MWRFtest	3.0.0.0
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.16dB
Radiated Disturbance	9kHz to 30MHz, 3.52dB 30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB
RF Conducted Measurement	Power related: 1.16dB Frequency related: 6.00×10^{-8}

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

THE END