

Ningbo Shenghong Communications Equipment Co., Ltd.

Product Specification

Product Name: 2.4G Antenna

Specification: SHZD2400-2U-K11

Company Code: SHSC3.945.04040

Customer Code:

Compile: Lijun

Reviewed: Tonghe

Approved: Panqingsong

File number:

Customer:

Customer affirm:

date: 2023.03.06

2.4G Antenna

I . **Product Name:** Line Antenna

II . **Specification:**

III. **Technical Parameter:**

1. Electrical Characteristics

Frequency range:	2400-2483MHz
Polarization:	Vertical
Max Gain:	2. 2dBi
Max VSWR:	≤ 3.8
Impedance:	50 Ω
3dB beam width:	H:360° E:/
Max.Power:	10W
Lighting protection:	DC Ground

(Determined by the sample)

2. Mechanical Characteristics

Input:	U.FL (male)
Cable type:	1.13 or other
Cable length:	195mm
Cable Impedance:	50 Ω
Connector pull-out:	2N





Antenna weight:	about 5g
Radiation material:	copper
Colour:	White (appoint color)

(Determined by the sample)

3. Working Environment:

Temperature: $-30^{\circ}\text{C} \sim +75^{\circ}\text{C}$

Corrosive gas environment: no acidity and no alkalescence in air all around
(contenting other request environment)

IV. Max exterior Dimensions:

L x Φ : about 195mm $\times$ Φ 2.9mm (Determined by the sample)

V. Materiel Introduction:

1. General Situation: This product is Designed according to the particular criterion, This antenna was used to The Wireless public-WIFI. This antenna's performance is excellent, figuration is handsome, dependability is well.


2. Package & Stock age: This product should be packed in plastic box, and then put into hard carton; each box with a conformity certificate, which is included product P/N, date, checking stamp, company stamp; each box is sticked with product P/N, package quantity. The stockage condition is: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$; the compared humidity is 80%; being stored in the room without acidity, alkalescency and causticity in air.

3. Exchange Relationship: U.FL-K

4. technics & use: immediately screw on.

JUNPER INTERCONNECTION CO., LTD,
TECHNOLOGY CENTRE

07070576CSHS

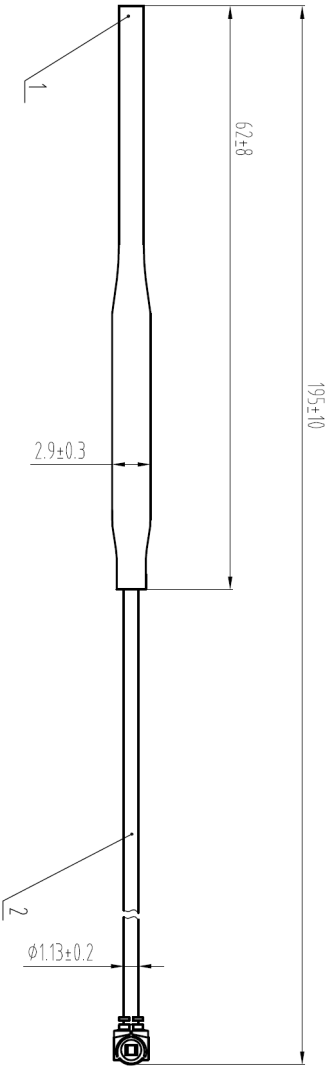

Technical requirements:
1.Antenna color: white.
2.Frequency requirements: 2400-2483MHz.
3.VSWR: ≤3.8.

3				
2	SHSC6645.8724	UFL Cable assembly	1	Ø1.13,White skin
1	SHSC7.391.04.009	Heat shrinkable tube	1	White
number	Code	Name	number	Remarks

Ningbo Shenghong Communications Equipment				
Assembly drawing			WiFi Antenna K11	
SHZD2400-2U-K11			V1.0	
Design	lijun	Quality		
Standard				
Check				
Assembly		Approval		
Figure like Mark			Version	Weight
S	A		--g	
Paper:	/	Proportion		
			SHSC3.945.04040	

Borrow items Code
Borrow items
Attachments


The Testing

Appendix 1

The Date

Number	Item type		Requiremengt	Result
1	Frequency		2400-2483MHz	OK
2	Band Width		83MHz	OK
3	Polarization		Vertical	OK
4	Max Gain		2.2dBi	OK
5	Max VSWR		<3.8	2.29
6	Beam width	H	360°	360°
		E	/	/
8	Input		UFL-K	OK

Appendix 2—VSWR

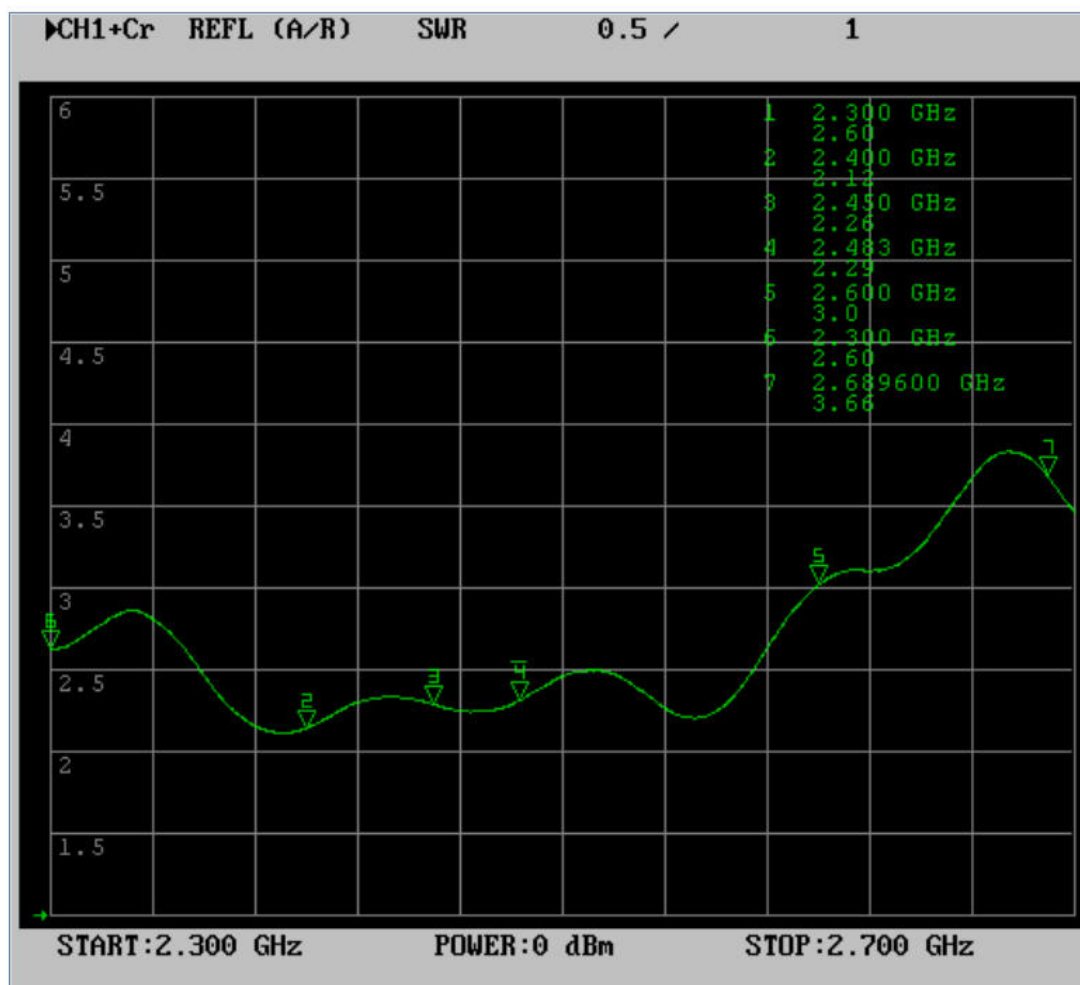

antenna K11 (SHZD2400-2U-K11, 195cm)

Frequency (MHz)	2400	2412	2437	2447	2462	2483
Directivity(dB)	5.8125	5.5863	5.3926	5.3917	5.2936	5.4056
Gain(dB)	2.0258	2.1896	1.9105	2.0268	2.0128	2.2123
Efficiency(dB)	-3.4108	-3.1922	-3.3012	-3.4013	-3.0938	-2.8988
Efficiency(%)	49.6685	50.978	50.2639	49.9218	51.961	52.8652
BW@Phi=0	40.9163	38.313	91.2966	87.7535	84.1497	41.9901
BW@phi=90	30.6546	30.071	29.633	29.5011	30.3416	29.5976
BW@theta=90	51.4605	50.9507	48.5624	47.9251	50.3584	85.689
Roundness@Theta=30	10.4569	11.0814	11.9047	10.8544	8.8121	7.6726
Roundness@Theta=60	7.8943	8.3979	12.1558	13.76	11.9072	13.2063
Roundness@Theta=90	11.1839	11.6223	12.313	12.4054	11.6365	11.5702
Peak Gain@Phi(deg)	46	46	46	46	46	46
Peak Gain@Theta(deg)	-138	-138	-138	-138	-136	-136
Null@Phi(deg)	158	158	158	158	158	158
Null@Theta(deg)	-180	-180	-180	-180	-180	-180
upper spherical efficiency(dB)	-7.9586	-7.5646	-7.4142	-7.51	-7.3554	-7.205
upper spherical efficiency(%)	16.0007	17.5203	18.1374	17.7419	18.3849	19.0329
lower spherical efficiency(dB)	-5.2771	-5.163	-5.3571	-5.505	-5.1462	-5.041
lower spherical efficiency(%)	29.6678	30.4577	29.1265	28.1517	30.5761	31.3255
Efficiency LHCP(dB)	-5.5811	-5.3619	-5.4457	-5.6487	-5.4414	-5.2766
Efficiency LHCP(%)	27.6622	29.0941	28.5385	27.2351	28.5669	29.6717
Efficiency RHCP(dB)	-7.4457	-7.2391	-7.2757	-7.2912	-6.905	-6.8431
Efficiency RHCP(%)	18.0063	18.8839	18.7254	18.6584	20.3941	20.6867
Gain LHCP(dB)	1.4932	1.5134	1.1077	0.8543	1.3555	1.8665
Gain RHCP(dB)	0.7059	0.7246	0.6151	0.6201	1.1648	1.2967
AR	3.0972	3.6988	3.108	2.5461	2.0642	1.9689
AR dB	9.8193	11.3612	9.8497	8.1175	6.2952	5.8846
Power ratio (%)	19.1936	19.8724	20.8928	20.9068	18.9774	18.4875

