



# FCC RADIO TEST REPORT

## FCC ID: ZY9-SPC906

**Product :** RF LCD Waves Clock

**Trade Name :** SHARP

**Model Name :** SPC906

**Serial Model :** SPC906, A02105

**Report No. :** NTEK-2012NT0911830F

### **Prepared for**

Shenzhen Great Power Enterprise Co., Ltd.

Building E, Xin Xulong Industrial Area, KuKeng Village, Guanlan Town,  
Bao'an District, Shenzhen, China

### **Prepared by**

NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599  
Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen Great Power Enterprise Co., Ltd.

Address ..... : Building E, Xin Xulong Industrial Area, KuKeng Village, Guanlan Town, Bao'an District, Shenzhen, China

**Manufacture's Name** ..... : Shenzhen Great Power Enterprise Co., Ltd.

Address ..... : Building E, Xin Xulong Industrial Area, KuKeng Village, Guanlan Town, Bao'an District, Shenzhen, China

### Product description

Product name ..... : RF LCD Waves Clock

Model and/or type reference : SPC906

Serial Model : SPC906, A02105

Rating(s) ..... : DC 3V

**Standards** ..... : FCC Part15.231

Test procedure ..... ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :

Date (s) of performance of tests ..... : 11 Sep 2012 ~21 Sep 2012

Date of Issue ..... : 22 Sep 2012

Test Result ..... : **Pass**

Testing Engineer : Apple Huang  
(Apple Huang)

Technical Manager : Tom Zhang  
(Tom Zhang)

Authorized Signatory : Bovey Yang  
(Bovey Yang)

Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1.1 TEST FACILITY</b>	<b>6</b>
<b>1.2 MEASUREMENT UNCERTAINTY</b>	<b>6</b>
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	<b>7</b>
<b>2.2 DESCRIPTION OF TEST MODES</b>	<b>8</b>
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>9</b>
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>10</b>
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>11</b>
<b>3 . ANTENNA REQUIREMENT</b>	<b>12</b>
<b>3.1 STANDARD REQUIREMENT</b>	<b>12</b>
<b>3.2 EUT ANTENNA</b>	<b>12</b>
<b>3.3 CONDUCTED EMISSION MEASUREMENT</b>	<b>13</b>
<b>3.3.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>13</b>
<b>3.3.2 TEST PROCEDURE</b>	<b>14</b>
<b>3.3.3 DEVIATION FROM TEST STANDARD</b>	<b>14</b>
<b>3.3.4 TEST SETUP</b>	<b>14</b>
<b>3.3.5 TEST RESULT</b>	<b>15</b>
<b>3.4 RADIATED EMISSION MEASUREMENT</b>	<b>16</b>
<b>3.4.1 RADIATED EMISSION LIMITS</b>	<b>16</b>
<b>3.4.2 TEST PROCEDURE</b>	<b>17</b>
<b>3.4.3 DEVIATION FROM TEST STANDARD</b>	<b>17</b>
<b>3.4.4 TEST SETUP</b>	<b>17</b>
<b>3.4.5 TEST RESULTS (BLOW 30MHZ)</b>	<b>19</b>
<b>3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)</b>	<b>20</b>
<b>4 . BANDWIDTH TEST</b>	<b>22</b>
<b>4.1 TEST PROCEDURE</b>	<b>22</b>
<b>4.2 DEVIATION FROM STANDARD</b>	<b>22</b>
<b>4.3 TEST SETUP</b>	<b>22</b>
<b>4.4 TEST RESULTS</b>	<b>23</b>
<b>5 . PERIODIC RATE EXCEEDING</b>	<b>24</b>
<b>5.1 REQUIREMENTS</b>	<b>24</b>
<b>5.2 TEST PROCEDURE</b>	<b>24</b>
<b>5.3 TEST SETUP</b>	<b>24</b>
<b>5.4 TEST RESULTS</b>	<b>24</b>
<b>6 . EUT TEST PHOTO</b>	<b>26</b>

Table of Contents	Page
-------------------	------

**APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS**

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

<b>FCC Part15, Subpart C (15.231)</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	Note(1)
15.203	Antenna Requirement	Pass	
15.231	Radiated Spurious Emission	Pass	
15.231	Occupied Bandwidth	Pass	
15.231	Deactivation Time	Pass	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report.

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	RF LCD Waves Clock															
Trade Name	SHARP															
Model Name	SPC906															
Serial Model	SPC906, A02105															
Model Difference	Only model name is different.															
Product Description	<p>The EUT is a RF LCD Waves Clock</p> <table border="1"> <tr> <td>Product Type</td> <td>Remote Control</td> </tr> <tr> <td>Operation Frequency:</td> <td>433.9MHz</td> </tr> <tr> <td>Modulation Type:</td> <td>FSK</td> </tr> <tr> <td>Number Of Channel</td> <td>1CH.</td> </tr> <tr> <td>Antenna Designation:</td> <td>External wire antenna</td> </tr> <tr> <td>Antenna Gain(Peak)</td> <td>0.8dBi</td> </tr> <tr> <td>Output Power:</td> <td>68.94 dBuV/m @3m(AV Max.)</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>		Product Type	Remote Control	Operation Frequency:	433.9MHz	Modulation Type:	FSK	Number Of Channel	1CH.	Antenna Designation:	External wire antenna	Antenna Gain(Peak)	0.8dBi	Output Power:	68.94 dBuV/m @3m(AV Max.)
Product Type	Remote Control															
Operation Frequency:	433.9MHz															
Modulation Type:	FSK															
Number Of Channel	1CH.															
Antenna Designation:	External wire antenna															
Antenna Gain(Peak)	0.8dBi															
Output Power:	68.94 dBuV/m @3m(AV Max.)															
Channel List	N/A															
Adapter	N/A															
Battery	DC 3.0V(2*AAA battery)															

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	External wire antenna	NA	0.8	Antenna

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX

For Conducted Emission	
Final Test Mode	Description
Mode 1	N/A


For Radiated Emission	
Final Test Mode	Description
Mode 1	TX

Note:

- (1) The EUT use new battery.

**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	RF LCD Waves Clock	SHARP	SPC906	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2013
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2013
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2013
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2013
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2013
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2013
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2013
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2013
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2013
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2013

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2013
2	LISN	R&S	ENV216	101313	Jul. 06. 2013
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2013
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2013
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2013
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2013

### **3. ANTENNA REQUIREMENT**

#### **3.1 STANDARD REQUIREMENT**

15.203 requirements: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **3.2 EUT ANTENNA**

The EUT antenna is External wire Antenna. It complies with the standard requirement.

### 3.3 CONDUCTED EMISSION MEASUREMENT

#### 3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.3.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

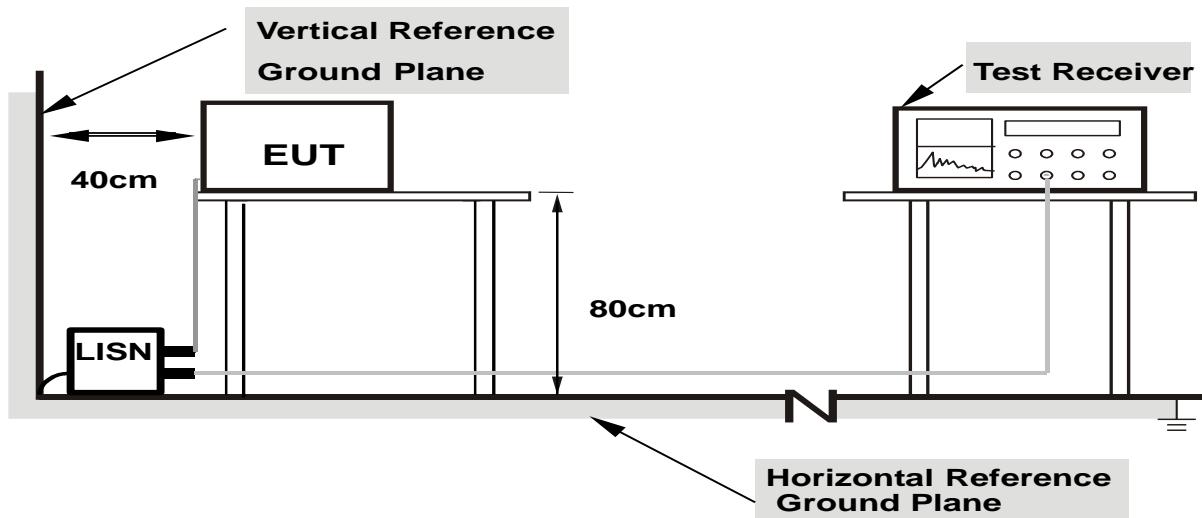

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

**3.2.5 TEST RESULT**

EUT :	RF LCD Waves Clock	Model Name. :	SPC906
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode :	N/A

### 3.4 RADIATED EMISSION MEASUREMENT

#### 3.4.1 Radiated Emission Limits ( FCC 15.209 )

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RADIATED EMISSION MEASUREMENT ( FCC 15.231 )

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 1,50 **
174 - 260	1,500	1,50
260 - 470	1,500 to 5,000 **	1,50 to 5,00 **
Above 470	5,000	5,00

Notes:

- (1) \*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $22.72727(F) - 2454.545$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $16.6667(F) - 2833.333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.] The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.4.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than AV Mode Limit, the EUT shall be deemed to meet AV Limits and then no additional AV Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.4.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.4.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

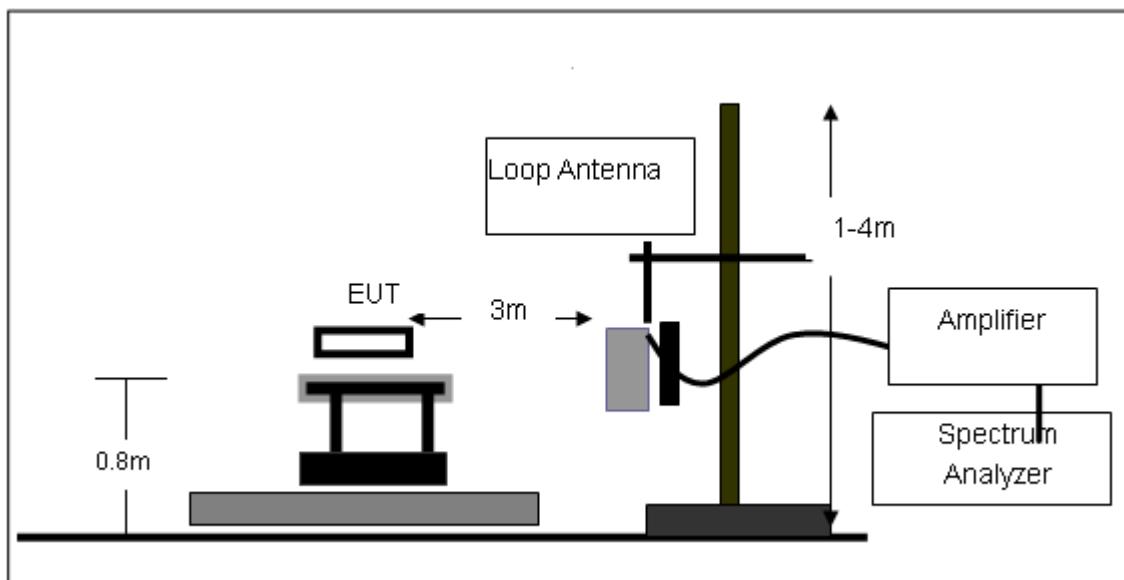

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

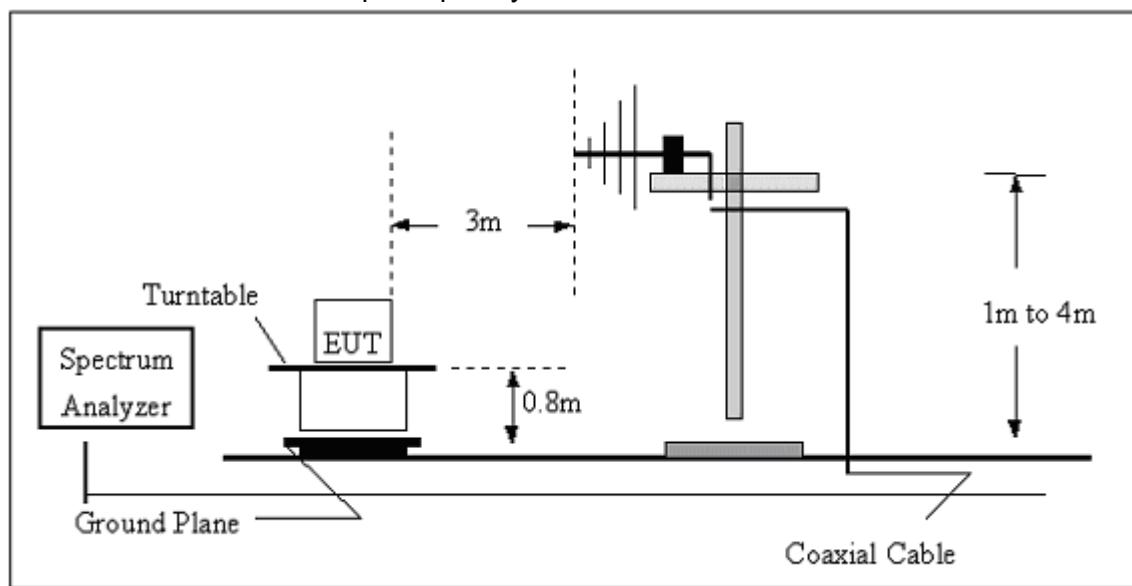

(C) Radiated Emission Test-Up Frequency Above 1GHz

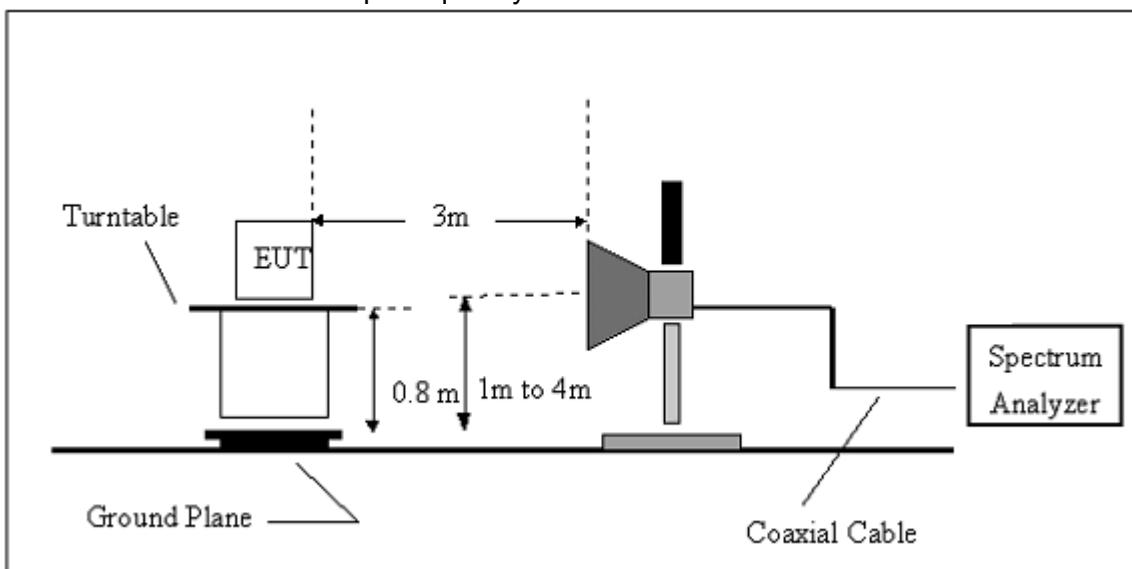

**3.4.5 TEST RESULTS (BLOW 30MHz)**

EUT :	RF LCD Waves Clock	Model Name. :	SPC906
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log \left( \frac{\text{specific distance}}{\text{test distance}} \right) \text{dB}$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.

### 3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 73.5ms

On time of one signal=0.425ms,


DC =  $0.425\text{ms} \times 37 / 73.5 = 0.214$

Therefore, the average factor is found by  $20\log 0.327 = -13.39\text{dB}$

#### The duration of one cycle



#### On time and off time of one signal

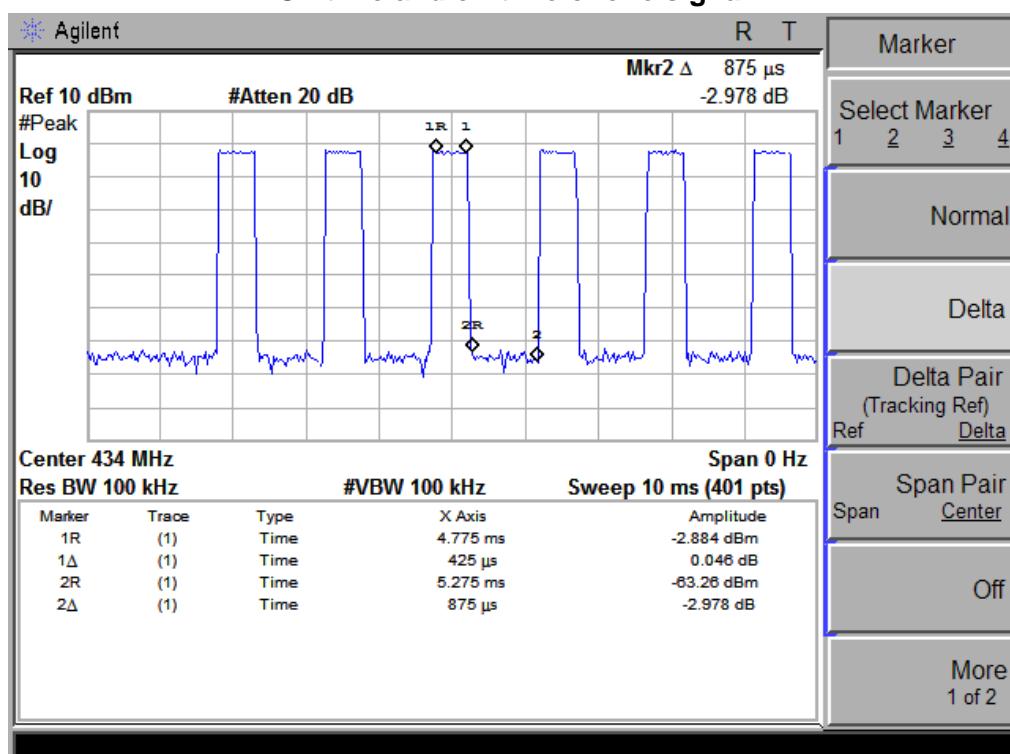

EUT :	RF LCD Waves Clock	Model Name :	SPC906
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	Horizontal

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
MHz	dB	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
433.920	-13.39	82.33	68.94	92.90	72.90	pass
869.1301	-13.39	50.58	37.19	72.90	52.90	pass
1737.500	-13.39	52.77	--	74.00	54.00	pass
2175.000	-13.39	48.23	--	72.90	52.90	pass
--	--	--	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass

EUT :	RF LCD Waves Clock	Model Name :	SPC906
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	Vertical

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
MHz	dB	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
433.920	-13.39	79.92	66.53	92.90	72.90	pass
869.1301	-13.39	49.34	35.95	72.90	52.90	pass
1737.500	-13.39	45.84	--	74.00	54.00	pass
2175.000	-13.39	52.33	--	72.90	52.90	pass
--	--	--	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass

**Note:**

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. \*: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. FCC Limit for Average Measurement =  $16.6667(433.92) - 2833.3333 = 4398.68\text{uV/m}$   
=72.90dBuV/m

## 4. BANDWIDTH TEST

### 4.1 TEST PROCEDURE

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Limit:  $433.92\text{MHz} \times 0.25\% = 1.08\text{MHz}$

### 4.2 DEVIATION FROM STANDARD

No deviation.


### 4.3 TEST SETUP



#### 4.4 TEST RESULTS

EUT :	RF LCD Waves Clock	Model Name :	SPC906
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.0V
Test Mode :	TX CH 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	Limit (MHz)
CH01	433.92	0.203	1.08

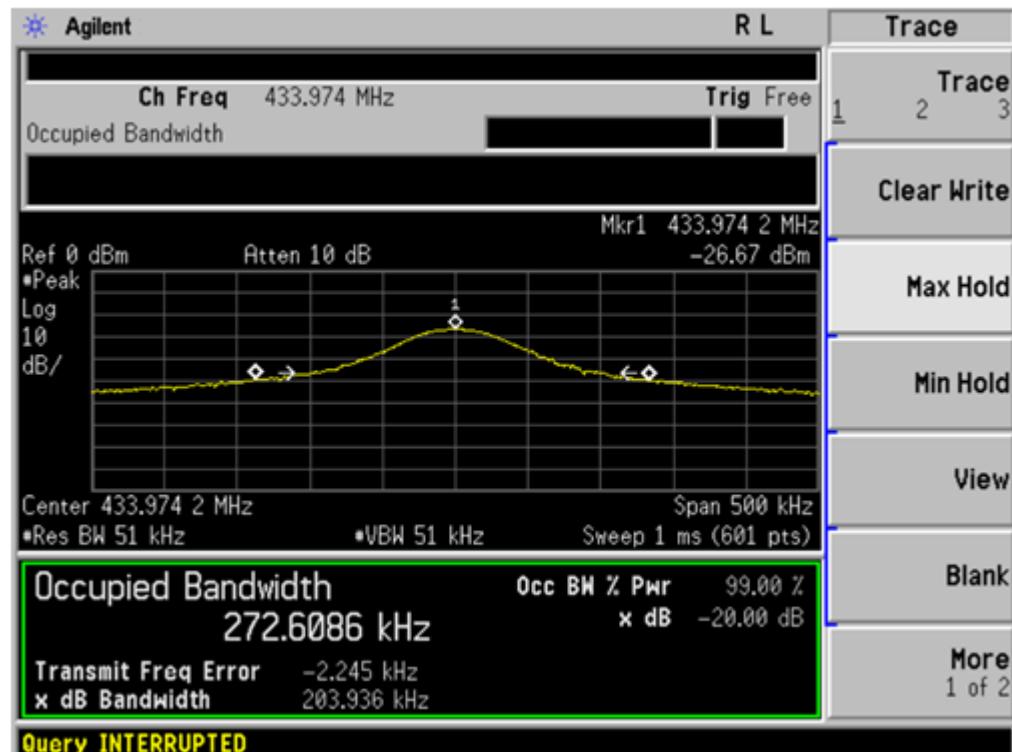

## 5. PERIODIC RATE EXCEEDING


### 5.1 REQUIREMENTS

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the but in no case less than 10 seconds.

### 5.2 TEST PROCEDURE

- (1) Connect the EUT to the Spectrum and Power on.
- (2) Set center frequency of spectrum analyzer = operating frequency.
- (3) Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz, Adjust Sweep=130s.
- (4) Record the duration time

### 5.3 TEST SETUP

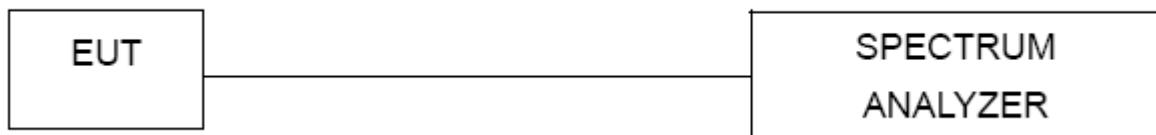


### 5.4 TEST RESULTS


EUT :	RF LCD Waves Clock	Model Name :	SPC906
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.0V
Test Mode :	TX		

Frequency(MHz)	Each transmission time(s)	Silent period between transmissions(s)
433.92	0.870	57.2
Limit	<1s	>10s and > 30*(duration of transmission)
Result		Pass

## Each transmission time

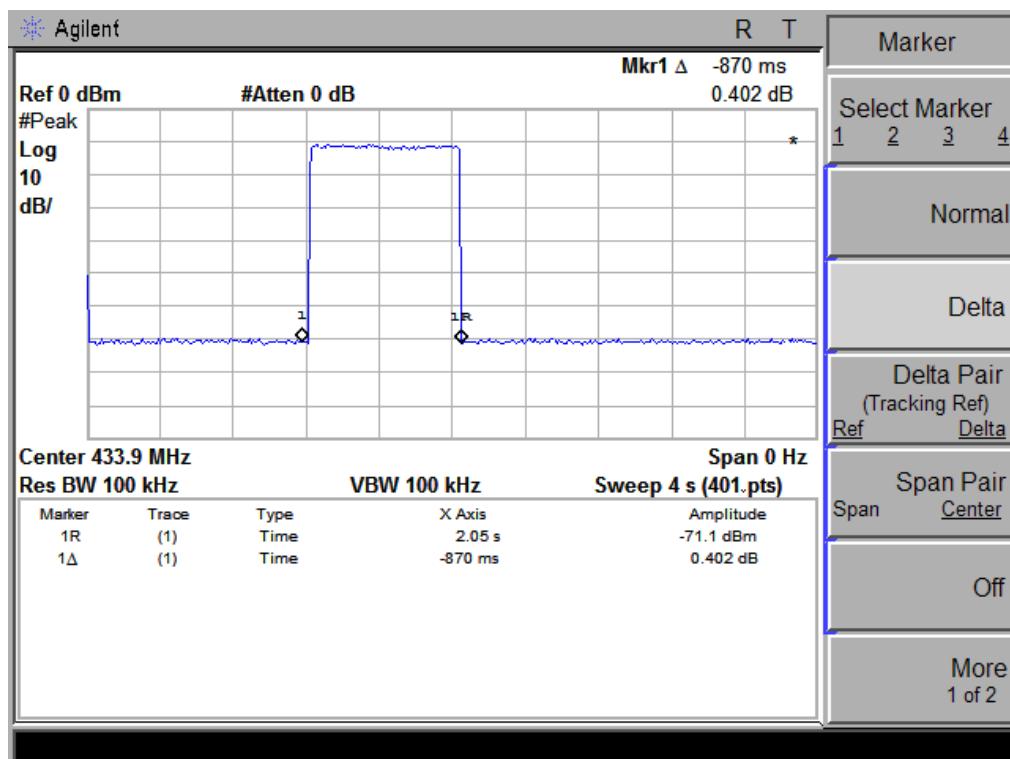

## Silent period between transmissions

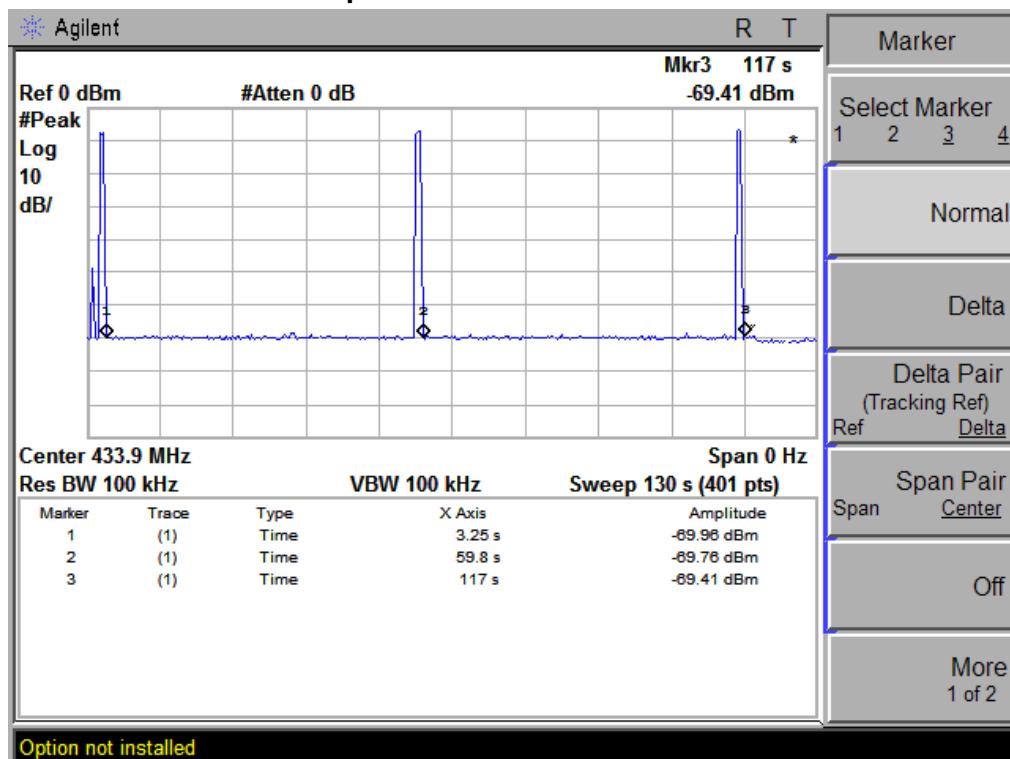

**6. EUT TEST PHOTO****Radiated Measurement Photos**