



Shenzhen Certification Technology Service Co., Ltd
2F, Building B, East Area of Nanchang Second Industrial
Zone, Gushu 2nd Road, Bao'an District, Shenzhen
518126, P.R. China.

TEST REPORT

FCC ID: ZYF-BC3

Applicant : 3M Cogent, Inc
Address : 639 N. Rosemead Blvd. Pasadena, CA 91107, USA

Equipment under Test (EUT):

Name : BlueCheck III mobile single finger capture device, incorporating the cogent CSD330, without membrane at 500ppi
Model : BC3

Standards : FCC PART 15, SUBPART C : 2012 (Section 15.249)

Report No. : STE121128706

Date of Test : March 10-28, 2013

Date of Issue : March 29, 2013

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in black ink that appears to read "Mark Zhu".

(Mark Zhu)
General Manager

The manufacturer should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

TABLE OF CONTENT

Description	Page
1 General Information -----	3
1.1 Description of Device (EUT) -----	3
1.2 Accessories of device (EUT) -----	4
1.3 Description of Test Facility -----	4
2 EMC Equipment List -----	5
2.1 Assistant equipment used for test -----	5
2.2 Block Diagram -----	5
2.3 Test mode -----	5
2.4 Test Conditions -----	5
2.5 Measurement Uncertainty (95% confidence levels, k=2)-----	6
2.6 Test Equipment -----	7
3 Test Procedure -----	8
4 Summary of Measurement-----	9
5 POWER LINE CONDUCTED EMISSION -----	10
5.1 Conducted Emission Limits(15.209&249)-----	10
5.2 Test Setup-----	10
5.3 Test Procedure-----	11
5.4 Test Results-----	11
6 Radiation Emission -----	14
6.1 Radiation Emission Limits(15.209&249 (a))-----	14
6.2 Test Setup-----	15
6.3 Test Procedure-----	16
6.4 Test Equipment Setting For emission test. -----	17
6.5 Test Condition -----	17
6.6 Test Result -----	17
7 Occupied bandwidth-----	23
7.1 Test limit -----	23
7.2 Method of measurement-----	23
7.3 Test Setup-----	23
7.4 Test Results-----	23
8 Band Edge Check-----	26
8.1 Test limit -----	26
8.2 Test Procedure-----	26
8.3 Test Setup-----	26
8.4 Test Result -----	26
9 Antenna Requirement -----	31
9.1 Standard Requirement -----	31
9.2 Antenna Connected Construction-----	31
9.3 Result -----	31
10 Photographs of Test Setup-----	32
11 Photographs of EUT -----	35

1 General Information

1.1 Description of Device (EUT)

Trade Name : **3M**

EUT : BlueCheck III mobile single finger capture device, incorporating the cogent CSD330, without membrane at 500ppi

Model No. : BC3

Type of Antenna : SMD chip Antenna

Antenna Specification : 0 dBi

Operation Frequency : 2402-2480MHz for Bluetooth 2.0

Channel number : 79

Modulation type : GFSK

Power Supply : DC 3.7V from battery or DC 5V From adapter

Adapter : Model No.:GFP241DA-0540-1
: Manufacturer:PLPU

Applicant : 3M Cogent, Inc

Address : 639 N. Rosemead Blvd. Pasadena, CA 91107, USA

Manufacturer : Cogent Systems (Shenzhen), Inc

Address : 10/F, Tinwe Industrial Park Phase 2, Liufang
RD NO.6, Area NO.67, Baoan District, Shenzhen

1.2 Accessories of device (EUT)

Accessories 1 : Adapter
M/N : FP241DA-0540-1

1.3 Description of Test Facility

Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
FCC Registered No.:197647
IC Registered No.: 8258B

2 EMC Equipment List

2.1 Assistant equipment used for test

Description : Notebook
Manufacturer : acer
Model No. : 4552G

2.2 Block Diagram



2.3 Test mode

The test control to EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.4 Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.5 Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.50dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.04dB	Polarize: V
	3.02dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.84dB	Polarize: H
	3.56dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	3%	
Uncertainty for DC and low frequency voltages	0.06%	

2.6 Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	Nov. 16, 12	1Year
Spectrum analyzer	Agilent	E4407B	MY49510055	Oct. 31, 12	1Year
Receiver	R&S	ESCI	100492	Oct. 31, 12	1Year
Receiver	R&S	ESCI	101202	Oct. 31, 12	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	VULB9168-4 38	Feb.20, 13	1Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	Oct. 31, 12	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	Feb.20, 13	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	Feb.20, 13	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170 D(1432)	Feb.20, 13	1Year
Cable	Resenberger	N/A	No.1	Oct. 31, 12	1Year
Cable	SCHWARZBECK	N/A	No.2	Oct. 31, 12	1Year
Cable	SCHWARZBECK	N/A	No.3	Oct. 31, 12	1Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	Oct. 31, 12	1Year
Pre-amplifier	Quietek	AP-180C	CHM-060201 2	Oct. 31, 12	1Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 μ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS
33.20 dBuV + 10.36 dB + 0.9 dB = 44.46 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

4 Summary of Measurement

Test Item	Test Requirement	Standard Paragraph	Result
Spurious Emission	FCC PART 15: 2012	Section 15.249&15.209	Compliance
Conduction Emission	FCC PART 15: 2012	Section 15.207	Compliance
Occupied bandwidth	FCC PART 15: 2012	Section 15.249	Compliance
Band edge Requirement	FCC PART 15: 2012	Section 15.249	Compliance
Antenna Requirement	FCC PART 15: 2012	Section 15.203	Compliance

Note: EUT can be powered with inside adapter, according to exploratory test, when powered by new battery have worse emissions, and also can make sure EUT have enough power for wireless work, so all the final test were performed with adapter.


5 POWER LINE CONDUCTED EMISSION

5.1 Conducted Emission Limits(15.209&249)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Test Setup

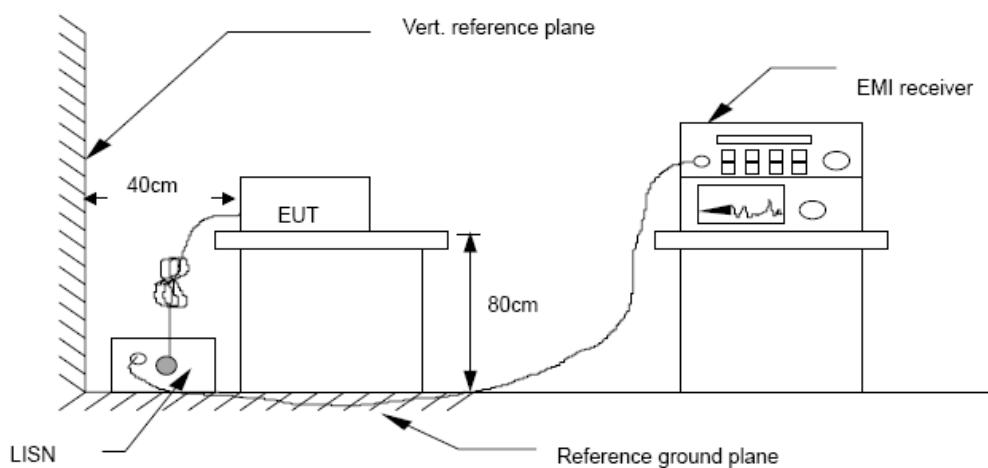

5.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement. m

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.


5.4 Test Results

PASS

Detailed information please see the following page.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

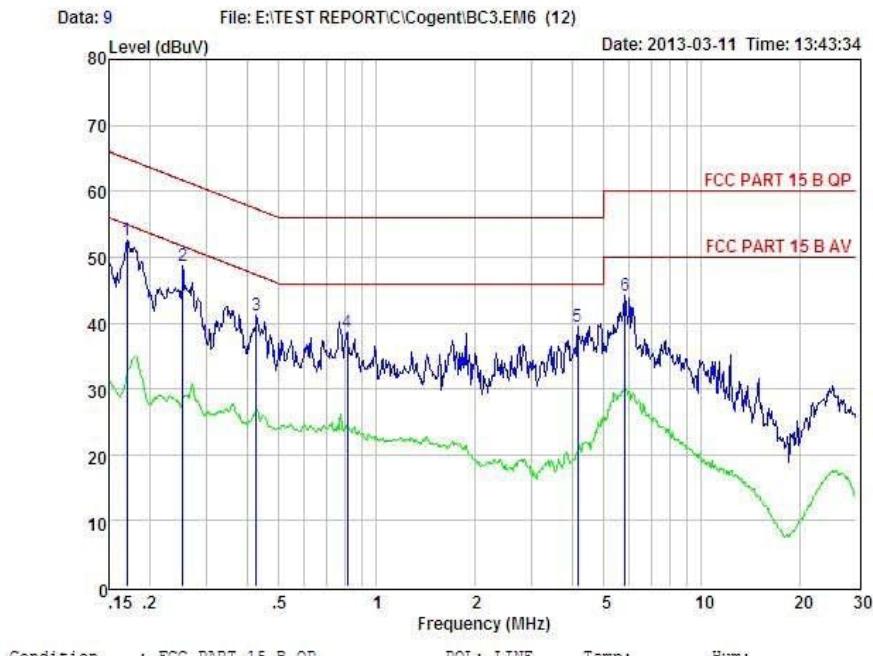


Condition : FCC PART 15 B QP POL: LINE Temp: Hum:
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : Link mode
Power : DC 5V From Adapter With AC 120V/60Hz
Test Engineer: Simple
Remark : STE121128706

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dBuV	dBuV	dBuV	
1	0.170	42.69	0.03	-9.72	0.10	52.54	64.94	-12.40	QP
2	0.253	38.82	0.03	-9.72	0.10	48.67	61.64	-12.97	QP
3	0.426	31.28	0.03	-9.72	0.10	41.13	57.33	-16.20	QP
4	0.813	28.86	0.02	-9.71	0.10	38.69	56.00	-17.31	QP
5	4.158	29.59	0.08	-9.69	0.12	39.48	56.00	-16.52	QP
6	5.805	34.23	0.11	-9.63	0.14	44.11	60.00	-15.89	QP

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

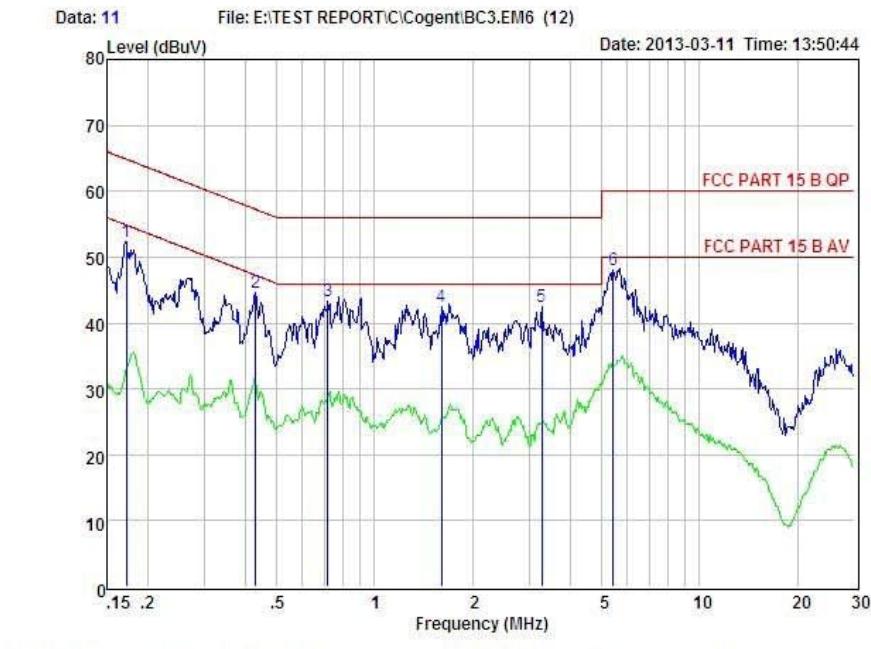

Condition : FCC PART 15 B QP POL: NEUTRAL Temp: Hum:
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : Link mode
Power : DC 5V From Adapter With AC 120V/60Hz
Test Engineer: Simple
Remark : STE121128706

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
						Factor			
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.172	42.47	0.03	-9.72	0.10	52.32	64.86	-12.54	QP
2	0.431	34.73	0.03	-9.72	0.10	44.58	57.24	-12.66	QP
3	0.716	33.55	0.04	-9.72	0.10	43.41	56.00	-12.59	QP
4	1.610	32.60	0.05	-9.71	0.10	42.46	56.00	-13.54	QP
5	3.276	32.52	0.07	-9.69	0.12	42.40	56.00	-13.60	QP
6	5.419	38.07	0.10	-9.65	0.13	47.95	60.00	-12.05	QP

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

6 Radiation Emission

6.1 Radiation Emission Limits(15.209&249 (a))


Frequency (MHZ)	Field Strength Limits at 3 metres (watts,e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Carrier frequency		93.97(AV)	3
Carrier frequency		113.97(PK)	3

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

6.2 Test Setup


See the next page

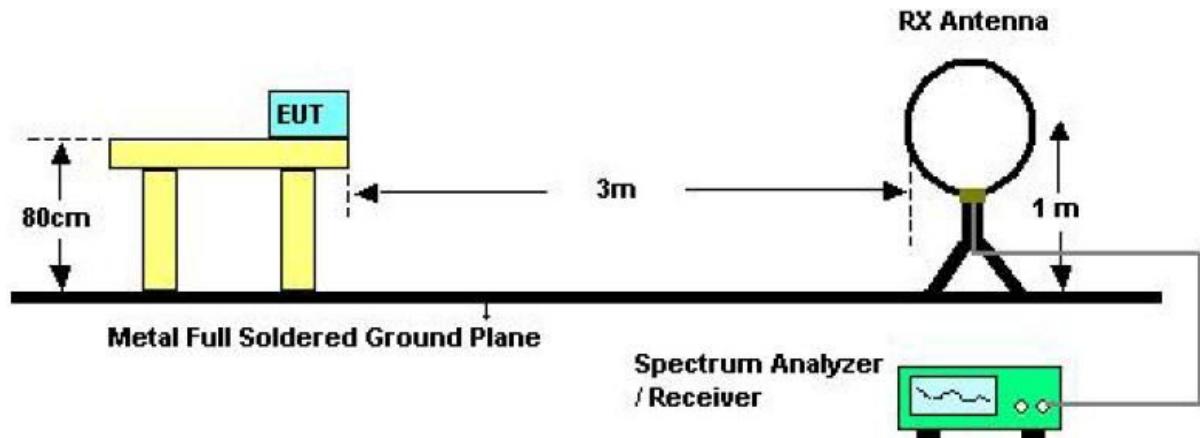

Below 30MHz Test Setup

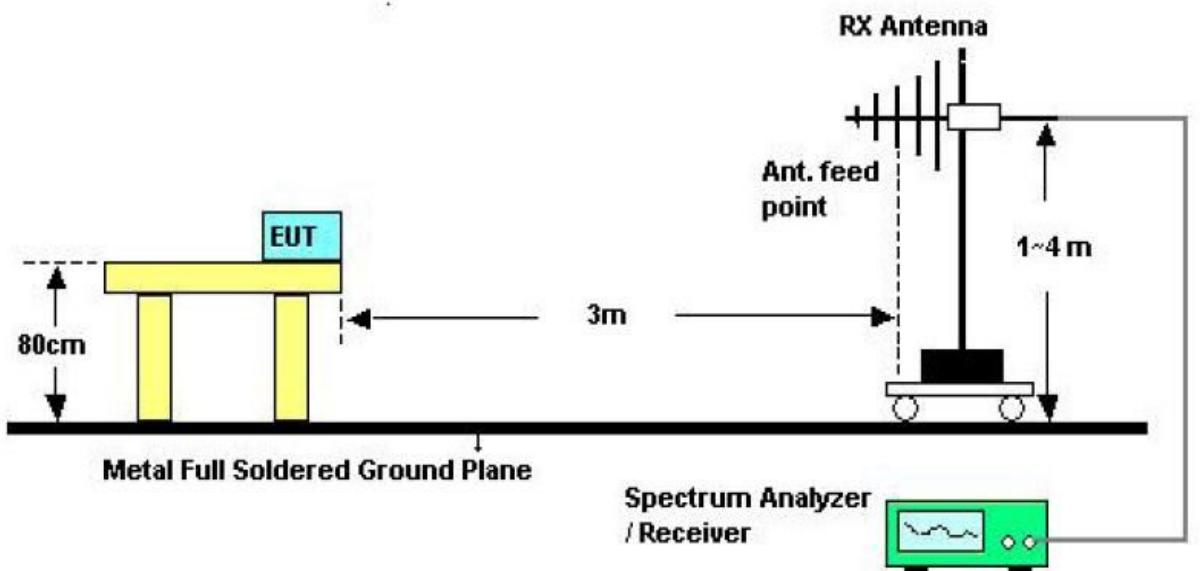

Above 30MHz Test Setup

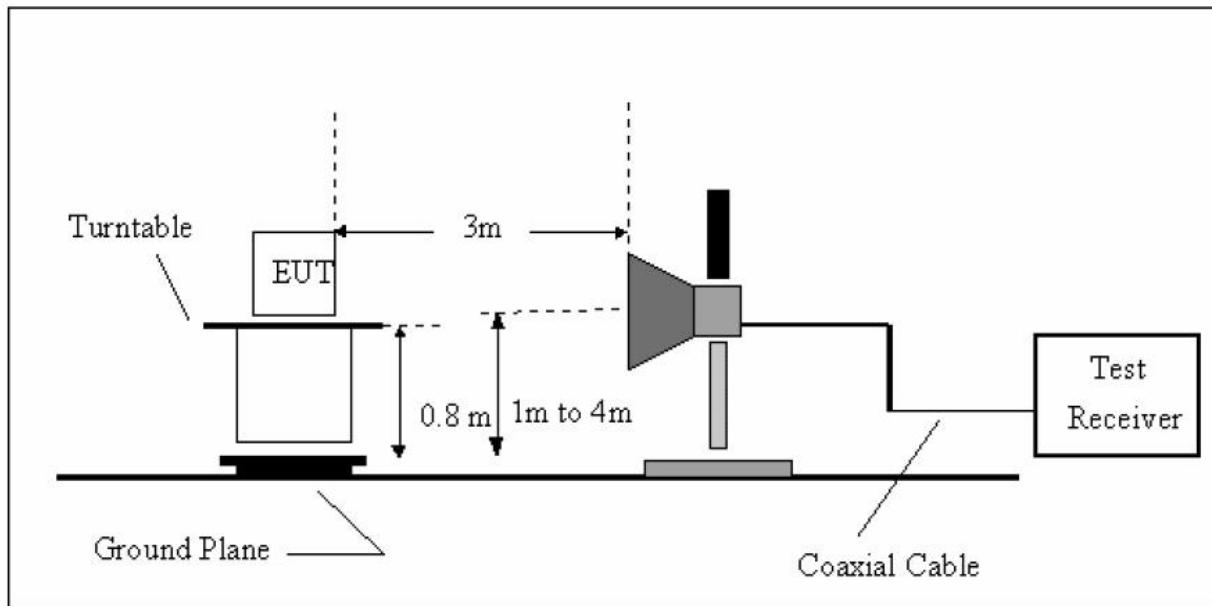

Above 1GHZ Test Setup

6.3 Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground,The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m,Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range.Significant Peaks are then marked.and then Qusia Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit.But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration,please see the test setup photo.

6.4 Test Equipment Setting For emission test.

For Peak setting

9KHZ~150KHZ	RBW 200HZ	VBW1KHZ
150KHZ~30MHZ	RBW 9KHZ	VBW 30KHZ
30MHZ~1GHZ	RBW 120KHZ	VBW 300KHZ
Above 1GHZ	RBW 1MHz	VBW 3MHz

For average setting:

Above 1GHz	RBW 1MHz	VBW 10Hz
------------	----------	----------

6.5 Test Condition

Continual Transmitting in maximum power.

6.6 Test Result

PASS.

We have scanned the 10th harmonic from 9KHz to the EUT.


Detailed information please see the following page.

From **9KHz to 30MHz**: Conclusion: **PASS**

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

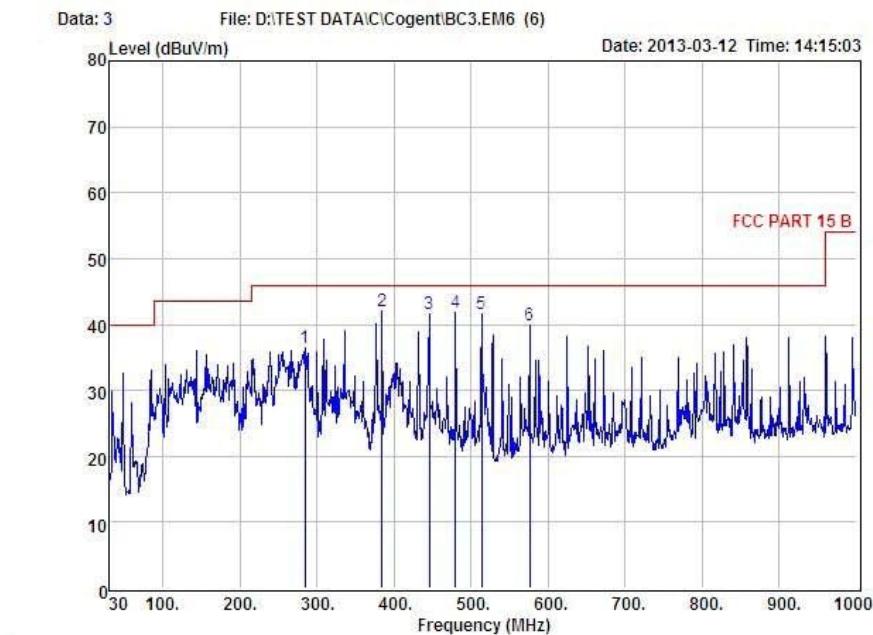


Condition : FCC PART 15 B 3m POL: VERTICAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : Link mode
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128076
Temp :
Hum :
Item Freq Read Level Antenna Preamp Cable Level Limit Margin Remark

		Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
		MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	284.14	51.17	12.45	27.16	0.00	36.46	46.00	-9.54	QP	
2	384.05	54.96	14.48	27.38	0.00	42.06	46.00	-3.94	QP	
3	446.13	53.28	15.87	27.48	0.00	41.67	46.00	-4.33	QP	
4	480.08	53.03	16.25	27.56	0.00	41.72	46.00	-4.28	QP	
5	514.03	52.43	16.79	27.65	0.00	41.57	46.00	-4.43	QP	
6	576.11	49.89	17.85	27.77	0.00	39.97	46.00	-6.03	QP	

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

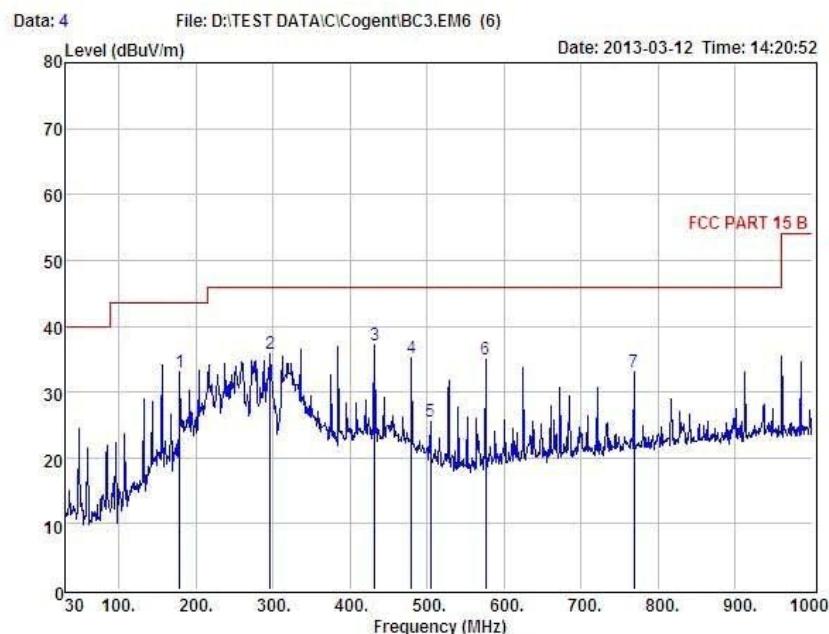

Condition : FCC PART 15 B 3m POL: HORIZONTAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : Link mode
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128706
Temp :
Hum :

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	179.38	47.96	11.98	26.93	0.00	33.01	43.50	-10.49	QP
2	296.75	50.22	12.76	27.19	0.00	35.79	46.00	-10.21	QP
3	431.58	49.06	15.53	27.46	0.00	37.13	46.00	-8.87	QP
4	480.08	46.40	16.25	27.56	0.00	35.09	46.00	-10.91	QP
5	504.33	36.64	16.61	27.63	0.00	25.62	46.00	-20.38	QP
6	576.11	44.88	17.85	27.77	0.00	34.96	46.00	-11.04	QP
7	768.17	40.26	20.47	27.67	0.00	33.06	46.00	-12.94	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Radiated Emissions Result of Inside band (2402MHz)

EUT	BlueCheck III mobile single finger capture device, incorporating the cogent CSD330, without membrane at 500ppi	Model Name	BC3
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by battery
Test Mode	TX Low	Antenna polarization	Horizontal/Vertical

Channel Low(2402MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2402	H	93.86 (PK)	27.62	3.94	34.97	-3.41	90.45	113.97	-23.52
2402	H	85.58 (AV)	27.62	3.94	34.97	-3.41	82.17	93.97	-11.80
--	H	--	--	--	--	--	--	--	--
2402	V	94.15 (PK)	27.62	3.94	34.97	-3.41	90.74	113.97	-23.23
2402	V	86.74(AV)	27.62	3.94	34.97	-3.41	83.33	93.97	-10.64
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1318.44	H	51.61	---	-5.84	45.77	---	74.00	54.00	-8.23	Peak
1657.22	H	51.07	---	-4.65	46.42	---	74.00	54.00	-7.58	Peak
2139.66	H	49.08	---	-4.36	44.72	---	74.00	54.00	-9.28	Peak
4804.77	H	41.93	---	2.76	44.69	---	74.00	54.00	-9.31	Peak
N/A										
1486.55	V	49.29	---	-5.27	44.02	---	74.00	54.00	-9.98	Peak
2073.22	V	50.25	---	-4.49	45.76	---	74.00	54.00	-8.24	Peak
3462.55	V	45.38	---	-0.95	44.43	---	74.00	54.00	-9.57	Peak
4804.77	V	42.77		2.76	45.53	---	74.00	54.00	-8.47	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor, Margin=Measurement Result-Limit

2 -Spectrum setting:

a. Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.

b. AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

Radiated Emissions Result of Inside band (2441MHz)

EUT	BlueCheck III mobile single finger capture device, incorporating the cogent CSD330, without membrane at 500ppi	Model Name	BC3
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by battery
Test Mode	TX Mid	Antenna polarization	Horizontal/Vertical

Channel Mid(2441MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2441	H	91.42 (PK)	27.60	3.97	34.97	-3.40	88.02	113.97	-25.95
2441	H	86.48 (AV)	27.60	3.97	34.97	-3.40	83.08	93.97	-10.89
--	H	--	--	--	--	--	--	--	--
2441	V	93.35 (PK)	27.60	3.97	34.97	-3.40	89.95	113.97	-24.02
2441	V	89.53 (AV)	27.60	3.97	34.97	-3.40	86.13	93.97	-7.84
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1416.44	H	51.94	---	-5.29	46.65	---	74.00	54.00	-7.35	Peak
1832.54	H	51.27	---	-4.16	47.11	---	74.00	54.00	-6.89	Peak
2753.33	H	51.63	---	-2.38	49.25	---	74.00	54.00	-4.75	Peak
4882.77	H	42.85	---	2.91	45.76	---	74.00	54.00	-8.24	Peak
N/A										
1273.55	V	53.03	---	-5.96	47.07	---	74.00	54.00	-6.93	Peak
1678.44	V	52.17	---	-5.65	46.52	---	74.00	54.00	-7.48	Peak
2136.55	V	50.44	---	-4.36	46.08	---	74.00	54.00	-7.92	Peak
4882.77	V	44.24		2.91	47.15	---	74.00	54.00	-6.85	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

a. Peak setting 30MHz-1GHz,RBW=120KHz,VBW=300KHz.

b. AV setting 30MHz-1GHz,RBW=1MHz,VBW=10Hz.

Radiated Emissions Result of Inside band (2480MHz)

EUT	BlueCheck III mobile single finger capture device, incorporating the cogent CSD330, without membrane at 500ppi	Model Name	BC3
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 3V supply by battery
Test Mode	TX High	Antenna polarization	Horizontal/Vertical

Channel High(2480MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2480	H	87.30 (PK)	27.59	4.00	34.97	-3.38	83.92	113.97	-30.05
2480	H	82.17 (AV)	27.59	4.00	34.97	-3.38	78.79	93.97	-15.18
--	H	--	--	--	--	--	--	--	--
2480	V	86.58 (PK)	27.59	4.00	34.97	-3.38	83.20	113.97	-30.77
2480	V	81.49 (AV)	27.59	4.00	34.97	-3.38	78.11	93.97	-15.86
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1566.77	H	51.58	---	-5.07	46.51	---	74.00	54.00	-7.49	Peak
2354.33	H	50.35	---	-4.59	45.76	---	74.00	54.00	-8.24	Peak
3658.22	H	48.03	---	-0.38	47.65	---	74.00	54.00	-6.35	Peak
4960.44	H	44.28	---	3.48	47.76	---	74.00	54.00	-6.24	Peak
N/A										
1289.22	V	54.07	---	-5.96	48.11	---	74.00	54.00	-5.89	Peak
1963.55	V	51.78	---	-4.64	47.14	---	74.00	54.00	-6.86	Peak
2675.33	V	49.37	---	-0.94	48.43	---	74.00	54.00	-5.57	Peak
4960.44	V	44.29		3.48	47.77	---	74.00	54.00	-6.23	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

- Peak setting 30MHz-1GHz,RBW=120KHz,VBW=300KHz.
- AV setting 30MHz-1GHz,RBW=1MHz,VBW=10Hz.

7 Occupied bandwidth


7.1 Test limit

Please refer section 15.249

7.2 Method of measurement

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver RBW set 30KHZ, VBW set 30KHZ, Sweep time set auto.

7.3 Test Setup




7.4 Test Results


Detailed information please see the following page.

Frequency	20dB bandwidth
Low : CH1: 2402MHz	858KHz
Middle: CH40: 2441MHz	875KHz
High: CH79: 2480MHz	867KHz

CH Low:

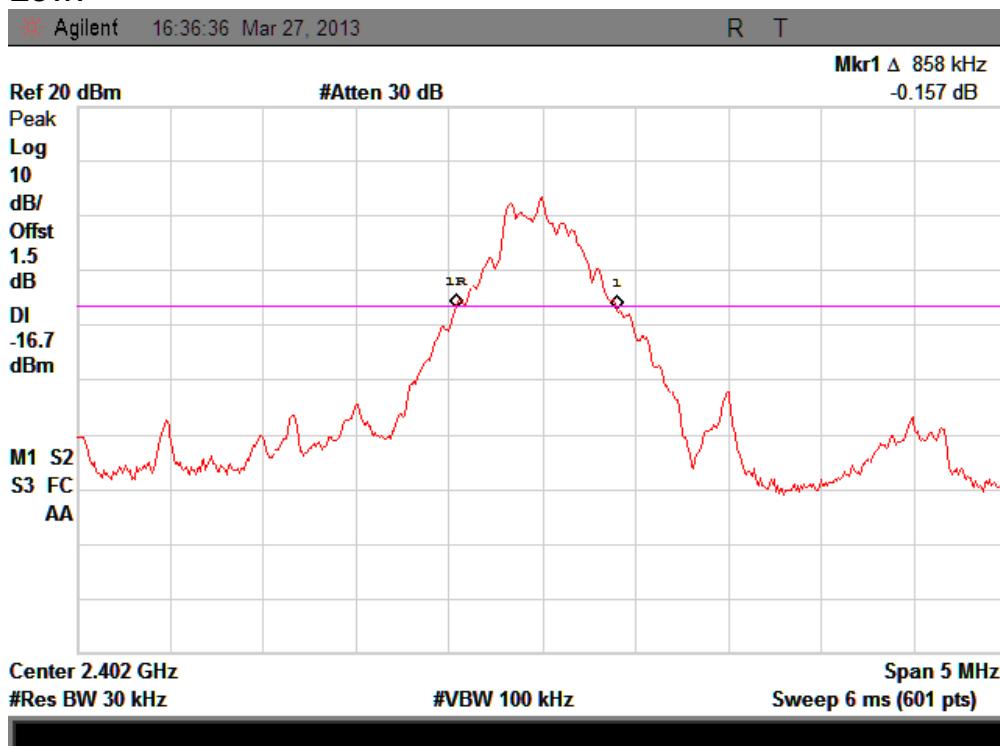


CH Mid:

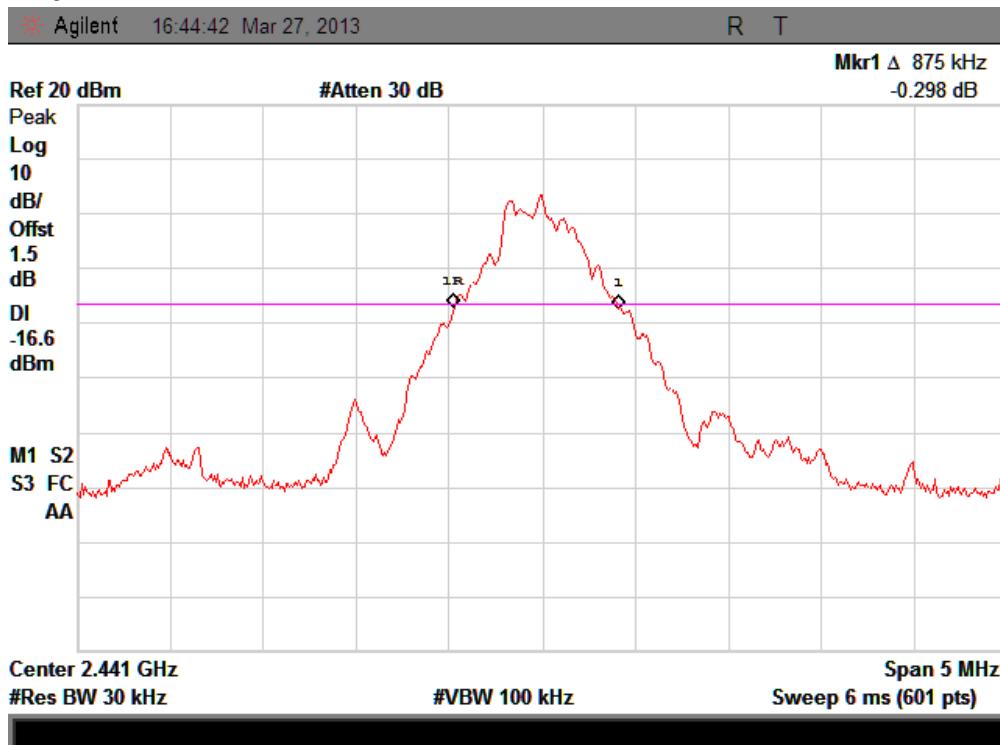

Report No.: STE121128706

CH High:

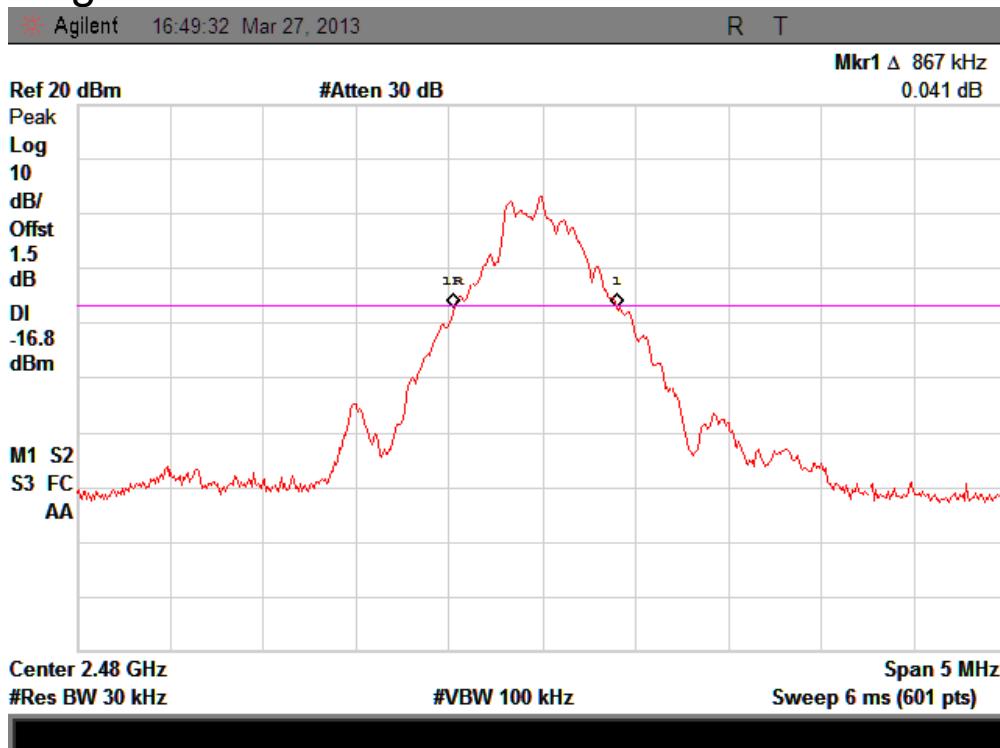

8 Band Edge Check

8.1 Test limit

Please refer section 15.249 and section 15.205.


249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As shown in section 15.35(b), for frequencies above 1000MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3meters along the antenna azimuth.

8.2 Test Procedure

- 8.2.1. The measuring distance of 3m shall be used for measurements at frequency above 1GHz. The EUT was placed on a rotating 0.8 m high above ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- 8.2.2. The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- 8.2.3. The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then AVG Detector mode premeasured
- 8.2.4. For the actual test configuration, please see the test setup photo.

8.3 Test Setup

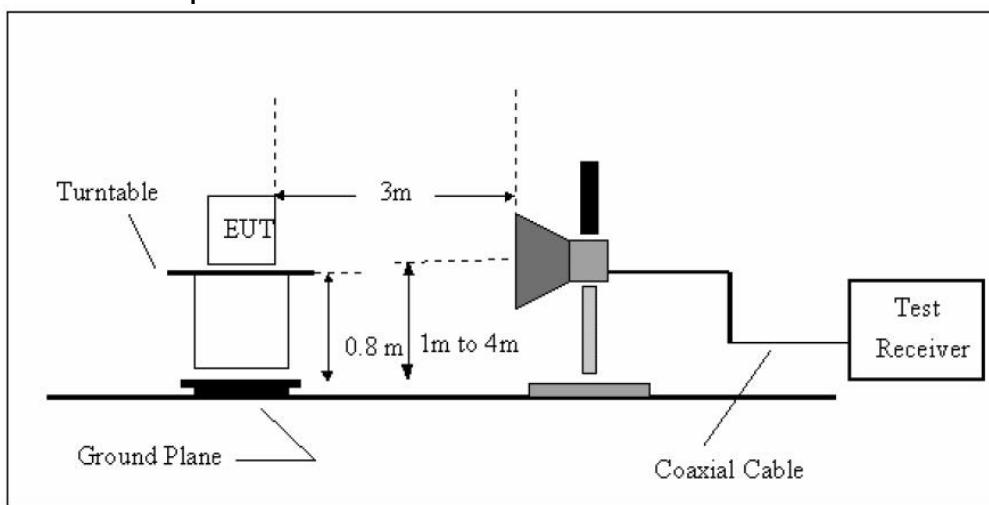

8.4 Test Result

PASS.


Detailed information please see the following page.

Report No.: STE121128706

CH Low :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

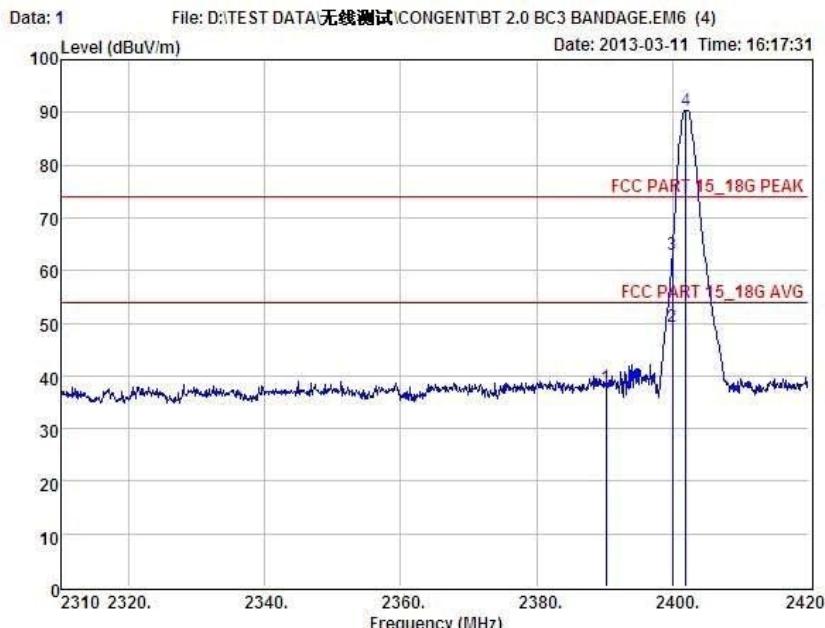


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : TX 2402MHz
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128706
Temp :
Hum :
Test Engineer : Simple

Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
		Level	Factor	Factor	Loss				
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	41.17	27.62	34.97	3.92	37.74	74.00	-36.26	Peak
2	2400.00	52.84	27.62	34.97	3.94	49.43	54.00	-4.57	Average
3	2400.00	66.51	27.62	34.97	3.94	63.10	74.00	-10.90	Peak
4	2402.00	93.86	27.62	34.97	3.94	90.45	74.00	16.45	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

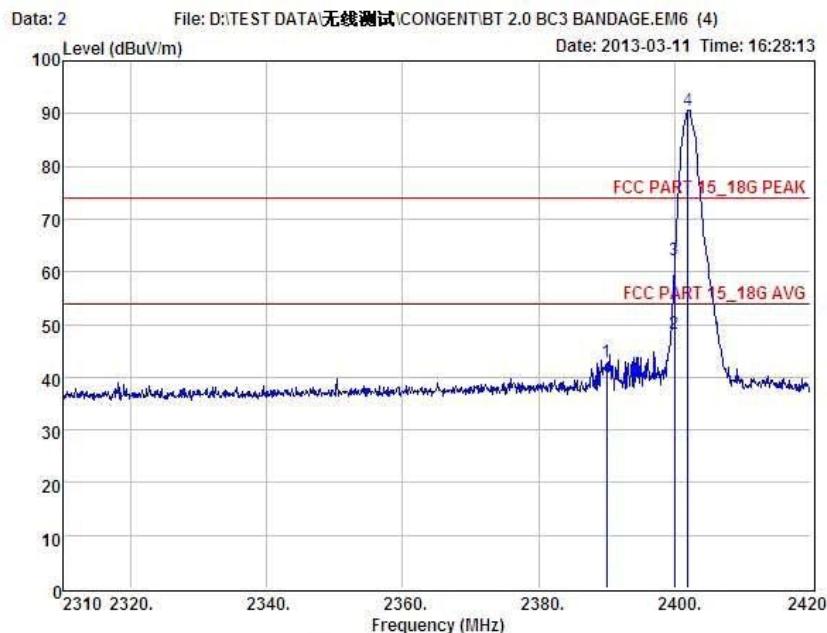

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : TX 2402MHz
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128706
Temp :
Hum :
Item Freq Read Antenna Preamp Cable Level Limit Margin Remark

	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	46.24	27.62	34.97	3.92	42.81	74.00	-31.19	Peak
2	2400.00	51.76	27.62	34.97	3.94	48.35	54.00	-5.65	Average
3	2400.00	65.73	27.62	34.97	3.94	62.32	74.00	-11.68	Peak
4	2402.00	94.15	27.62	34.97	3.94	90.74	74.00	16.74	Peak


Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Report No.: STE121128706

CH High :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

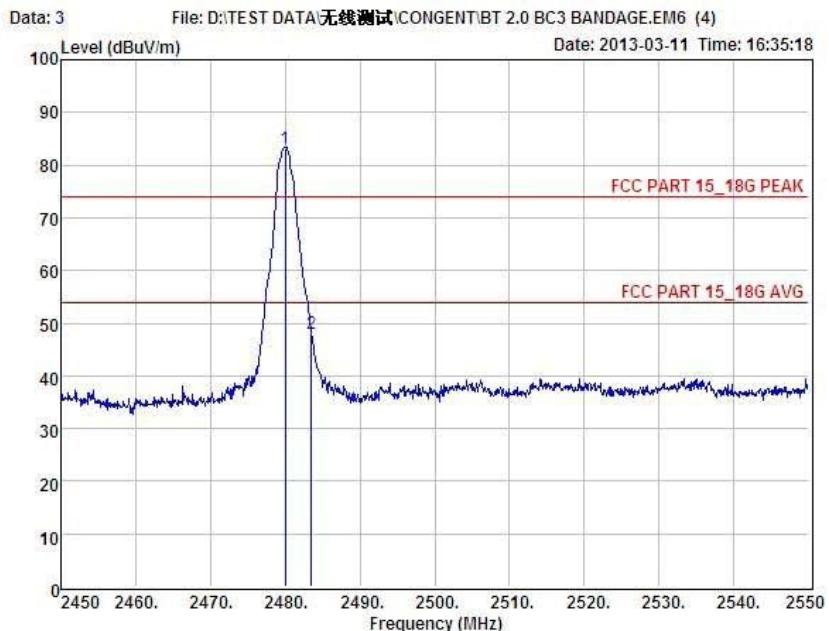


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : TX 2480MHz
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128706
Temp :
Hum :
Test Engineer : Simple

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2480.00	86.58	27.59	34.97	4.00	83.20	74.00	9.20	Peak
2	2483.50	51.42	27.59	34.97	4.00	48.04	74.00	-25.96	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

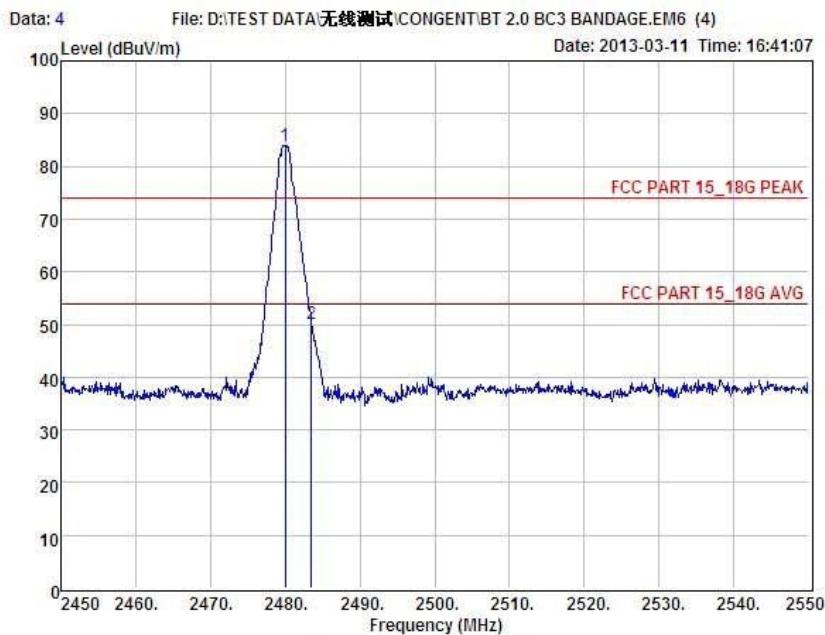

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : BlueCheck III mobile single finger capture device
Model No : BC3
Test Mode : TX 2480MHz
Power : DC 5V From Adapter with AC 120V/60Hz
Test Engineer : Simple
Remark : STE121128706
Temp :
Hum :
Item Freq Read Antenna Preamp Cable Level Limit Margin Remark
MHz Level Factor Factor Loss dBuV dBuV dBuV

Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2480.00	87.30	27.59	34.97	4.00	83.92	74.00	9.92	Peak
2	2483.50	53.58	27.59	34.97	4.00	50.20	74.00	-23.80	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

9 Antenna Requirement

9.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.


9.3 Result

The EUT antenna is SMD chip Antenna. It comply with the standard requirement.


10 Photographs of Test Setup

Photographs-Radiated Emission Test Setup in Chamber

Below 1G

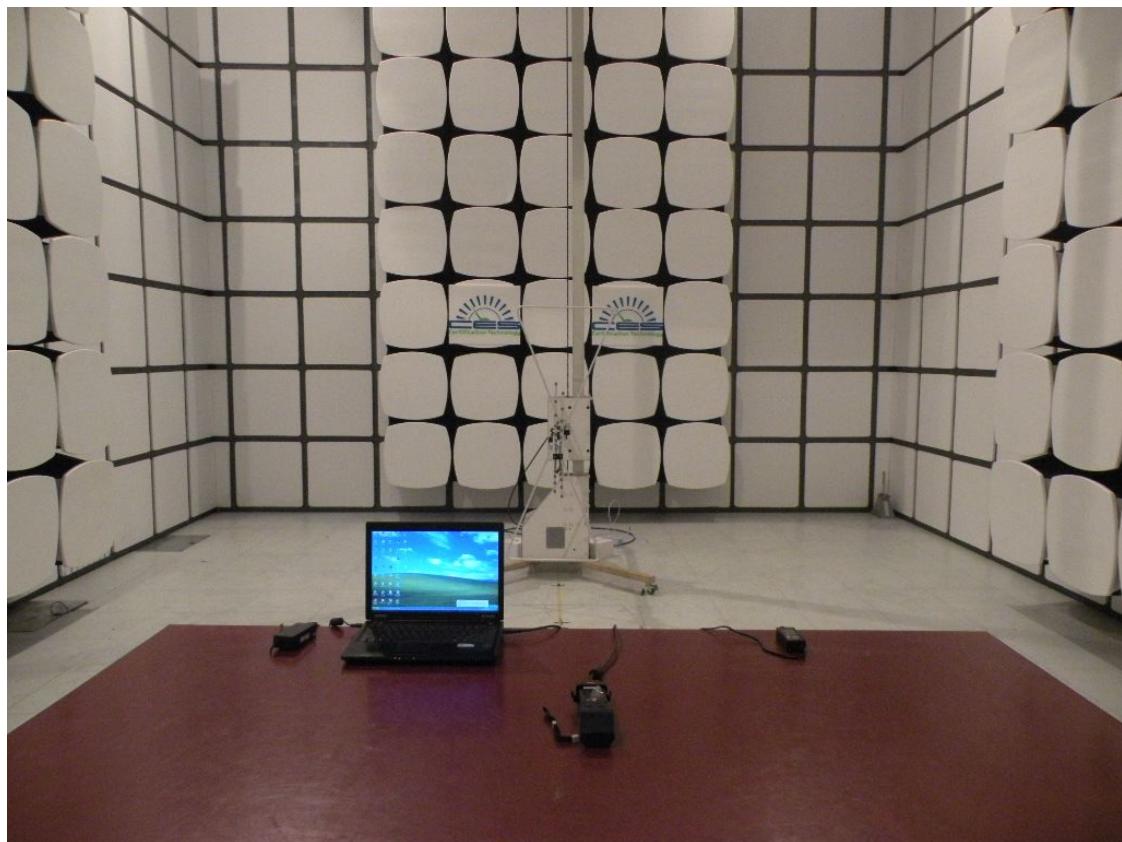

Above 1G

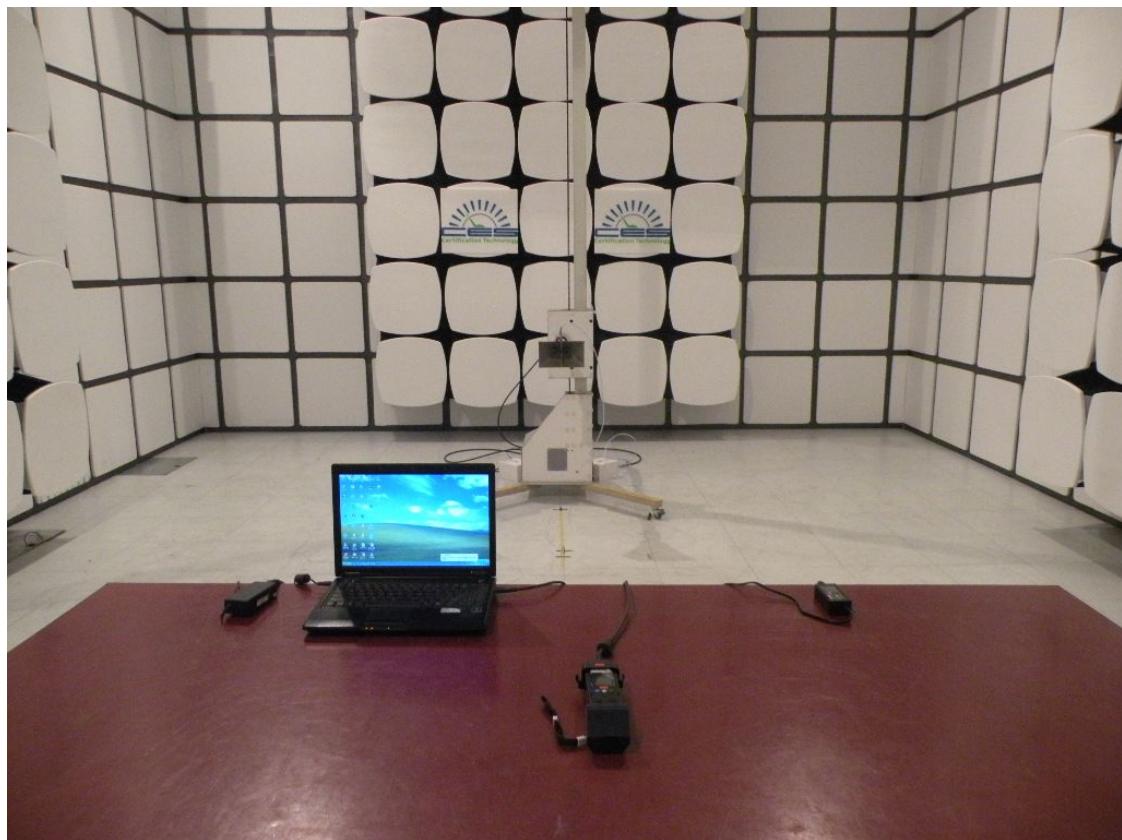

Photographs-Conducted Emission Test Setup





11 Photographs of EUT












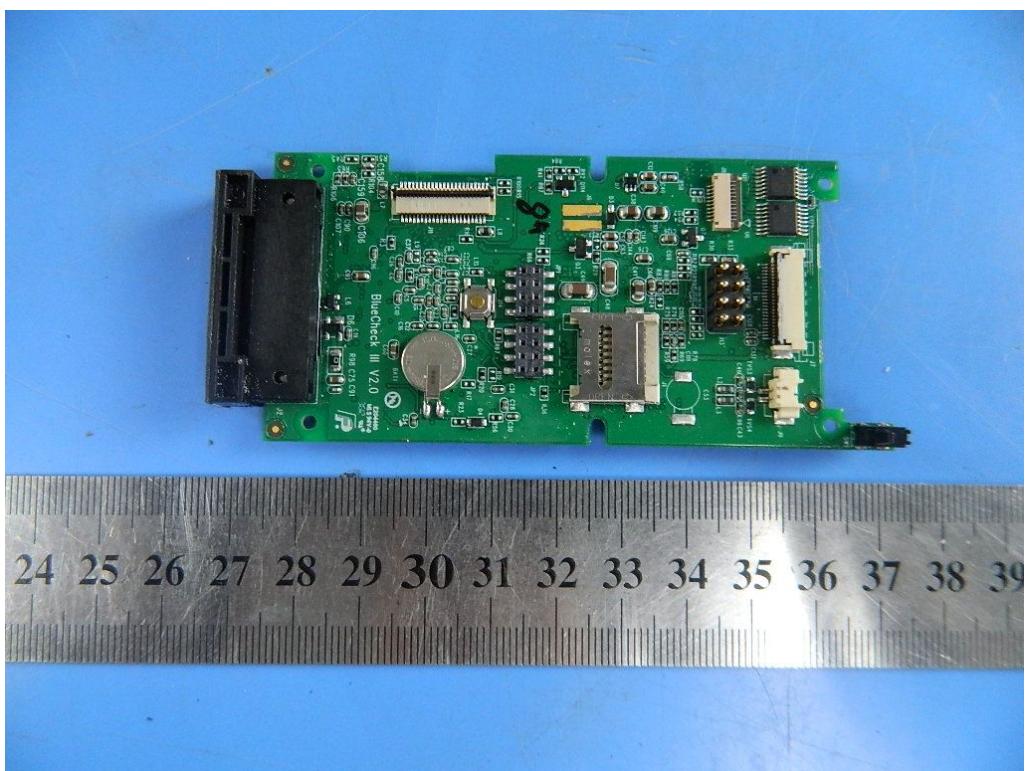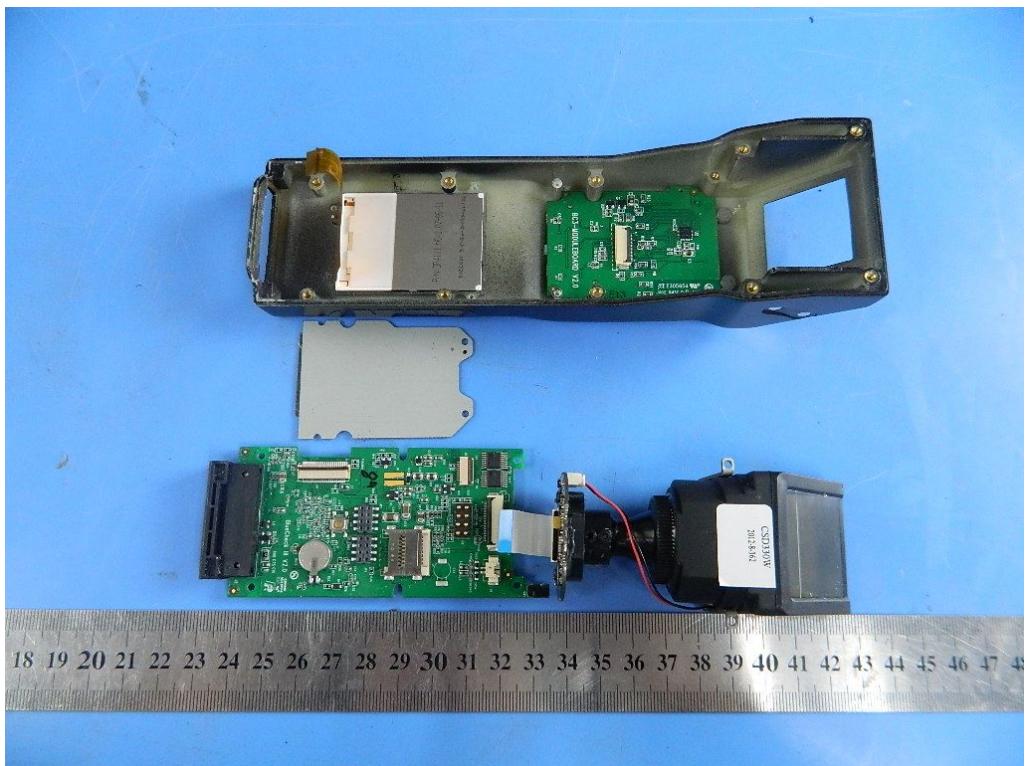

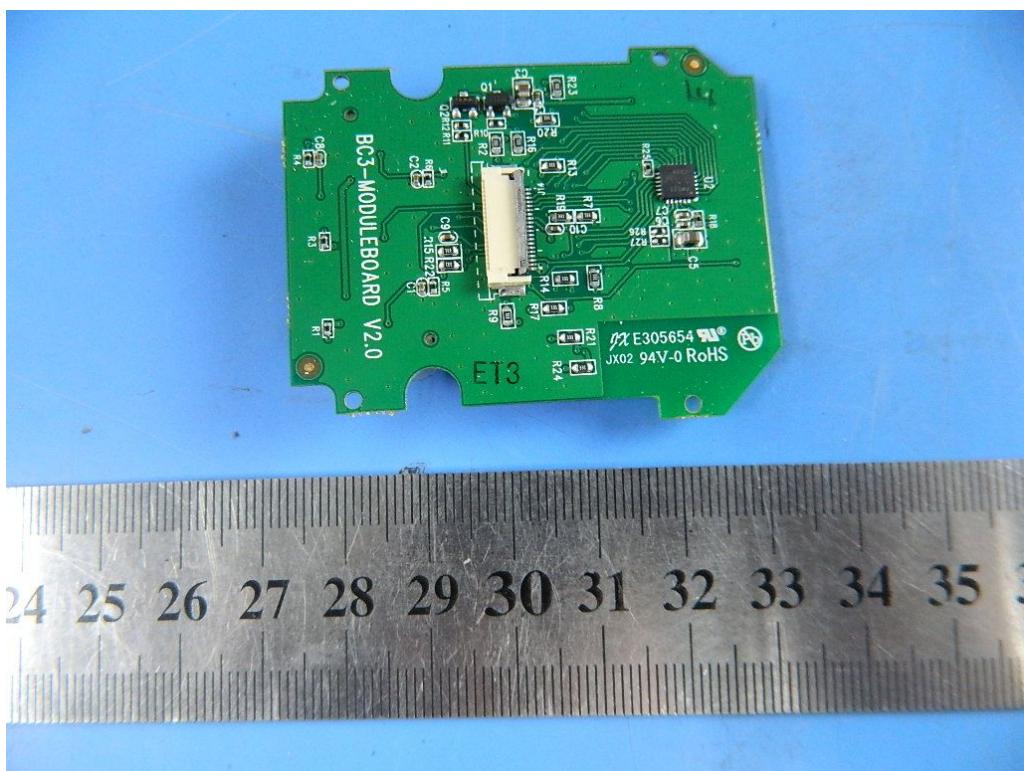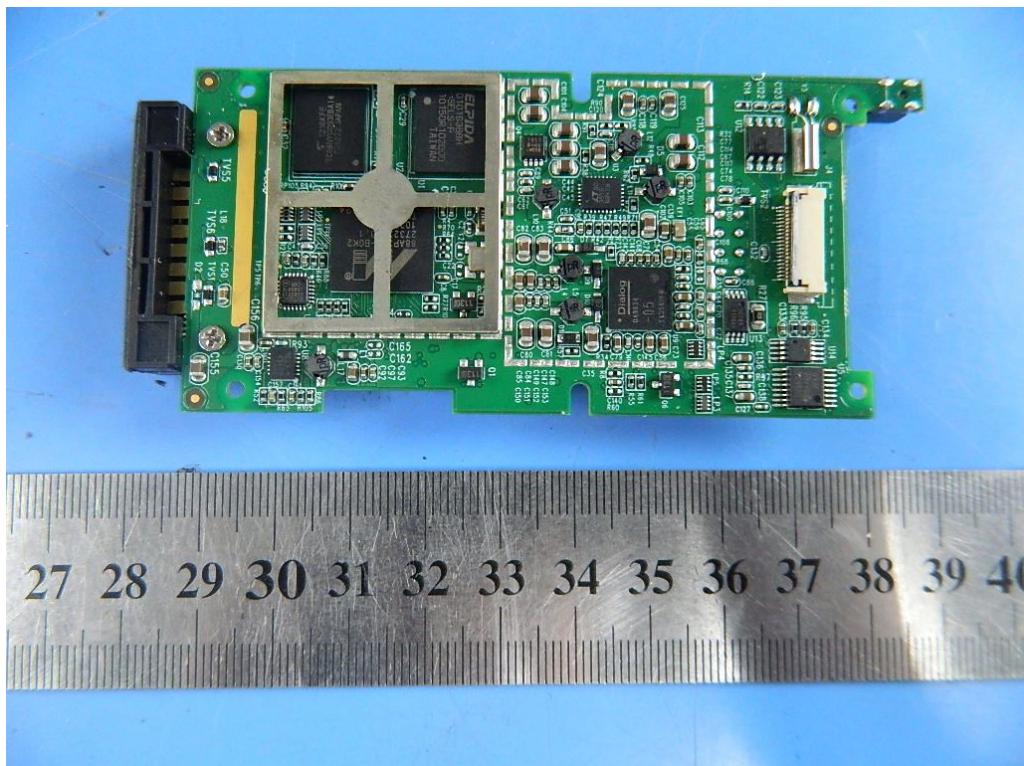

Report No.: STE121128706

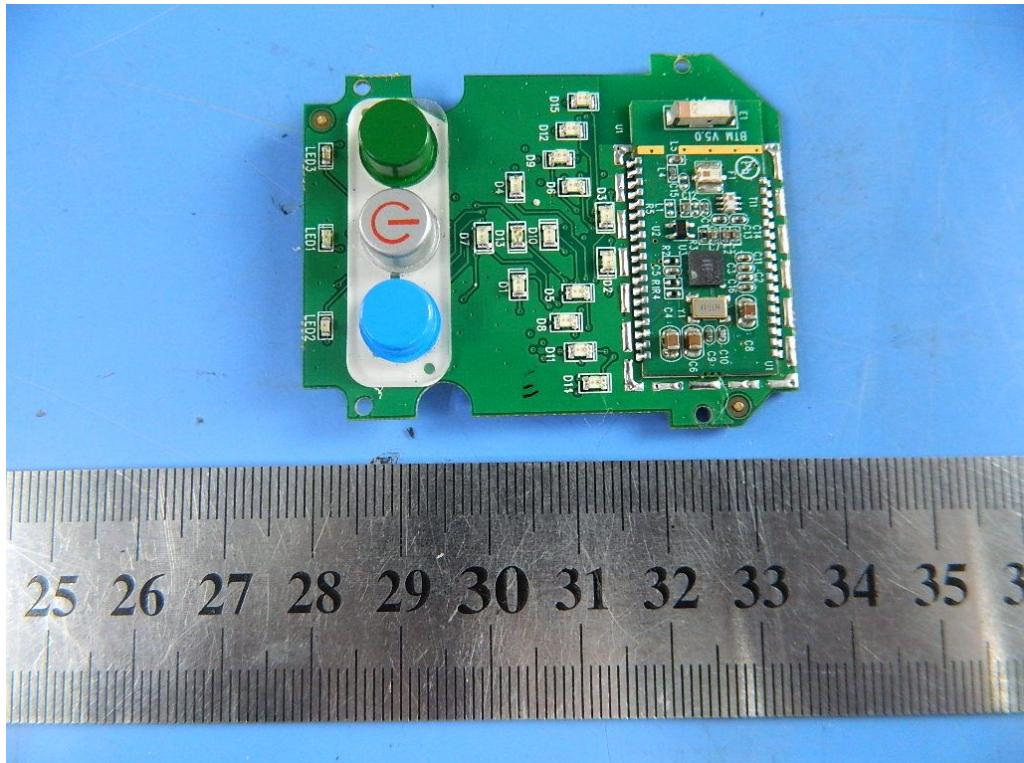

-----END OF THE REPORT-----