



# FCC PART 15.247

# MEASUREMENT AND TEST REPORT

For

# **Nexpro International Limitada**

San Jose-Goicoechea, Guadalupe, Barrio Tournon, frente Al Hotel Villas Tournon,

Oficinas Del Bufete Facio Y Canas, Costa Rica

FCC ID: ZYPE750

Report Type: **Product Type:** Original Report GSM Mobile Phone Jimmy xiao **Test Engineer:** Jimmy Xiao **Report Number:** RDG110916002-00A **Report Date:** 2011-10-24 Alvin Huang **Reviewed By:** EMC Engineer **Test Laboratory:** Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "\*\* (Rev.2)

# TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT EXERCISE SOFTWARE	
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
CONFIGURATION OF TEST SETUP	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §15.247 (I) AND §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	
RESULT:	10
FCC §15.203 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP TEST PROCEDURE	
TEST FROCEDURE TEST EQUIPMENT LIST AND DETAILS.	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	16
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	16
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST EQUIPMENT LIST AND DETAILS	
Test Procedure	20

TEST DATA	20
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	23
APPLICABLE STANDARD	23
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	26
APPLICABLE STANDARD	26
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	26
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	28
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	28
TEST DATA	28
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS	34
TEST DATA	34
FCC §15.247(d) - BAND EDGES TESTING	37
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	37
Team Dama	20

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *Nexpro International Limitada*'s product, model number: *E750 (FCC ID: ZYPE750)* (the "EUT") in this report is a *GSM Mobile Phone*, which was measured approximately: 11.3 cm (L) x 6.1 cm (W) x 1.1 cm (H), rated input voltage: DC 3.7 V battery or DC 5.2 V from adapter for charging.

Report No.: RDG110916002-00A

ADAPTADOR ca/cc

ENTRADA: 100-240Vca 50/60 Hz 120mA

SALIDA: 5.2Vcc 500mA

Frequency Range:

Cellular Band: 824-849 MHz (Tx), 869-894 MHz (Rx) PCS Band: 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)

Bluetooth: 2402-2480 MHz (Tx/Rx)

Modulation Mode: GMSK (GSM/PCS); GFSK (Bluetooth)

Transmitter Output Power:

Cellular Band: 33 dBm, PCS Band: 30 dBm

Bluetooth: -6~4 dBm

### **Objective**

This report is prepared on behalf of *Nexpro International Limitada in* accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of EUT with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE, Part 15B JBP submission with FCC ID: ZYPE750.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is  $\pm 0.96$  dB, the uncertainty of any radiation on emissions measurement is  $\pm 4.0$  dB

FCC Part 15.247 Page 4 of 39

<sup>\*</sup> All measurement and test data in this report was gathered from production sample serial number: 1108068 (Assigned by BACL, Shenzhen). The EUT was received on 2011-09-16.

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RDG110916002-00A

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <a href="http://ts.nist.gov/Standards/scopes/2007070.htm">http://ts.nist.gov/Standards/scopes/2007070.htm</a>

FCC Part 15.247 Page 5 of 39

# **SYSTEM TEST CONFIGURATION**

# **Description of Test Configuration**

The system was configured for testing in an engineering mode, which is provided by manufacture.

Report No.: RDG110916002-00A

#### **EUT Exercise Software**

N/A

# **Equipment Modifications**

No modification was made to the EUT tested.

# **Local Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
R & S	Universal Radio CommutationTester	CMU200	109038

#### **External I/O Cable**


Cable Description	Length (m)	From Port	То
Unshielded Detachable DC Power Cable	1.0	EUT	Adapter

FCC Part 15.247 Page 6 of 39

# **Configuration of Test Setup**

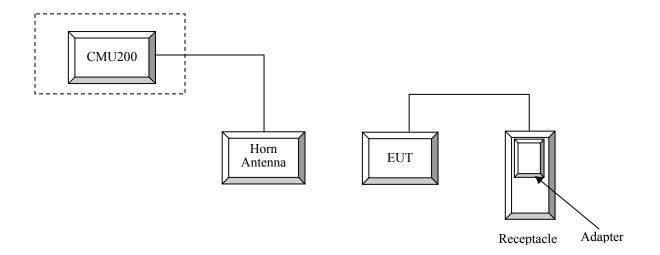

# **Block Diagram of Test Setup**

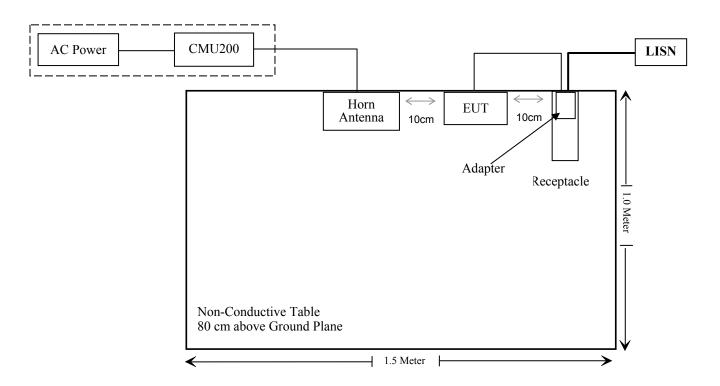

FCC Part 15.247 Page 7 of 39

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliace
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Report No.: RDG110916002-00A

Page 8 of 39 FCC Part 15.247

# FCC §15.247 (I) AND §2.1093 – RF EXPOSURE

#### **Applicable Standard**

According to FCC §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: RDG110916002-00A

Table 2 - Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only
Unlicensed Transmitters	When there is no simultaneous transmission —  o output ≤ 60/f: SAR not required  o output > 60/f: stand-alone SAR required  When there is simultaneous transmission —  Stand-alone SAR not required when  o output ≤ 2·P <sub>Ref</sub> and antenna is ≥ 5.0 cm from other antennas  o output ≤ P <sub>Ref</sub> and antenna is ≥ 2.5 cm from other antennas  o output ≤ P <sub>Ref</sub> and antenna is < 2.5 cm from other antennas  o output ≤ P <sub>Ref</sub> and antenna is < 2.5 cm from other antennas, each with either output power ≤ P <sub>Ref</sub> or 1-g SAR < 1.2 W/kg  Otherwise stand-alone SAR is required  When stand-alone SAR is required  o test SAR on highest output channel for each wireless mode and exposure condition  o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	o when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas  Licensed & Unlicensed o when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas o when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3  SAR required:  Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition  Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Jaw, Mouth and Nose	Flat phantom SAR required  o when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues  o position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

FCC Part 15.247 Page 9 of 39

- 1) The distance between BT and GSM antenna is 8.6 cm which is more than 5 cm. The max output power of Bluetooth antenna is -1.25 dBm + 2.0 dBi = 0.75 dBm, i.e.  $1.19 \text{ mW} < 2*P_{Ref}(24\text{mW})$ .
- 2) The maximum 1g SAR value of GSM antenna with body-worn back configuration is 1.395 W/Kg which is less than 1.6 W/Kg.
- 3) According to KDB648474, simultaneous transmission SAR evaluation is not required for BT and GSM antenna.
- 4) Stand alone SAR for Bluetooth is not reqired.

#### **Result:**

The stand along SAR evaluation of Bluetooth antenna can be exempted.

FCC Part 15.247 Page 10 of 39

# FCC §15.203 - ANTENNA REQUIREMENT

### **Applicable Standard**

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RDG110916002-00A

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas, one is for Bluetooth, the gain is 2.0 dBi; one is for GSM/PCS, the gain of PCS is 2.1 dBi and that of GSM is 0.78 dBi. All antennas are permanently attached, which are in accordance to section 15.203, please refer to the internal photos.

Result: Compliance.

FCC Part 15.247 Page 11 of 39

# FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**


FCC §15.207

#### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is  $\pm 2.4$  dB(k=2, 95% level of confidence).

#### **EUT Setup**

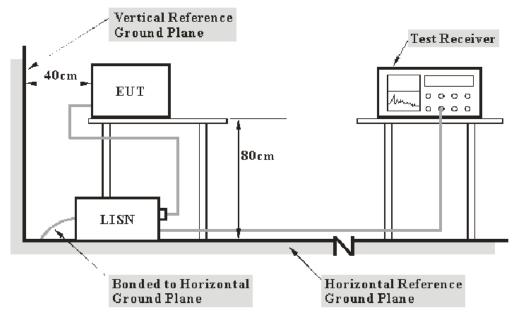

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

FCC Part 15.247 Page 12 of 39

### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Report No.: RDG110916002-00A

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15 Section15.207</u>, with the worst margin reading of:

#### 17.92 dB at 0.370 MHz in the Neutral conducted mode

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-10-19.

FCC Part 15.247 Page 13 of 39

Test Mode: Charging & Transmitting


# AC 120V/60 Hz, Line

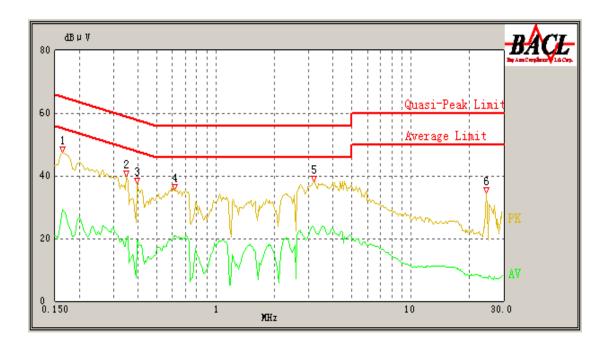

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/QP/Ave.)
3.175	23.38	10.10	46.00	22.62	Ave.
3.180	32.11	10.10	56.00	23.89	QP
0.615	20.58	10.10	46.00	25.42	Ave.
0.615	30.38	10.10	56.00	25.62	QP
0.165	29.17	10.10	55.57	26.40	Ave.
0.165	37.78	10.10	65.57	27.79	QP
0.350	31.95	10.10	60.29	28.34	QP
0.395	19.54	10.10	49.00	29.46	Ave.
0.395	29.42	10.10	59.00	29.58	QP
0.350	20.21	10.10	50.29	30.08	Ave.
24.350	7.66	10.10	50.00	42.34	Ave.
24.350	10.26	10.10	60.00	49.74	QP

FCC Part 15.247 Page 14 of 39

# AC 120V/60 Hz, Neutral

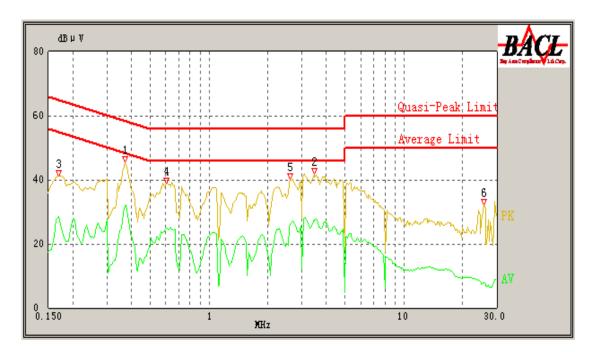

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/QP/Ave.)
0.370	31.79	10.10	49.71	17.92	Ave.
0.370	41.21	10.10	59.71	18.50	QP
3.460	27.45	10.10	46.00	18.55	Ave.
3.460	36.34	10.10	56.00	19.66	QP
2.620	26.06	10.10	46.00	19.94	Ave.
2.605	35.18	10.10	56.00	20.82	QP
0.610	24.84	10.10	46.00	21.16	Ave.
0.605	34.37	10.10	56.00	21.63	QP
0.170	28.39	10.10	55.43	27.04	Ave.
0.170	36.95	10.10	65.43	28.48	QP
25.630	7.91	10.10	50.00	42.09	Ave.
25.630	12.06	10.10	60.00	47.94	QP

FCC Part 15.247 Page 15 of 39

# FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

#### **Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

#### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is +4.0 dB(k=2, 95% level of confidence).

#### **EUT Setup**

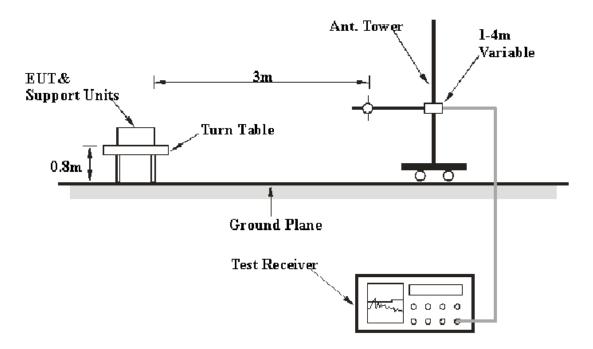

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

FCC Part 15.247 Page 16 of 39

### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Report No.: RDG110916002-00A

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

#### **Test Procedure**

For the radiated emissions test, the adapter was connected to the outlet of the LISN

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 17 of 39

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247</u>, with the worst margin reading of:

#### 5.9 dB at 44.397500 MHz in the Vertical polarization

Report No.: RDG110916002-00A

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Jimmy Xiao on 2011-10-19.

Test Mode: Charging & Transmitting

#### 1) Below 1 GHz

Auto Test(FCC 15 Class B)

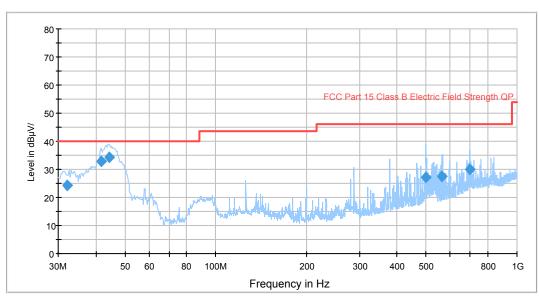

Frequency	Corrected	Test A	ntenna	Turntable	Correction	Limit	Margin
(MHz)	Amplitude (dBµV/m)	Height (cm)	Polarity (H/V)	Position Factor (degree) (dB)		(dBµV/m)	(dB)
44.397500	34.1	102.0	V	135.0	-14.8	40.0	5.9
41.664250	32.8	102.0	V	42.0	-13.1	40.0	7.2
32.247750	24.2	102.0	V	222.0	-7.0	40.0	15.8
695.636500	29.9	102.0	V	8.0	-3.2	46.0	16.1
565.150000	27.5	102.0	V	343.0	-7.2	46.0	18.5
496.870500	27.2	102.0	V	344.0	-8.4	46.0	18.8

FCC Part 15.247 Page 18 of 39

# 2) Above 1 GHz

Indic	cated		Table	Test An	tenna	Correction Factor			FCC	Part 15.247	/15.209/1	5.205	
Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/Ave.)	Angle Degree	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment	
	Low Channel (2402 MHz)												
4804	30.54	Ave.	250	2.1	Н	36.3	4.28	26.73	44.39	54	9.61	harmonic	
3621.4	28.57	Ave.	190	1.7	Н	32.7	3.73	26.87	38.13	54	15.87	spurious	
4804	43.35	PK	250	2.1	Н	36.3	4.28	26.73	57.20	74	16.80	harmonic	
4804	24.26	Ave.	310	1.6	V	35.2	4.28	26.73	37.01	54	16.99	harmonic	
3621.4	25.79	Ave.	170	1.2	V	32.1	3.73	26.87	34.75	54	19.25	spurious	
3621.4	41.26	PK	190	1.7	Н	32.7	3.73	26.87	50.82	74	23.18	spurious	
4804	37.23	PK	310	1.6	V	35.2	4.28	26.73	49.98	74	24.02	harmonic	
3621.4	38.46	PK	170	1.2	V	32.1	3.73	26.87	47.42	74	26.58	spurious	
				Mie	ddle Ch	annel (24	141 MH	z)					
4882	29.78	Ave.	170	1.2	Н	36.6	4.37	26.75	44.0	54	10.00	harmonic	
3621.4	28.64	Ave.	210	2.1	Н	32.7	3.73	26.87	38.2	54	15.80	spurious	
4882	25.06	Ave.	180	1.8	V	35.4	4.37	26.75	38.08	54	15.92	harmonic	
4882	42.15	PK	170	1.2	Н	36.6	4.37	26.75	56.37	74	17.63	harmonic	
3621.4	26.16	Ave.	350	1.4	V	32.1	3.73	26.87	35.12	54	18.88	spurious	
4882	38.06	PK	180	1.8	V	35.4	4.37	26.75	51.08	74	22.92	harmonic	
3621.4	41.37	PK	210	2.1	Н	32.7	3.73	26.87	50.93	74	23.07	spurious	
3621.4	38.75	PK	350	1.4	V	32.1	3.73	26.87	47.71	74	26.29	spurious	
				Hi	igh Cha	nnel (248	30 MHz	<b>:</b> )					
4960	28.96	Ave.	170	2.4	Н	36.6	4.37	26.75	43.18	54	10.82	harmonic	
4960	26.74	Ave.	180	1.6	V	35.4	4.37	26.75	39.76	54	14.24	harmonic	
4960	43.01	PK	170	2.4	Н	36.6	4.37	26.75	57.23	74	16.77	harmonic	
3621.4	27.46	Ave.	260	1.9	Н	32.7	3.73	26.87	37.02	54	16.98	spurious	
3621.4	27.14	Ave.	310	1.2	V	32.1	3.73	26.87	36.10	54	17.90	spurious	
4960	38.42	PK	180	1.6	V	35.4	4.37	26.75	51.44	74	22.56	harmonic	
3621.4	40.78	PK	260	1.9	Н	32.7	3.73	26.87	50.34	74	23.66	spurious	
3621.4	39.12	PK	310	1.2	V	32.1	3.73	26.87	48.08	74	25.92	spurious	

Report No.: RDG110916002-00A

# 3) Spurious Emission in Restricted Bands

Indic	Indicated		Table Test Antenna		Corr	Correction Factor		FCC Part 15.247/15.209/15.205				
Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/Ave.)	Angle	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
2483.6	27.96	Ave.	190	1.5	Н	30.5	3.15	26.85	34.76	54	19.24	spurious
2389.1	27.47	Ave.	120	1.2	Н	30.3	3.01	26.84	33.94	54	20.06	spurious
24836	26.39	Ave.	360	1.2	V	30.5	3.15	26.85	33.19	54	20.81	spurious
2389.1	25.03	Ave.	75	1.9	V	30.3	3.01	26.84	31.5	54	22.50	spurious
2483.6	44.39	PK	190	1.9	Н	30.5	3.15	26.85	51.19	74	22.81	spurious
2483.6	39.75	PK	360	1.2	V	30.5	3.15	26.85	46.55	74	27.45	spurious
2389.1	39.03	PK	120	1.2	Н	30.3	3.01	26.84	45.5	74	28.50	spurious
2389.1	38.06	PK	75	1.9	V	30.3	3.01	26.84	44.53	74	29.47	spurious

FCC Part 15.247 Page 19 of 39

# FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

#### **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RDG110916002-00A

#### **Test Equipment List and Details**

Manufacturer	Description	Description Model Serial Number		Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Procedure**

- 1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
- 2. Set the adjacent channel of the EUT maxhold another truce
- 3. Measure the channel separation.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-10-17.

**Test Result:** Compliance.

Please refer to following tables and plots


FCC Part 15.247 Page 20 of 39

Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.004	0.699	Pass
Adjacent	2403	1.004	0.099	1 ass
Middle	2441	1.004	0.696	Pass
Adjacent	2442	1.004	0.090	rass
High	2480	1.004	0.606	D
Adjacent	2479	1.004	0.696	Pass

Please refer to the following plots.


#### **Low Channel**

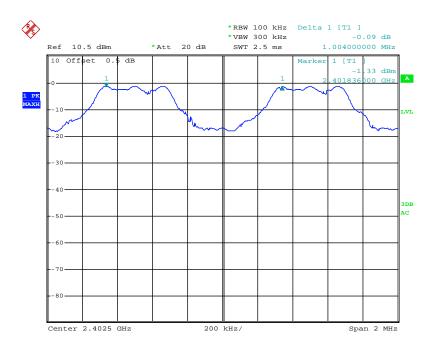

Date: 17.0CT.2011 20:48:31

FCC Part 15.247 Page 21 of 39

#### **Middle Channel**

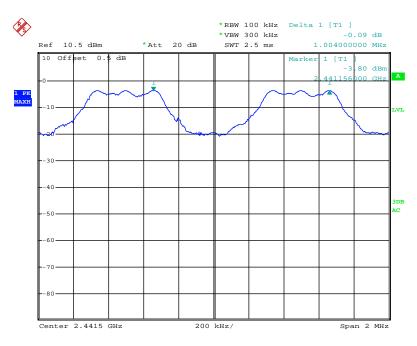

Date: 17.OCT.2011 20:50:36

#### **High Channel**



Date: 17.OCT.2011 20:52:53

FCC Part 15.247 Page 22 of 39

# FCC $\S15.247(a)$ (1) – 20 dB BANDWIDTH TESTING

#### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RDG110916002-00A

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

### **Test Equipment List and Details**

Manufacturer	Description Model		Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-10-17.

**Test Result:** Compliance.

Please refer to following tables and plots


FCC Part 15.247 Page 23 of 39

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.048
Middle	2441	1.044
High	2480	1.044

Please refer to the following plots.


#### **Low Channel**

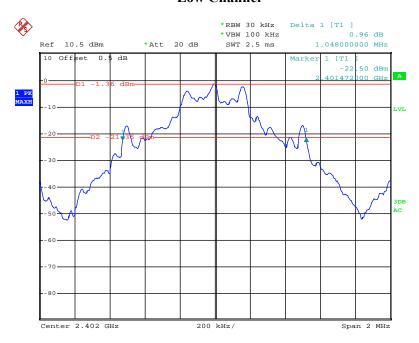

Date: 17.OCT.2011 20:43:40


FCC Part 15.247 Page 24 of 39

#### **Middle Channel**

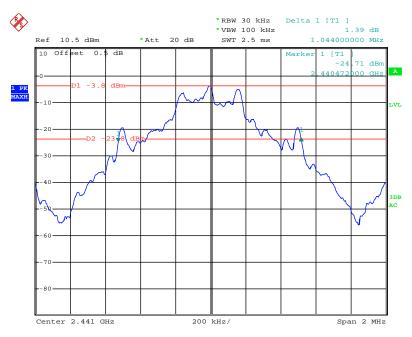

Date: 17.0CT.2011 20:45:00

# **High Channel**

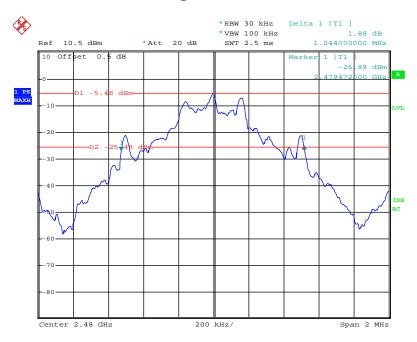

Date: 17.0CT.2011 20:46:06

FCC Part 15.247 Page 25 of 39

# FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Report No.: RDG110916002-00A

#### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

Manufacturer	Description	Description Model Serial Number		Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.9kPa	

The testing was performed by Jimmy Xiao on 2011-10-17.

**Test Result:** Compliance.


Please refer to following tables and plots

FCC Part 15.247 Page 26 of 39

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	79	≥ 15

# **Number of Hopping Channels**

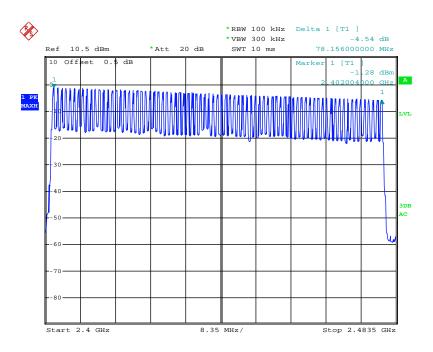

Date: 17.0CT.2011 20:40:16

FCC Part 15.247 Page 27 of 39

# FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

#### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RDG110916002-00A

#### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s Hop rate=1600/s

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.9kPa	

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-10-17.

Test Result: Compliance.

Please refer to following tables and plots


FCC Part 15.247 Page 28 of 39

Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
	Low	0.430	0.138	0.4	Pass
DH 1	Middle	0.420	0.134	0.4	Pass
DILI	High	0.425	0.136	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s				
	Low	1.70	0.272	0.4	Pass
DH 3	Middle	1.69	0.270	0.4	Pass
DH 3	High	1.69	0.270	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s				
	Low	3.00	0.320	0.4	Pass
DH 5	Middle	2.98	0.318	0.4	Pass
DH 5	High	3.04	0.324	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s				

Please refer to the following plots.


#### **Low Channel for DH1**

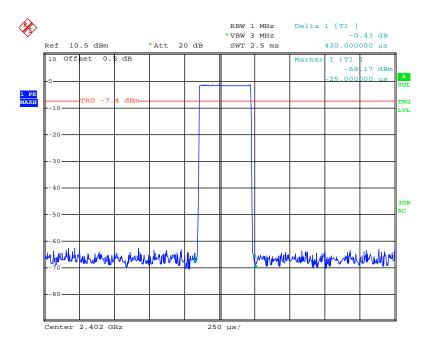

Date: 17.OCT.2011 20:57:08


FCC Part 15.247 Page 29 of 39

#### Middle Channel for DH1

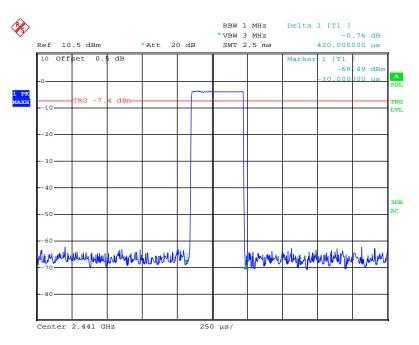

Date: 17.0CT.2011 20:57:38


# **High Channel for DH1**

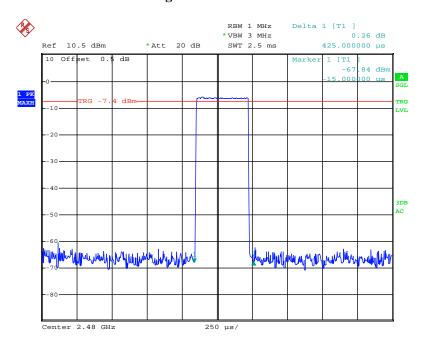

Date: 17.0CT.2011 20:58:19


FCC Part 15.247 Page 30 of 39

#### **Low Channel for DH3**

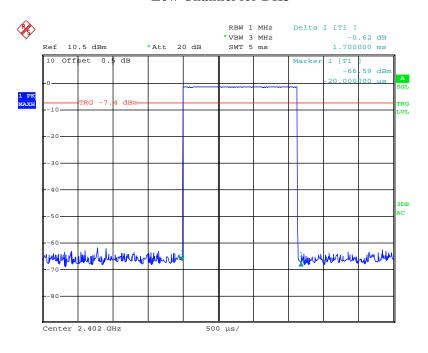

Date: 17.0CT.2011 21:00:23


#### Middle Channel for DH3

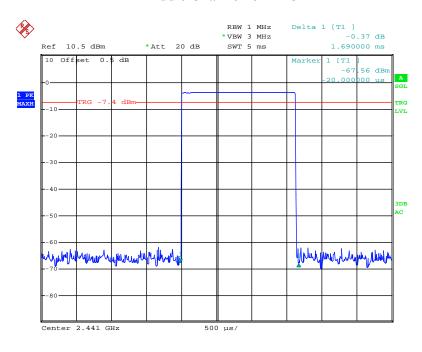

Date: 17.OCT.2011 20:59:49


FCC Part 15.247 Page 31 of 39

#### **High Channel for DH3**

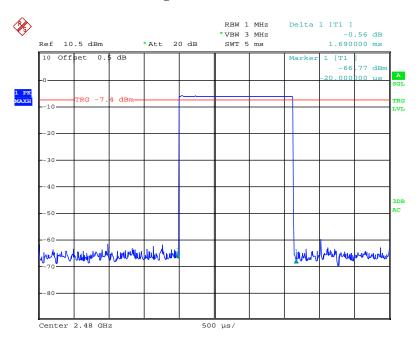

Date: 17.0CT.2011 20:59:14


#### **Low Channel for DH5**

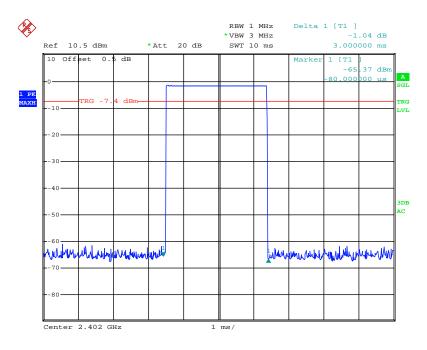

Date: 17.0CT.2011 21:01:17


FCC Part 15.247 Page 32 of 39

#### **Middle Channel for DH5**

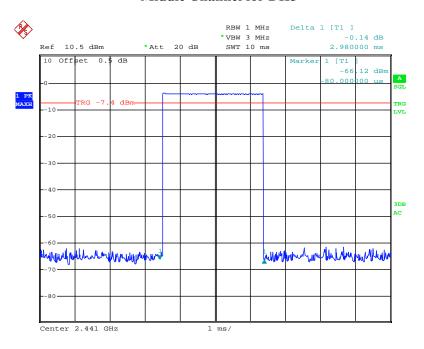

Date: 17.0CT.2011 21:01:52

# **High Channel for DH5**

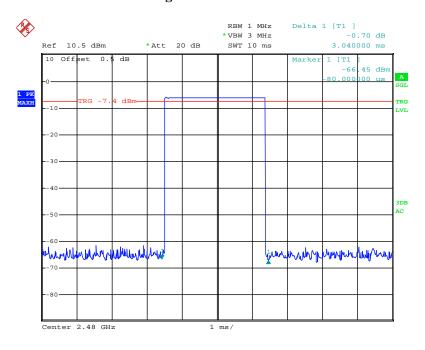

Date: 17.0CT.2011 21:02:42

FCC Part 15.247 Page 33 of 39

# FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

#### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Report No.: RDG110916002-00A

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
- 3. Add a correction factor to the display.



### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.9kPa	

<sup>\*</sup> The testing was performed by Jimmy Xiao on 2011-10-17.


Test Result: Compliance.

FCC Part 15.247 Page 34 of 39

Test Mode: Transmitting

Channel	Frequency	Conducted Output Power		Limit
Chamiei	(MHz)	(dBm)	(mW)	(mW)
Low	2402	-1.25	0.749	125
Middle	2441	-3.70	0.426	125
High	2480	-5.84	0.261	125


#### **Low Channel**

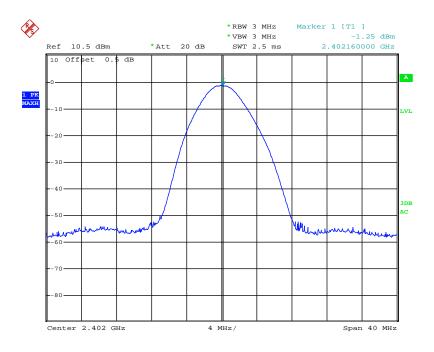

Date: 17.0CT.2011 20:54:42


FCC Part 15.247 Page 35 of 39

#### Middle Channel

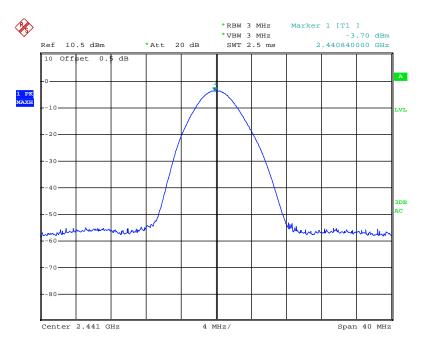

Date: 17.0CT.2011 20:54:21

# **High Chanel**

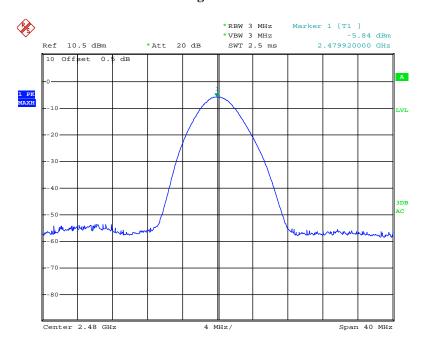

Date: 17.OCT.2011 20:53:48

FCC Part 15.247 Page 36 of 39

# FCC §15.247(d) - BAND EDGES TESTING

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RDG110916002-00A

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

FCC Part 15.247 Page 37 of 39

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.9 kPa	

<sup>\*</sup>The testing was performed by Jimmy Xiao 2011-10-17.


Test Result: Compliant

Please refer to the following table and plots.

Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.974	51.91	20
2483.962	50.49	20


## **Band Edge: Left Side**

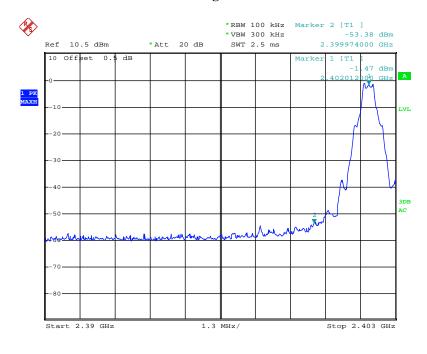

Date: 17.0CT.2011 21:08:30

FCC Part 15.247 Page 38 of 39

# **Band Edge: Right Side**

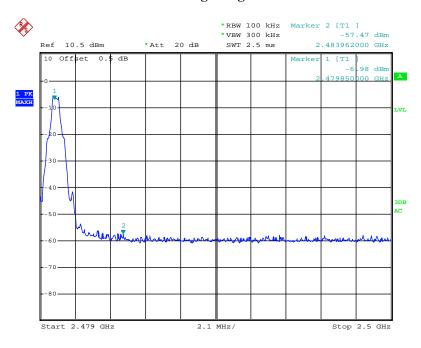

Date: 17.0CT.2011 21:13:30

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 39 of 39