



FCC PART 15 CLASS B MEASUREMENT AND TEST REPORT

For

Nexpro International Limitada

San Jose-Goicoechea, Guadalupe, Barrio Tournon, frente Al Hotel Villas Tournon, Oficinas Del Bufete Facio Y Canas, Costa Rica

FCC ID: ZYPQ28

Product Type: Report Type: Original Report GSM Mobile Phone ion Cai **Test Engineer:** Lion Cai Report Number: R1DG120206001-00C **Report Date:** 2012-02-29 Merry Zhao Reviewed By: EMC Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, **Test Laboratory:** ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

Fax: +86-755-33320008 www.baclcorp.com.cn

^{*} This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	5
EQUIPMENT MODIFICATIONS	
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
External I/O Cable	
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
SUMMARY OF TEST RESULTS	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.	9
TEST EQUIPMENT LIST AND DETAILS	9
TEST PROCEDURE	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	12
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST FROCEDORE TEST EQUIPMENT LIST AND DETAILS.	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Nexpro International Limitada*'s product, model number: *Q28 (FCC ID: ZYPQ28)* (the "EUT") in this report was a *GSM Mobile Phone*, which was measured approximately: 11.5 cm (L) x 5.6cm (W) x 1.2cm (H), rated input voltage: DC 3.7V Lithium battery or DC 5.0V from adapter for charging. The highest EUT operating frequency is 26 MHz.

Report No.: R1DG120206001-00C

Adapter Information: Trade name : sendtel Modelo : O28

ENTRADA: AC100-240V 50/60 Hz 0.2A

SALIDA: DC5V 500mA

* All measurement and test data in this report was gathered from production sample serial number: 1202061 (Assigned by BACL, Shenzhen). The EUT was received on 2012-02-17.

Objective

This report is prepared on behalf of *Nexpro International Limitada* in accordance with Part 2- Subpart J, Part 15- Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 Class B.

Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE submissions with FCC ID: ZYPQ28. FCC Part 15C DSS submissions with FCC ID: ZYPQ28 for BT. FCC Part 15C DSS submissions with FCC ID: ZYPQ28 for WIFI.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15 Class B Page 3 of 15

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).

Report No.: R1DG120206001-00C



The current scope of accreditations can be found at http://ts.nist.gov/Standards/scopes/2007070.htm

FCC Part 15 Class B Page 4 of 15

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical mode which is provided by manufacture.

Report No.: R1DG120206001-00C

EUT Exercise Software

Winthraw.exe software was provided by BACL

Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	GX280	000005185
DELL	Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
DELL	Mouse	MOC5UO	G1900NKD
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
HP	Printer	C3941A	JPTVOB2337


External I/O Cable

Cable Description	Length (m)	From/Port	То
Shielded Detachable Keyboard Cable	1.5	USB Port/Host PC	Keyboard
Shielded Detachable Mouse Cable	1.5	USB Port/Host PC	Mouse
Shielded Detachable VGA Cable	1.5	VGA Port/Host PC	Monitor
Shielded Detachable USB Cable	1.5	Host PC	EUT
Shielded Detachable Serial Cable	1.2	Serial Port/Host	Modem
Shielded Detachable Printer Cable	1.8	Parallel Port/Host	Printer

FCC Part 15 Class B Page 5 of 15

Block Diagram of Test Setup

Downloading Mode:

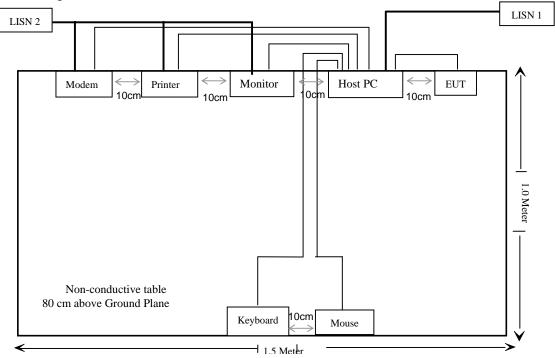

FCC Part 15 Class B Page 6 of 15

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

Report No.: R1DG120206001-00C

FCC Part 15 Class B Page 7 of 15

FCC §15.107 – AC LINE CONDUCTED EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 2.4 dB.(k=2, 95% level of confidence)

Report No.: R1DG120206001-00C

EUT Setup

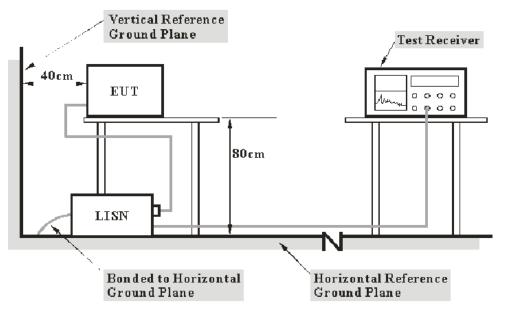

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

FCC Part 15 Class B Page 8 of 15

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Report No.: R1DG120206001-00C

Frequency Range	IF BW
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A

^{*} Statement of Traceability: Bay Area Compliance Laboratory Corp. attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the host PC was connected to the outlet of the first LISN, the printer, monitor and modem were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.107</u>, with the worst margin reading of:

8.46 dB at 0.660 MHz in the Line conducted mode

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Lion Cai on 2012-02-20.

FCC Part 15 Class B Page 9 of 15

EUT Operation Mode: Downloading


AC 120V/60 Hz, Line

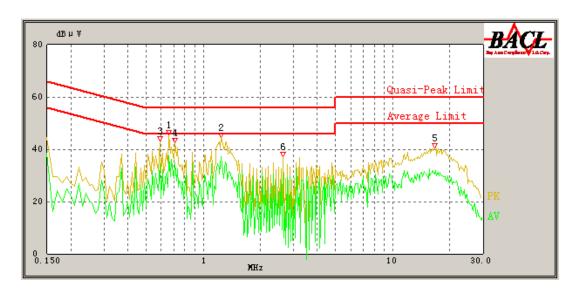

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/ QP/Ave.)
0.660	42.38	1.10	56.00	13.62	QP
0.660	37.54	1.10	46.00	8.46	Ave
1.240	42.54	1.10	56.00	13.46	QP
1.240	37.32	1.10	46.00	8.68	Ave
0.590	40.63	1.10	56.00	15.37	QP
0.590	34.64	1.10	46.00	11.36	Ave
0.710	38.75	1.10	56.00	17.25	QP
0.710	34.82	1.10	46.00	11.18	Ave
16.660	35.19	1.10	60.00	24.81	QP
16.660	30.36	1.10	50.00	19.64	Ave
2.640	32.20	1.10	56.00	23.80	QP
2.640	30.58	1.10	46.00	15.42	Ave

FCC Part 15 Class B Page 10 of 15

AC 120V/60 Hz, Neutral

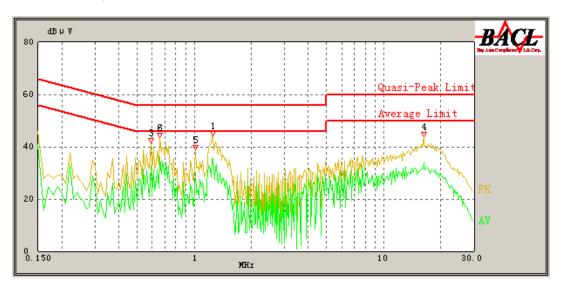

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/ QP/Ave.)
1.260	41.63	1.10	56.00	14.37	QP
1.260	35.34	1.10	46.00	10.66	Ave
0.660	40.85	1.10	56.00	15.15	QP
0.660	36.13	1.10	46.00	9.87	Ave
0.590	39.19	1.10	56.00	16.81	QP
0.590	32.91	1.10	46.00	13.09	Ave
16.230	39.10	1.10	60.00	20.90	QP
16.230	34.20	1.10	50.00	15.80	Ave
1.020	34.79	1.10	56.00	21.21	QP
1.020	30.16	1.10	46.00	15.84	Ave
0.660	40.69	1.10	56.00	15.31	QP
0.660	36.13	1.10	46.00	9.87	Ave

FCC Part 15 Class B Page 11 of 15

FCC §15.109 - RADIATED EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: R1DG120206001-00C

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB. (k=2, 95% level of confidence)

EUT Setup

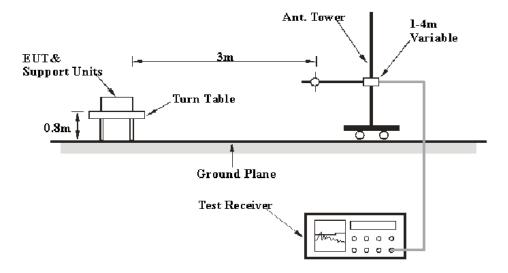

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

FCC Part 15 Class B Page 12 of 15

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Report No.: R1DG120206001-00C

Frequency	RBW	VBW	IF BW	Detection
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz	Ouasi-peak

Test Procedure

During the radiated emissions test, the host PC, monitor, modem and the printer were connected to AC floor outlet

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all Install combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

5.31 dB at 250.1900 MHz in the Horizontal polarization

FCC Part 15 Class B Page 13 of 15

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	100.0 kPa

The testing was performed by Lion Cai on 2012-02-21.

EUT Operation Mode: Downloading

Horizontal

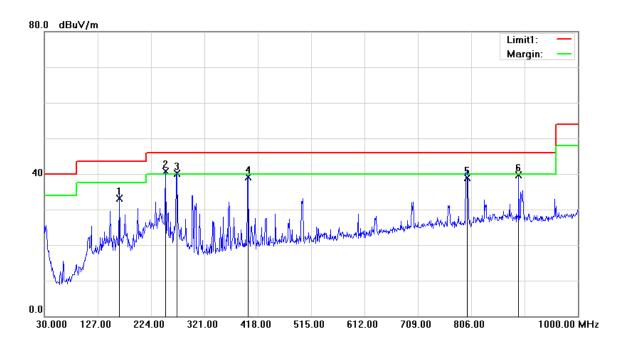


Report No.: R1DG120206001-00C

Frequency (MHz)	Reading (dBµV)	Detector	Correction Factor (dB)	Corrected Amplitude (dBµV/m)	Limit (dBuV/m)	Margin (dB)
165.8000	40.21	QP	-7.10	33.11	43.50	10.39
250.1900	47.60	QP	-6.91	40.69	46.00	5.31
271.5300	45.36	QP	-5.34	40.02	46.00	5.98
400.5400	41.65	QP	-2.51	39.14	46.00	6.86
799.2100	35.61	QP	3.28	38.89	46.00	7.11
892.3300	35.12	QP	4.55	39.67	46.00	6.33

FCC Part 15 Class B Page 14 of 15

Vertical

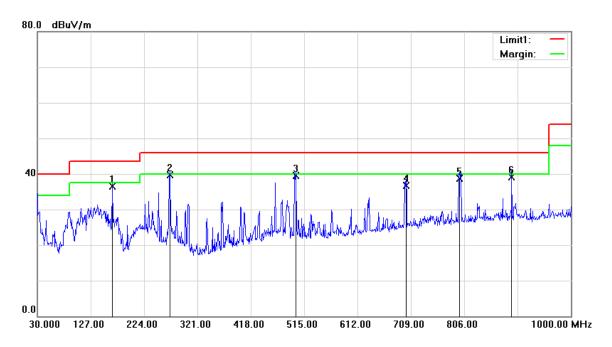

Report No.: R1DG120206001-00C

Frequency (MHz)	Reading (dBµV)	Detector	Correction Factor (dB)	Corrected Amplitude (dBµV/m)	Limit (dBuV/m)	Margin (dB)
165.8000	43.56	QP	-7.10	36.46	43.50	7.04
270.5600	45.16	QP	-5.37	39.79	46.00	6.21
499.4800	40.21	QP	-0.62	39.59	46.00	6.41
700.2700	33.85	QP	2.90	36.75	46.00	9.25
797.2700	35.35	QP	3.27	38.62	46.00	7.38
892.3300	34.52	QP	4.55	39.07	46.00	6.93

***** END OF REPORT *****

FCC Part 15 Class B Page 15 of 15