

## FCC ID TEST REPORT

for

Mobile Phone

Model: SAGE+

FCC ID: ZYPSAGE

Prepared for: Nexpro International Limitada  
Guadalupe, Barrio Tournon, Frente Al Hotel Villas Oficinas Del Bufete  
Facio Y Canas, San Jose-Goicoechea, Costa Rica

Prepared by: Shenzhen TCT Testing Technology Co., Ltd.  
1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,  
Baoan District, Shenzhen, Guangdong, China

Tel: +86-0755-27673339  
Fax: +86-0755-27673332

Report Number: TCT130902007F2-4  
Date of Test: August 20 ~September 26, 2013  
Date of Issue: September 26, 2013

Tested By   
Beryl Zhao

Reviewed By   
Jack Kang

## Table of contents

<b>1.0</b>	<b>General Information .....</b>	<b>3</b>
1.1	Client Information .....	3
1.2	General Description of E.U.T.....	3
1.3	Test Facility .....	4
<b>2.0</b>	<b>List of Measurement Equipment.....</b>	<b>5</b>
<b>3.0</b>	<b>Technical Details.....</b>	<b>6</b>
3.1	Investigations Requested.....	6
3.2	Test Standards.....	6
3.3	Measurement Uncertainty.....	6
<b>4.0</b>	<b>Power Line Conducted Emission Test.....</b>	<b>7</b>
4.1	Schematics of the test.....	7
4.2	Test Method and test Procedure.....	7
4.3	EUT Operating Condition.....	8
4.4	Test Equipment.....	8
4.5	Power line conducted Emission Limit.....	8
4.6	Photo documentation of the test set-up.....	8
4.7	Test specification.....	8
4.8	Test result.....	8
<b>5.0</b>	<b>Radiated Emission test.....</b>	<b>11</b>
5.1	Test Method and Test Procedure.....	11
5.2	EUT Operating Condition.....	12
5.3	Radiated Emission Limit.....	12
5.4	Photo documentation of the test set-up.....	12
5.5	Test Equipment.....	12
5.6	Test specification.....	12
5.7	Test result.....	12
<b>6.0</b>	<b>FCC label.....</b>	<b>15</b>

## 1.0 General Information

### 1.1 Client Information

Application:	Nexpro International Limitada
Address of Application:	Guadalupe, Barrio Tournon, Frente Al Hotel Villas Oficinas Del Bufete Facio Y Canas, San Jose-Goicoechea, Costa Rica
Manufacturer:	Nexpro International Limitada
Address of Manufacturer:	Guadalupe, Barrio Tournon, Frente Al Hotel Villas Oficinas Del Bufete Facio Y Canas, San Jose-Goicoechea, Costa Rica

### 1.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	SAGE+
Trade Mark:	N/A
Power Supply:	DC 3.7V Via Lithium Battery & DC 5V Via Adapter
	Battery information Model: TBT9605 Voltage: 3.7V/1500mAh
	Adapter Information Model:AT-5915 Brand Name: ekt Input: AC 100-240V,50/60Hz 0.4A, Output: DC 5V 800mA
Test Accessory:	Notebook Computer Trade Mark: Lenovo Model: Lenovo G485 S/N:LB00402300
Remark:	--
Model Difference:	--

## 1.3 Test Facility:

Name of Test Lab:	Shenzhen Tongce Testing Lab
Address of Test Lab:	1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

**FCC Registration Number: 572331**

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab  
The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

Registration Number: 572331

**Industry Canada (IC)**

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing  
Registration Number IC: 10668A-1

<b>2.0 List of Measurement Equipment</b>					
2.1 Conducted Emission Test					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESH3	860905/006	RS	July 08, 2013	July 07, 2014
Spectrum Analyzer	ESA-L1500A	US37451154	HP	July 08, 2013	July 07, 2014
PULSE LIMITER	ESH3-Z2	100281	RS	July 08, 2013	July 07, 2014
LISN	ESH3-Z5	100294	RS	July 08, 2013	July 07, 2014
LISN	ESH3-Z5	100253	RS	July 08, 2013	July 07, 2014
LISN	LS16C	10010947251	AFJ	July 08, 2013	July 07, 2014
LISN (Three Phase)	NSLK 8126	8126453	Schwarebeck	July 08, 2013	July 07, 2014
2.2 Radiated Emission Test					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESVD	1026.5506.10	RS	July 08, 2013	July 07, 2014
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer	8595E	3441A00893	HP	July 08, 2013	July 07, 2014
Amplifier	8447D	2727A05017	HP	July 08, 2013	July 07, 2014
Bilog Antenna	VULB9163	9163/340	Schwarebeck	July 08, 2013	July 07, 2014
Horn Antenna	BBHA 9120D	9120D-631	Schwarebeck	July 08, 2013	July 07, 2014

### 3.0 Technical Details

#### 3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

#### 3.2 Test Standards


FCC Part 15 Subpart B:2012

#### 3.3 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Temperature	±0.1 °C
2.	Humidity	±1.0%
3.	Spurious emissions, conducted	±3.70dB
4.	All emissions, radiated	±4.50dB

## 4.0 Power Line Conducted Emission Test

### 4.1 Schematics of the test

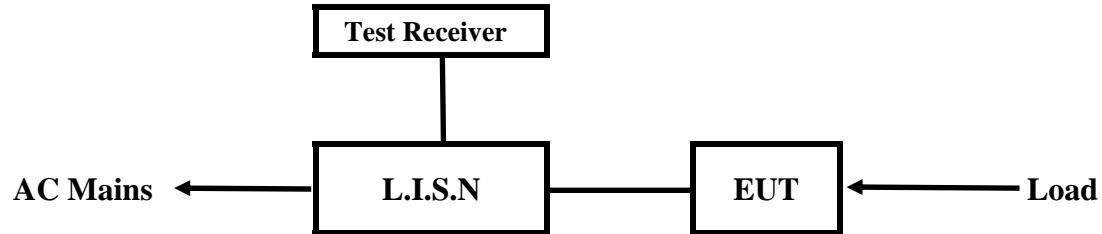


EUT: Equipment Under Test

### 4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2009.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

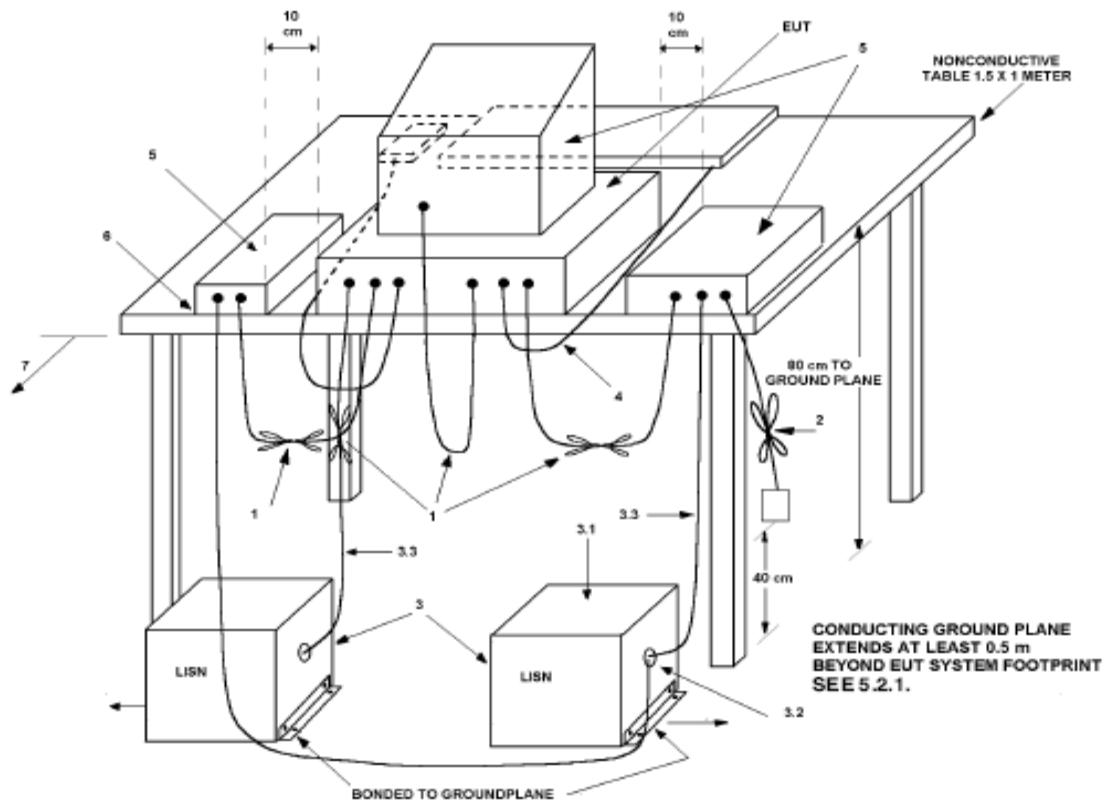

#### 4.3 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009

- 1) Setup the EUT and simulators as shown on the following
- 2) Enable AF signal and confirm EUT active to normal condition

#### 4.4 Test Equipment

Please refer to the Section 2

#### 4.5 Power line conducted Emission Limit

Frequency(MHz)	Class A Limits (dB $\mu$ V)		Class B Limits (dB $\mu$ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The tighter limit shall apply at the transition frequencies

#### 4.6 Photo documentation of the test set-up

Please refer to the Section 7

#### 4.7 Test specification:

Environmental conditions: Temperature: 24° C Humidity: 51% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

#### 4.8 Test result

Min. limit margin >10dB from 0.15 MHz - 30MHz


The requirements are FULFILLED

Remarks: According to the FCC part 15 Subpart B:2012

**A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)**

EUT Description: Mobile Phone  
 Operation Mode: Data Transfer mode  
 Tested By: Beryl Zhao  
 Test date: Sept.06, 2013  
 Test Result: PASS

Start Frequency Stop Frequency Step IF BW Detector Final M-Time  
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

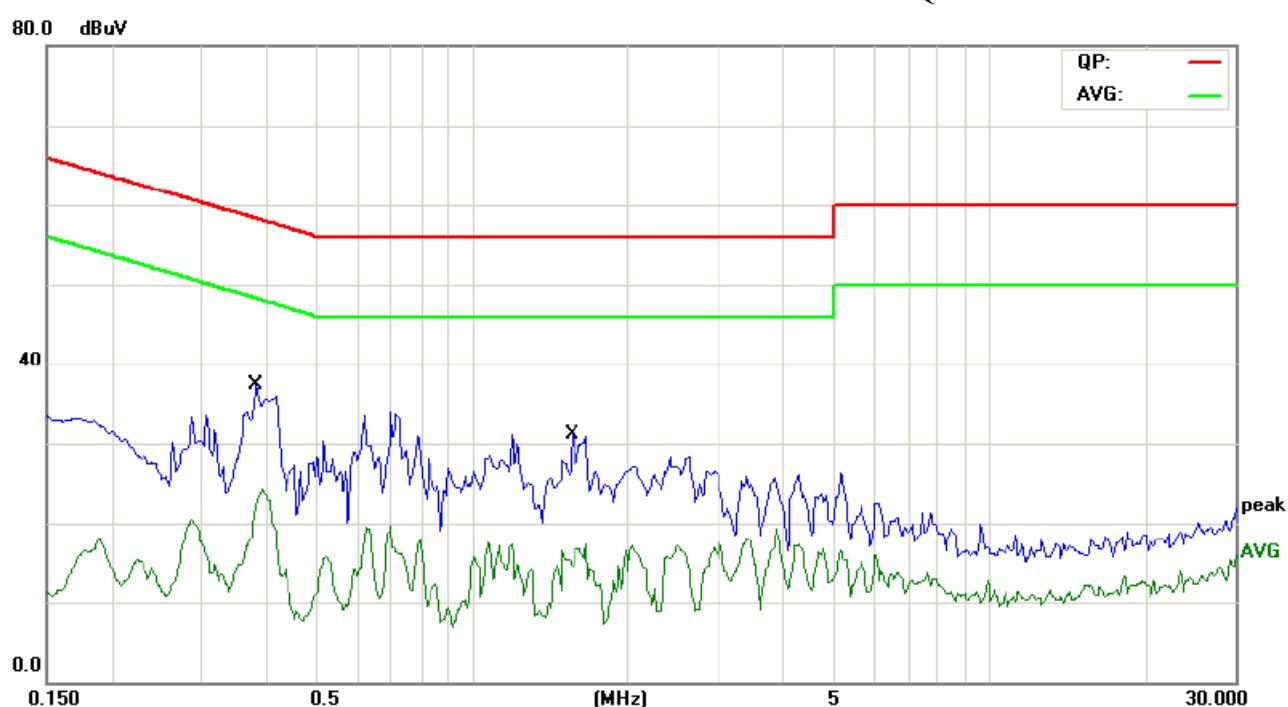

Frequency (MHz)	Reading(dB $\mu$ V)				Limit (dB $\mu$ V)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.3810	37.36	22.24	--	--	58.26	48.26
1.5680	31.45	20.35	--	--	56.00	46.00

**B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)**

EUT Description: Mobile Phone


Operation Mode: Data Transfer mode

Tested By: Beryl Zhao

Test date: Sept.06, 2013

Test Result: PASS

Start Frequency 0.15MHz	Stop Frequency 30MHz	Step 4.5KHz	IF BW 10KHz	Detector QP+AV	Final M-Time 1s
----------------------------	-------------------------	----------------	----------------	-------------------	--------------------

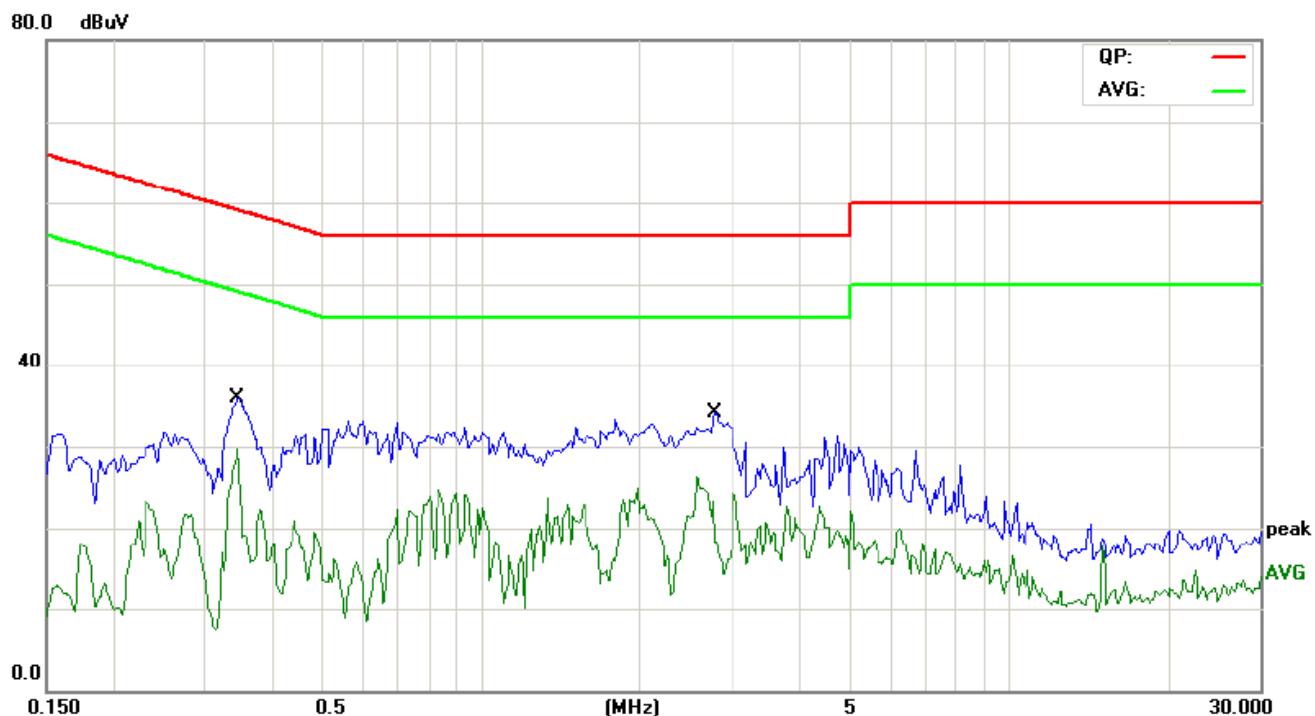



Frequency (MHz)	Reading(dB $\mu$ V)				Limit (dB $\mu$ V)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.3425	--	--	35.81	29.47	64.25	54.25
2.7790	--	--	34.32	22.66	62.52	52.52

## 5.0 Radiated Emission Test

### 5.1 Test Method and test Procedure:

- 1) The EUT was tested according to ANSI C63.4 –2009.
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2009.
- 3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- 4) The antenna polarization: Vertical polarization and Horizontal polarization.

#### Block diagram of Test setup

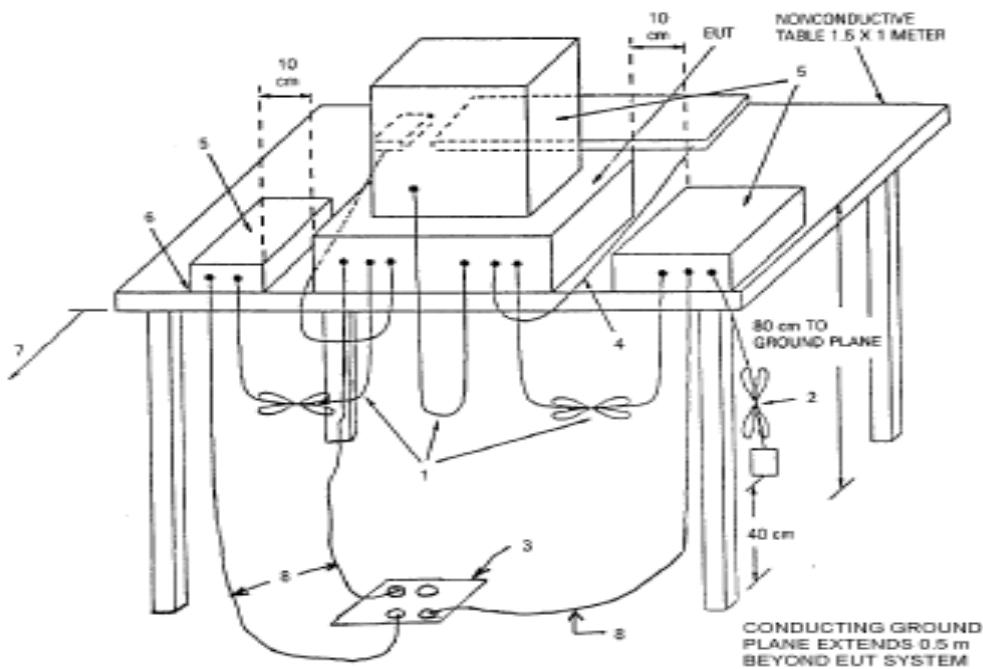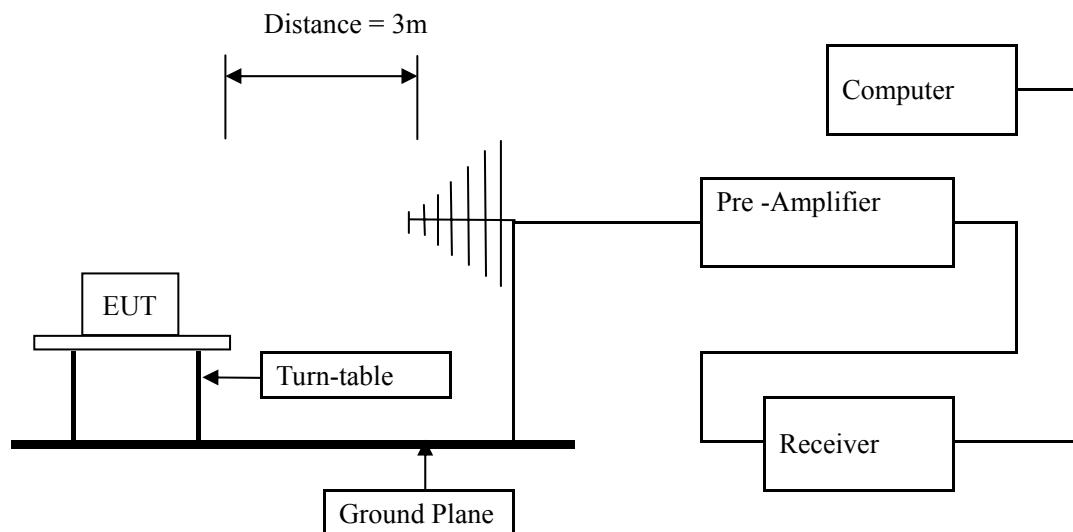

## 5.2 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009

## 5.3 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: 1) The frequency spectrum from 30MHz to 8GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK.  
2) Measurements were made at 3 meters.  
3) If measurement is not made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula  $Ld1 = Ld2 * (d2/d1)$

## 5.4 Photo documentation of the test set-up

Please refer to the Section 7

## 5.5 Test Equipment:

Please refer to the Section 2

## 5.6 Test specification:

Environmental conditions: Temperature 26° C Humidity: 56% Atmospheric pressure: 103kPa

## 5.7 Test result

Min. limit margin 6.66dB at 702.0801MHz

The requirements are FULFILLED

Remarks: According to the FCC part 15 Subpart B:2012

**A. Radiated Emission In Horizontal (30MHz----1000MHz)**


EUT Description: Mobile Phone

Operation Mode: Data Transfer mode

Tested By: Beryl Zhao

Test date: Sept.06, 2013

Test Result: PASS

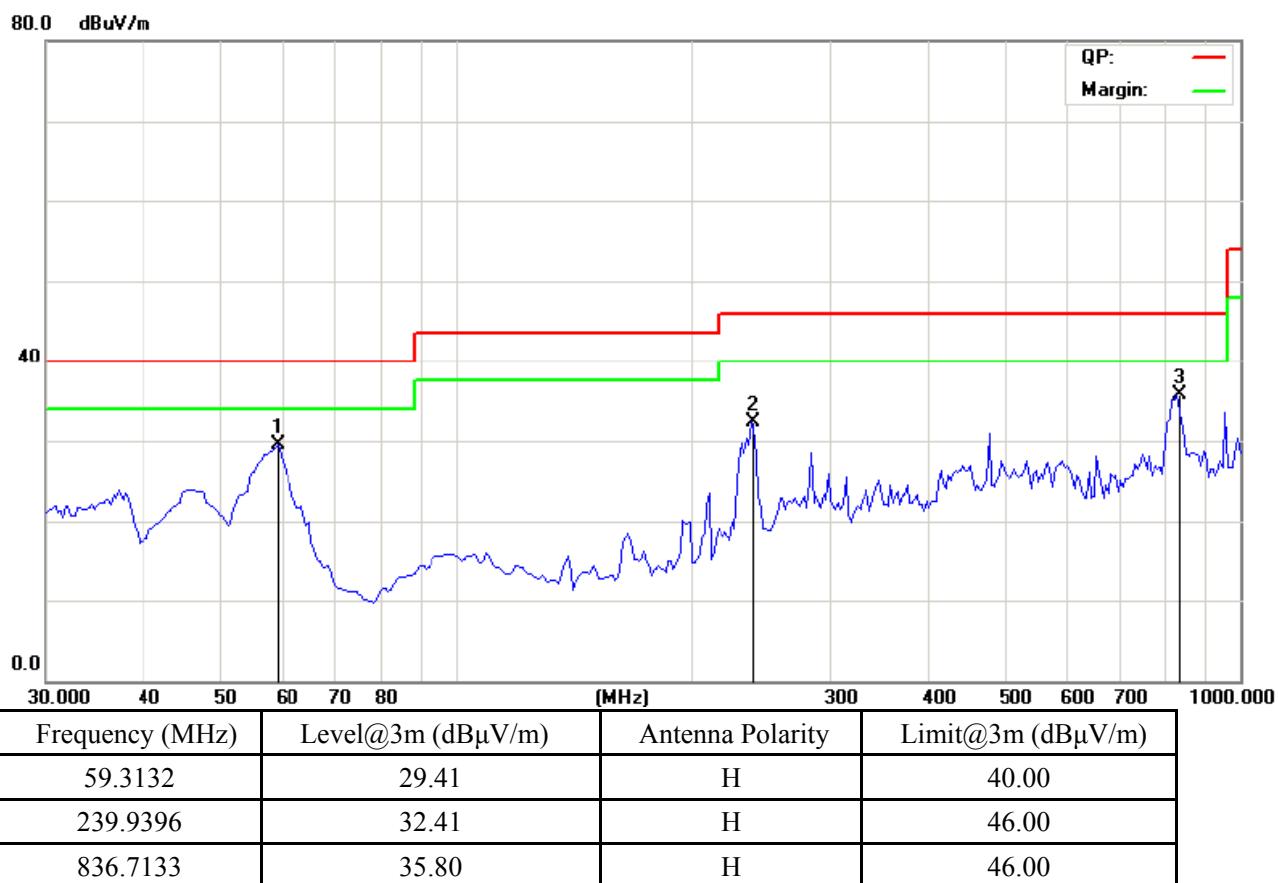

**B. Radiated Emission In Vertical (30MHz----1000MHz)**


EUT Description: Mobile Phone

Operation Mode: Data Transfer mode

Tested By: Beryl Zhao

Test date: Sept.06, 2013

Test Result: PASS

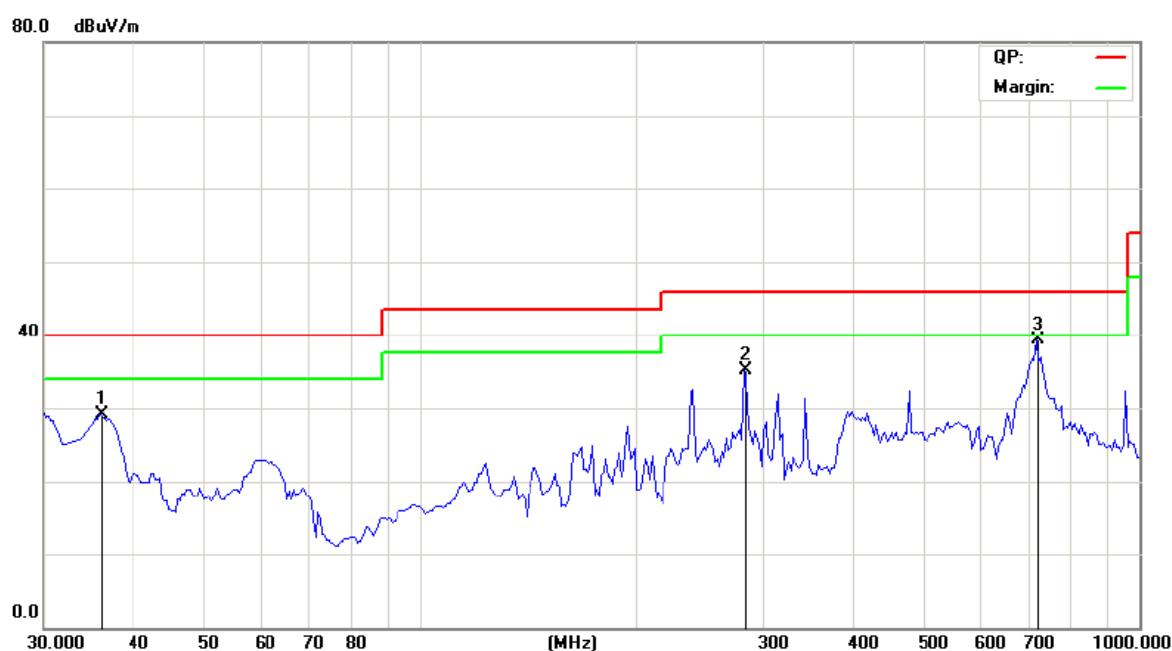

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB $\mu$ V/m)
35.8316	29.18	V	40.00
282.7053	35.02	V	46.00
720.0801	39.34	V	46.00

**6.0 FCC Label****FCC ID: ZYPSAGE**

**This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

**Mark Location:**