

# TEST REPORT

<b>FCC ID.</b> .....	ZZ2-ALW301W
<b>Test Report No.</b> .....	TCT250829E035
<b>Date of issue</b> .....	Sep. 05, 2025
<b>Testing laboratory</b> .....	SHENZHEN TONGCE TESTING LAB
<b>Testing location/ address:</b>	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China
<b>Applicant's name</b> .....	Amcrest Technologies LLC
<b>Address</b> .....	16727 Park Row Dr. Houston, Texas 77084, United States
<b>Manufacturer's name</b> ...	Amcrest Industries LLC.
<b>Address</b> .....	16727 Park Row Dr. Houston, Texas 77084, United States
<b>Standard(s)</b> .....	FCC CFR Title 47 Part 15 Subpart E Section 15.407 KDB 662911 D01 Multiple Transmitter Output v02r01 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
<b>Product Name</b> .....	2K Window Camera
<b>Trade Mark</b> .....	AMCREST, AMCREST LINK
<b>Model/Type reference</b> .....	AL-W301W, AL-W302W, W301W, W302W, F-CW8341A
<b>Rating(s)</b> .....	Adapter Information: MODEL: BS05A-0501000US INPUT: AC 100-240V, 50/60Hz, 0.25A Max OUTPUT: DC 5V, 1000mA
<b>Date of receipt of test item</b> .....	Aug. 29, 2025
<b>Date (s) of performance of test</b> .....	Aug. 29, 2025 ~ Sep. 05, 2025
<b>Tested by (+signature)</b> ....	Yannie ZHONG
<b>Check by (+signature)</b> ....	Beryl ZHAO
<b>Approved by (+signature):</b>	Tomsin
<b>General disclaimer:</b>	<p>This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.</p>

**TABLE OF CONTENTS**

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
1.3. Test Frequency .....	4
<b>2. Test Result Summary .....</b>	<b>5</b>
<b>3. General Information.....</b>	<b>6</b>
3.1. Test environment and mode.....	6
3.2. Description of Support Units.....	7
<b>4. Facilities and Accreditations .....</b>	<b>8</b>
4.1. Facilities .....	8
4.2. Location .....	8
<b>5. Measurement Uncertainty .....</b>	<b>8</b>
<b>6. Test Results and Measurement Data .....</b>	<b>9</b>
6.1. Antenna requirement .....	9
6.2. Conducted Emission.....	10
6.3. Maximum Conducted Output Power.....	14
6.4. 6dB Emission Bandwidth.....	16
6.5. 26dB Bandwidth and 99% Occupied Bandwidth .....	17
6.6. Power Spectral Density.....	18
6.7. Band edge .....	19
6.8. Unwanted Emissions .....	30
6.9. Frequency Stability Measurement .....	45

**Appendix A: Test Result of Conducted Test****Appendix B: Photographs of Test Setup****Appendix C: Photographs of EUT**

## 1. General Product Information

### 1.1. EUT description

Product Name.....	2K Window Camera
Model/Type reference.....	AL-W301W
Sample Number.....	TCT250829E016-0101
Operation Frequency .....	Band 1: 5180 MHz ~ 5240 MHz Band 3: 5745 MHz ~ 5825 MHz
Channel Bandwidth.....	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz 802.11ax: 20MHz, 40MHz
Modulation Technology .....	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type .....	256QAM, 64QAM, 16QAM, BPSK, QPSK
Antenna Type.....	Chip Antenna
Antenna Gain.....	Band 1: 2.61dBi Band 3: 3.76dBi
Rating(s).....	Adapter Information: MODEL: BS05A-0501000US INPUT: AC 100-240V, 50/60Hz, 0.25A Max OUTPUT: DC 5V, 1000mA

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

No.	Model No.	Tested with
1	AL-W301W	<input checked="" type="checkbox"/>
Other models	AL-W302W, W301W, W302W, F-CW8341A	<input type="checkbox"/>

Note: AL-W301W is tested model, other models are derivative models. The models are identical in circuit and PCB layout, different on the model names, image pixel, color and trademark. So the test data of AL-W301W can represent the remaining models.

### 1.3. Test Frequency

#### Band 1

20MHz		40MHz	
Channel	Frequency	Channel	Frequency
36	5180	38	5190
40	5200	46	5230
48	5240		

#### Band 3

20MHz		40MHz	
Channel	Frequency	Channel	Frequency
149	5745	151	5755
157	5785	159	5795
165	5825		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(a)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(b)	PASS
Radiated Emission	§15.407(b)	PASS
Frequency Stability	§15.407(g)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. For the band 5.15-5.25GHz, EUT meet the requirements of 15.407(a)(ii).

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	22.8 °C	24.5 °C
Humidity:	50 % RH	52 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar

Test Software:	
Software Information:	SSCOM V5.13.1
Power Level:	12

Test Mode:	
Engineer mode:	Keep the EUT in continuous transmitting by select channel and modulations with max duty cycle.

The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
802.11ac(VHT20)	6.5 Mbps
802.11ac(VHT40)	13.5 Mbps
802.11ax(HE20)	6.5Mbps
802.11ax(HE40)	13.5Mbps

### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339


## 5. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB

## 6. Test Results and Measurement Data

### 6.1. Antenna requirement
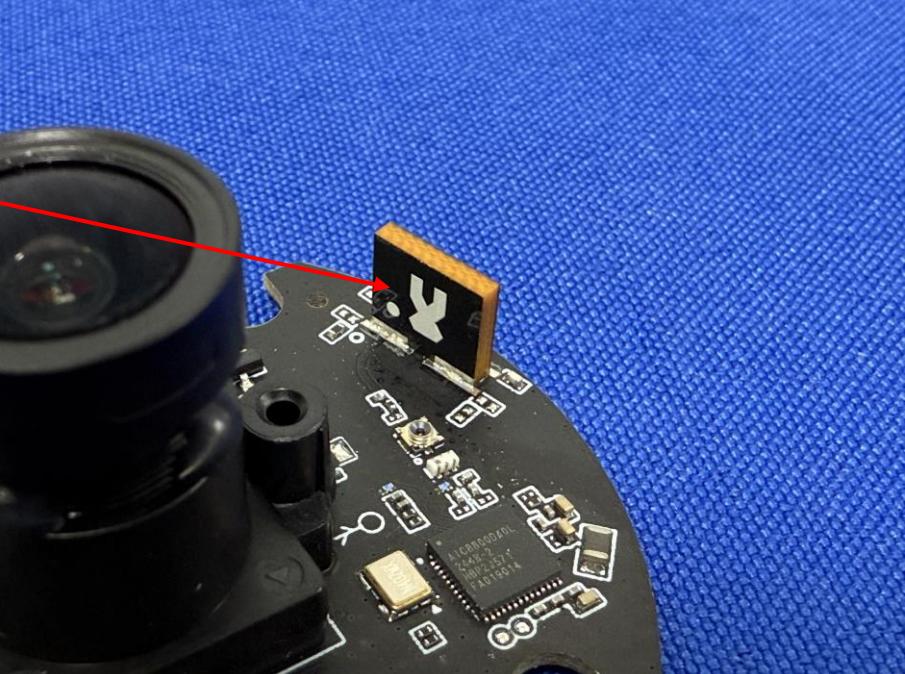
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>E.U.T Antenna:</b>	
<p>The WIFI antenna is chip antenna which permanently attached, and the best case gain of the antenna is 3.76dBi of Band 3.</p> 	

## 6.2. Conducted Emission

### 6.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2020														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p>Reference Plane</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														


**6.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 26, 2025	Jun. 25, 2026
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 21, 2025	Jan. 20, 2026
Attenuator	N/A	10dB	164080	Jun. 26, 2025	Jun. 25, 2026
Line-5	TCT	CE-05	/	Jun. 26, 2025	Jun. 25, 2026
EMI Test Software	EZ_EMC	EMEC-3A1	1.1.4.2	/	/

### 6.2.3. Test data

Please refer to following diagram for individual

#### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

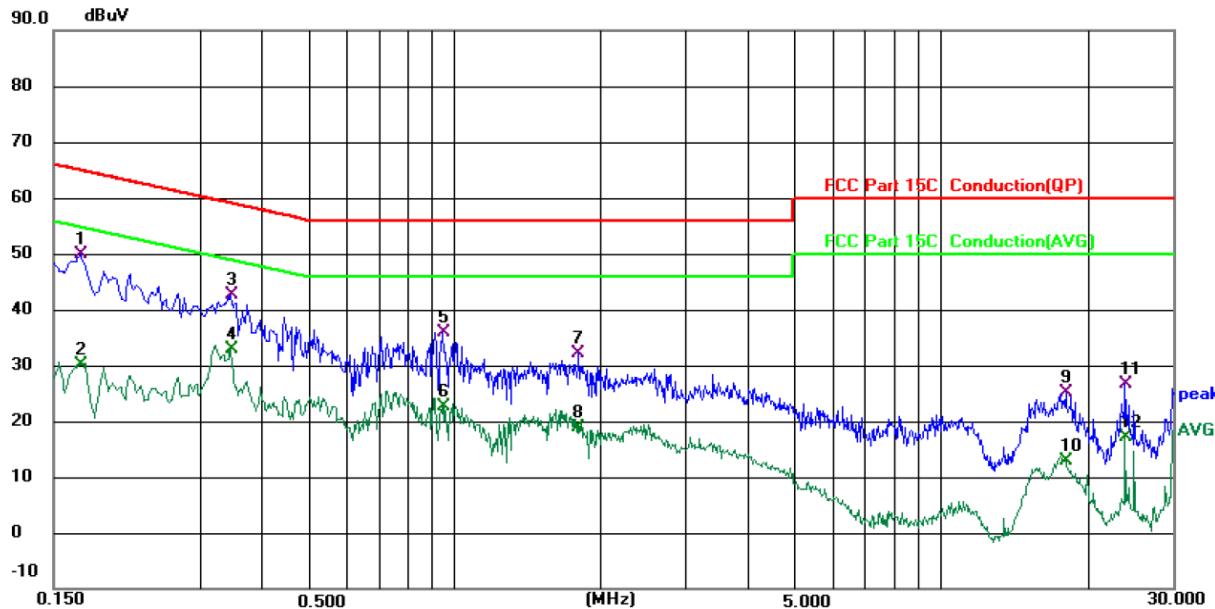

Site 844 Shielding Room

Phase: **L1**

Temperature: 22.8 (°C)

Humidity: 50 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/ 60 Hz

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	
1	*	0.1700	41.30	8.53	49.83	64.96	-15.13	QP
2		0.1700	21.66	8.53	30.19	54.96	-24.77	AVG
3		0.3459	34.00	8.53	42.53	59.06	-16.53	QP
4		0.3459	24.27	8.53	32.80	49.06	-16.26	AVG
5		0.9459	27.46	8.52	35.98	56.00	-20.02	QP
6		0.9459	14.17	8.52	22.69	46.00	-23.31	AVG
7		1.8060	23.56	8.59	32.15	56.00	-23.85	QP
8		1.8060	10.28	8.59	18.87	46.00	-27.13	AVG
9		18.1140	16.13	9.12	25.25	60.00	-34.75	QP
10		18.1140	3.83	9.12	12.95	50.00	-37.05	AVG
11		24.0019	17.29	9.33	26.62	60.00	-33.38	QP
12		24.0019	7.81	9.33	17.14	50.00	-32.86	AVG

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) - Limits (dB $\mu$ V)

Q.P. = Quasi-Peak

AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

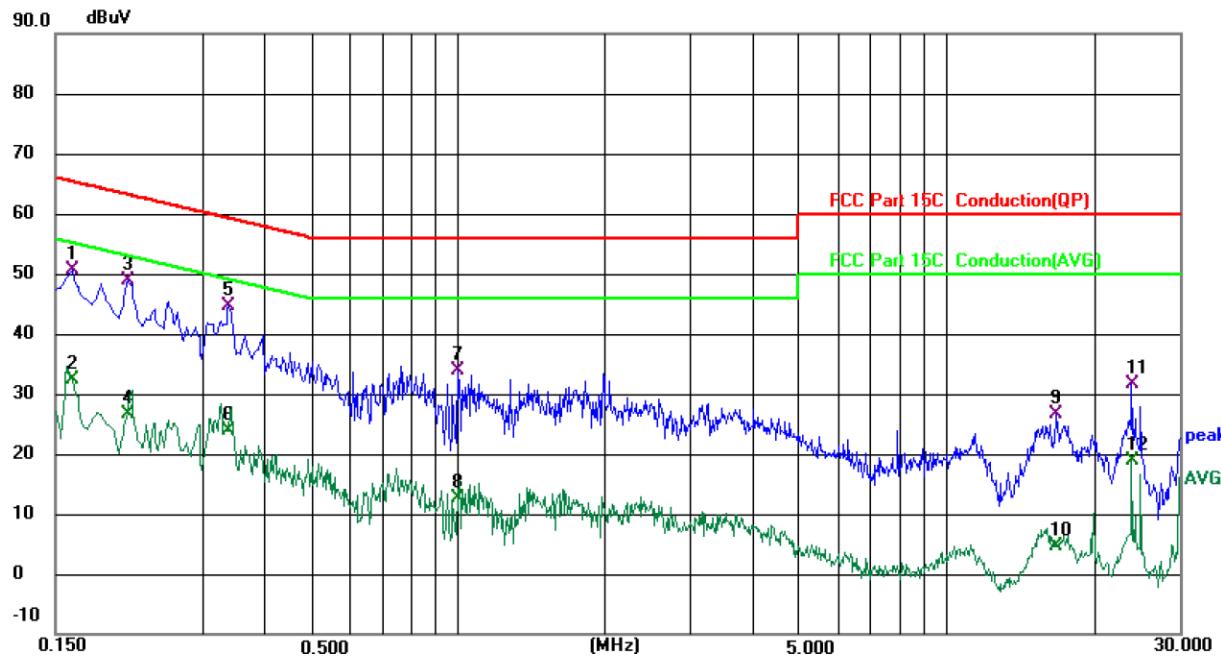

Site 844 Shielding Room

Phase: **N**

Temperature: 22.8 (°C)

Humidity: 50 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/ 60 Hz

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1		0.1620	42.02	8.53	50.55	65.36	-14.81	QP
2		0.1620	23.77	8.53	32.30	55.36	-23.06	AVG
3 *		0.2100	40.35	8.52	48.87	63.21	-14.34	QP
4		0.2100	18.10	8.52	26.62	53.21	-26.59	AVG
5		0.3379	36.04	8.53	44.57	59.25	-14.68	QP
6		0.3379	15.42	8.53	23.95	49.25	-25.30	AVG
7		1.0020	25.23	8.56	33.79	56.00	-22.21	QP
8		1.0020	4.18	8.56	12.74	46.00	-33.26	AVG
9		16.7500	17.47	9.10	26.57	60.00	-33.43	QP
10		16.7500	-4.49	9.10	4.61	50.00	-45.39	AVG
11		24.0019	22.31	9.44	31.75	60.00	-28.25	QP
12		24.0019	9.52	9.44	18.96	50.00	-31.04	AVG

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard

Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ax(HE20), 802.11ax(HE40) and the worst case Mode (Lowest channel and 802.11ax(HE20) was submitted only.

## 6.3. Maximum Conducted Output Power

### 6.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E	
<b>Limit:</b>	Frequency Band (MHz)	Limit
	5180 - 5240	24dBm(250mW) for client device
	5260 - 5320	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz
	5470 - 5725	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz
	5745 - 5825	30dBm(1W)
<b>Test Setup:</b>	 <b>Spectrum Analyzer</b> <b>EUT</b>	
<b>Test Mode:</b>	Transmitting mode with modulation	
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 2, b</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>5. Measure the conducted output power and record the results in the test report.</li> </ol>	
<b>Test Result:</b>	PASS	
<b>Remark:</b>	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power	

**6.3.2. Test Instruments**

Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 6.4. 6dB Emission Bandwidth

### 6.4.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	 <p>Spectrum Analyzer      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW. Set the Video bandwidth (VBW) = 3 *RBW. In order to make an accurate measurement. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 6.4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 6.5. 26dB Bandwidth and 99% Occupied Bandwidth

### 6.5.1. Test Specification

## 6.5.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 6.6. Power Spectral Density

### 6.6.1. Test Specification


<b>Test Requirement:</b>	FCC Part15 E Section 15.407 (a)
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
<b>Limit:</b>	<p>≤11.00dBm/MHz for Band 1 5150MHz-5250MHz(client device)</p> <p>≤11.00dBm/MHz for Band 2A&amp;2C 5250-5350&amp;5470-5725</p> <p>≤30.00dBm/500KHz for Band 3 5725MHz-5850MHz</p> <p>The e.i,r,p spectral density for Band 1 5150MHz – 5250 MHz should not exceed 10dBm/MHz</p>
<b>Test Setup:</b>	 <p><b>Spectrum Analyzer</b>      <b>EUT</b></p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.</li> <li>1. Set RBW = 510 kHz/1 MHz, VBW <math>\geq</math> 3*RBW, Sweep time = Auto, Detector = RMS.</li> <li>2. Allow the sweeps to continue until the trace stabilizes.</li> <li>3. Use the peak marker function to determine the maximum amplitude level.</li> <li>4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.</li> </ol>
<b>Test Result:</b>	PASS

### 6.6.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 6.7. Band edge

### 6.7.1. Test Specification
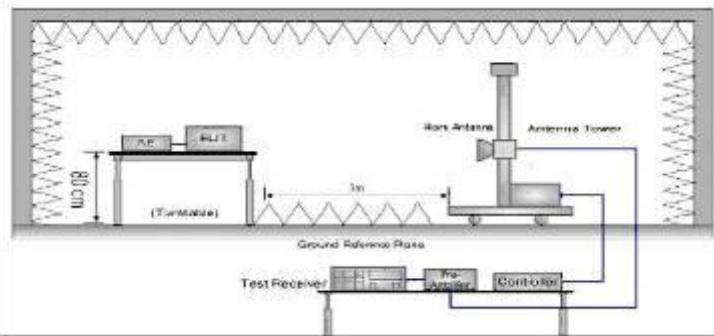
<b>Test Requirement:</b>	FCC CFR47 Part 15E Section 15.407																										
<b>Test Method:</b>	ANSI C63.10:2020																										
<b>Limit:</b>	<p>In un-restricted band: For Band 1&amp;2A&amp;2C: -27dBm/MHz For Band 3:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> </tr> </thead> <tbody> <tr> <td>&lt; 5650</td> <td>-27</td> <td>5850~5855</td> <td>27~15.6</td> </tr> <tr> <td>5650~5700</td> <td>-27~10</td> <td>5855~5875</td> <td>15.6~10</td> </tr> <tr> <td>5700~5720</td> <td>10~15.6</td> <td>5875~5925</td> <td>10~27</td> </tr> <tr> <td>5720~5725</td> <td>15.6~27</td> <td>&gt; 5925</td> <td>-27</td> </tr> </tbody> </table> <p><math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 @ 3\text{m}</math></p> <p>In restricted band:</p> <table border="1"> <thead> <tr> <th>Detector</th> <th>Limit@3m</th> </tr> </thead> <tbody> <tr> <td>Peak</td> <td>74dB<math>\mu</math>V/m</td> </tr> <tr> <td>AVG</td> <td>54dB<math>\mu</math>V/m</td> </tr> </tbody> </table>	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)	< 5650	-27	5850~5855	27~15.6	5650~5700	-27~10	5855~5875	15.6~10	5700~5720	10~15.6	5875~5925	10~27	5720~5725	15.6~27	> 5925	-27	Detector	Limit@3m	Peak	74dB $\mu$ V/m	AVG	54dB $\mu$ V/m
Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)																								
< 5650	-27	5850~5855	27~15.6																								
5650~5700	-27~10	5855~5875	15.6~10																								
5700~5720	10~15.6	5875~5925	10~27																								
5720~5725	15.6~27	> 5925	-27																								
Detector	Limit@3m																										
Peak	74dB $\mu$ V/m																										
AVG	54dB $\mu$ V/m																										
<b>Test Setup:</b>																											
<b>Test Mode:</b>	Transmitting mode with modulation																										
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold</li> </ol>																										


	<p>Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.</p>
<b>Test Result:</b>	PASS

### 6.7.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 11, 2025	Apr. 10, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 26, 2025	Jun. 25, 2026
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 30, 2025	Jun. 29, 2026
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 24, 2025	Jan. 23, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EMCA	FA-03A2 RE+	1.1.4.2	/	/

### 6.7.3. Test Data

#### AX20-5180

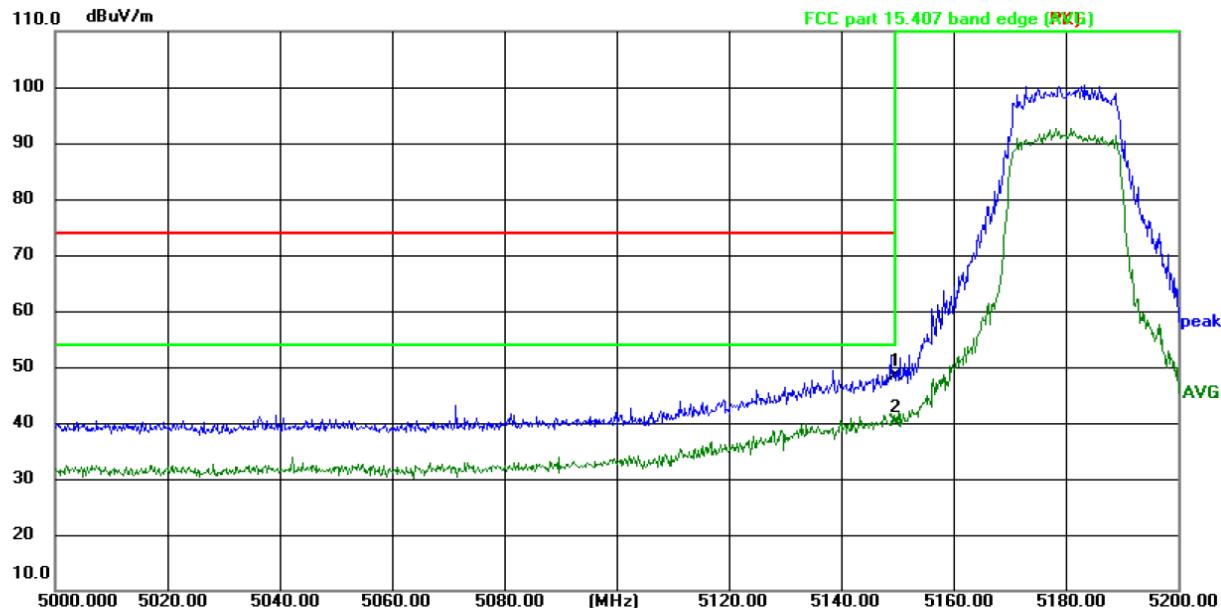

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	56.27	-7.87	48.40	74.00	-25.60	peak	P	
2 *	5150.000	47.95	-7.87	40.08	54.00	-13.92	AVG	P	

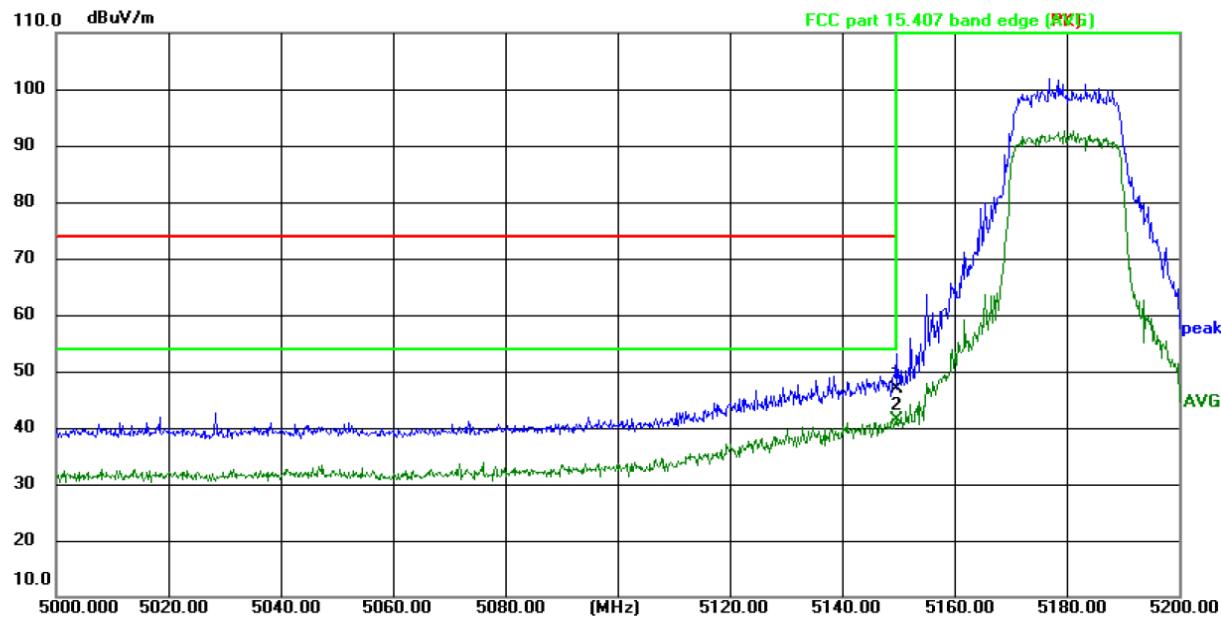

Site: 3m Anechoic Chamber

Polarization: **Vertical**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	54.84	-7.87	46.97	74.00	-27.03	peak	P	
2 *	5150.000	49.21	-7.87	41.34	54.00	-12.66	AVG	P	

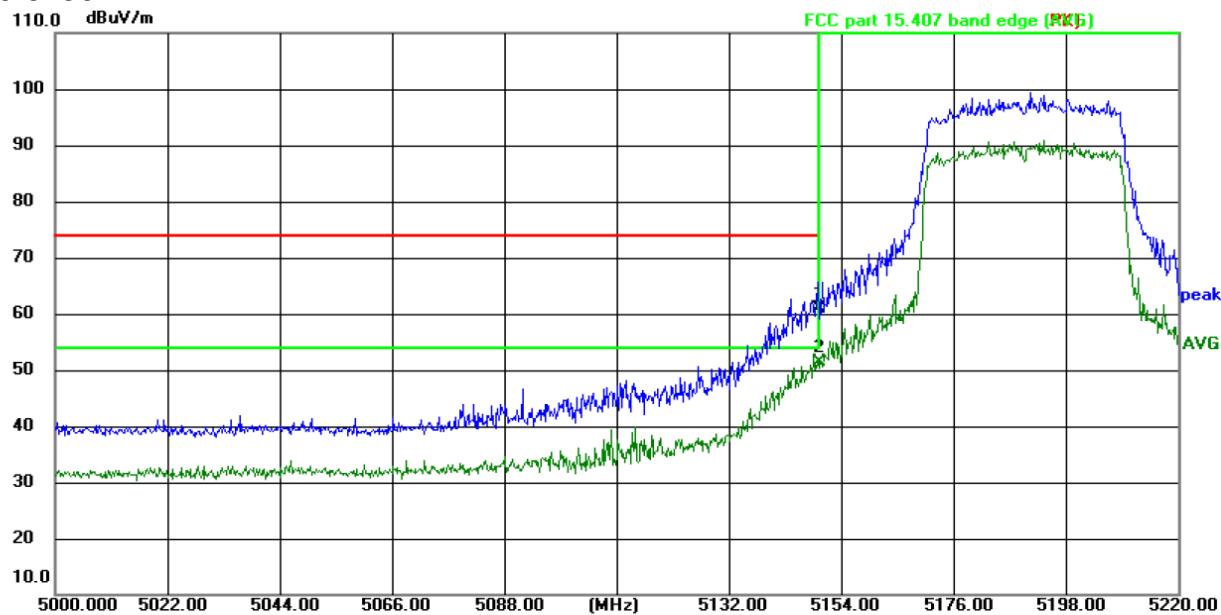**AX40-5190**


Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	68.68	-7.87	60.81	74.00	-13.19	peak	P	
2 *	5150.000	59.24	-7.87	51.37	54.00	-2.63	AVG	P	

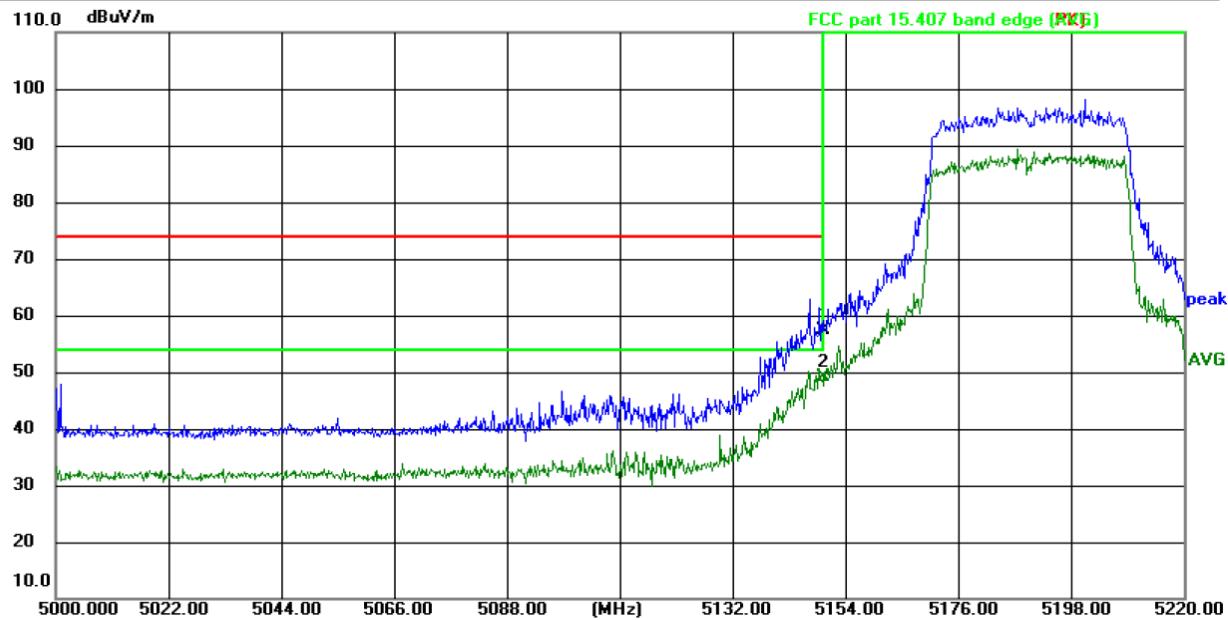

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 22.3(°C)


Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	65.34	-7.87	57.47	74.00	-16.53	peak	P	
2 *	5150.000	56.89	-7.87	49.02	54.00	-4.98	AVG	P	

## AX20-5240

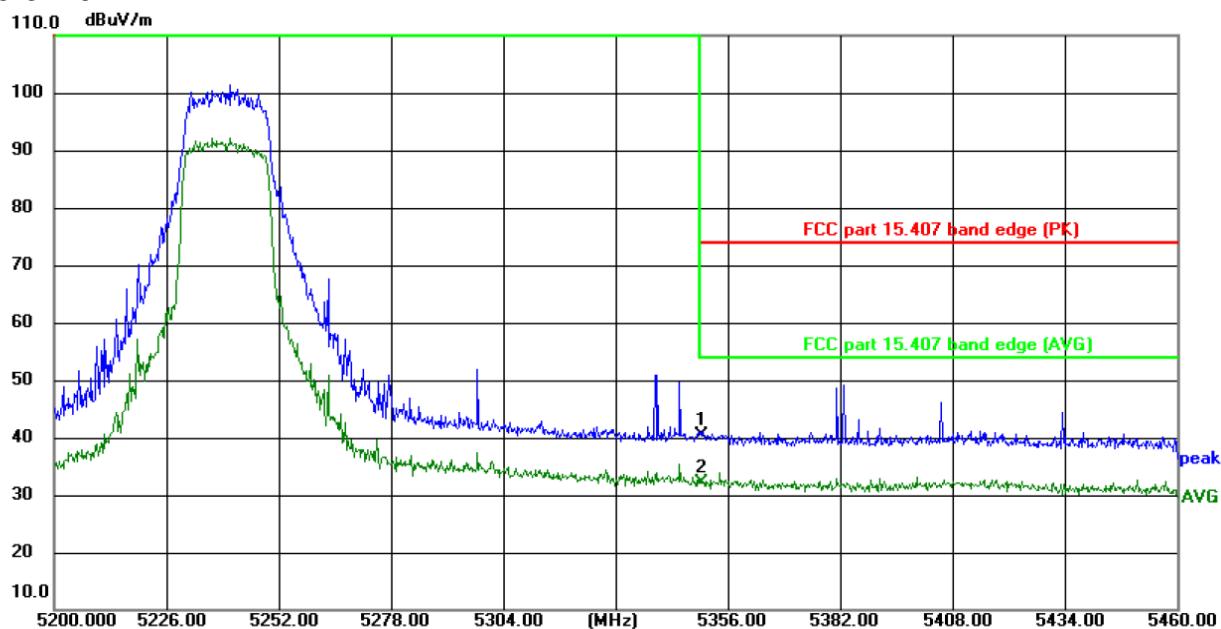

Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	47.95	-7.67	40.28	74.00	-33.72	peak	P	
2 *	5350.000	39.69	-7.67	32.02	54.00	-21.98	AVG	P	

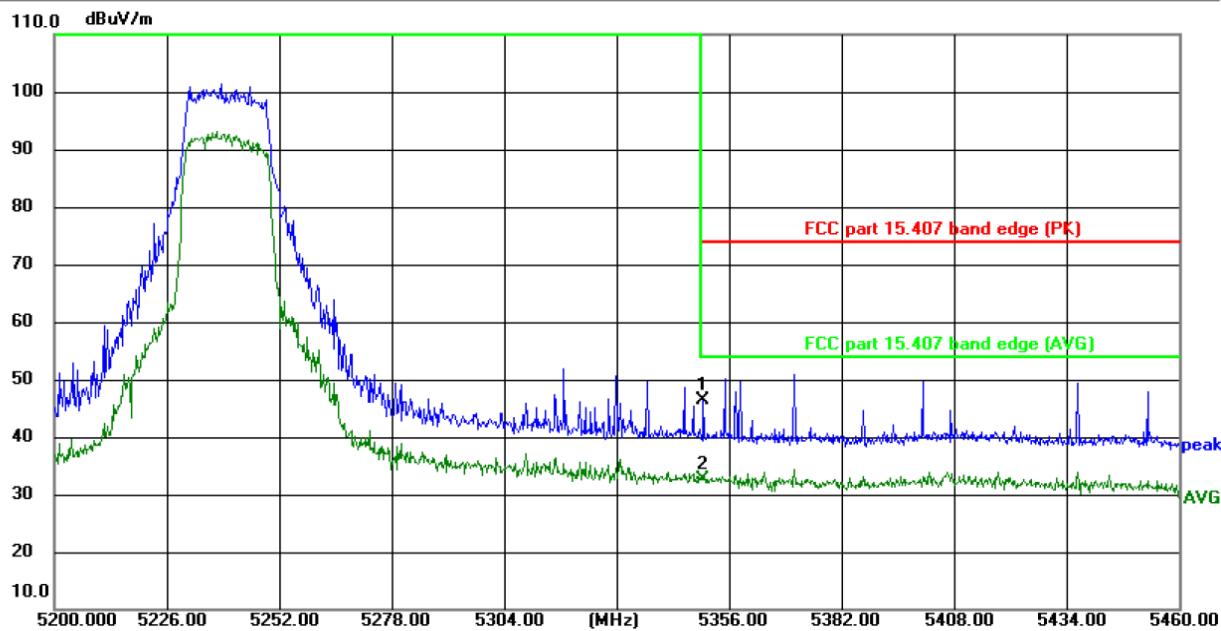

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 22.3(°C)


Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	53.97	-7.67	46.30	74.00	-27.70	peak	P	
2 *	5350.000	40.27	-7.67	32.60	54.00	-21.40	AVG	P	

## AX40-5230

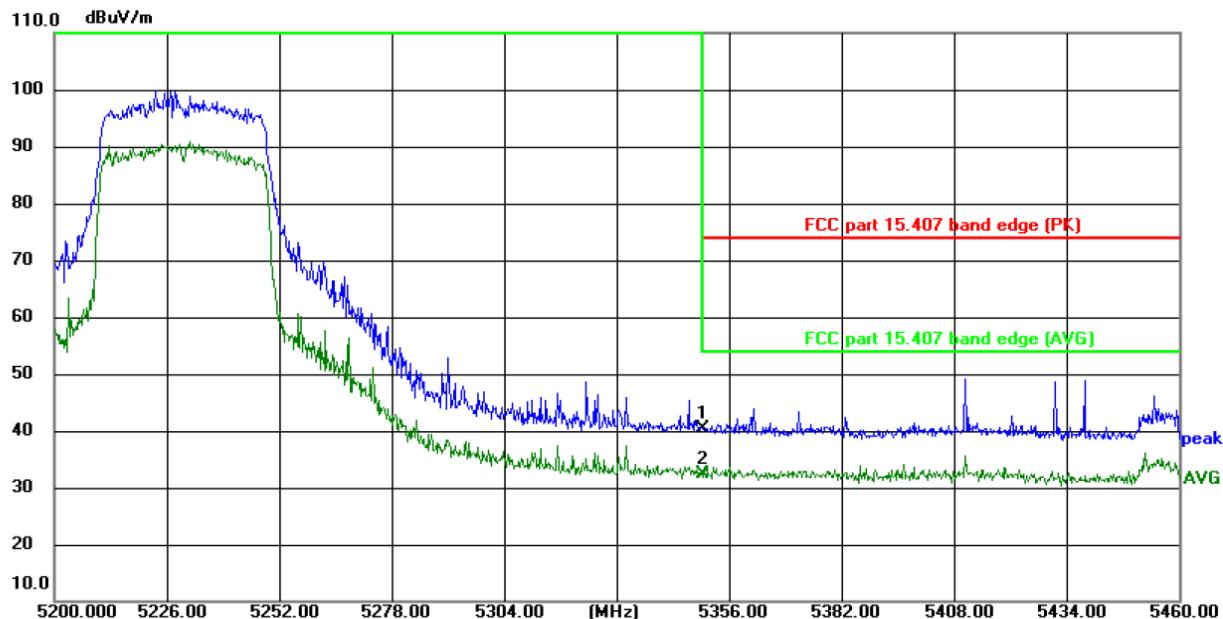

Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	48.09	-7.67	40.42	74.00	-33.58	peak	P	
2 *	5350.000	39.98	-7.67	32.31	54.00	-21.69	AVG	P	

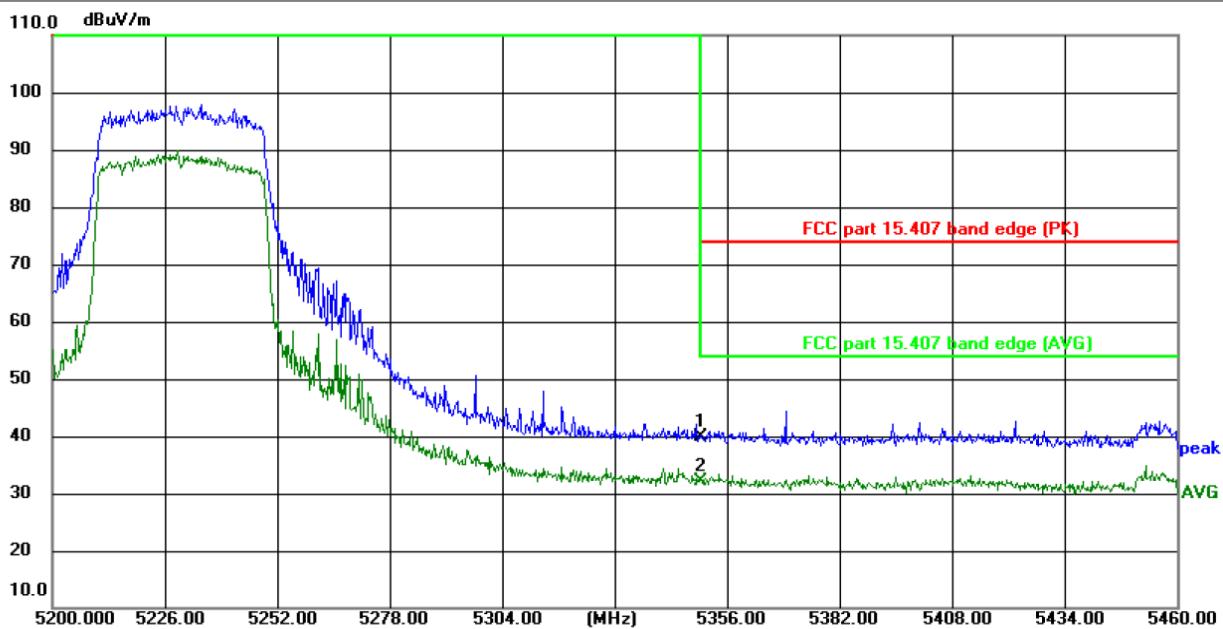

Site: 3m Anechoic Chamber

 Polarization: **Vertical**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	47.60	-7.67	39.93	74.00	-34.07	peak	P	
2 *	5350.000	39.76	-7.67	32.09	54.00	-21.91	AVG	P	

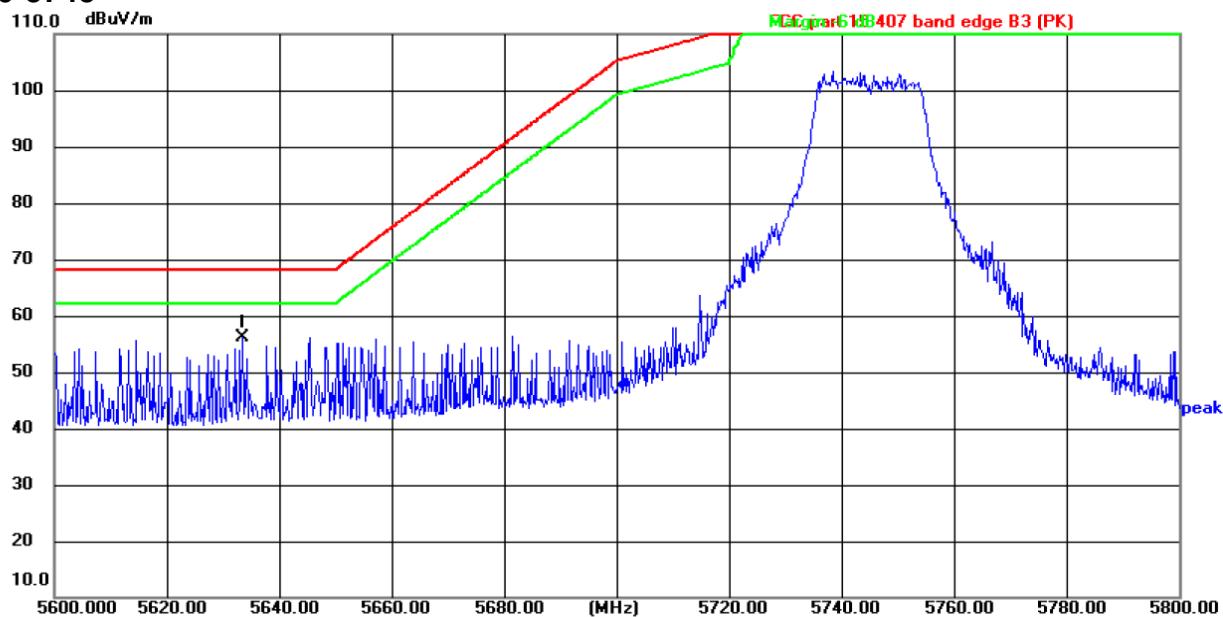**AX20-5745**


Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power:AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5633.520	63.15	-7.09	56.06	68.20	-12.14	peak	P	

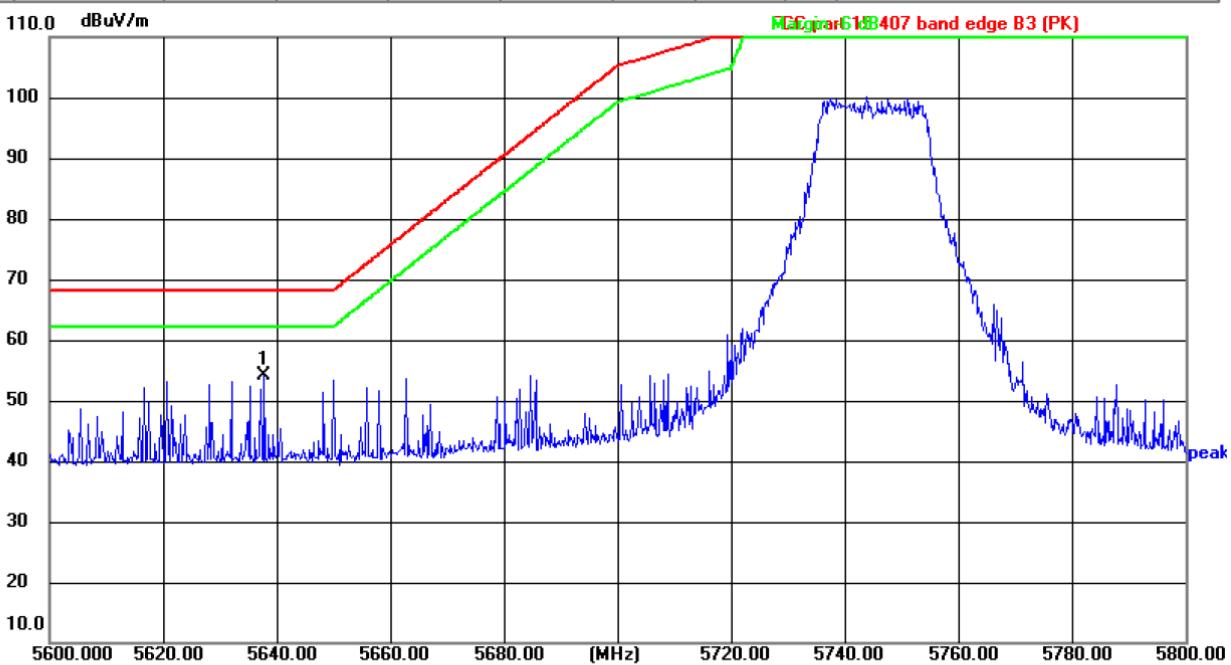

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 22.3(°C)


Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power:AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5637.893	61.17	-7.07	54.10	68.20	-14.10	peak	P	

## AX40-5755

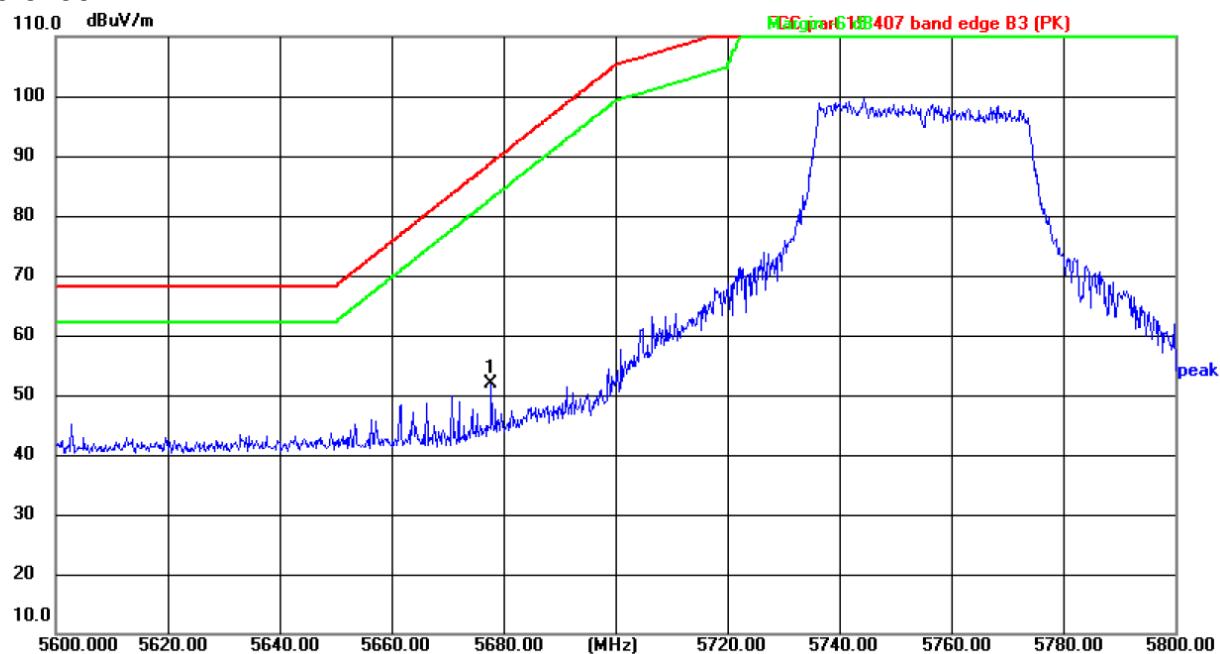

Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power:AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5677.853	58.82	-6.93	51.89	88.81	-36.92	peak	P	

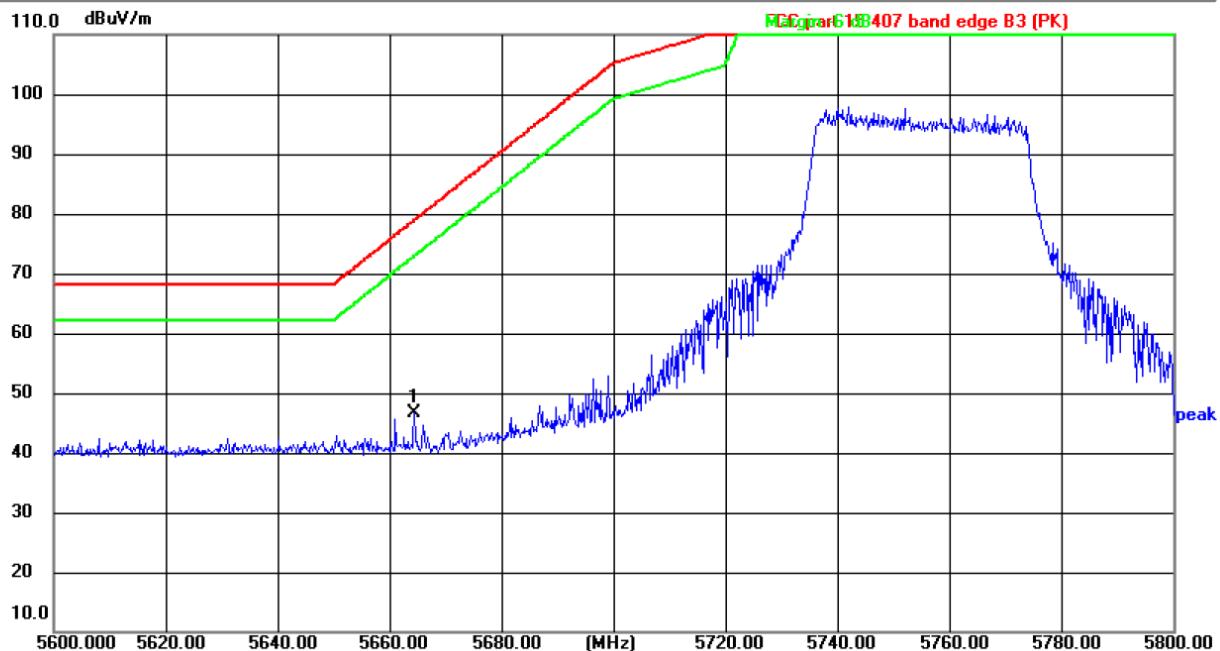

Site: 3m Anechoic Chamber

 Polarization: **Vertical**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power:AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5664.473	53.53	-6.98	46.55	78.91	-32.36	peak	P	

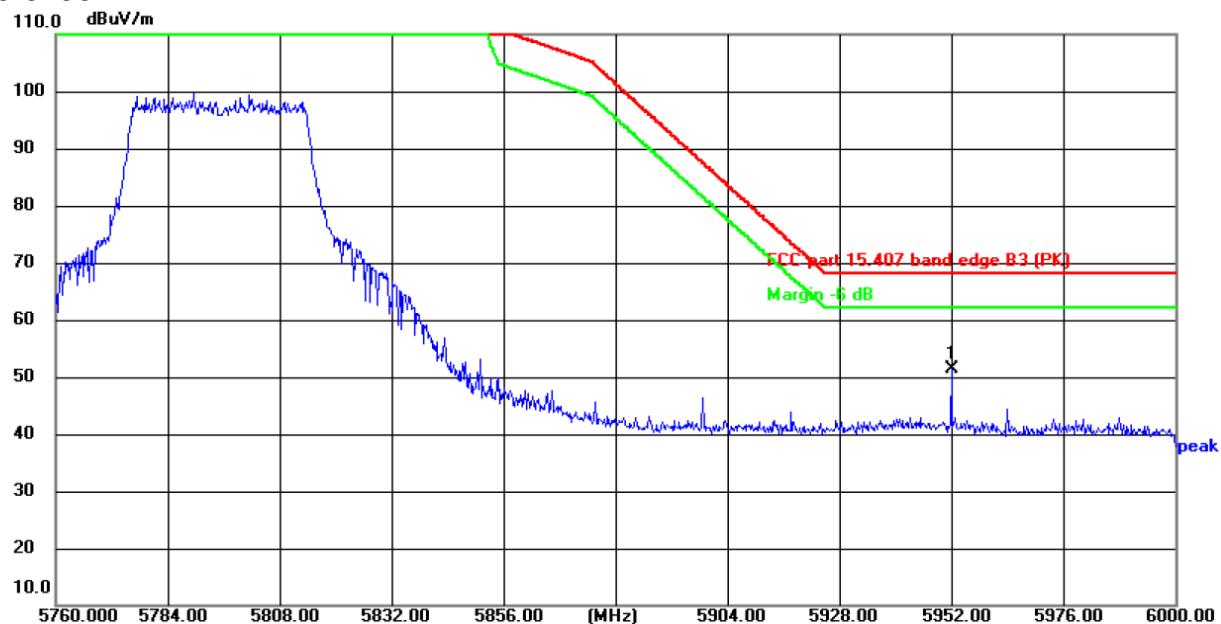**AX40-5795**


Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5952.080	57.08	-5.68	51.40	68.20	-16.80	peak	P	

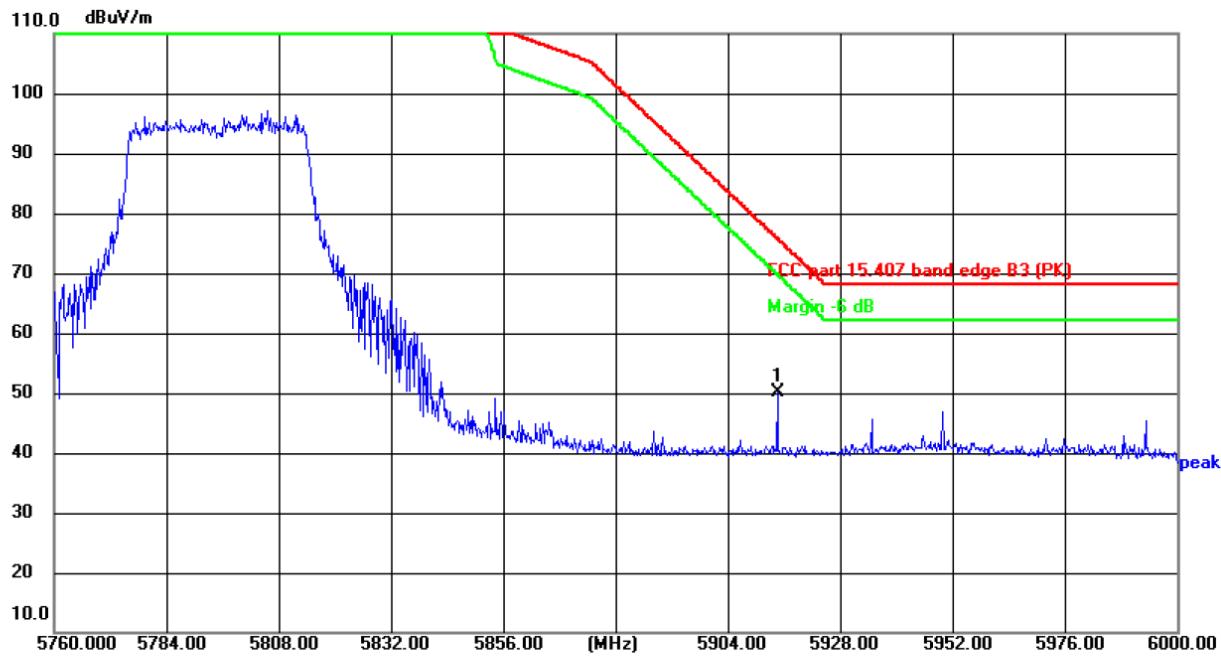

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 22.3(°C)


Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5914.568	56.09	-5.88	50.21	75.92	-25.71	peak	P	

## AX20-5825

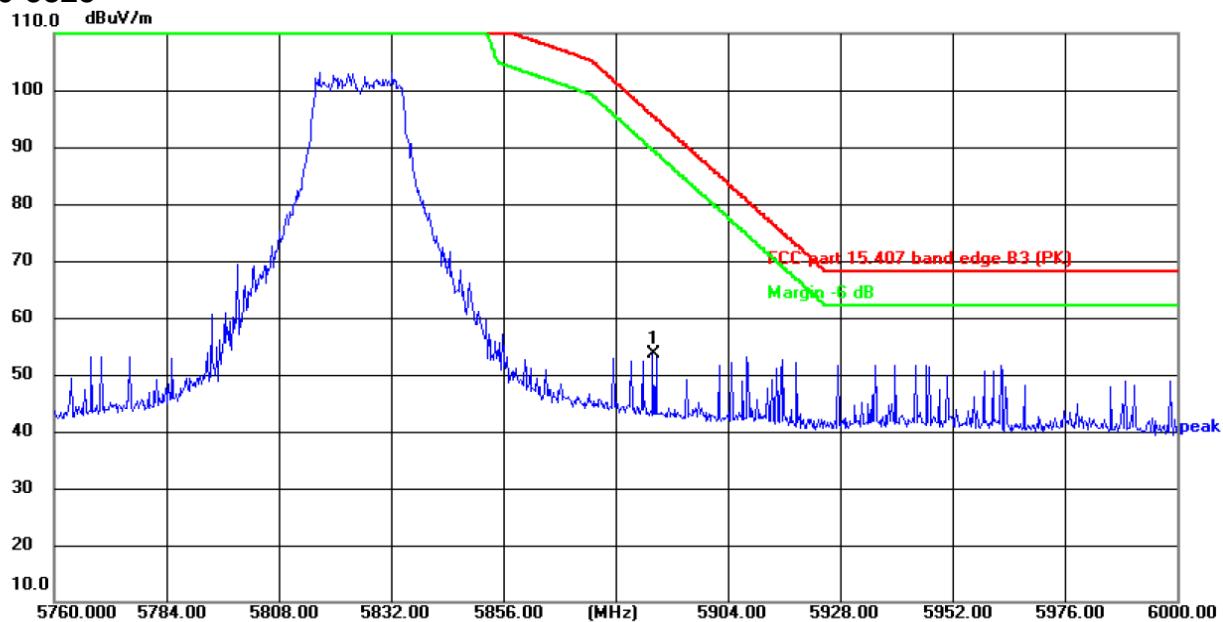

Site: 3m Anechoic Chamber

 Polarization: **Horizontal**


Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5887.928	59.53	-5.99	53.54	95.63	-42.09	peak	P	

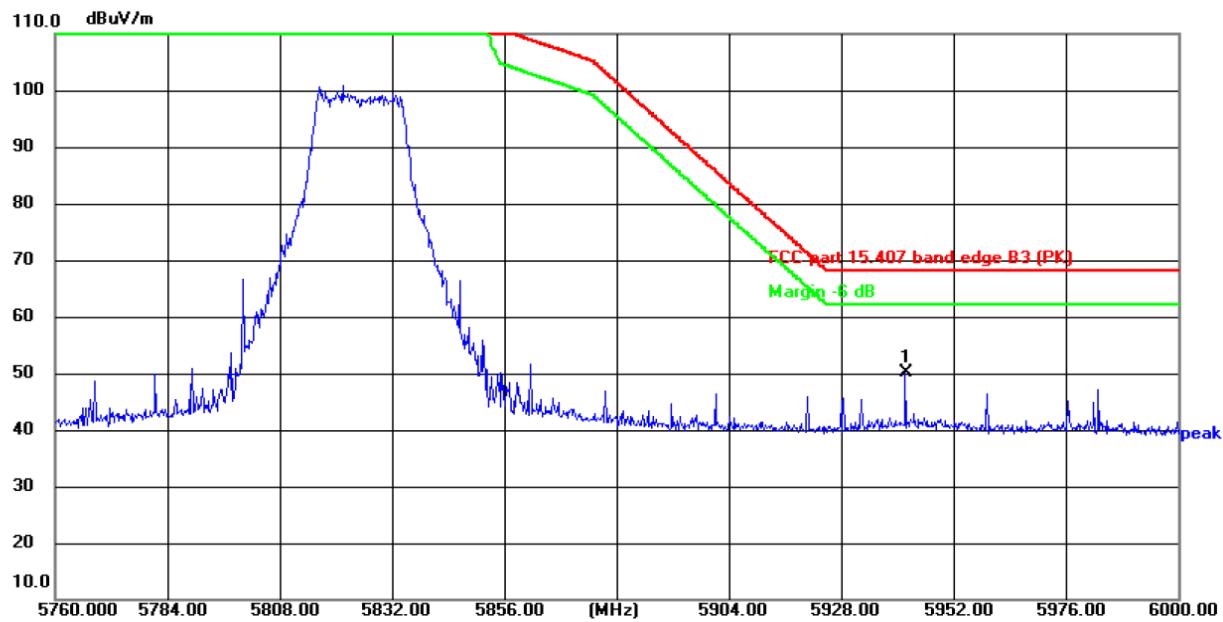

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 22.3(°C)

Humidity: 44 %

Limit: FCC part 15.407 band edge B3 (PK)


Power: AC 120 V/60 Hz


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5941.816	55.76	-5.73	50.03	68.20	-18.17	peak	P	

Note: All modulation (802.11a, 802.11n, 802.11ac, 802.11ax) have been tested, only the worst case in 802.11ax be reported.


## 6.8. Unwanted Emissions

### 6.8.1. Test Specification
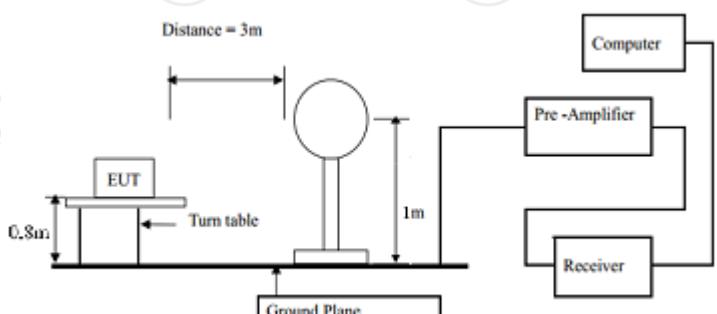
<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205							
<b>Test Method:</b>	KDB 789033 D02 v02r01							
<b>Frequency Range:</b>	9kHz to 40GHz							
<b>Measurement Distance:</b>	3 m							
<b>Antenna Polarization:</b>	Horizontal & Vertical							
<b>Operation mode:</b>	Transmitting mode with modulation							
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark			
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value			
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value			
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
		Peak	1MHz	10Hz	Average Value			
<b>Limit:</b>	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table, In restricted bands:							
	Frequency	Detector	Limit@3m					
	Above 1G	Peak	74dB $\mu$ V/m					
		AVG	54dB $\mu$ V/m					
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)					
	0.009-0.490	2400/F(KHz)	300					
	0.49 -1.705	24000/F(KHz)	3					
	1.705-30	30	30					
	30-88	100	3					
	88-216	150	3					
	216-960	200	3					
	Above 960	500	3					
	In un-restricted bands: 68.2dB $\mu$ V/m							
<b>Test setup:</b>	For radiated emissions below 30MHz							
								
	30MHz to 1GHz							

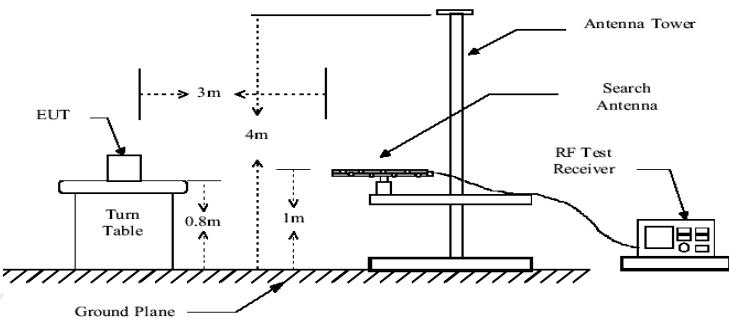

Above 1GHz

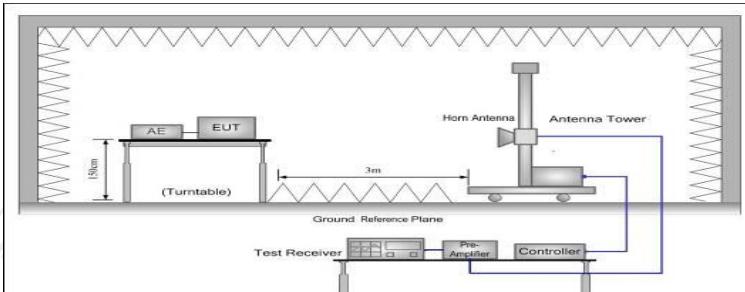

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Test Procedure:**

**Test results:**

PASS

### 6.8.2. Test Instruments


Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 11, 2025	Apr. 10, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 26, 2025	Jun. 25, 2026
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 30, 2025	Jun. 29, 2026
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 24, 2025	Jan. 23, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EMCA	FA-03A2 RE+	1.1.4.2	/	/

### 6.8.3. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:

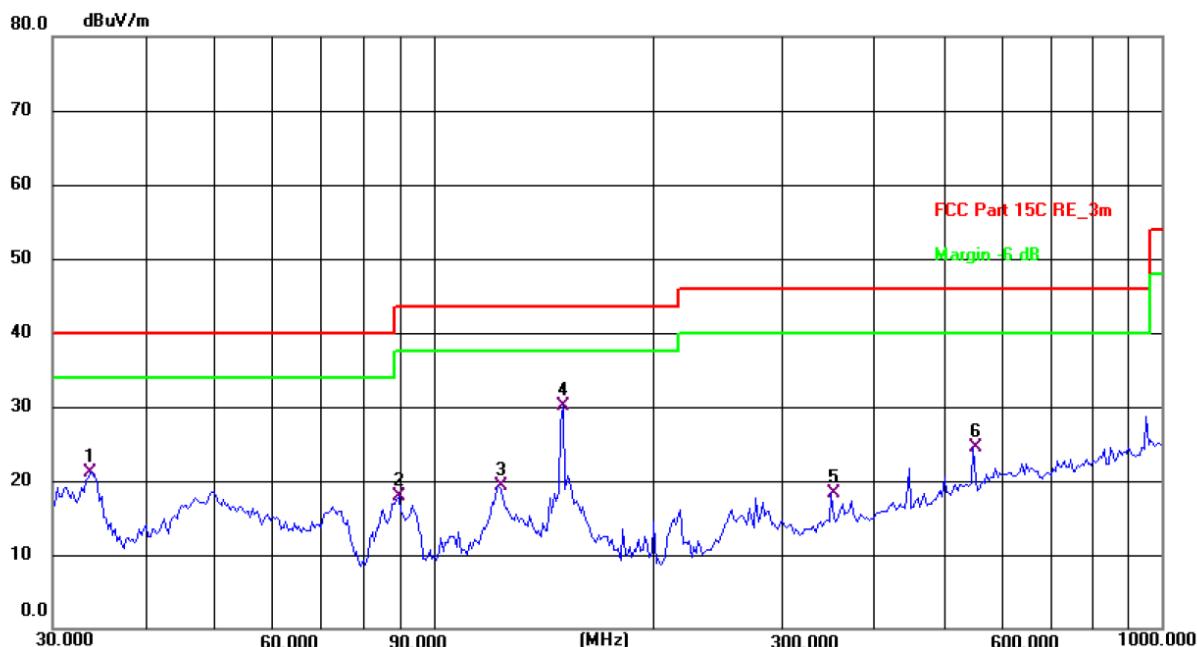

Site: 3m Anechoic Chamber1

Polarization: *Horizontal*


Temperature: 24.5(C) Humidity: 52 %

Limit: FCC Part 15C RE\_3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	33.7986	33.85	-12.67	21.18	40.00	-18.82	QP	P	
2	89.5899	34.60	-16.72	17.88	43.50	-25.62	QP	P	
3	122.8339	32.55	-13.20	19.35	43.50	-24.15	QP	P	
4 *	150.5377	41.43	-11.27	30.16	43.50	-13.34	QP	P	
5	351.7079	28.52	-10.15	18.37	46.00	-27.63	QP	P	
6	550.9480	31.27	-6.73	24.54	46.00	-21.46	QP	P	

Vertical:

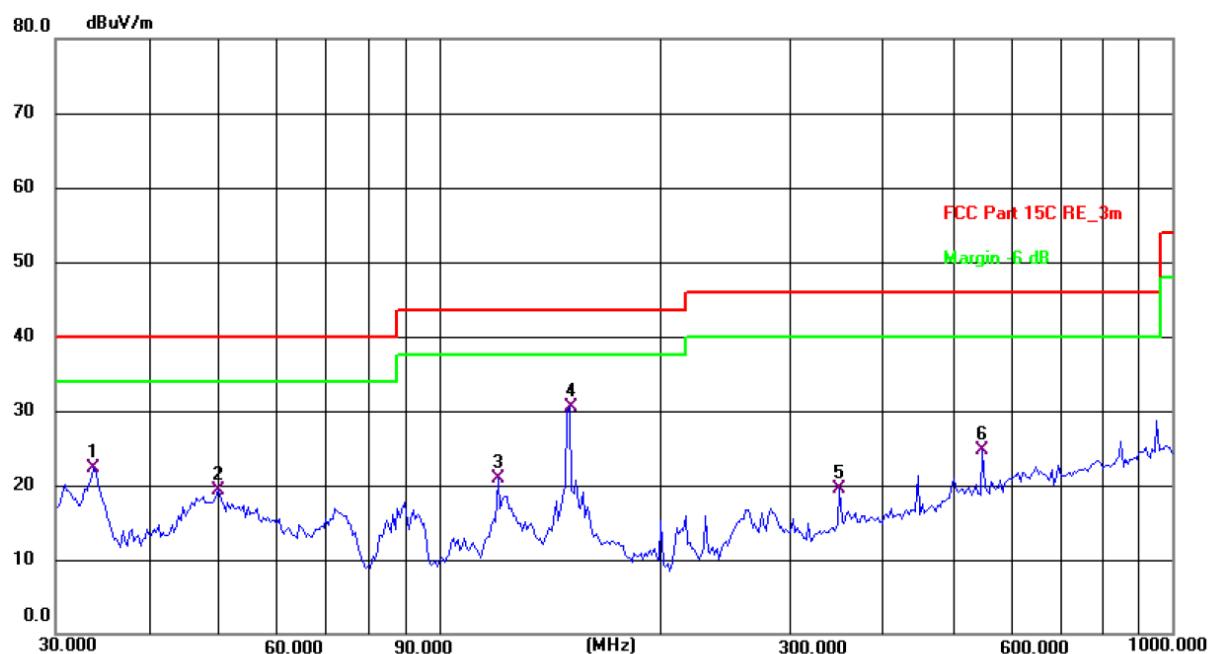

Site: 3m Anechoic Chamber1

 Polarization: **Vertical**

Temperature: 24.5(C) Humidity: 52 %

Limit: FCC Part 15C RE 3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	33.7986	35.00	-12.67	22.33	40.00	-17.67	QP	P	
2	50.0566	31.70	-12.38	19.32	40.00	-20.68	QP	P	
3	120.2766	34.25	-13.37	20.88	43.50	-22.62	QP	P	
4 *	150.5378	41.78	-11.27	30.51	43.50	-12.99	QP	P	
5	351.7079	29.67	-10.15	19.52	46.00	-26.48	QP	P	
6	550.9480	31.49	-6.73	24.76	46.00	-21.24	QP	P	

**Note:**

1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported
2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ax(HE20), 802.11ax(HE40) and the worst case Mode (Lowest channel and 802.11ax(HE20) was submitted only).
3. Measurement (dB $\mu$ V) = Reading level + Correction Factor, correction Factor= Antenna Factor + Cable loss - Pre-amplifier.

Modulation Type: Band 1									
11a CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10360	H	52.36	---	1.78	54.14	---	68.2	---	-14.06
15540	H	39.29	---	5.21	44.5	---	74	54	-9.5
---	H	---	---	---	---	---	---	---	---
10360	V	50.94	---	1.78	52.72	---	68.2	---	-15.48
15540	V	40.78	---	5.21	45.99	---	74	54	-8.01
---	V	---	---	---	---	---	---	---	---
11a CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10400	H	51.14	---	1.83	52.97	---	68.2	---	-15.23
15600	H	38.23	---	5.23	43.46	---	74	54	-10.54
---	H	---	---	---	---	---	---	---	---
10400	V	52.33	---	1.83	54.16	---	68.2	---	-14.04
15600	V	39.65	---	5.23	44.88	---	74	54	-9.12
---	V	---	---	---	---	---	---	---	---
11a CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10480	H	52.02	---	1.85	53.87	---	68.2	---	-14.33
15720	H	39.31	---	5.25	44.56	---	74	54	-9.44
---	H	---	---	---	---	---	---	---	---
10480	V	51.44	---	1.85	53.29	---	68.2	---	-14.91
15720	V	39.66	---	5.25	44.91	---	74	54	-9.09
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10360	H	50.25	---	1.78	52.03	---	68.2	---	-16.17
15540	H	39.44	---	5.21	44.65	---	74	54	-9.35
---	H	---	---	---	---	---	---	---	---
10360	V	51.02	---	1.78	52.8	---	68.2	---	-15.4
15540	V	37.33	---	5.21	42.54	---	74	54	-11.46
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10400	H	52.36	---	1.83	54.19	---	68.2	---	-14.01
15600	H	39.69	---	5.23	44.92	---	74	54	-9.08
---	H	---	---	---	---	---	---	---	---
11n(HT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10480	H	52.11	---	1.85	53.96	---	68.2	---	-14.24
15720	H	39.64	---	5.25	44.89	---	74	54	-9.11
---	H	---	---	---	---	---	---	---	---
10480	V	50.16	---	1.85	52.01	---	68.2	---	-16.19
15720	V	38.34	---	5.25	43.59	---	74	54	-10.41
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10380	H	52.24	---	1.80	54.04	---	68.2	---	-14.16
15570	H	41.66	---	5.22	46.88	---	74	54	-7.12
---	H	---	---	---	---	---	---	---	---
10380	V	52.78	---	1.80	54.58	---	68.2	---	-13.62
15570	V	39.97	---	5.22	45.19	---	74	54	-8.81
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10460	H	52.13	---	1.85	53.98	---	68.2	---	-14.22
15690	H	37.67	---	5.08	42.75	---	74	54	-11.25
---	H	---	---	---	---	---	---	---	---
10460	V	50.8	---	1.85	52.65	---	68.2	---	-15.55
15690	V	38.36	---	5.08	43.44	---	74	54	-10.56
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10360	H	51.11	---	1.78	52.89	---	68.2	---	-15.31
15540	H	37.38	---	5.21	42.59	---	74	54	-11.41
---	H	---	---	---	---	---	---	---	---
10360	V	50.01	---	1.78	51.79	---	68.2	---	-16.41
15540	V	38.98	---	5.21	44.19	---	74	54	-9.81
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10400	H	51.36	---	1.83	53.19	---	68.2	---	-15.01
15600	H	38.02	---	5.23	43.25	---	74	54	-10.75
---	H	---	---	---	---	---	---	---	---
10400	V	52.41	---	1.83	54.24	---	68.2	---	-13.96
15600	V	39.98	---	5.23	45.21	---	74	54	-8.79
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH48:5240									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10480	H	50.78	---	1.85	52.63	---	68.2	---	-15.57
15720	H	38.50	---	5.25	43.75	---	74	54	-10.25
---	H	---	---	---	---	---	---	---	---
10480	V	50.69	---	1.85	52.54	---	68.2	---	-15.66
15720	V	39.06	---	5.25	44.31	---	74	54	-9.69
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH38:5190									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10380	H	50.32	---	1.80	52.12	---	68.2	---	-16.08
15570	H	38.78	---	5.22	44	---	74	54	-10
---	H	---	---	---	---	---	---	---	---
10380	V	53.44	---	1.80	55.24	---	68.2	---	-12.96
15570	V	38.66	---	5.22	43.88	---	74	54	-10.12
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH46:5230									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10460	H	52.78	---	1.85	54.63	---	68.2	---	-13.57
15690	H	37.30	---	5.08	42.38	---	74	54	-11.62
---	H	---	---	---	---	---	---	---	---
10460	V	52.11	---	1.85	53.96	---	68.2	---	-14.24
15690	V	39.34	---	5.08	44.42	---	74	54	-9.58
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10360	H	52.3	---	1.78	54.08	---	68.2	---	-14.12
15540	H	39.14	---	5.21	44.35	---	74	54	-9.65
---	H	---	---	---	---	---	---	---	---
10360	V	52.12	---	1.78	53.9	---	68.2	---	-14.3
15540	V	38.06	---	5.21	43.27	---	74	54	-10.73
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10400	H	51.47	---	1.83	53.3	---	68.2	---	-14.9
15600	H	38.75	---	5.23	43.98	---	74	54	-10.02
---	H	---	---	---	---	---	---	---	---
10400	V	52.90	---	1.83	54.73	---	68.2	---	-13.47
15600	V	38.76	---	5.23	43.99	---	74	54	-10.01
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH48:5240									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10480	H	52.33	---	1.85	54.18	---	68.2	---	-14.02
15720	H	38.12	---	5.25	43.37	---	74	54	-10.63
---	H	---	---	---	---	---	---	---	---
10480	V	52.77	---	1.85	54.62	---	68.2	---	-13.58
15720	V	37.5	---	5.25	42.75	---	74	54	-11.25
---	V	---	---	---	---	---	---	---	---

11ax(HE40) CH38:5190									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10380	H	54.2	---	1.80	56	---	68.2	---	-12.2
15570	H	38.41	---	5.22	43.63	---	74	54	-10.37
---	H	---	---	---	---	---	---	---	---
10380	V	54.35	---	1.80	56.15	---	68.2	---	-12.05
15570	V	37.48	---	5.22	42.7	---	74	54	-11.3
---	V	---	---	---	---	---	---	---	---
11ax(HE40) CH46:5230									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
10460	H	53.04	---	1.85	54.89	---	68.2	---	-13.31
15690	H	37.32	---	5.08	42.4	---	74	54	-11.6
---	H	---	---	---	---	---	---	---	---
10460	V	50.78	---	1.85	52.63	---	68.2	---	-15.57
15690	V	37.36	---	5.08	42.44	---	74	54	-11.56
---	V	---	---	---	---	---	---	---	---

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 3									
11a CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11490	H	42.14	---	2.48	44.62	---	74	54	-9.38
17235	H	51.6	---	6.50	58.1	---	68.2	---	-10.1
---	H	---	---	---	---	---	---	---	---
11490	V	42.47	---	2.48	44.95	---	74	54	-9.05
17235	V	51.34	---	6.50	57.84	---	68.2	---	-10.36
---	V	---	---	---	---	---	---	---	---
11a CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11570	H	41.03	---	2.42	43.45	---	74	54	-10.55
17355	H	52.69	---	7.03	59.72	---	68.2	---	-8.48
---	H	---	---	---	---	---	---	---	---
11570	V	40.01	---	2.42	42.43	---	74	54	-11.57
17355	V	52.5	---	7.03	59.53	---	68.2	---	-8.67
---	V	---	---	---	---	---	---	---	---
11a CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11650	H	40.33	---	2.41	42.74	---	74	54	-11.26
17475	H	50.49	---	7.41	57.9	---	68.2	---	-10.3
---	H	---	---	---	---	---	---	---	---
11650	V	41.04	---	2.41	43.45	---	74	54	-10.55
17475	V	50.88	---	7.41	58.29	---	68.2	---	-9.91
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11490	H	41.03	---	2.48	43.51	---	74	54	-10.49
17235	H	52.65	---	6.50	59.15	---	68.2	---	-9.05
---	H	---	---	---	---	---	---	---	---
11490	V	41.78	---	2.48	44.26	---	74	54	-9.74
17235	V	51.69	---	6.50	58.19	---	68.2	---	-10.01
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11570	H	41.33	---	2.42	43.75	---	74	54	-10.25
17355	H	51.01	---	7.03	58.04	---	68.2	---	-10.16
---	H	---	---	---	---	---	---	---	---
11570	V	41.77	---	2.42	44.19	---	74	54	-9.81
17355	V	50.5	---	7.03	57.53	---	68.2	---	-10.67
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11650	H	41.33	---	2.41	43.74	---	74	54	-10.26
17475	H	50.05	---	7.41	57.46	---	68.2	---	-10.74
---	H	---	---	---	---	---	---	---	---
11650	V	41.11	---	2.41	43.52	---	74	54	-10.48
17475	V	52.36	---	7.41	59.77	---	68.2	---	-8.43
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11510	H	41.33	---	2.47	43.8	---	74	54	-10.2
17265	H	51.15	---	6.62	57.77	---	68.2	---	-10.43
---	H	---	---	---	---	---	---	---	---
11510	V	41.9	---	2.47	44.37	---	74	54	-9.63
17265	V	50.29	---	6.62	56.91	---	68.2	---	-11.29
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11590	H	41.58	---	2.40	43.98	---	74	54	-10.02
17385	H	50.26	---	7.15	57.41	---	68.2	---	-10.79
---	H	---	---	---	---	---	---	---	---
11590	V	41.02	---	2.40	43.42	---	74	54	-10.58
17385	V	52.59	---	7.15	59.74	---	68.2	---	-8.46
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11490	H	40.12	---	2.48	42.6	---	74	54	-11.4
17235	H	52.57	---	6.50	59.07	---	68.2	---	-9.13
---	H	---	---	---	---	---	---	---	---
11ac(VHT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11570	H	41.31	---	2.42	43.73	---	74	54	-10.27
17355	H	52.19	---	7.03	59.22	---	68.2	---	-8.98
---	H	---	---	---	---	---	---	---	---
11570	V	40.26	---	2.42	42.68	---	74	54	-11.32
17355	V	51.47	---	7.03	58.5	---	68.2	---	-9.7
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11650	H	41.01	---	2.41	43.42	---	74	54	-10.58
17475	H	51.29	---	7.41	58.7	---	68.2	---	-9.5
---	H	---	---	---	---	---	---	---	---
11650	V	40.15	---	2.41	42.56	---	74	54	-11.44
17475	V	52.47	---	7.41	59.88	---	68.2	---	-8.32
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11510	H	40.47	---	2.47	42.94	---	74	54	-11.06
17265	H	50.96	---	6.62	57.58	---	68.2	---	-10.62
---	H	---	---	---	---	---	---	---	---
11510	V	41.62	---	2.47	44.09	---	74	54	-9.91
17265	V	50.78	---	6.62	57.4	---	68.2	---	-10.8
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11590	H	41.45	---	2.40	43.85	---	74	54	-10.15
17385	H	51.33	---	7.15	58.48	---	68.2	---	-9.72
---	H	---	---	---	---	---	---	---	---
11590	V	40.65	---	2.40	43.05	---	74	54	-10.95
17385	V	52.8	---	7.15	59.95	---	68.2	---	-8.25
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11490	H	41.32	---	2.48	43.8	---	74	54	-10.2
17235	H	52.52	---	6.50	59.02	---	68.2	---	-9.18
---	H	---	---	---	---	---	---	---	---
11490	V	40.36	---	2.48	42.84	---	74	54	-11.16
17235	V	51.81	---	6.50	58.31	---	68.2	---	-9.89
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11570	H	41.42	---	2.42	43.84	---	74	54	-10.16
17355	H	50.33	---	7.03	57.36	---	68.2	---	-10.84
---	H	---	---	---	---	---	---	---	---
11570	V	42.5	---	2.42	44.92	---	74	54	-9.08
17355	V	51.66	---	7.03	58.69	---	68.2	---	-9.51
---	V	---	---	---	---	---	---	---	---
11ax(HE20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11650	H	40.67	---	2.41	43.08	---	74	54	-10.92
17475	H	50.5	---	7.41	57.91	---	68.2	---	-10.29
---	H	---	---	---	---	---	---	---	---
11650	V	41.53	---	2.41	43.94	---	74	54	-10.06
17475	V	50.11	---	7.41	57.52	---	68.2	---	-10.68
---	V	---	---	---	---	---	---	---	---


11ax(HE40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11510	H	41.25	---	2.47	43.72	---	74	54	-10.28
17265	H	52.33	---	6.62	58.95	---	68.2	---	-9.25
---	H	---	---	---	---	---	---	---	---
11510	V	41.5	---	2.47	43.97	---	74	54	-10.03
17265	V	51.69	---	6.62	58.31	---	68.2	---	-9.89
---	V	---	---	---	---	---	---	---	---
11ax(HE40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB $\mu$ V)	AV reading (dB $\mu$ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB $\mu$ V/m)	AV limit (dB $\mu$ V/m)	Margin (dB)
					Peak (dB $\mu$ V/m)	AV (dB $\mu$ V/m)			
11590	H	40.84	---	2.40	43.24	---	74	54	-10.76
17385	H	52.11	---	7.15	59.26	---	68.2	---	-8.94
---	H	---	---	---	---	---	---	---	---
11590	V	40.33	---	2.40	42.73	---	74	54	-11.27
17385	V	50.47	---	7.15	57.62	---	68.2	---	-10.58
---	V	---	---	---	---	---	---	---	---

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

## 6.9. Frequency Stability Measurement

### 6.9.1. Test Specification
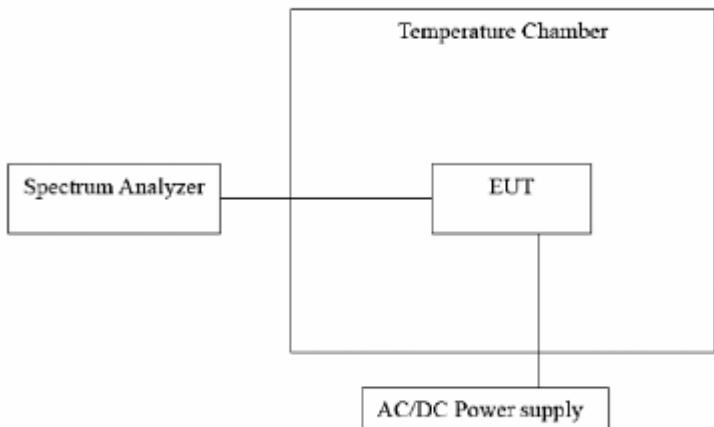
<b>Test Requirement:</b>	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
<b>Test Method:</b>	ANSI C63.10:2020
<b>Limit:</b>	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
<b>Test Setup:</b>	 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]     EUT --- ACDC[AC/DC Power supply]     EUT --- TC[Temperature Chamber]     </pre>
<b>Test Procedure:</b>	<p>The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.</p> <ol style="list-style-type: none"> <li>Turn the EUT on and couple its output to a spectrum analyzer.</li> <li>Turn the EUT off and set the chamber to the highest temperature specified.</li> <li>Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.</li> <li>Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.</li> <li>The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.</li> </ol>
<b>Test Result:</b>	PASS
<b>Remark:</b>	Pre-scan was performed at all models(11a,11n,11ac, 11ax), the worst case (11ax) was found and test data was shown in this report.

**6.9.2. Test Instruments**

Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
DC power supply	Kingrang	KR3005K	/	Jun. 26, 2025	Jun. 25, 2026
Programable temprature and humidity chamber	JQ	JQ-2000	510101234	Jun. 26, 2025	Jun. 25, 2026

**Test plots as follows:**

Test mode:		802.11ax(HE20)	Frequency(MHz):	5180
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5180	0	PASS
35		5180	0	PASS
25		5180	0	PASS
15		5180	0	PASS
5		5180	0	PASS
0		5180	0	PASS
25		102V	5180	0
	120V	5180	0	PASS
	138V	5180	0	PASS

Test mode:		802.11ax(HE20)	Frequency(MHz):	5200
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5200	0	PASS
35		5200	0	PASS
25		5200	0	PASS
15		5200	0	PASS
5		5200	0	PASS
0		5200	0	PASS
25		102V	5200	0
	120V	5200	0	PASS
	138V	5200	0	PASS

Test mode:		802.11ax(HE20)	Frequency(MHz):	5240
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5240	0	PASS
35		5240	0	PASS
25		5240	0	PASS
15		5240	0	PASS
5		5240	0	PASS
0		5240	0	PASS
25		102V	5240	0
	120V	5240	0	PASS
	138V	5240	0	PASS

Test mode:		802.11ax(HE20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5745	0	PASS
35		5745	0	PASS
25		5745	0	PASS
15		5745	0	PASS
5		5745	0	PASS
0		5745	0	PASS
25		102V	5745	0
	120V	5745	0	PASS
	138V	5745	0	PASS

Test mode:		802.11ax(HE20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5785	0	PASS
35		5785	0	PASS
25		5785	0	PASS
15		5785	0	PASS
5		5785	0	PASS
0		5785	0	PASS
25		102V	5785	0
	120V	5785	0	PASS
	138V	5785	0	PASS

Test mode:		802.11ax(HE20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5825	0	PASS
35		5825	0	PASS
25		5825	0	PASS
15		5825	0	PASS
5		5825	0	PASS
0		5825	0	PASS
25		102V	5825	0
	120V	5825	0	PASS
	138V	5825	0	PASS

Test mode:		802.11ax(HE40)	Frequency(MHz):	5190
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5190	0	PASS
35		5190	0	PASS
25		5190	0	PASS
15		5190	0	PASS
5		5190	0	PASS
0		5190	0	PASS
25		102V	5190	0
	120V	5190	0	PASS
	138V	5190	0	PASS

Test mode:		802.11ax(HE40)	Frequency(MHz):	5230
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5230	0	PASS
35		5230	0	PASS
25		5230	0	PASS
15		5230	0	PASS
5		5230	0	PASS
0		5229.96	-40000	PASS
25		102V	5230	0
	120V	5230	0	PASS
	138V	5230	0	PASS


Test mode:		802.11ax(HE40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5755	0	PASS
35		5755	0	PASS
25		5755	0	PASS
15		5755	0	PASS
5		5755	0	PASS
0		5755	0	PASS
25		102V	5755	0
	120V	5755	0	PASS
	138V	5755	0	PASS


Test mode:		802.11ax(HE40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(V <sub>AC</sub> )	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	120V	5795	0	PASS
35		5795	0	PASS
25		5795	0	PASS
15		5795	0	PASS
5		5795	0	PASS
0		5795	0	PASS
25		102V	5795	0
	120V	5795	0	PASS
	138V	5795	0	PASS


## Appendix A: Test Result of Conducted Test


### Duty Cycle


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	99.1	0
NVNT	a	5200	99.0	0
NVNT	a	5240	98.8	0
NVNT	n20	5180	98.6	0
NVNT	n20	5200	99.3	0
NVNT	n20	5240	98.9	0
NVNT	n40	5190	94.81	0.23
NVNT	n40	5230	94.51	0.25
NVNT	ac20	5180	98.8	0
NVNT	ac20	5200	99.1	0
NVNT	ac20	5240	98.4	0
NVNT	ac40	5190	99.2	0
NVNT	ac40	5230	99.3	0
NVNT	ax20	5180	97.8	0.10
NVNT	ax20	5200	99.1	0
NVNT	ax20	5240	99.1	0
NVNT	ax40	5190	99.5	0
NVNT	ax40	5230	99.4	0
NVNT	a	5745	99.4	0
NVNT	a	5785	98.8	0
NVNT	a	5825	98.6	0
NVNT	n20	5745	99.0	0
NVNT	n20	5785	98.1	0
NVNT	n20	5825	97.7	0.10
NVNT	n40	5755	99.5	0
NVNT	n40	5795	98.8	0
NVNT	ac20	5745	98.3	0
NVNT	ac20	5785	98.1	0
NVNT	ac20	5825	98.7	0
NVNT	ac40	5755	99.6	0
NVNT	ac40	5795	99.4	0
NVNT	ax20	5745	97.2	0.12
NVNT	ax20	5785	97.8	0.10
NVNT	ax20	5825	98.3	0
NVNT	ax40	5755	99.2	0
NVNT	ax40	5795	99.1	0

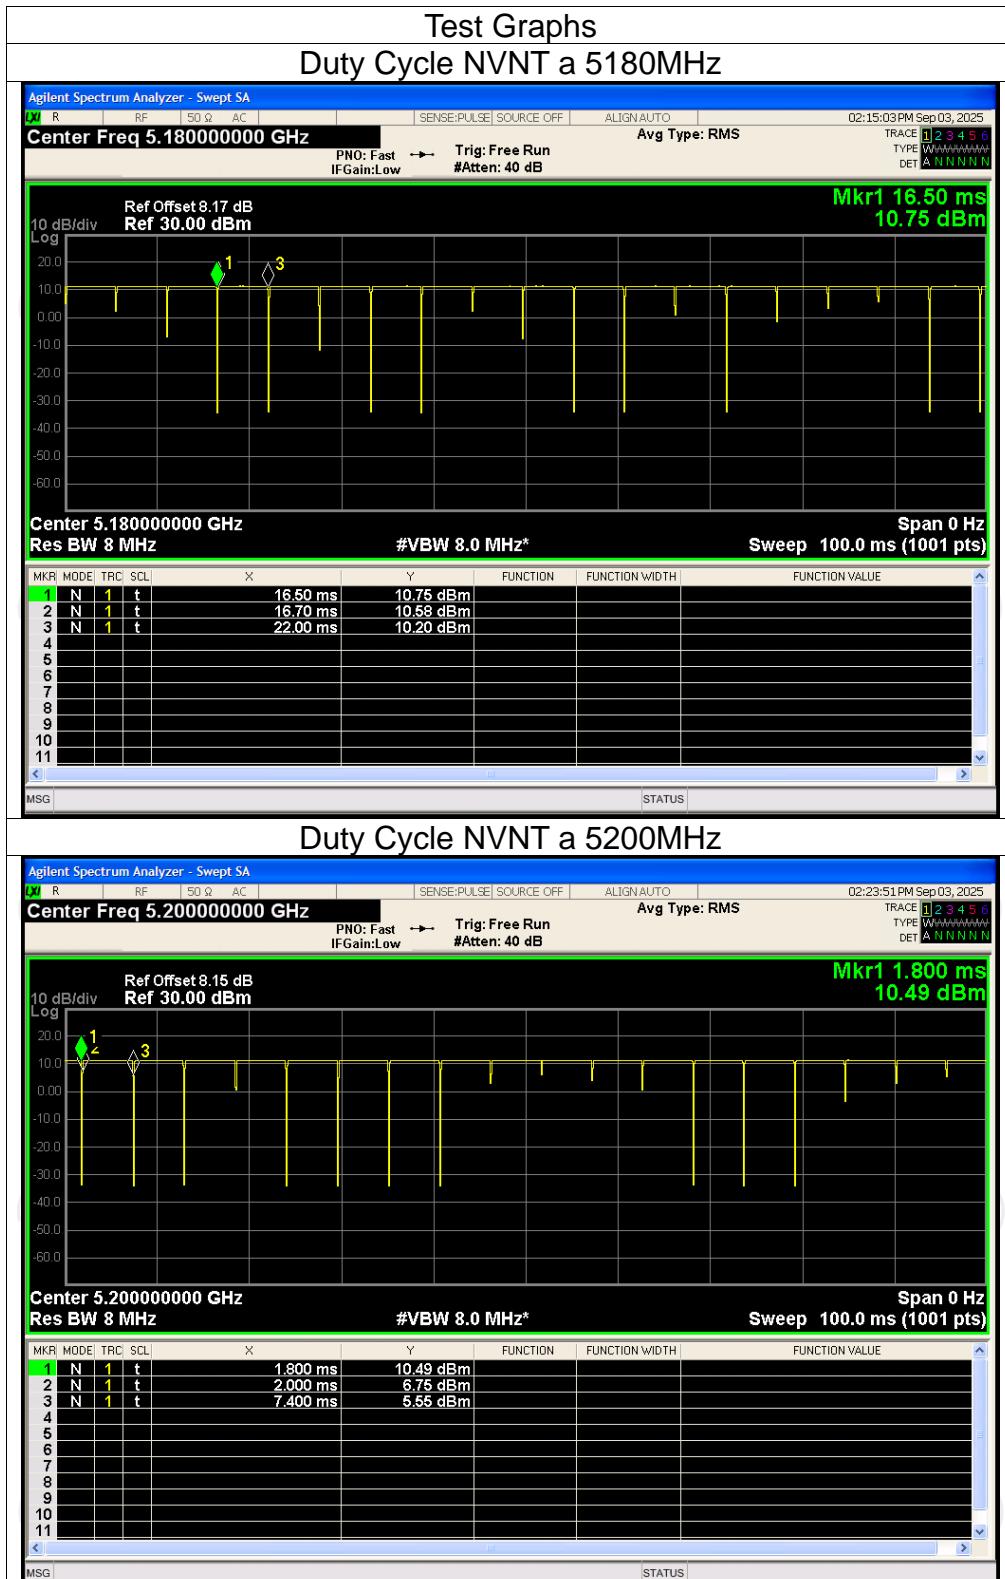


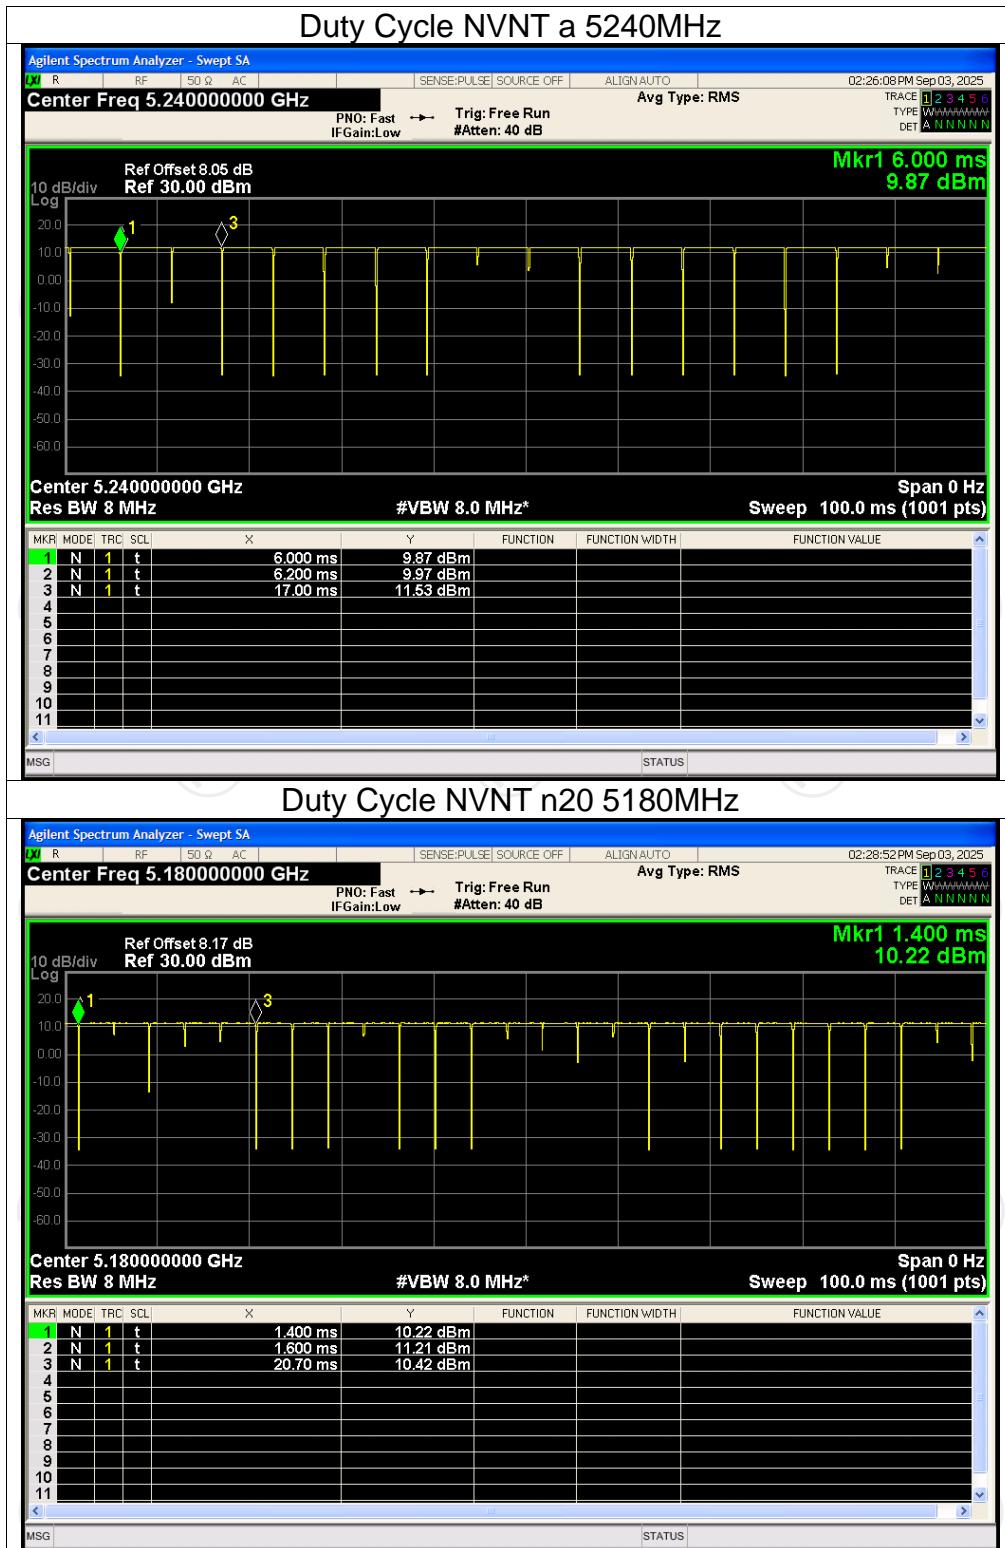


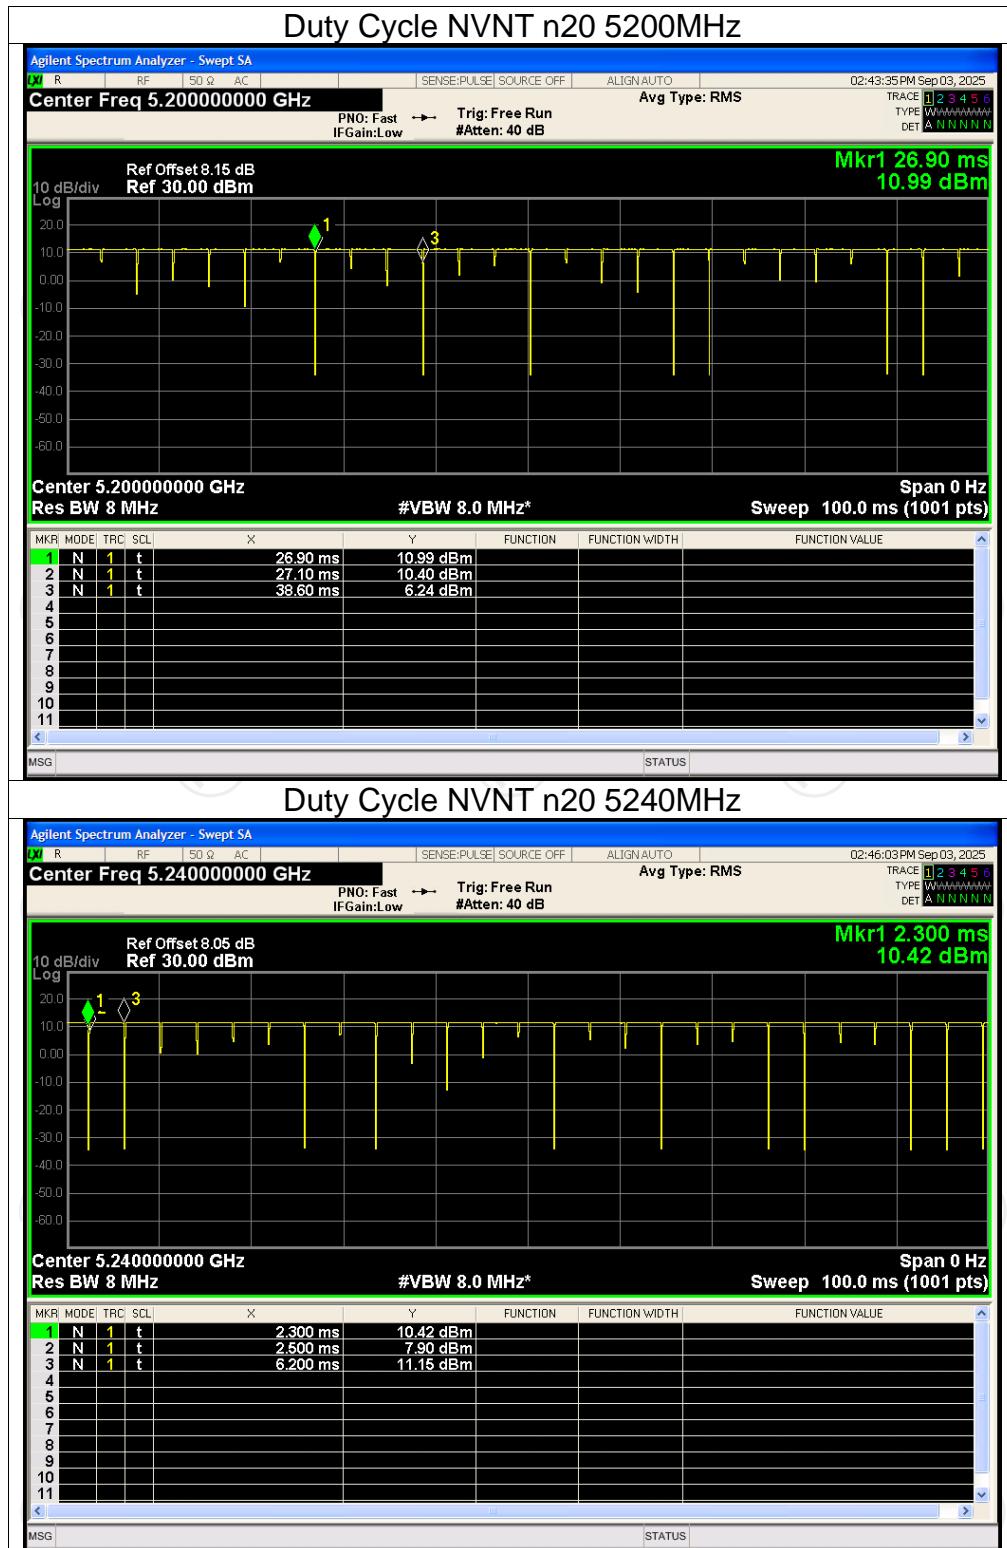


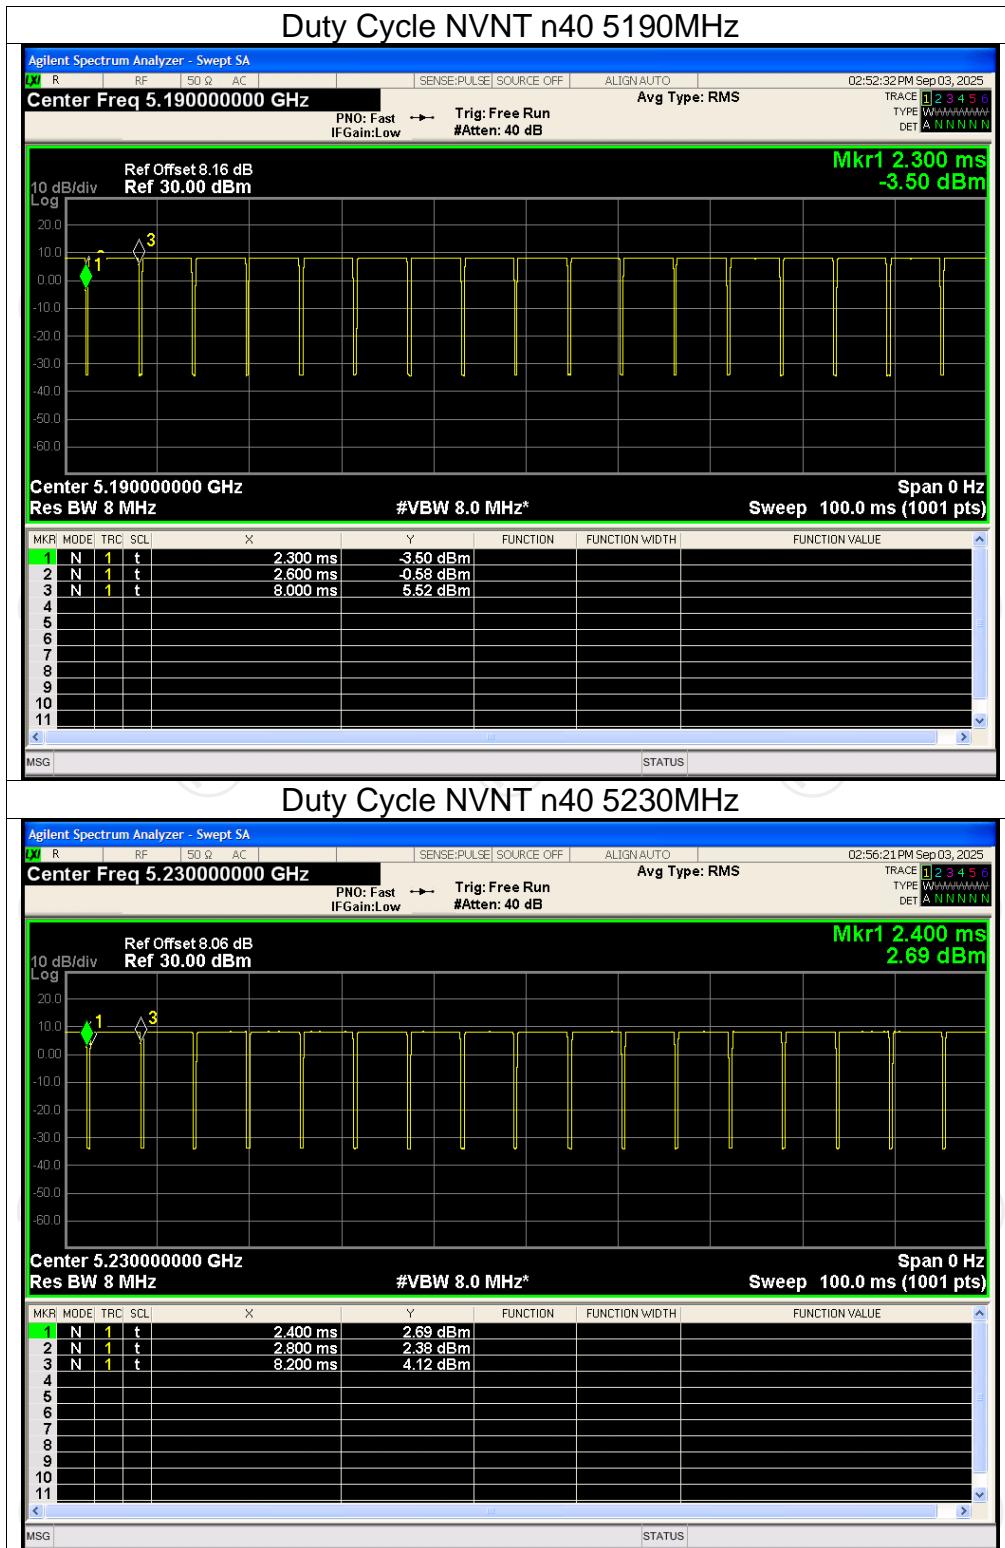


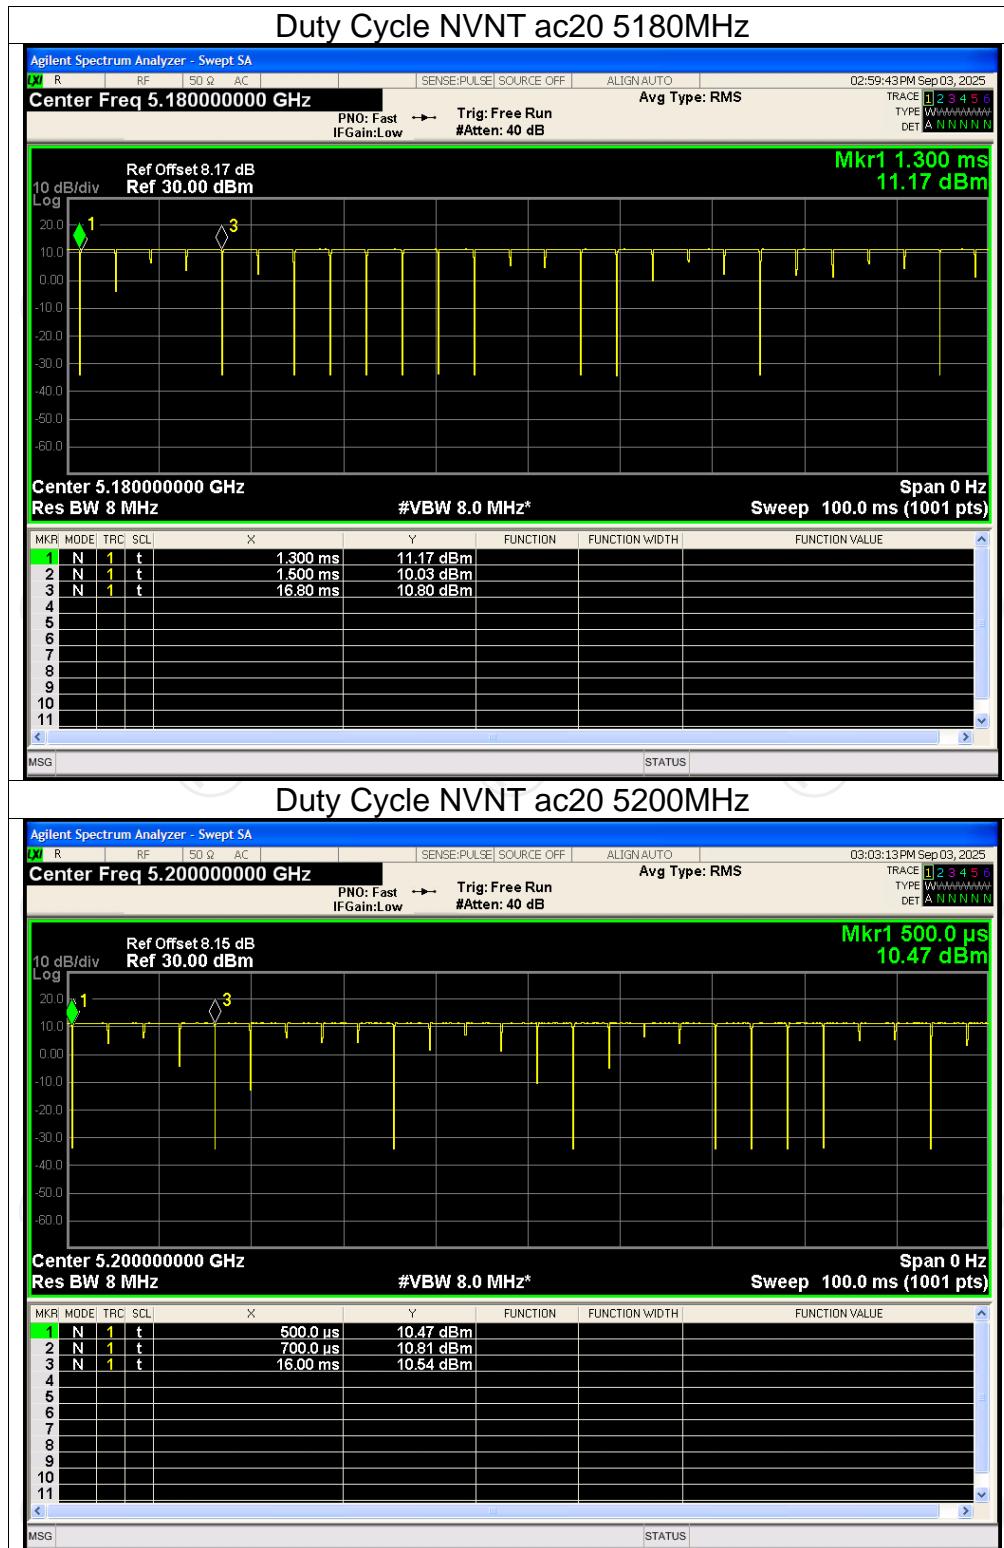


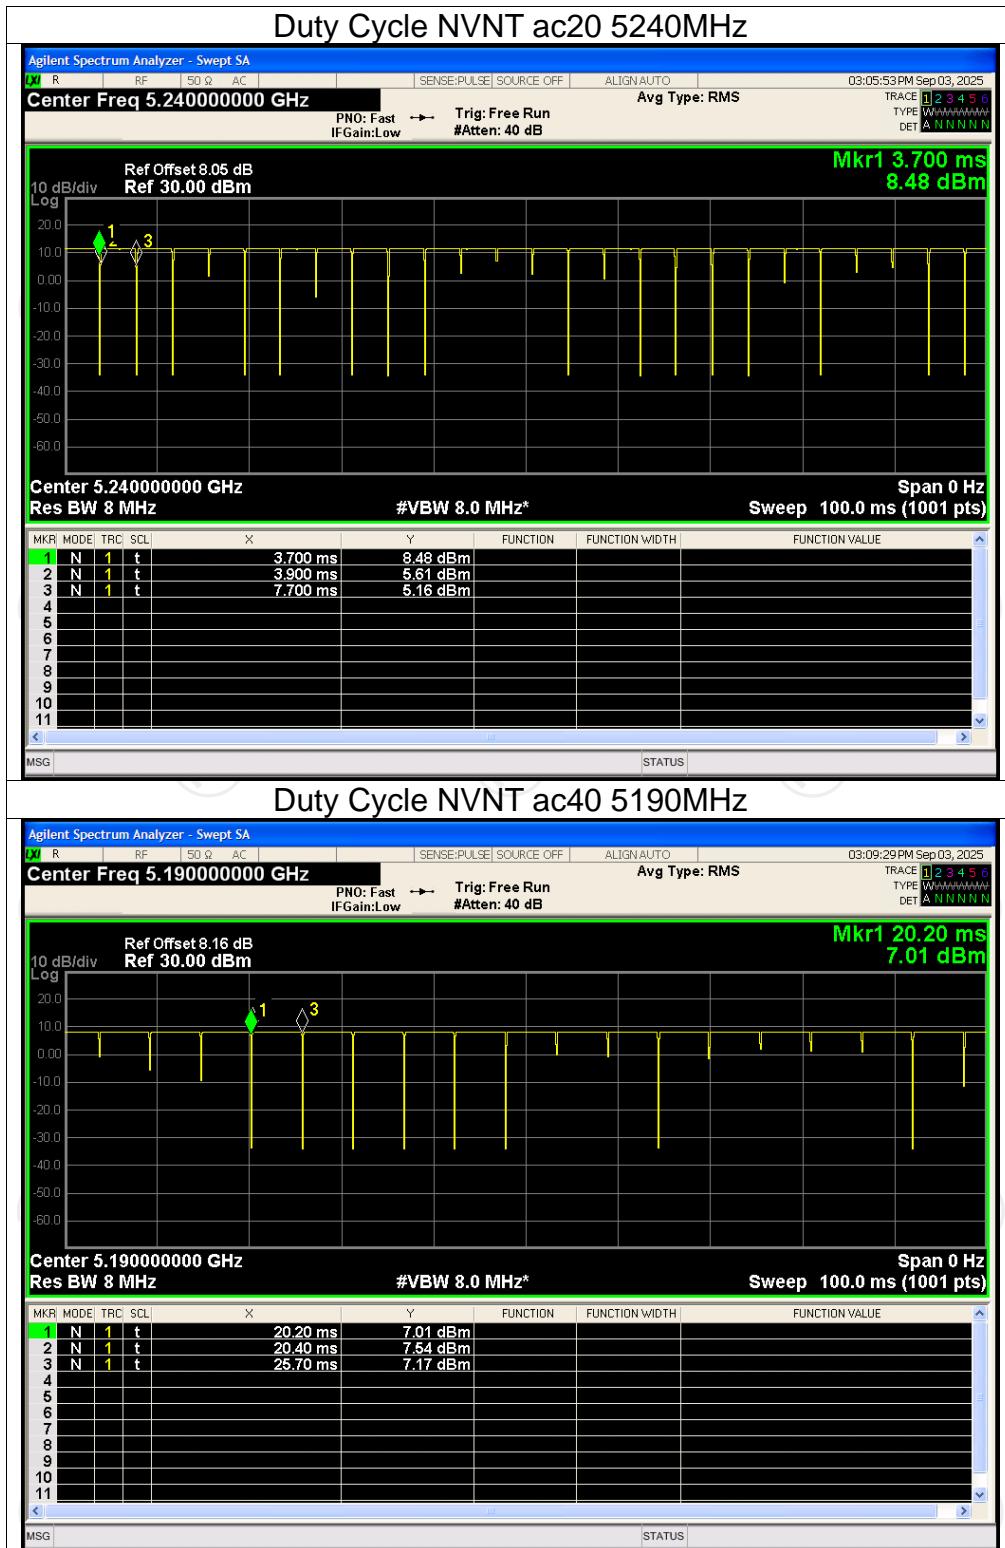


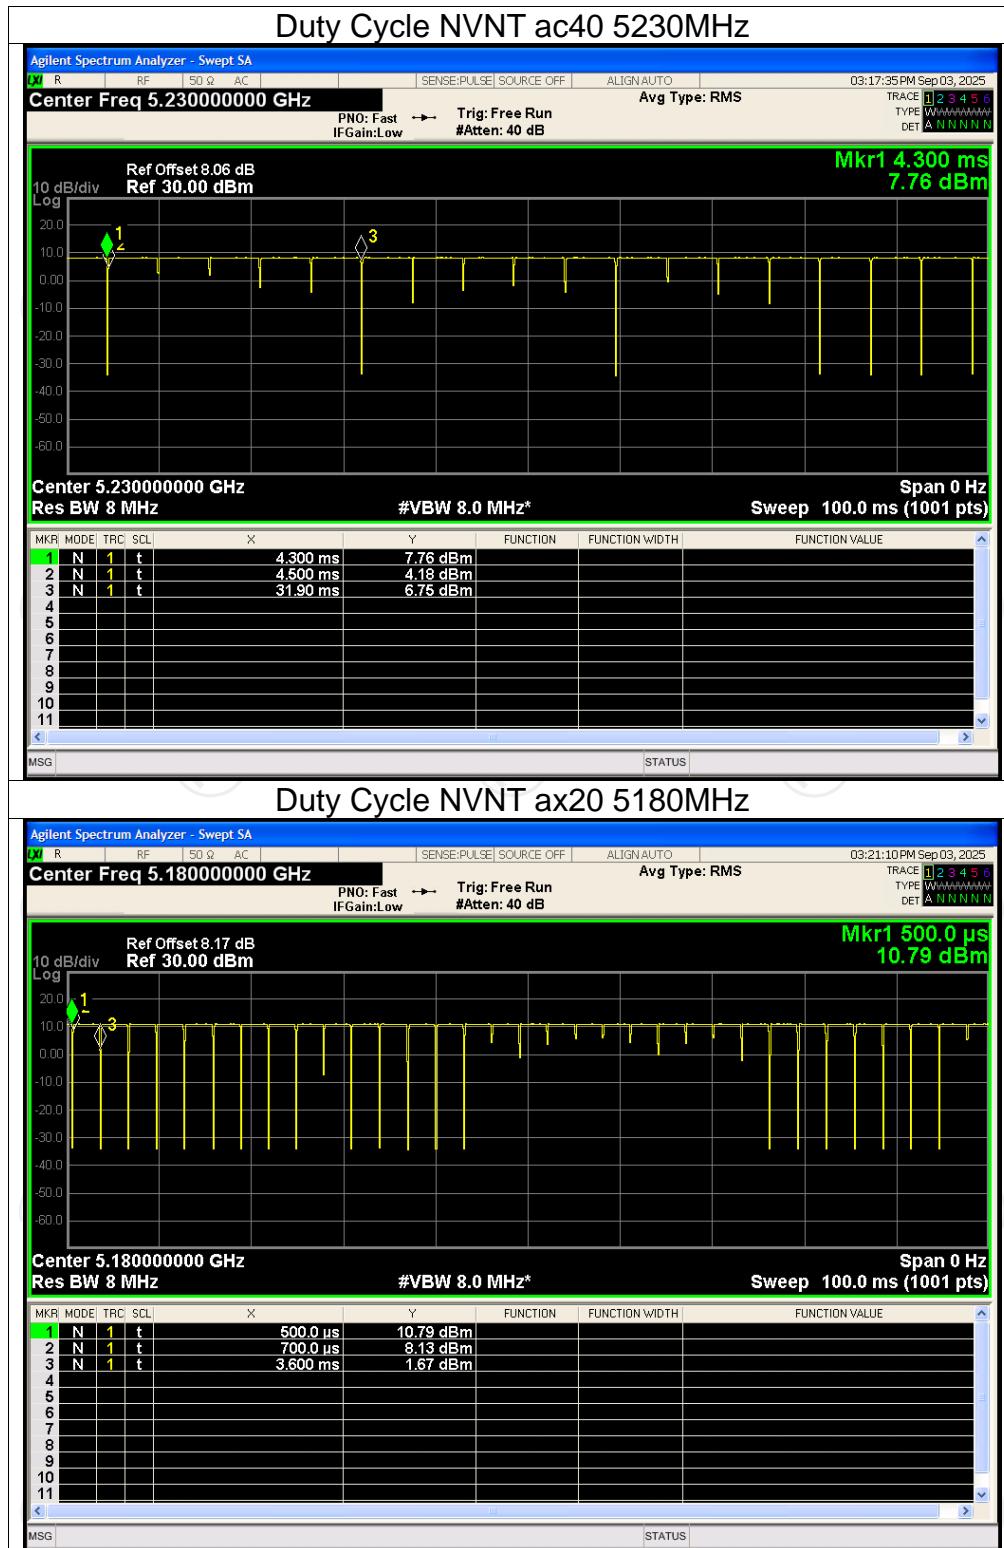


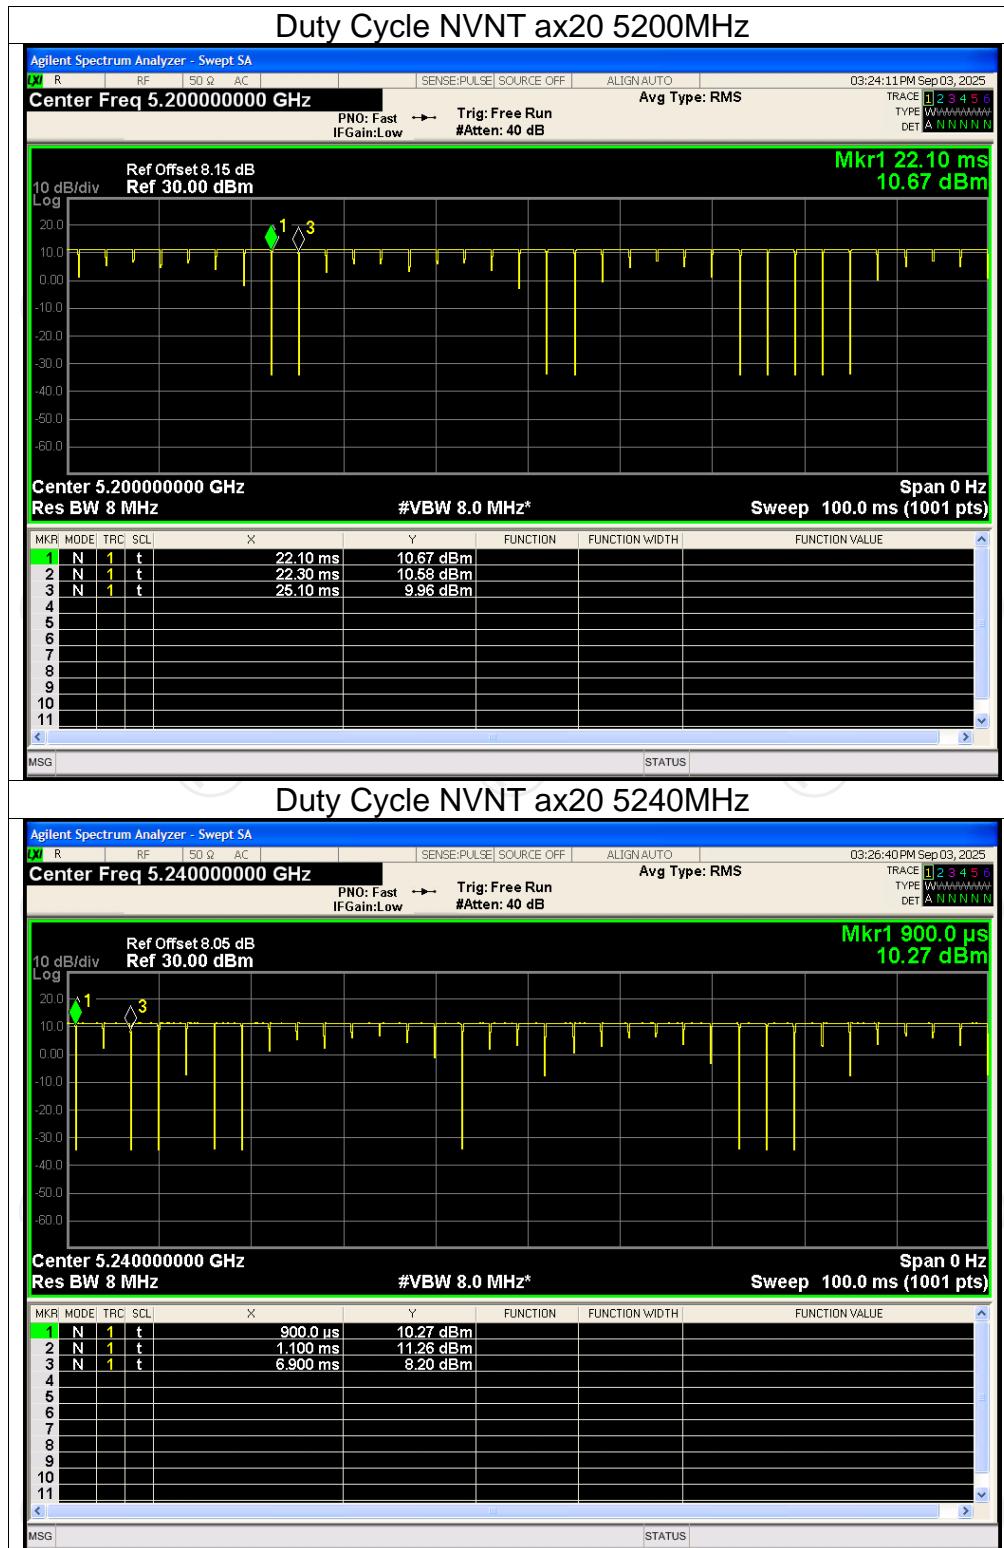


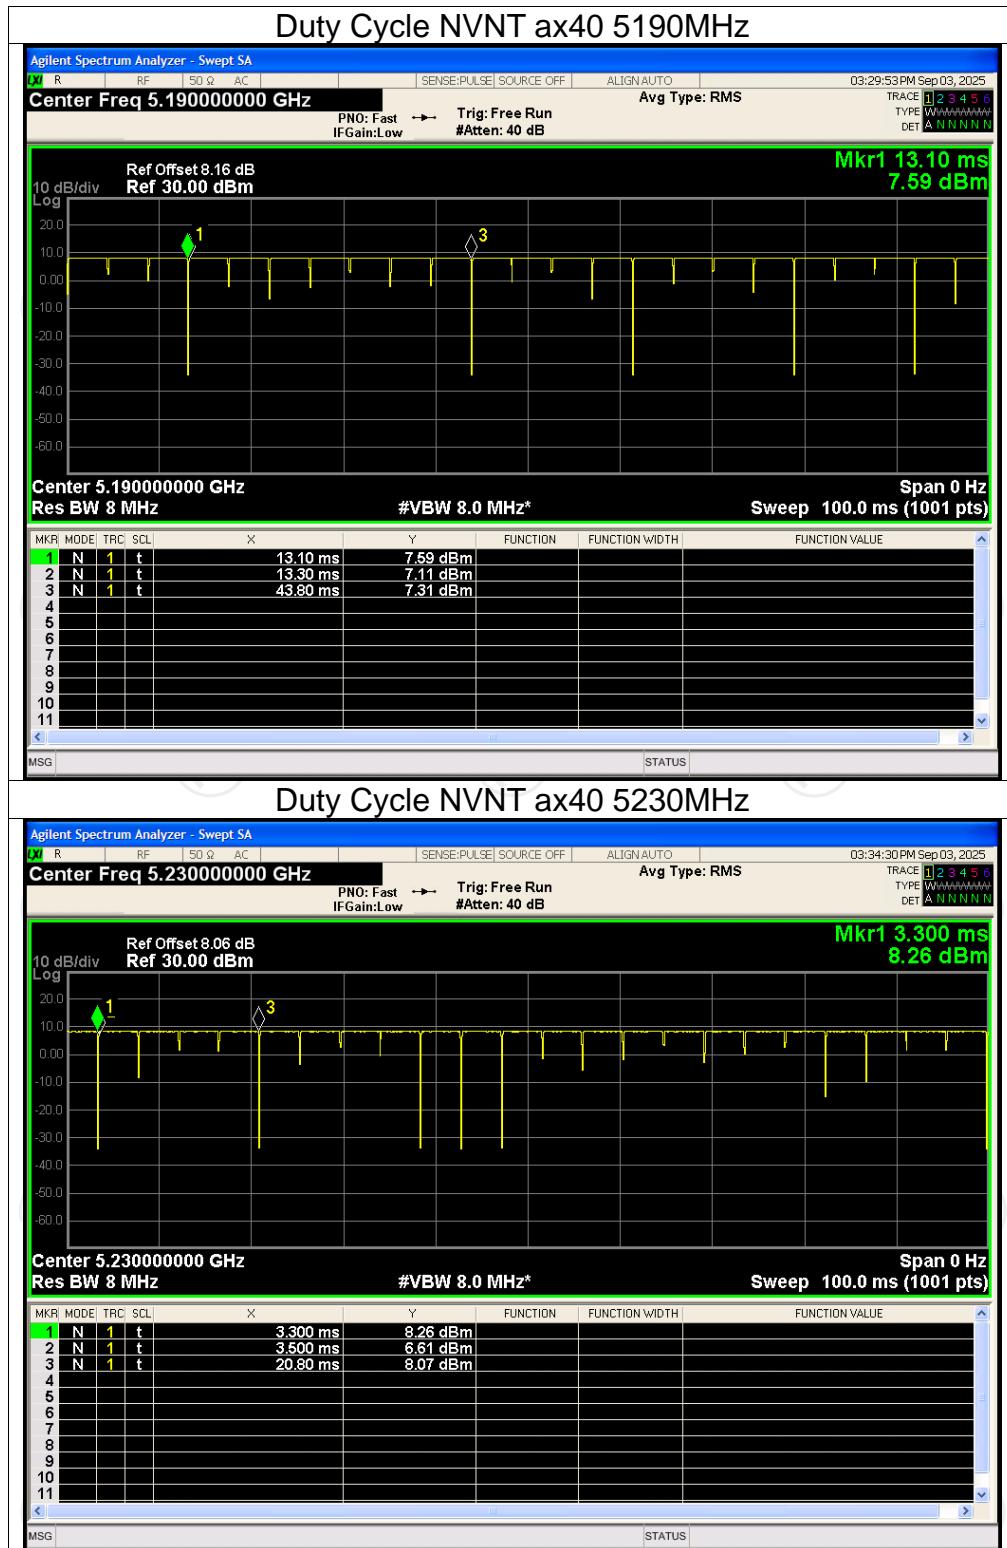


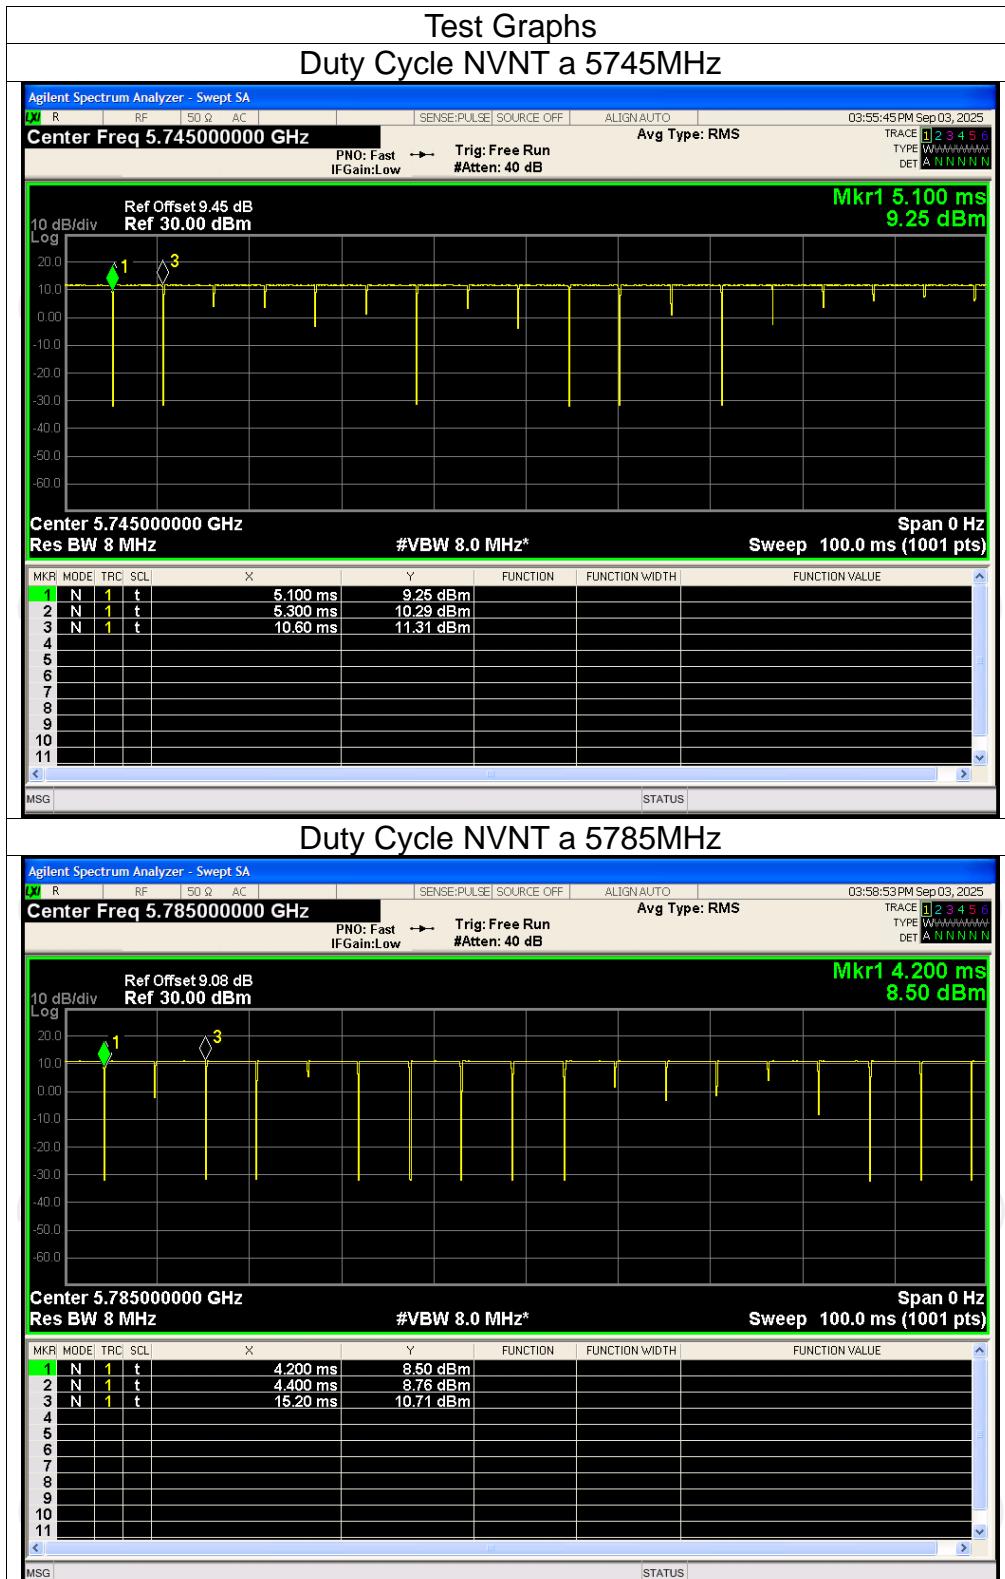


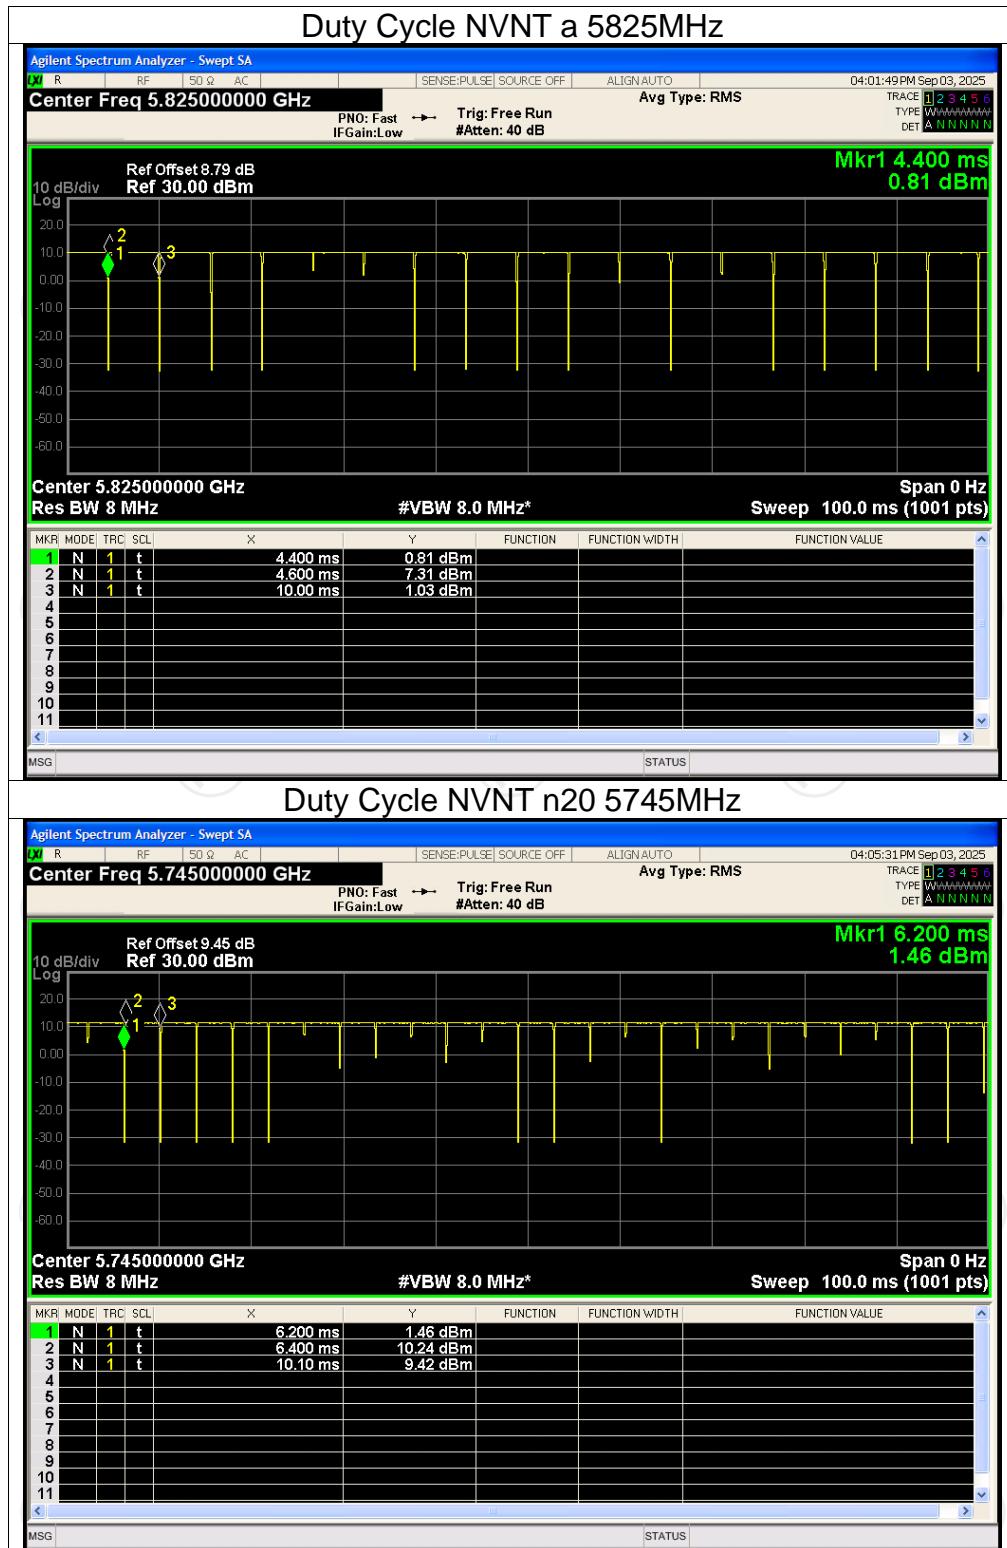


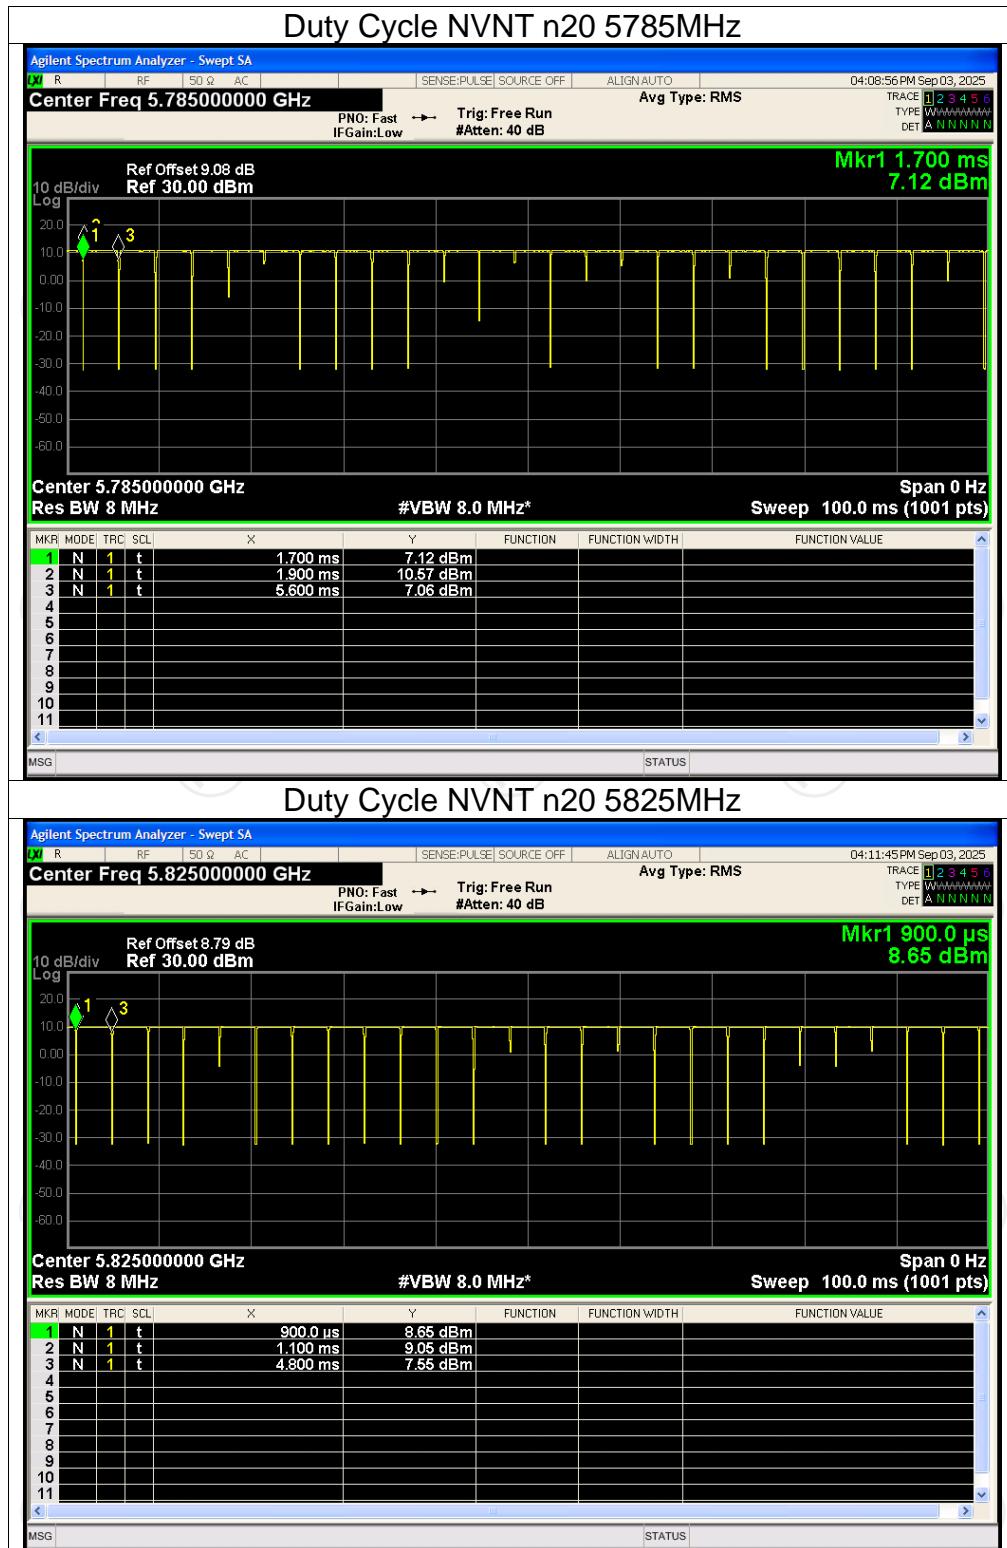


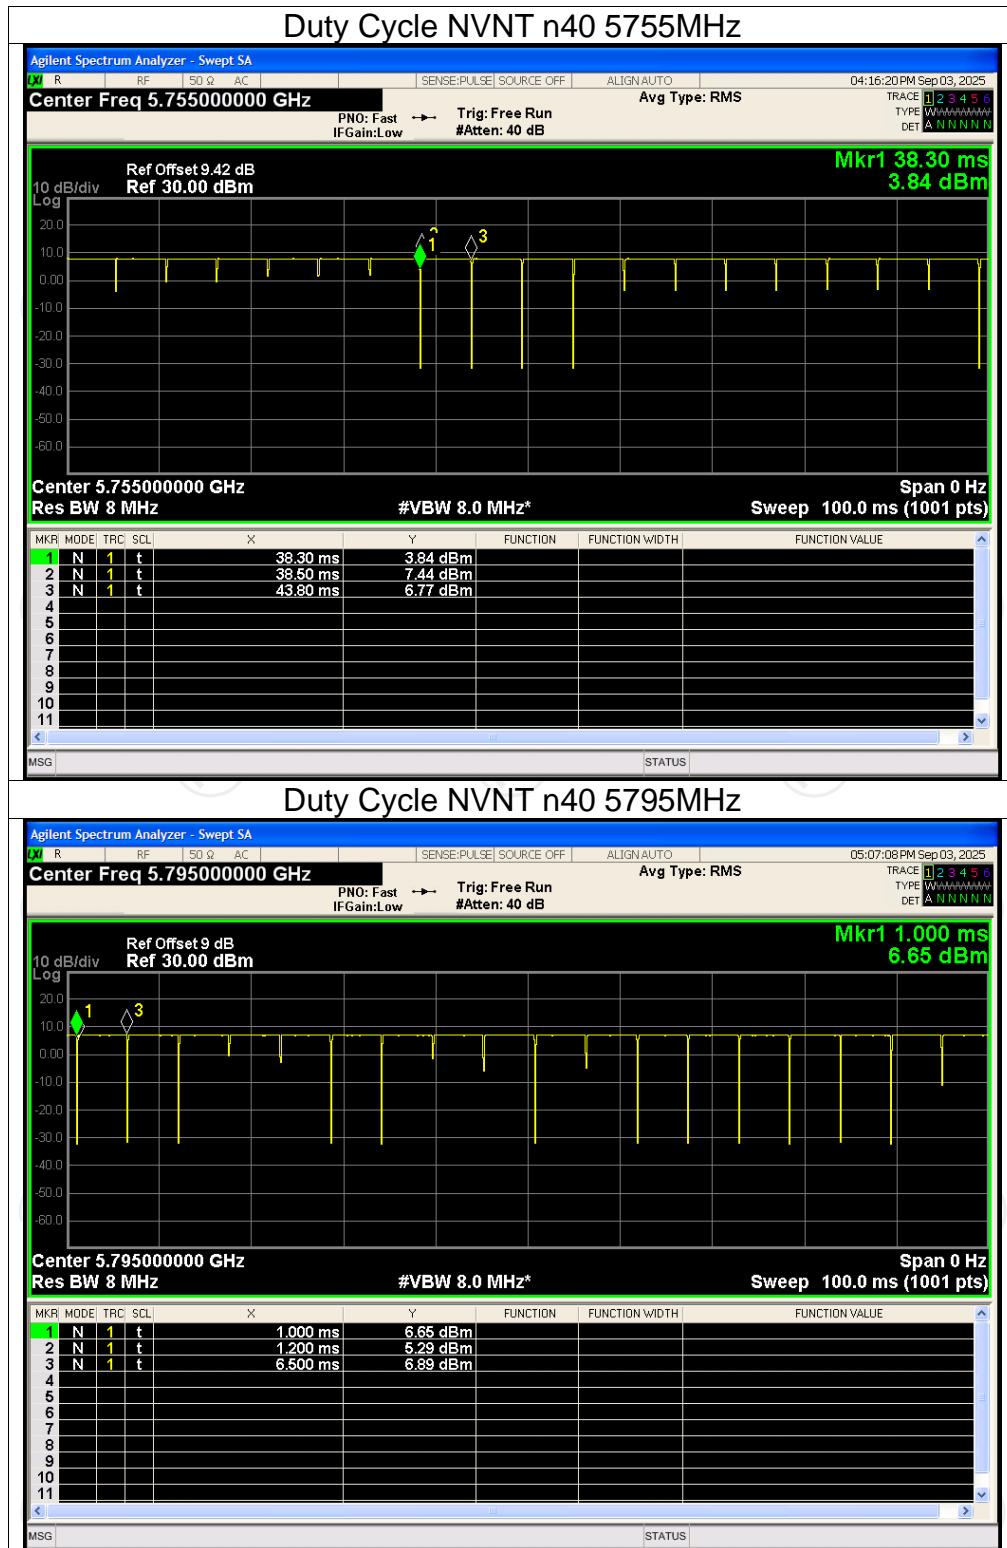


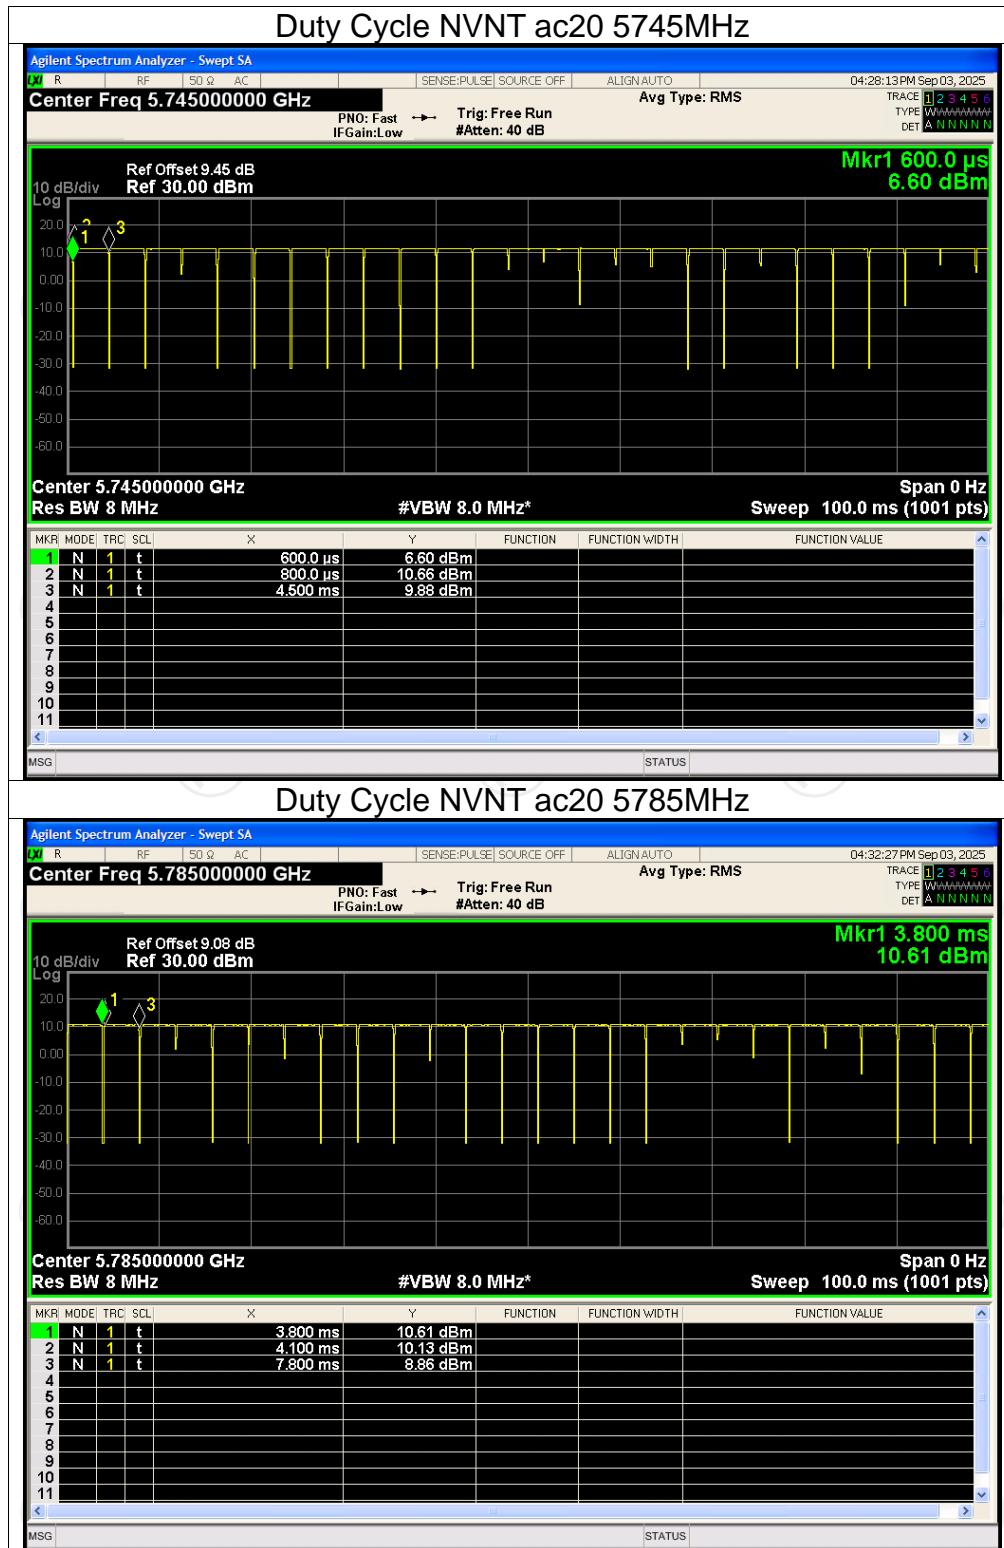

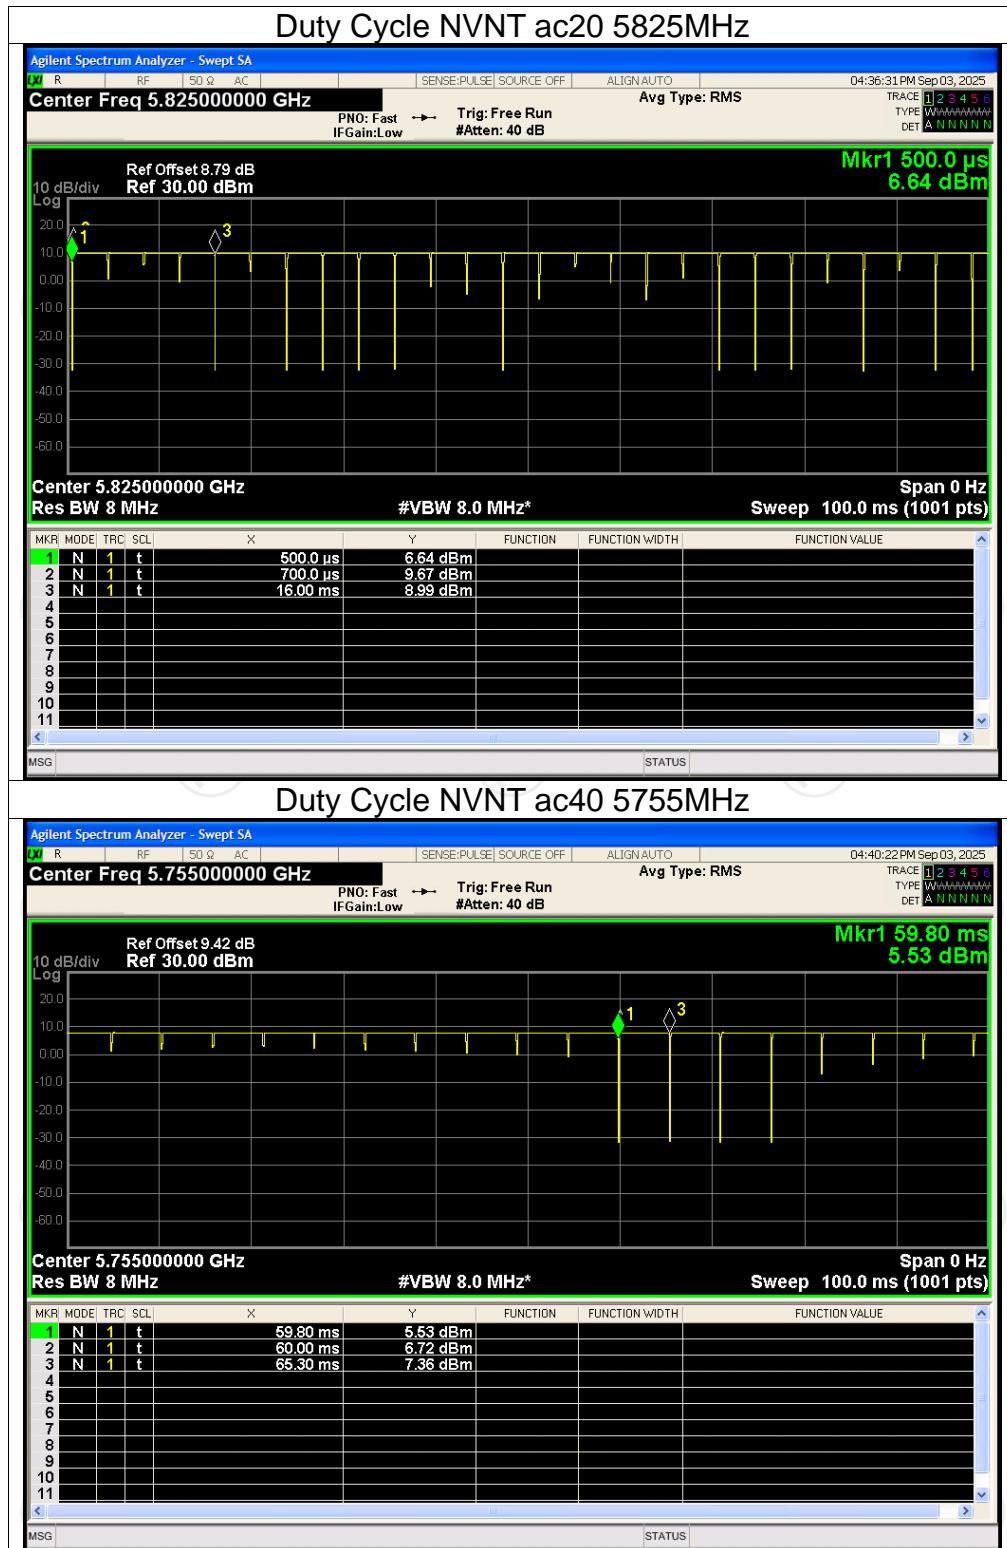

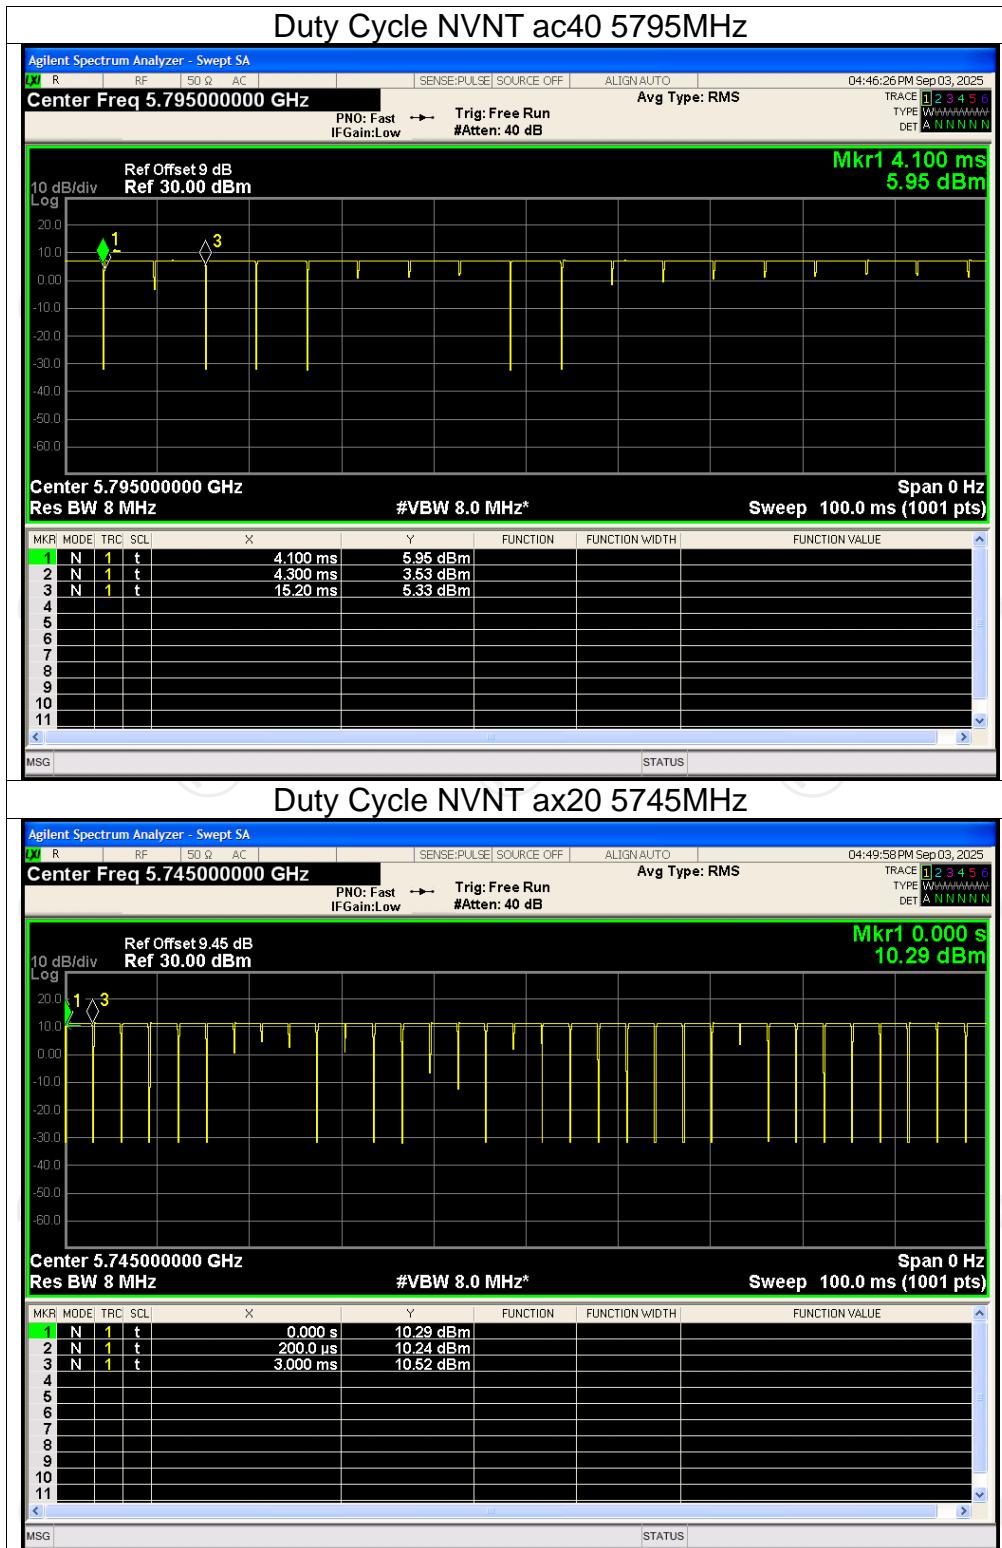

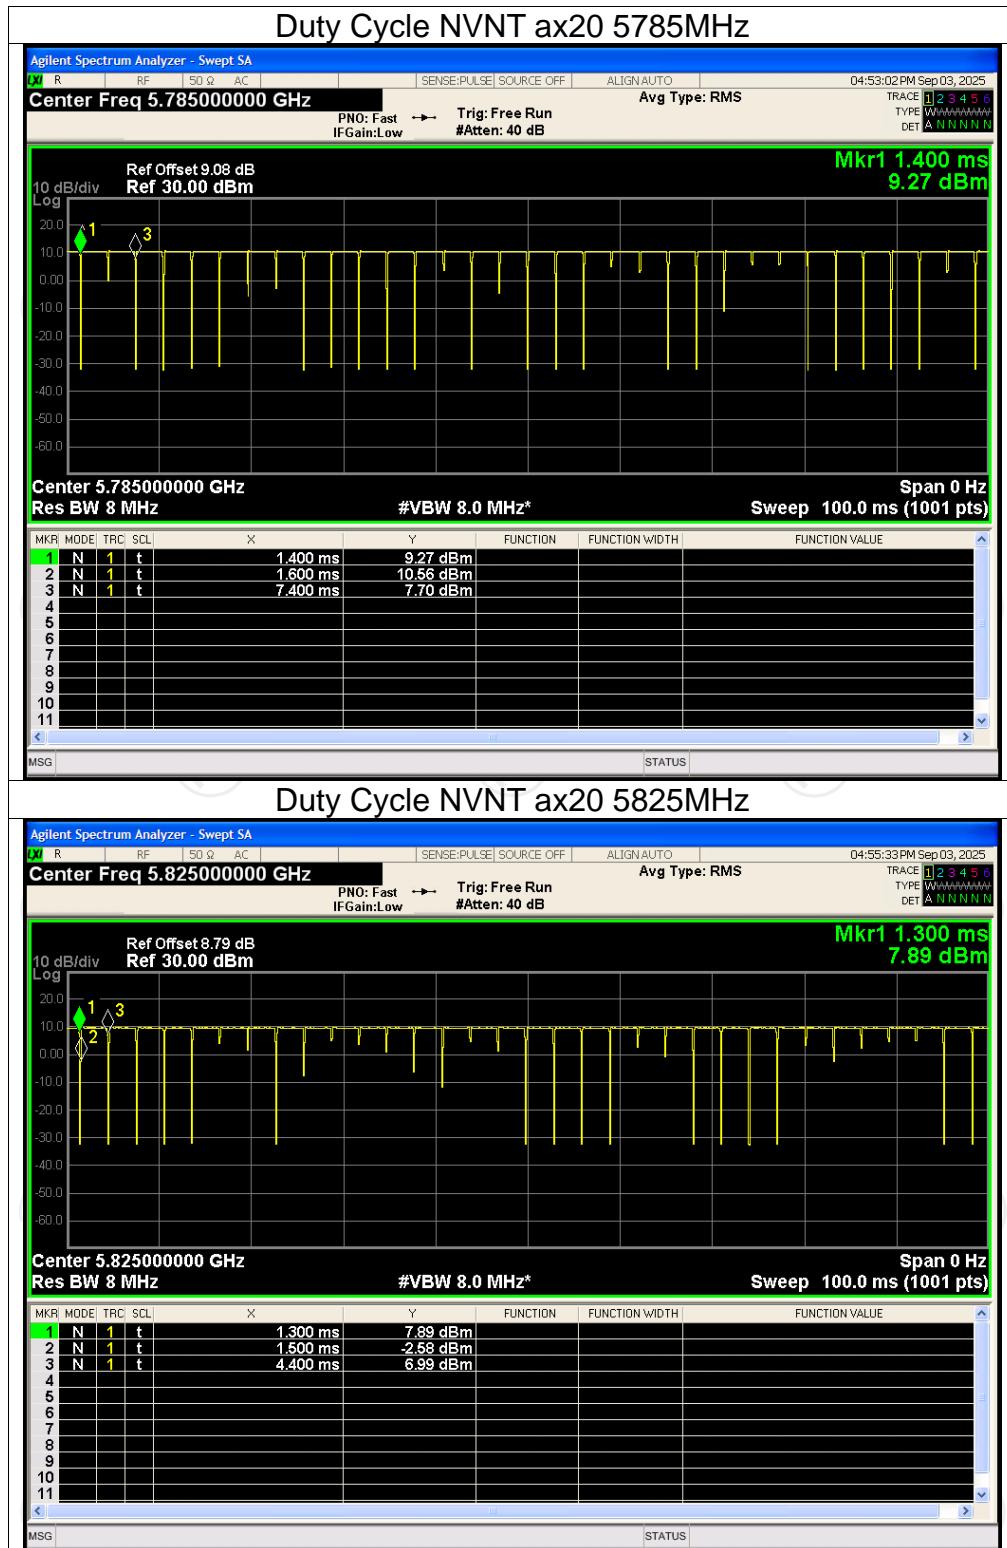

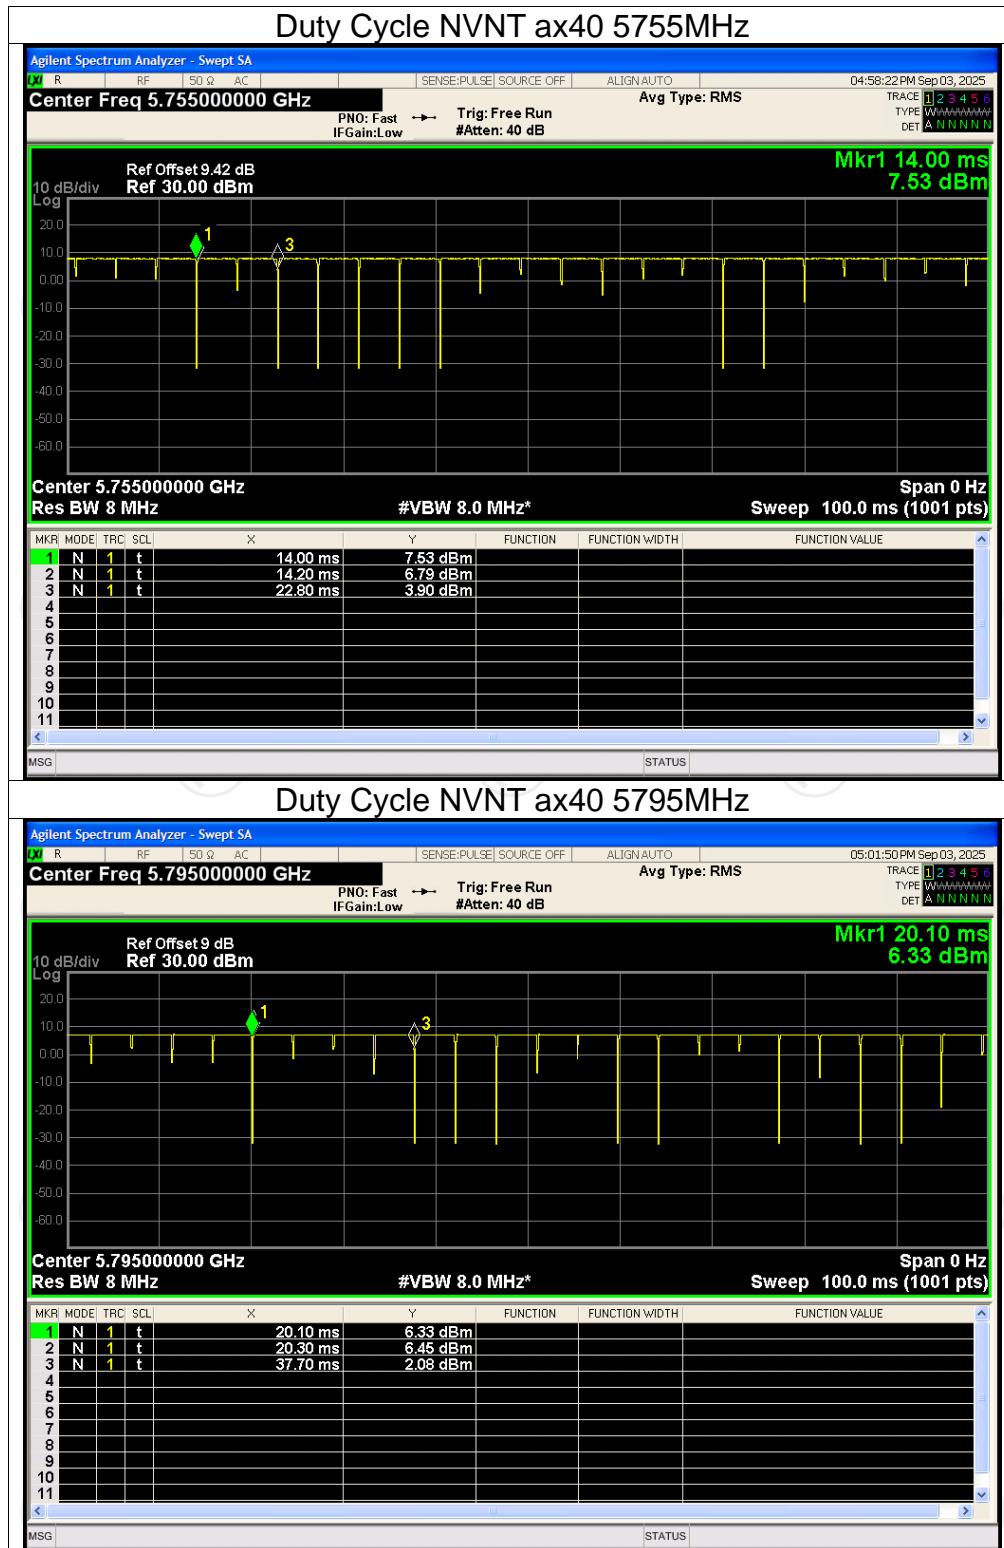

**Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	14.18	0	14.18	24	Pass
NVNT	a	5200	14.09	0	14.09	24	Pass
NVNT	a	5240	14.77	0	14.77	24	Pass
NVNT	n20	5180	14.42	0	14.42	24	Pass
NVNT	n20	5200	14.41	0	14.41	24	Pass
NVNT	n20	5240	14.59	0	14.59	24	Pass
NVNT	n40	5190	14.09	0.23	14.32	24	Pass
NVNT	n40	5230	14.36	0.25	14.61	24	Pass
NVNT	ac20	5180	14.35	0	14.35	24	Pass
NVNT	ac20	5200	14.47	0	14.47	24	Pass
NVNT	ac20	5240	14.55	0	14.55	24	Pass
NVNT	ac40	5190	14.46	0	14.46	24	Pass
NVNT	ac40	5230	14.66	0	14.66	24	Pass
NVNT	ax20	5180	14.21	0.10	14.31	24	Pass
NVNT	ax20	5200	14.41	0	14.41	24	Pass
NVNT	ax20	5240	14.61	0	14.61	24	Pass
NVNT	ax40	5190	14.49	0	14.49	24	Pass
NVNT	ax40	5230	14.54	0	14.54	24	Pass
NVNT	a	5745	15.11	0	15.11	30	Pass
NVNT	a	5785	14.29	0	14.29	30	Pass
NVNT	a	5825	13.42	0	13.42	30	Pass
NVNT	n20	5745	15.10	0	15.10	30	Pass
NVNT	n20	5785	14.27	0	14.27	30	Pass
NVNT	n20	5825	13.53	0.10	13.63	30	Pass
NVNT	n40	5755	14.97	0	14.97	30	Pass
NVNT	n40	5795	14.12	0	14.12	30	Pass
NVNT	ac20	5745	15.03	0	15.03	30	Pass
NVNT	ac20	5785	14.43	0	14.43	30	Pass
NVNT	ac20	5825	13.42	0	13.42	30	Pass
NVNT	ac40	5755	14.97	0	14.97	30	Pass
NVNT	ac40	5795	14.23	0	14.23	30	Pass
NVNT	ax20	5745	15.02	0.12	15.14	30	Pass
NVNT	ax20	5785	14.35	0.10	14.45	30	Pass
NVNT	ax20	5825	13.40	0	13.40	30	Pass
NVNT	ax40	5755	15.00	0	15.00	30	Pass
NVNT	ax40	5795	14.12	0	14.12	30	Pass

