

Test Mode	Channel	Verdict
11B	MCH	PASS







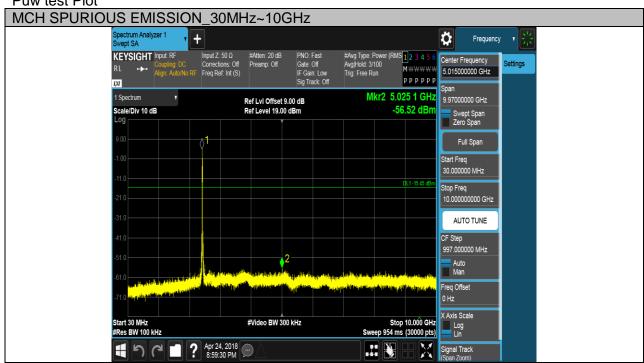

Test Mode	Channel	Verdict
11B	HCH	PASS

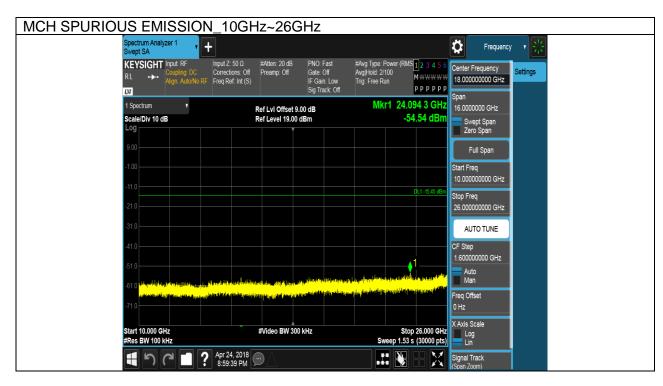


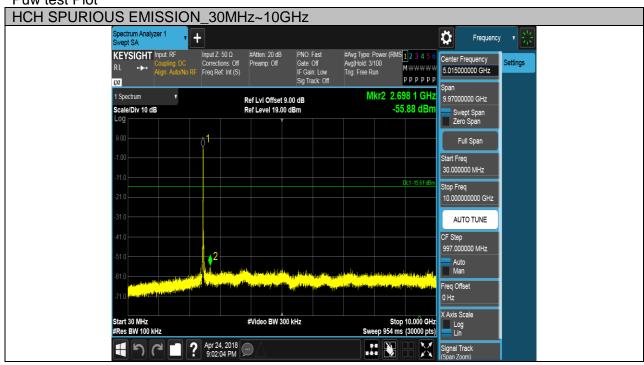


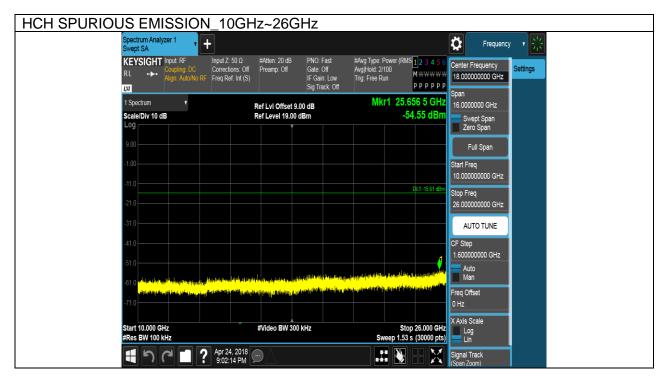

Test Mode	Channel	Verdict
11G	LCH	PASS




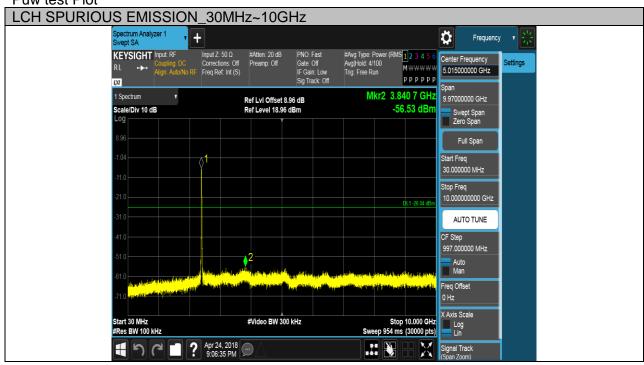


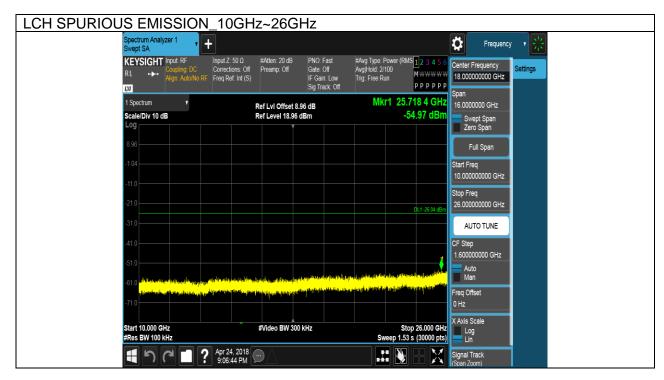

Test Mode	Channel	Verdict
11G	MCH	PASS




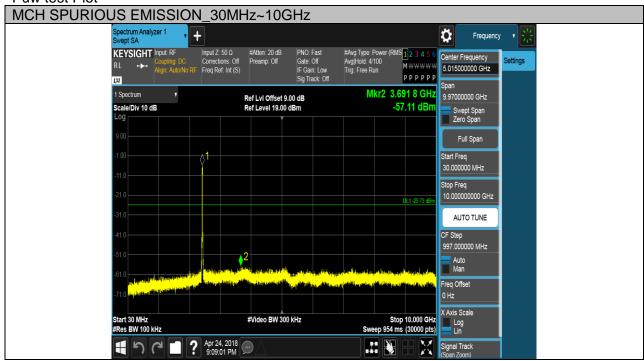


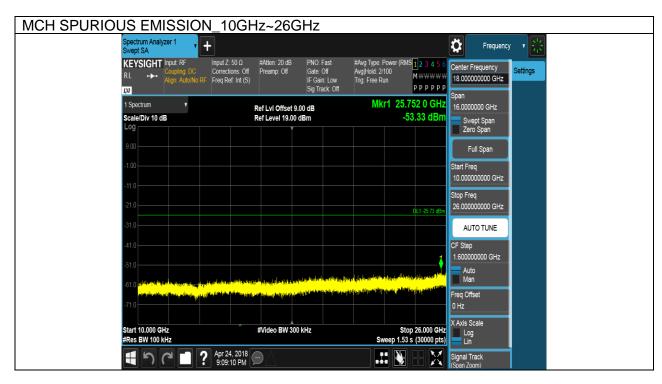


Test Mode	Channel	Verdict
11G	HCH	PASS




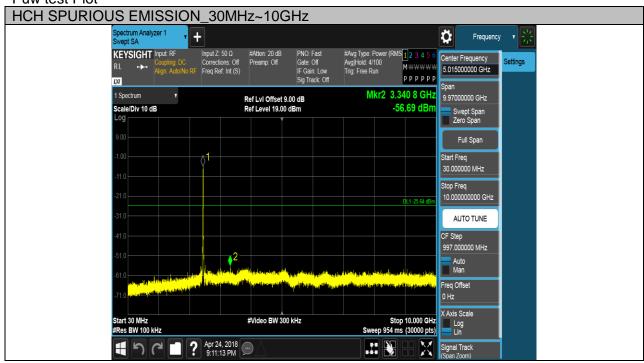


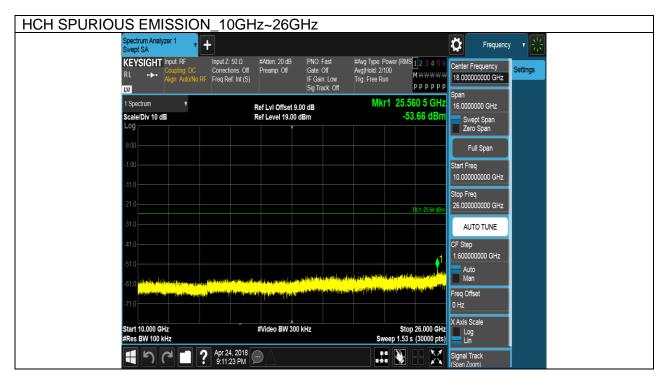

Test Mode	Channel	Verdict
11NSISO20	LCH	PASS

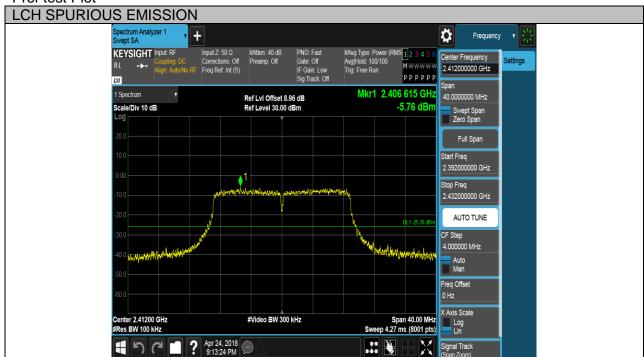


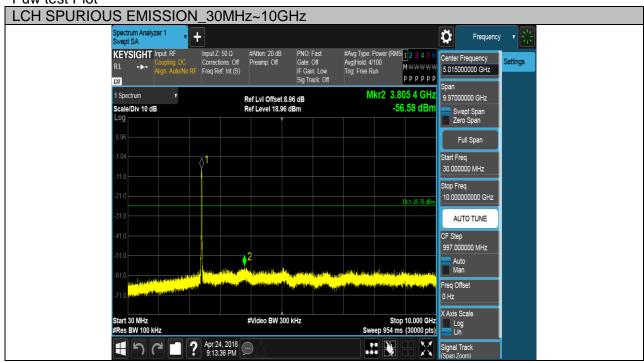


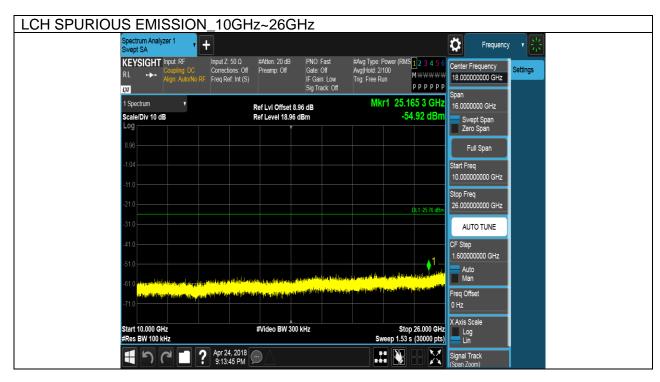

Test Mode	Channel	Verdict
11NSISO20	MCH	PASS




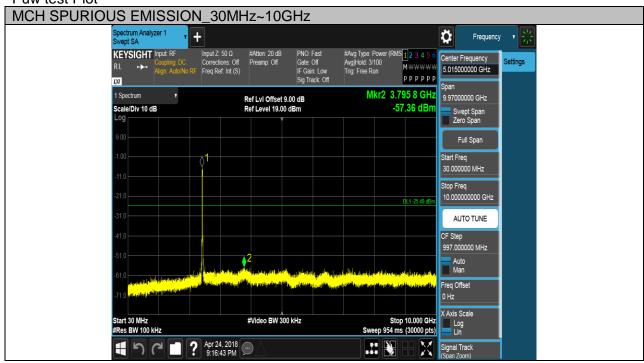


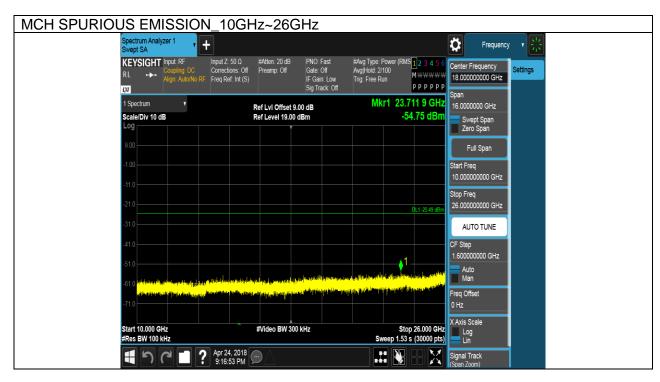

Test Mode	Channel	Verdict
11NSISO20	HCH	PASS




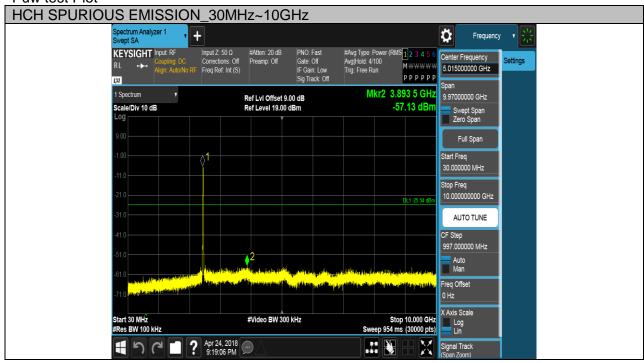


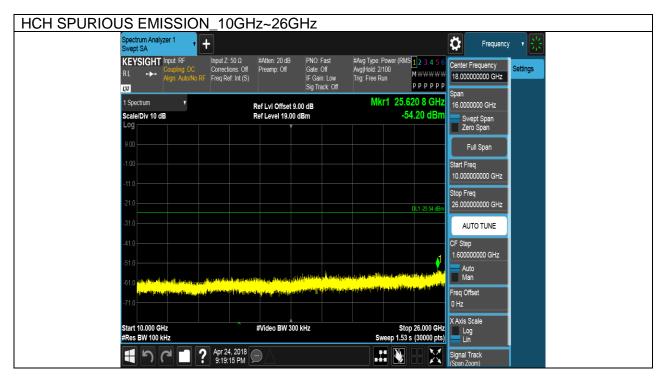


Test Mode	Channel	Verdict
11NSISO40	LCH	PASS




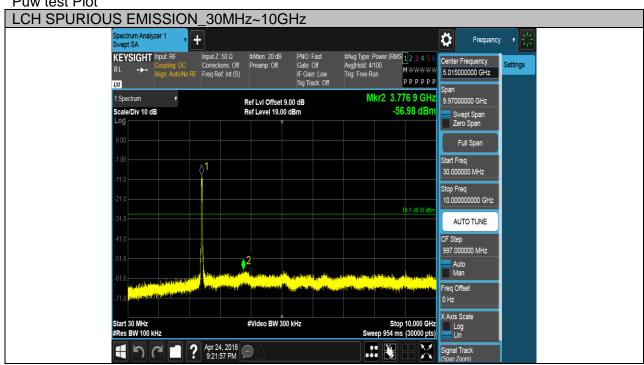


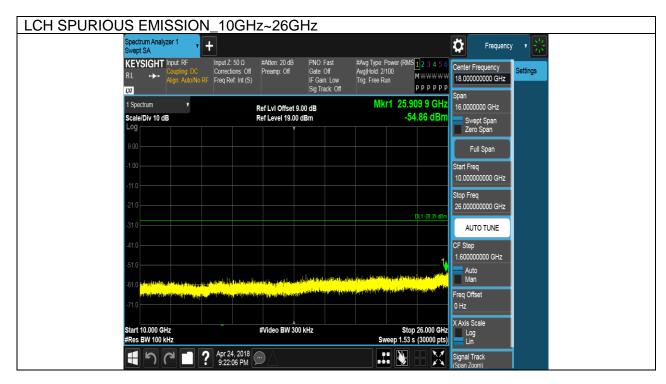


Test Mode	Channel	Verdict
11NSISO40	MCH	PASS

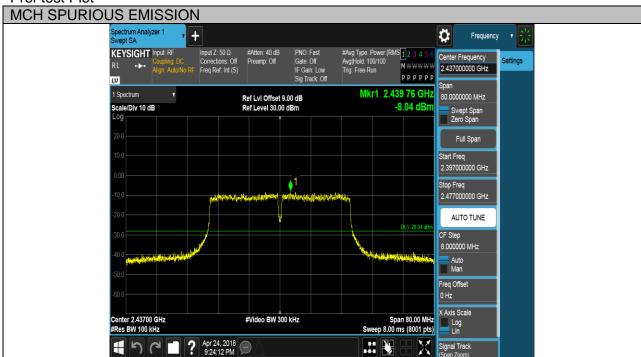


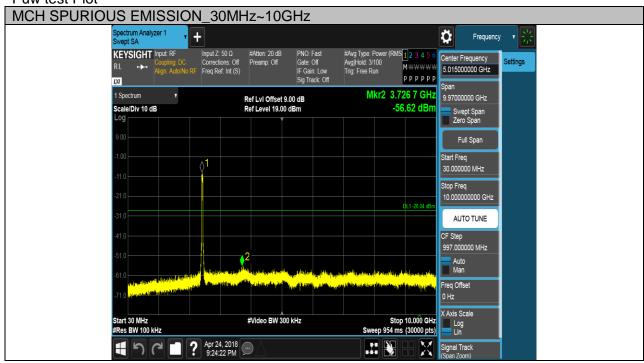


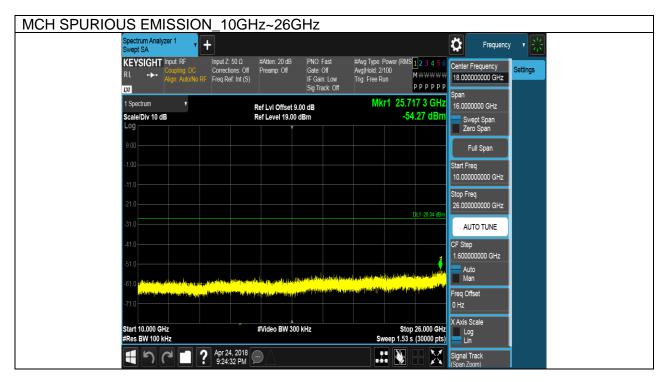

Test Mode	Channel	Verdict
11NSISO40	HCH	PASS

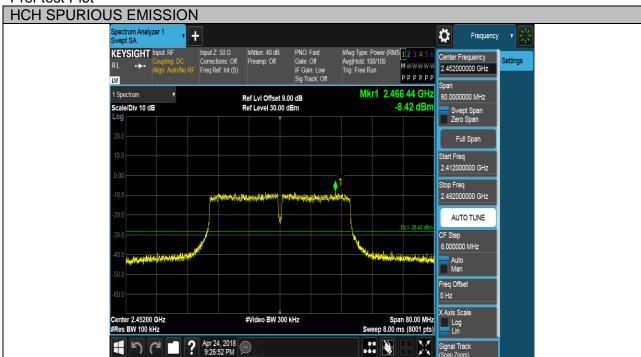

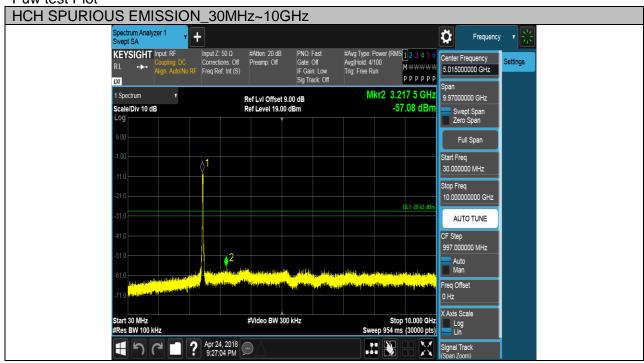

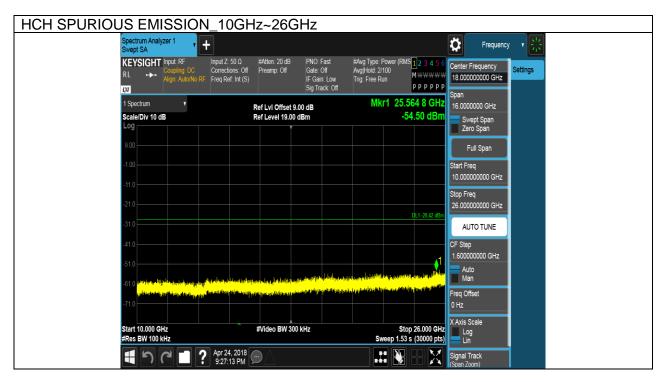

6.6. RADIATED TEST RESULTS

6.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
Frequency (Miriz)	Peak	Average
Above 1000	74	54


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: 1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. 2 Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

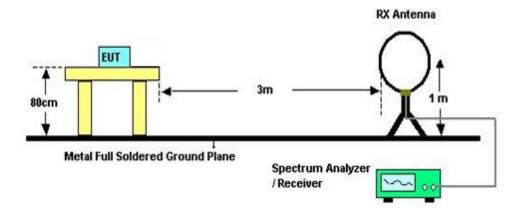


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
- 6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

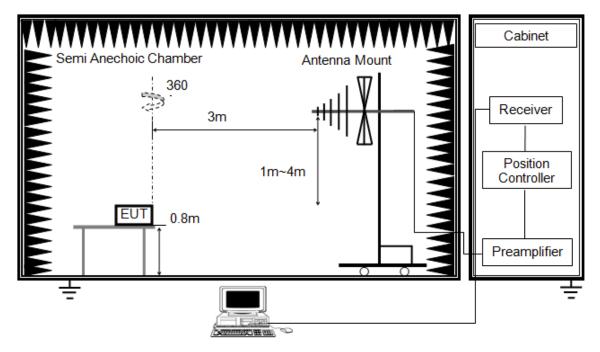


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

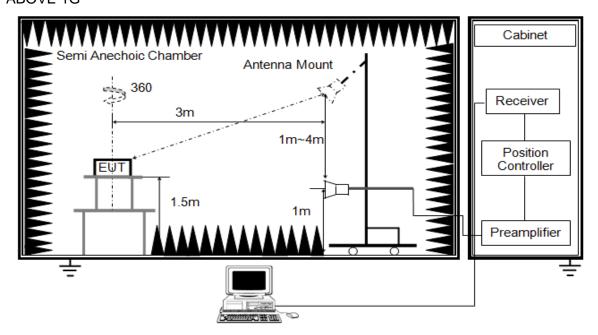


The setting of the spectrum analyser

RBW	1M
IV/BW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 1.5m above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set VBW ≤RBW/100, but not less than 10Hz video bandwidth with peak detector, max hold to be run for at least 50 traces for average measurements.
- 8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

X axis, Y axis, Z axis positions:



Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

DATE: June. 1, 2018


6.6.2. RESTRICTED BANDEDGE

Test Result Table

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
11G	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
11NSISO20	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	MCH <limit< td=""><td>PASS</td></limit<>		PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
11NSISO40	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS

Test Graphs:

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

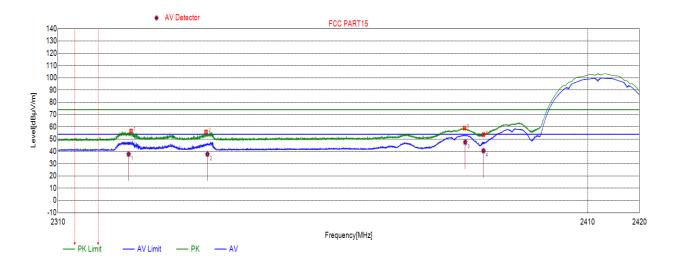


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2323.5424	56.63	74.00	-17.37	peak
	2323.5424	37.75	54.00	-16.25	average
2	2337.5358	55.91	74.00	-18.09	peak
	2337.5358	37.75	54.00	-16.25	average
3	2386.3806	58.99	74.00	-15.01	peak
	2386.3806	47.49	54.00	-6.51	average
4	2390.000	53.70	74.00	-20.30	peak
	2390.000	40.49	54.00	-13.51	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


DATE: June. 1, 2018

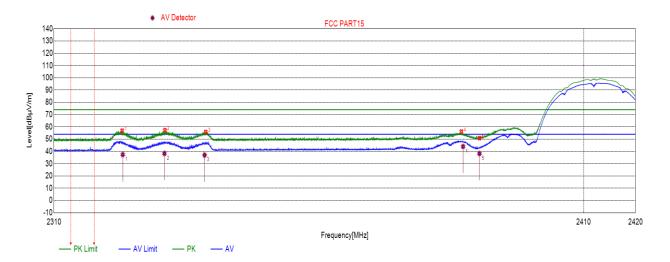

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2322.7532	56.89	74.00	-17.11	peak
	2322.7332	37.38	54.00	-16.62	average
2	2330.5125	57.26	74.00	-16.74	peak
	2330.5125	38.27	54.00	-15.73	average
3	2338.0152	55.78	74.00	-18.22	peak
	2336.0132	37.04	54.00	-16.96	average
4	2206 0655	56.17	74.00	-17.83	peak
	2386.8655	43.99	54.00	-10.01	average
5	2390.0000	50.82	74.00	-23.18	peak
	2390.0000	38.22	54.00	-15.78	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

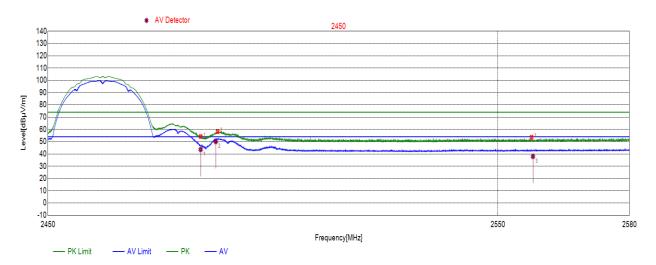


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	0400 5000	54.19	74.00	-19.81	peak
	2483.5000	43.58	54.00	-10.42	average
2	2486.8348	58.24	74.00	-15.76	peak
	2486.8348	49.99	54.00	-4.01	average
3	2557.9720	53.53	74.00	-20.47	peak
	2557.9720	37.91	54.00	-16.09	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


DATE: June. 1, 2018

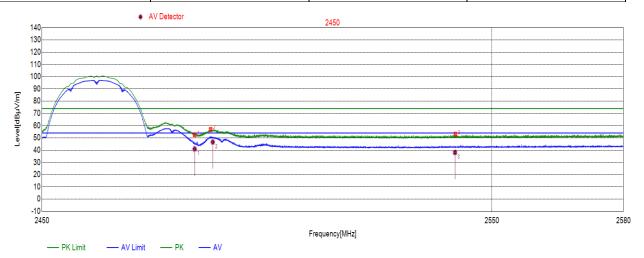

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	0400 5000	52.54	74.00	-21.46	peak
	2483.5000	40.97	54.00	-13.03	average
2	2487.5038	57.01	74.00	-16.99	peak
	2487.5038	46.61	54.00	-7.39	average
3	2541.6591	53.13	74.00	-20.87	peak
	2541.0591	38.05	54.00	-15.95	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

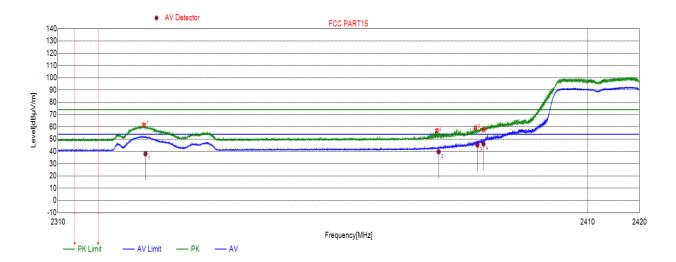

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2326.2352	61.55	74.00	-12.45	peak
	2320.2332	37.98	54.00	-16.02	average
2	2381.4486	57.02	74.00	-16.98	peak
	2381.4486	39.70	54.00	-14.30	average
3	2388.8375	59.31	74.00	-14.69	peak
	2300.03/3	45.17	54.00	-8.83	average
4	2390.0000	57.67	74.00	-16.33	peak
	2390.0000	46.01	54.00	-7.99	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

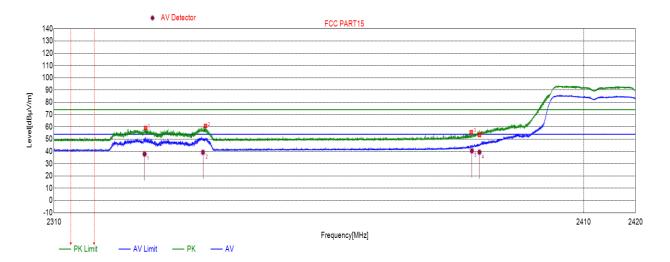

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2226 0101	59.05	74.00	-14.95	peak
	2326.8181	37.86	54.00	-16.14	average
2	2227 7007	60.74	74.00	-13.26	peak
	2337.7087	39.26	54.00	-14.74	average
3	2388.5498	55.64	74.00	-18.36	peak
	2300.5490	40.48	54.00	-13.52	average
4	2390.0000	53.41	74.00	-20.59	peak
	2390.0000	39.35	54.00	-14.65	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

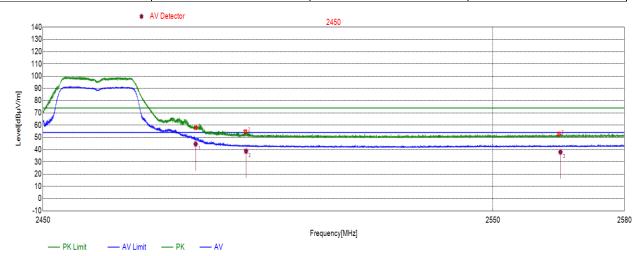


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	57.97	74.00	-16.03	peak
	2403.3000	44.62	54.00	-9.38	average
2	2494.6496	54.70	74.00	-19.30	peak
	2494.0490	38.71	54.00	-15.29	average
3	2565.3756	52.82	74.00	-21.18	peak
	2505.5750	38.01	54.00	-15.99	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Mode Channel Pola		Verdict
11G	HCH	Vertical	PASS


DATE: June. 1, 2018

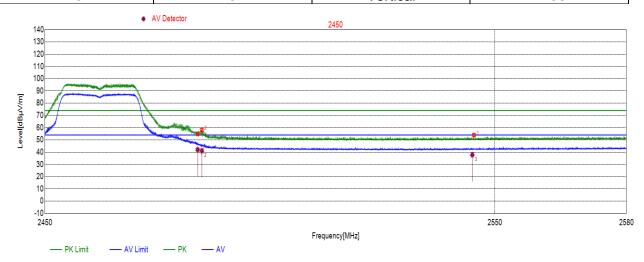

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	54.86	74.00	-19.14	peak
	2403.3000	42.03	54.00	-11.97	average
2	2484.4419	58.20	74.00	-15.80	peak
	2404.4419	41.18	54.00	-12.82	average
3	2544.8987	53.96	74.00	-20.04	peak
	2344.0907	37.72	54.00	-16.28	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11NSISO20	LCH	Horizontal	PASS

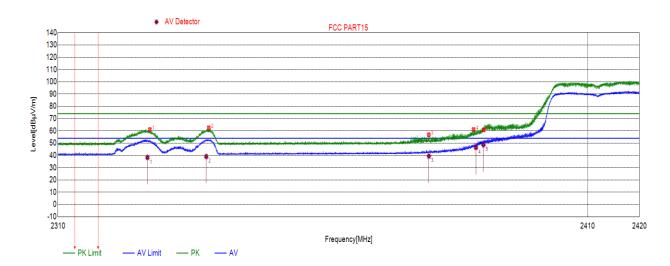


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2326.6031	61.11	74.00	-12.89	peak
	2320.0031	38.30	54.00	-15.70	average
2	2337.5723	62.51	74.00	-11.49	peak
	2337.3723	39.05	54.00	-14.95	average
3	2379.5884	56.91	74.00	-17.09	peak
	23/9.3004	39.46	54.00	-14.54	average
4	2388.5694	61.15	74.00	-12.85	peak
	2300.3094	46.44	54.00	-7.56	average
5	2390.0000	60.77	74.00	-13.23	peak
	2390.0000	48.57	54.00	-5.43	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Channel	Polarization	Verdict
11NSISO20	LCH	Vertical	PASS


DATE: June. 1, 2018

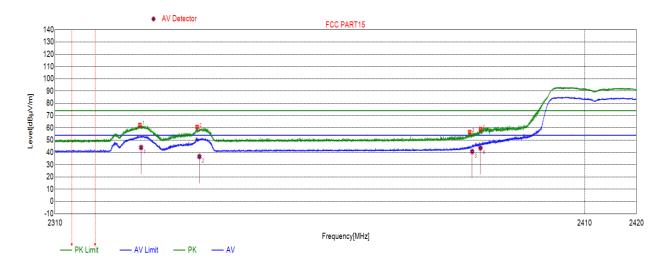

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2325.9736	62.30	74.00	-11.70	peak
	2325.9736	43.98	54.00	-10.02	average
2	2336.8509	60.74	74.00	-13.26	peak
	2336.8509	36.59	54.00	-17.41	average
3	2388.4146	56.61	74.00	-17.39	peak
		40.71	54.00	-13.29	average
4	2390.0000	59.07	74.00	-14.93	peak
	2390.0000	43.64	54.00	-10.36	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11NSISO20	HCH	Horizontal	PASS

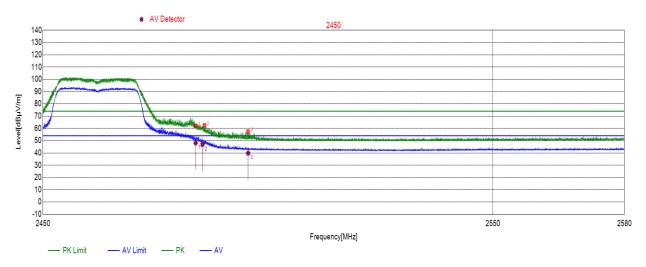

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	61.92	74.00	-12.08	peak
	2403.3000	48.17	54.00	-5.83	average
2	2484.9929	62.41	74.00	-11.59	peak
	2464.9929	46.92	54.00	-7.08	average
3	2495.1117	57.34	74.00	-16.66	peak
	2495.1117	39.78	54.00	-14.22	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Channel	Polarization	Verdict
11NSISO20	HCH	Vertical	PASS


DATE: June. 1, 2018



No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	56.17	74.00	-17.83	peak
	2463.3000	42.33	54.00	-11.67	average
2	2484.6139	58.87	74.00	-15.13	peak
	2404.0139	41.85	54.00	-12.15	average
3	2538.1318	53.05	74.00	-20.95	peak
	2000.1010	37.51	54.00	-16.49	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11NSISO40	LCH	Horizontal	PASS

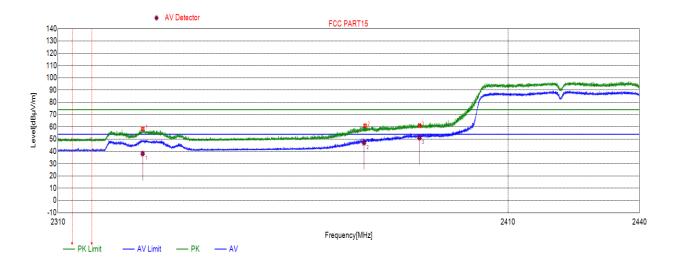

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2328.5052	58.35	74.00	-15.65	peak
	2320.3032	38.13	54.00	-15.87	average
2	2377.5443	60.94	74.00	-13.06	peak
	2377.3443	46.99	54.00	-7.01	average
3	2390.0000	61.07	74.00	-12.93	peak
	2390.0000	51.17	54.00	-2.83	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11NSISO40	LCH	Vertical	PASS

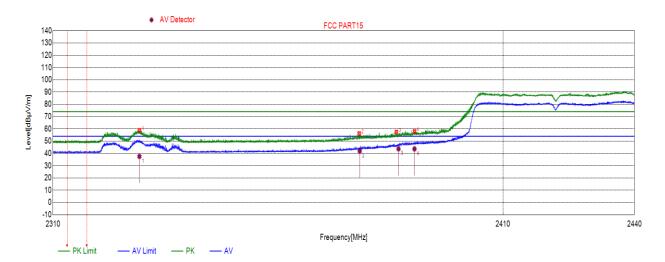

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2328.8822	58.84	74.00	-15.16	peak
	2320.0022	37.57	54.00	-16.43	average
2	2377.7024	56.24	74.00	-17.76	peak
	23/1./024	41.83	54.00	-12.17	average
3	2386.3994	57.46	74.00	-16.54	peak
		43.75	54.00	-10.25	average
4	2390.0000	57.96	74.00	-16.04	peak
	2390.0000	43.66	54.00	-10.34	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11NSISO40	HCH	Horizontal	PASS

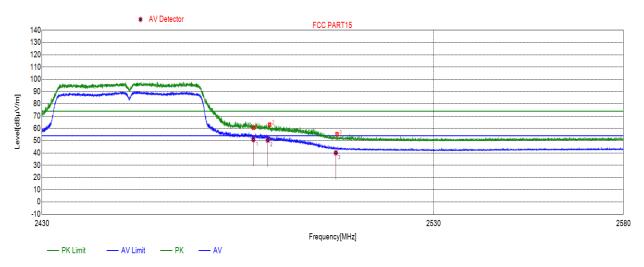


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	60.58	74.00	-13.42	peak
	2403.3000	50.87	54.00	-3.13	average
2	2497 1090	63.06	74.00	-10.94	peak
	2487.1989	50.43	54.00	-3.57	average
3	2504 7065	55.28	74.00	-18.72	peak
	2504.7065	40.06	54.00	-13.94	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788435051-1 FCC ID: ZZ2-AMC047

Test Mode	Channel	Polarization	Verdict	
11NSISO40	HCH	Vertical	PASS	

DATE: June. 1, 2018

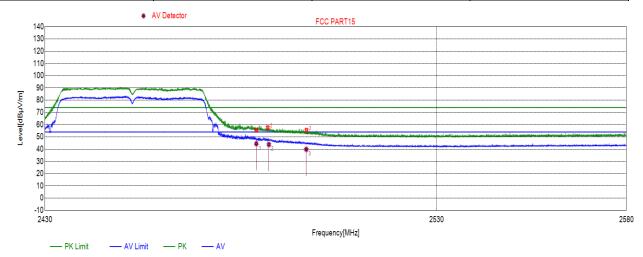

No.	Frequency	Result	Limit	Margin	Remark	
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)		
1	2483.5000	55.56	74.00	-18.44	peak	
	2403.3000	44.41	54.00	-9.59	average	
2	2486.7129	57.57	74.00	-16.43	peak	
	2400.7129	43.80	54.00	-10.20	average	
3	2496.2957	55.47	74.00	-18.53	peak	
	2490.2937	39.83	54.00	-14.17	average	


- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

6.6.3. SPURIOUS EMISSIONS

Part I: 1GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict	
11N40	LCH	Horizontal	PASS	

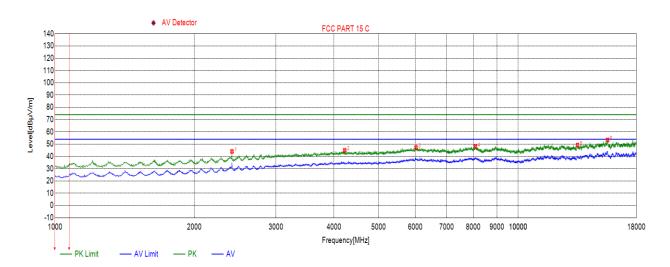

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	2411.1411	44.10	74.00	-29.90	54.00	-9.9	peak
2	4223.5224	44.93	74.00	-29.07	54.00	-9.07	peak
3	6018.9019	47.32	74.00	-26.68	54.00	-6.68	peak
4	8086.3086	48.07	74.00	-25.93	54.00	-5.93	peak
5	13435.0435	49.20	74.00	-24.80	54.00	-4.8	peak
6	15599.3599	53.44	74.00	-20.56	54.00	-0.56	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit. 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.