



Canada

RF Test Report

As per

RSS-247 Issue 2:2017 & FCC Part 15 Subpart 15.247

Unlicensed Intentional Radiators

on the

**Precision 3 Powermeter
PML300
(BLE Transmitter)**

Issued by:

TÜV SÜD Canada Inc.
11 Gordon Collins Dr,
Gormley, ON, L0H 1G0
Canada
Ph: (905) 883-7255

Testing produced for



See Appendix A for full client &
EUT details.

Prepared by:

Amir Emami,
Project Engineer

Reviewed by:

Min Xie,
Sr. Project Engineer

Innovation, Science and
Economic Development Canada

Registration #
6844A-3



Testing Laboratory
Certificate #2955.02



R-14023, G-20072
C-14498, T-20060



Registration #
CA6844

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Table of Contents

Table of Contents	2
Report Scope.....	3
Summary	4
Test Results Summary	5
Notes, Justifications, or Deviations	6
Sample Calculation(s)	6
Applicable Standards, Specifications and Methods.....	7
Document Revision Status	8
Definitions and Acronyms	9
Testing Facility	10
Calibrations and Accreditations.....	10
Testing Environmental Conditions and Dates	11
Detailed Test Results Section	12
6dB Bandwidth of Digitally Modulated Systems	13
Maximum Peak Envelope Conducted Power	17
Antenna Spurious Conducted Emissions (-20 dBc Requirement)	22
Transmitter Spurious Radiated Emissions	32
Power Spectral Density	54
Appendix A – EUT Summary.....	59
Appendix B – EUT and Test Setup Photos.....	61

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Report Scope

This report addresses the EMC verification testing and test results of the **Precision 3 Powermeter**, Model: **PML300** and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 2:2017

FCC Part 15 Subpart C 15.247

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Summary

The results contained in this report relate only to the item(s) tested.

EUT:	Precision 3 Powermeter – PML300
FCC Certification #, FCC ID:	ZZNPM300
ISED Certification #, IC:	9896A-PM300
EUT passed all tests performed	Yes
Tests conducted by	Amir Emami
Report reviewed by	Min Xie

For testing dates, see "Testing Environmental Conditions and Dates".

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN (Table 6)	Restricted Bands for Intentional Operation	QuasiPeak Average	Pass
FCC 15.207 RSS-GEN (Table 3)	Power Line Conducted Emissions	QuasiPeak Average	N/A See Justification
FCC 15.209 RSS-GEN (Table 4)	Spurious Radiated Emissions	QuasiPeak Average	Pass
FCC 15.247(a)2 RSS-247 5.2(a)	6 dB Bandwidth	> 500 kHz	Pass
FCC 15.247(b)2 RSS-247 5.4(d)	Max Output Power	< 1 Watt	Pass
FCC 15.247(b)4 RSS-247 5.4(d)	Antenna Gain	< 6 dBi	Pass See Justification
FCC 15.247(d) RSS-247 5.5	Antenna Conducted Spurious	< 20 dBc	Pass
FCC 15.247(e) RSS-247 5.2(b)	Spectral Density	< 8 dBm (3 kHz BW)	Pass
Overall Result			Pass

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Notes, Justifications, or Deviations

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.4(d)), the unit uses a ceramic chip antenna (-2.0 dBi gain - Johanson 2450AT42E0100) with less than 6 dBi gain.

For the Restricted Bands of operation, the EUT is designed to only operate between 2400 – 2483.5 MHz.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it. However, the 15.247 (d) requirement of power density were met and are detailed later in this test report.

The EUT was mounted in three orthogonal axes. Worst case results were obtained with the EUT in the X-axis. Worst case results are presented. See Appendix B for axis details.

Power line conducted emissions was not applicable since the EUT is a coin cell battery operated device. All tests were performed with a new battery.

Sample Calculation(s)

Radiated Emission Test

E-Field Level = Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain

E-Field Level = $50\text{dB}\mu\text{V} + 10\text{dB/m} + 2\text{dB} - 20\text{dB}$

E-Field Level = $42\text{dB}\mu\text{V/m}$

Margin = Limit – E-Field Level

Margin = $50\text{dB}\mu\text{V/m} - 42\text{dB}\mu\text{V/m}$

Margin = 8.0 dB (pass)

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Applicable Standards, Specifications and Methods

ANSI C63.4:2014 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10:2013 American National Standard For Testing Unlicensed Wireless Devices

CFR 47 FCC 15 Code of Federal Regulations – Radio Frequency Devices, Subpart C Intentional Radiators

FCC KDB 558074: FCC KDB 558074 Digital Transmission Systems, measurements 2019 and procedures

FCC KDB 447498: RF exposure procedures and equipment authorization policies 2015 for mobile and portable devices

ICES-003 Issue 7 Digital Apparatus - Spectrum Management and 2020 Telecommunications Policy Interference-Causing Equipment Standard

RSS-GEN Issue 5 General Requirements and Information for the Certification of 2019 Radio Apparatus

RSS-247 Issue 2:2017 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

ISO 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Document Revision Status

Revision	Date	Description	Initials
000	November 26, 2021	Initial Release	AE
-	-	-	-

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

DTS – Digital Transmission System

LISN – Line Impedance Stabilization Network

NCR – No Calibration Required

NSA – Normalized Site Attenuation

N/A – Not Applicable

RF – Radio Frequency

AE – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

Antenna Port – Port, other than a broadcast receiver tuner port, for connection of an antenna used for intentional transmission and/or reception of radiated RF energy.

BW – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

EMI – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

EUT – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

ITE – Information Technology Equipment. Has a primary function of entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada testing lab near Toronto, Ontario. The testing lab has calibrated 3m semi-anechoic chambers which allow measurements on a EUT that has a maximum width or length of up to 2m and a height of up to 3m. The testing lab also has a calibrated 10m Open Area Test Site (OATS). The chambers are equipped with a turntable that is capable of testing devices up to 5000lb in weight and are equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. This facility is capable of testing products that are rated for single phase or 3-phase AC input and DC capability is also available. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the vertical ground plane if applicable.

Calibrations and Accreditations

The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Innovation, Science and Economic Development Canada (ISED, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-14023, G-20072, C-14498, and T-20060). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc. is accredited to ISO 17025 by A2LA with Testing Certificate #2955.02. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or biennial basis as listed for each respective test.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Testing Environmental Conditions and Dates

Following environmental conditions were recorded in the facility during time of testing

Date	Test	Initials	Temperature (°C)	Humidity (%)	Pressure (kPa)
September 23 to 28, 2021	Radiated Emissions	AE	21 – 23	38 – 56	100 – 102
October 13, 2021	Antenna Conducted Emissions	AE	23.8	59.4	101.4

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Detailed Test Results Section

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

6dB Bandwidth of Digitally Modulated Systems

Purpose

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

Limits and Method

The limit is as specified in FCC Part 15.247(a)2 and RSS-247 5.2(a).

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. This should be measured with a 100 kHz RBW and a 300 kHz VBW.

The method is given in FCC KDB 558074 Section 8.1 and ANSI C63.10.

Results

The EUT passed.

The minimum 6 dB Bandwidth measured was 534 kHz


The maximum 99% Occupied Bandwidth was 1050 kHz.

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.538	1.05
Mid	2440	0.538	1.05
High	2480	0.534	1.05


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Graphs

The graphs shown below show the OBW of the device during the conducted measurement operation of the EUT. This is measured by a max hold on the spectrum analyzer.

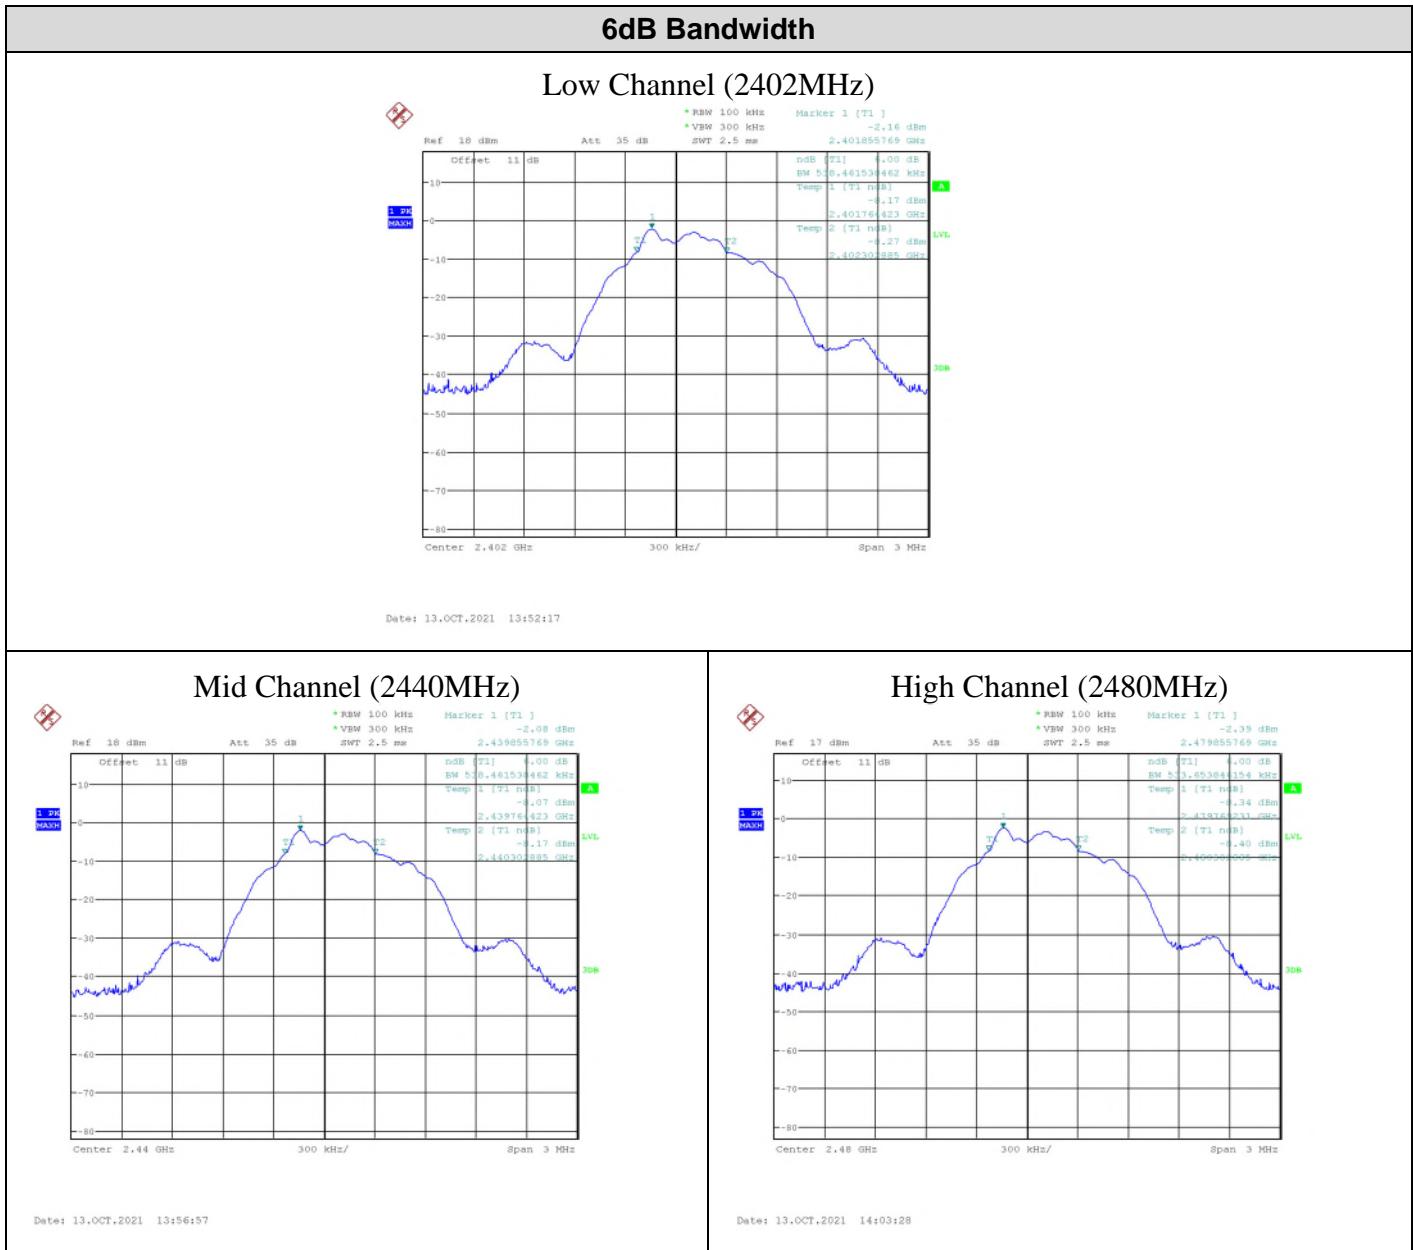

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247

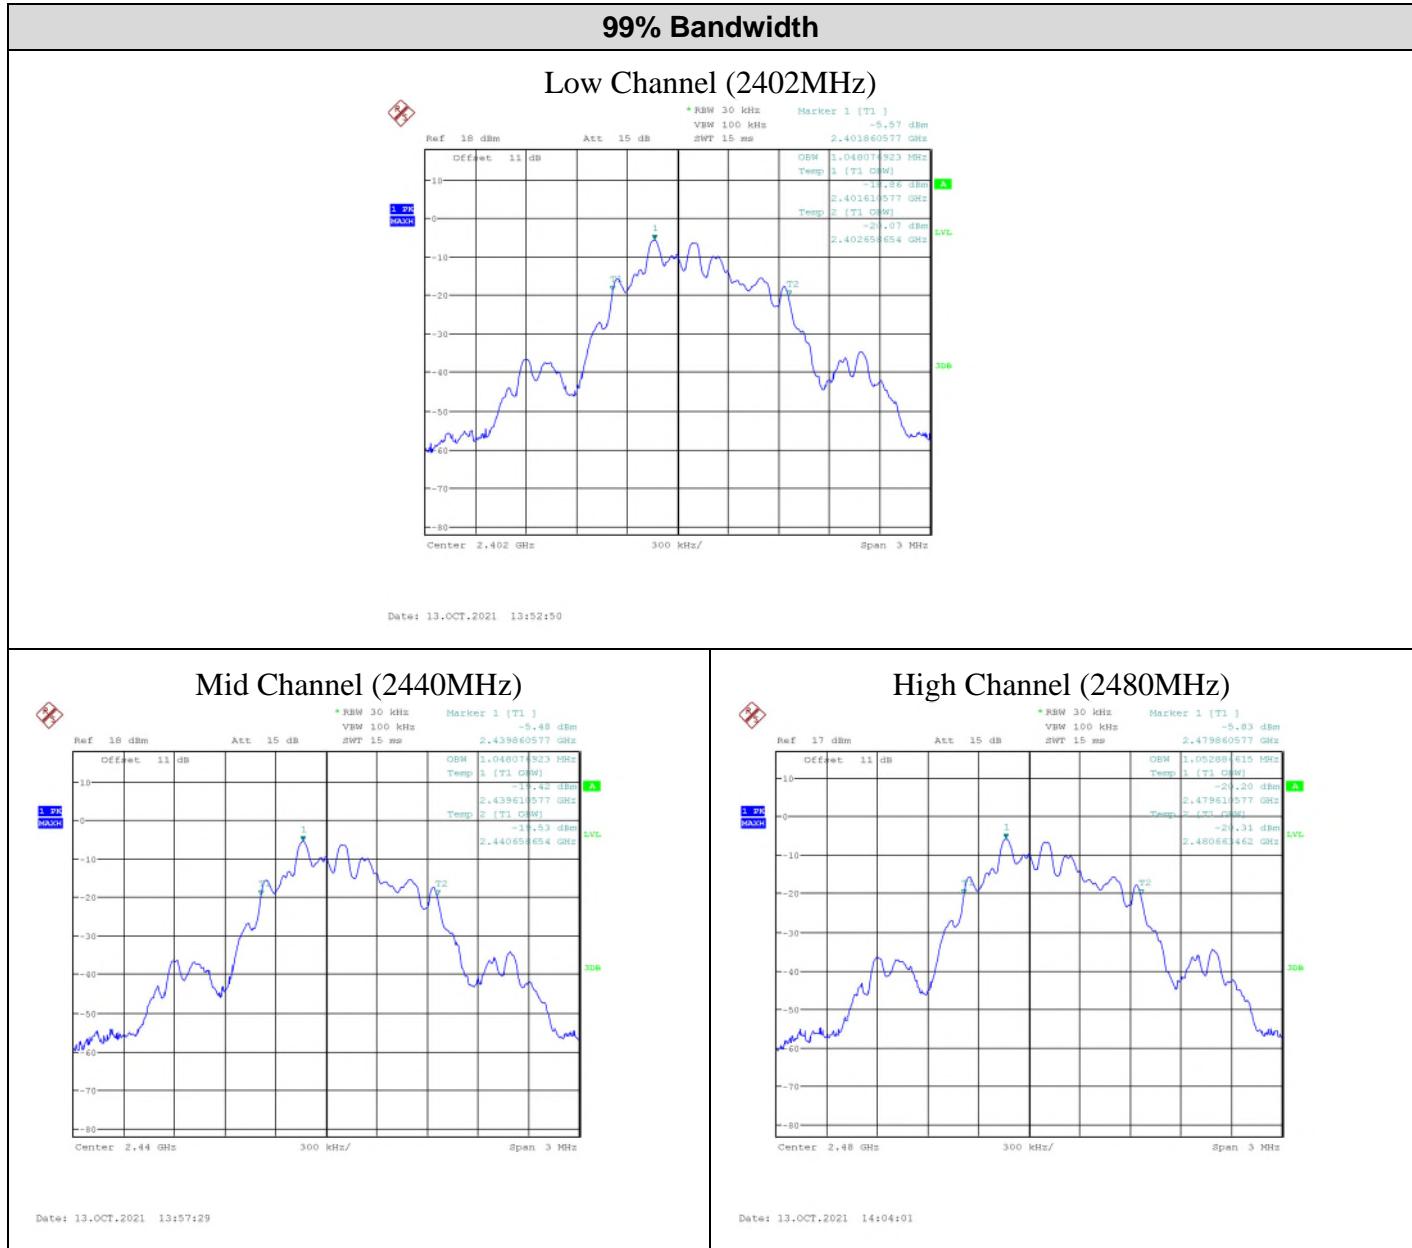

Note: See 'Appendix B – EUT & Test Setup Photos' for photos showing the test set-up.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Signal Analyzer	FSQ 26	Rohde & Schwarz	Oct. 25, 2019	Oct. 25, 2021	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Maximum Peak Envelope Conducted Power

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, the maximum power does not exceed an amount which may create an excessive power level.

Limits and Method

The limits are defined in FCC Part 15.247(b) and RSS-247 5.4(d).

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt (30 dBm).

The method is given in FCC KDB 558074 Section 9.1.2 and ANSI C63.10.

Results

The EUT passed.


Channel	Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)
Low	2402	-1.76	0.67
Mid	2440	-1.70	0.68
High	2480	-2.03	0.63

Note: The external attenuator and cable loss are accounted for as reference offset in the spectrum analyzer


Graphs

The graphs shown below show the peak power output of the device during the conducted measurement operation of the EUT. The measurement RBW is \geq than the DTS bandwidth.


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

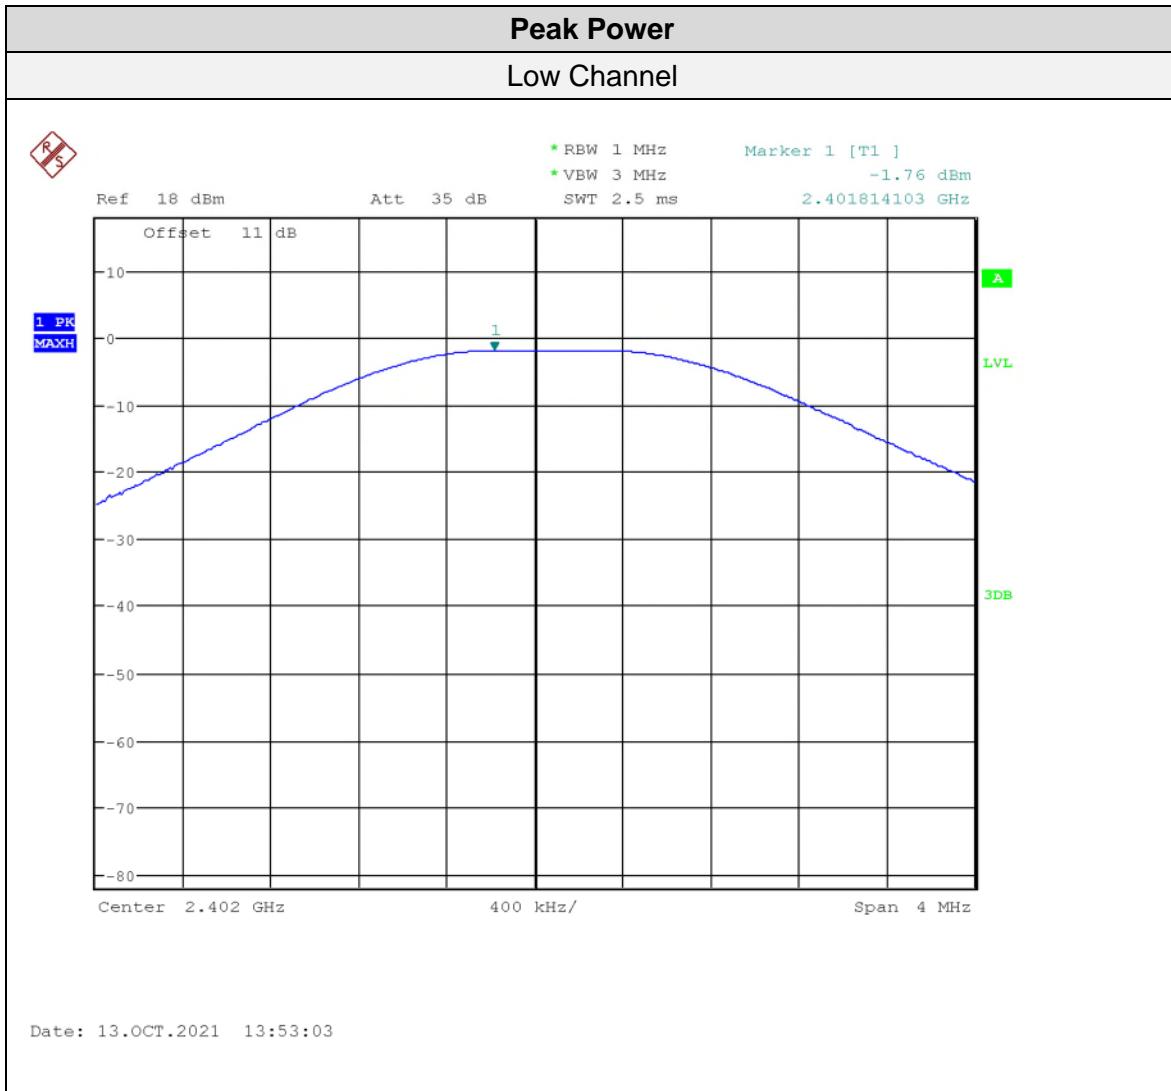

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

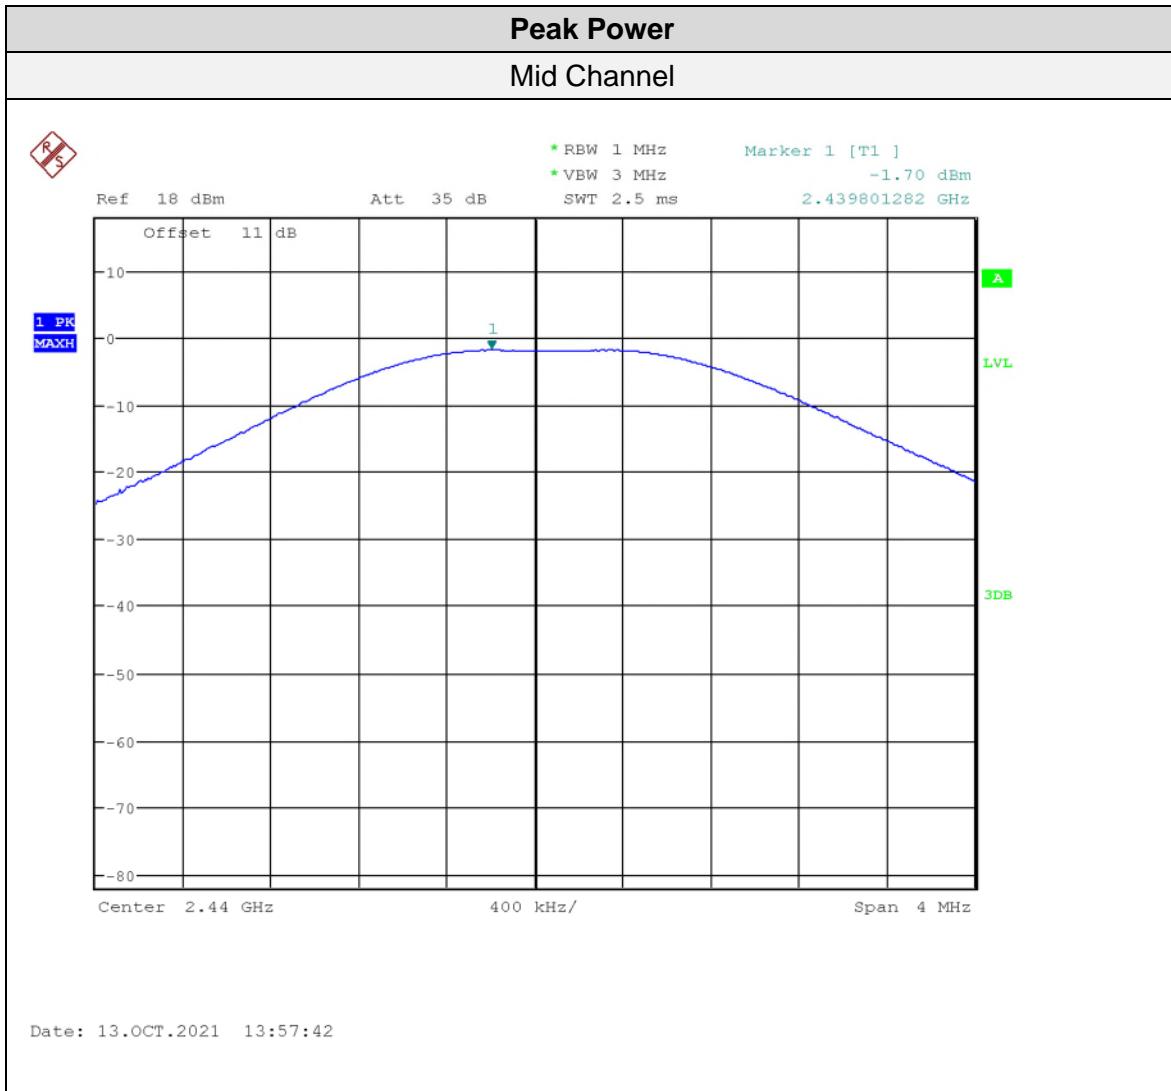

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

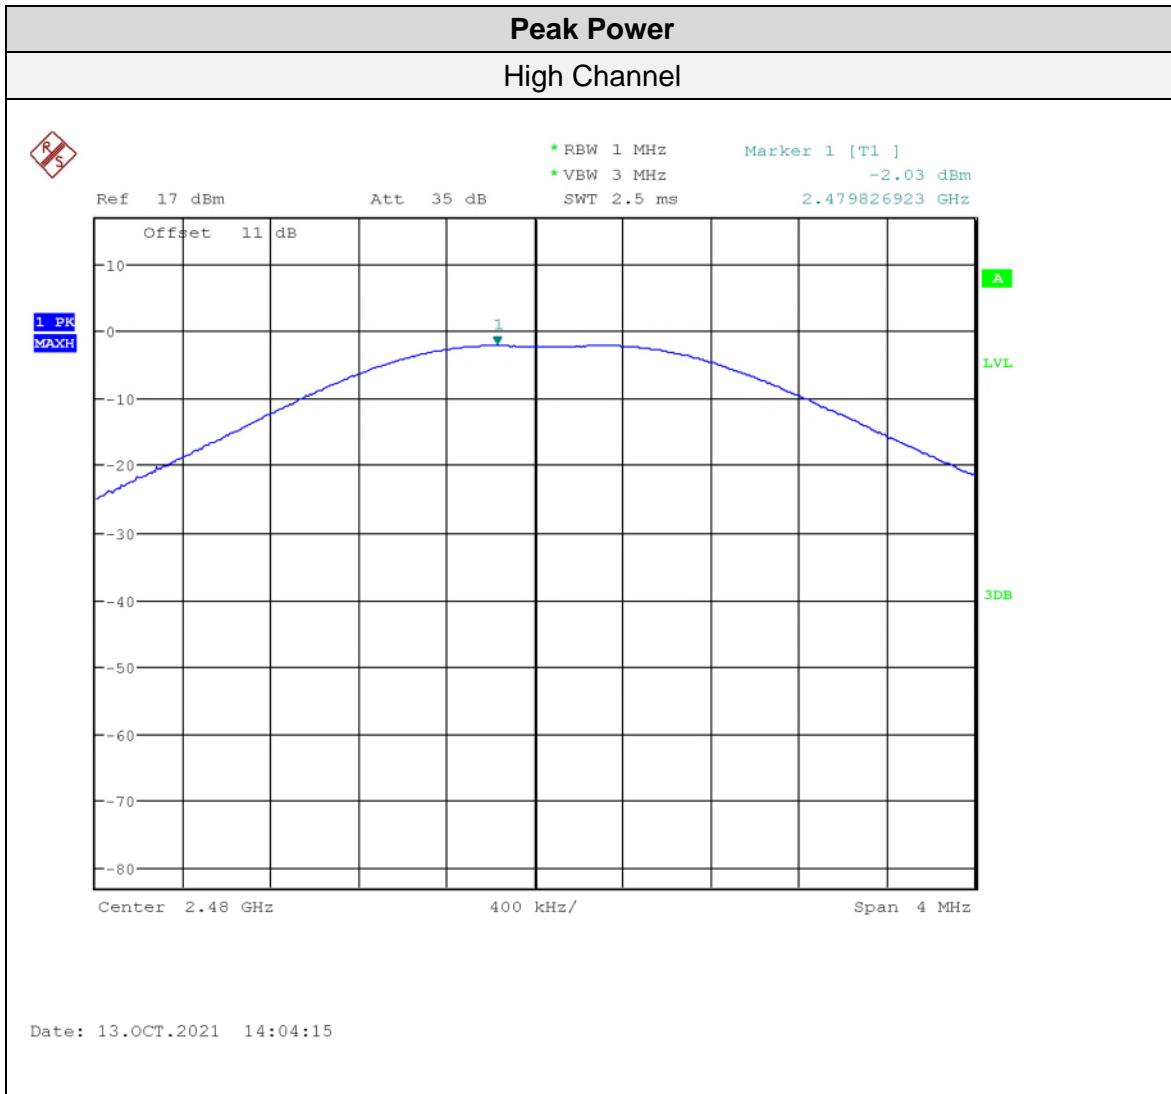

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Signal Analyzer	FSQ 26	Rohde & Schwarz	Oct. 25, 2019	Oct. 25, 2021	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Antenna Spurious Conducted Emissions (-20 dBc Requirement)

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

Limits and Method

The limits are defined in 15.247(d) and RSS-247 5.5. In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10th harmonic. This -20 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.

The method is given in FCC KDB 558074 Section 11 and ANSI C63.10


Results

The EUT passed. Low, middle and high bands were measured. The -20 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band and for the higher band edge at 2.4835 GHz in the high band.


Client	4iii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Graphs


The graphs shown below show the power output of the device during the conducted measurement operation of the EUT.

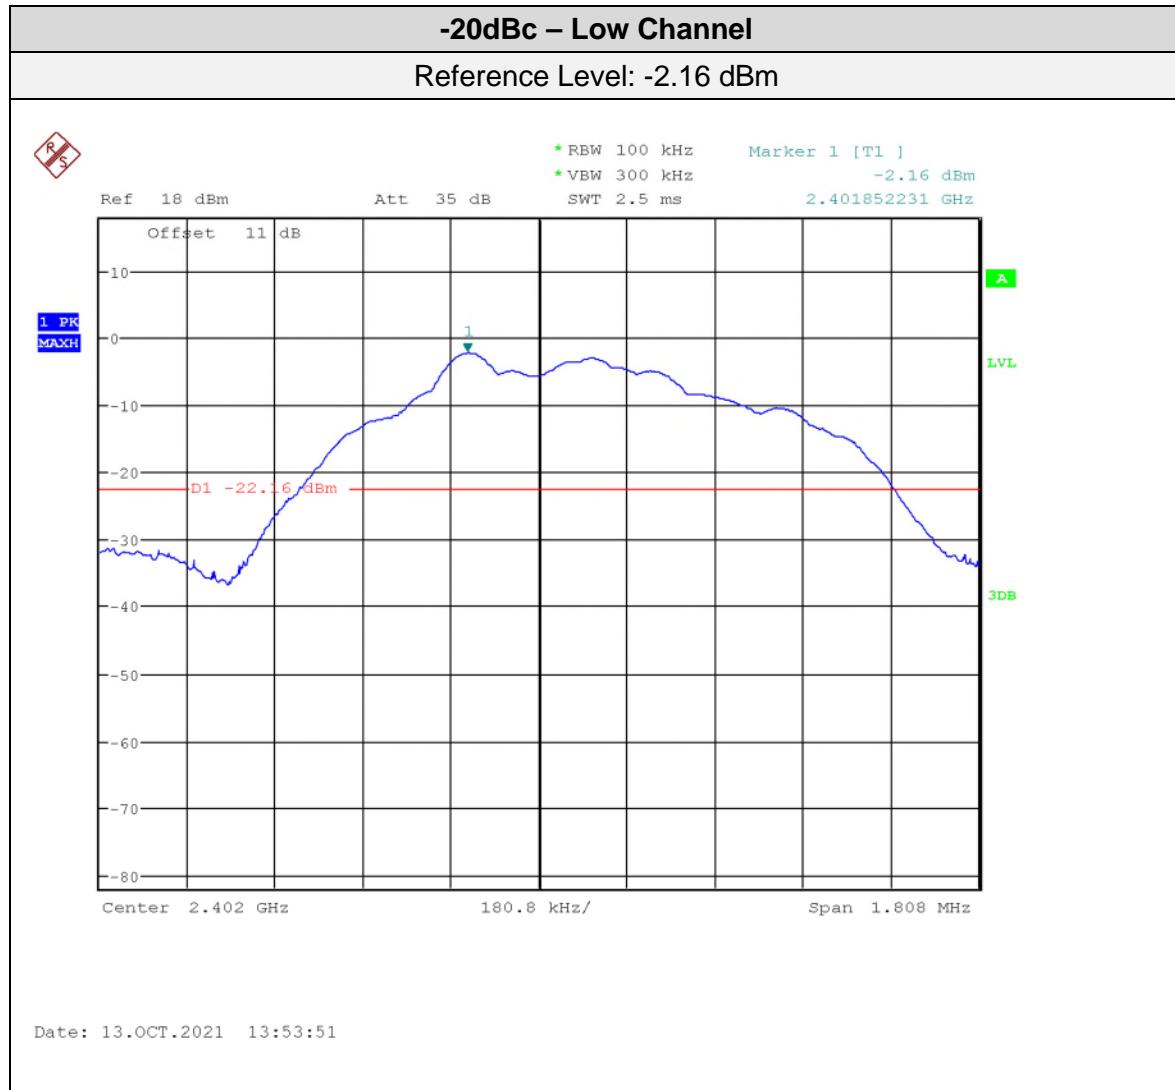


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

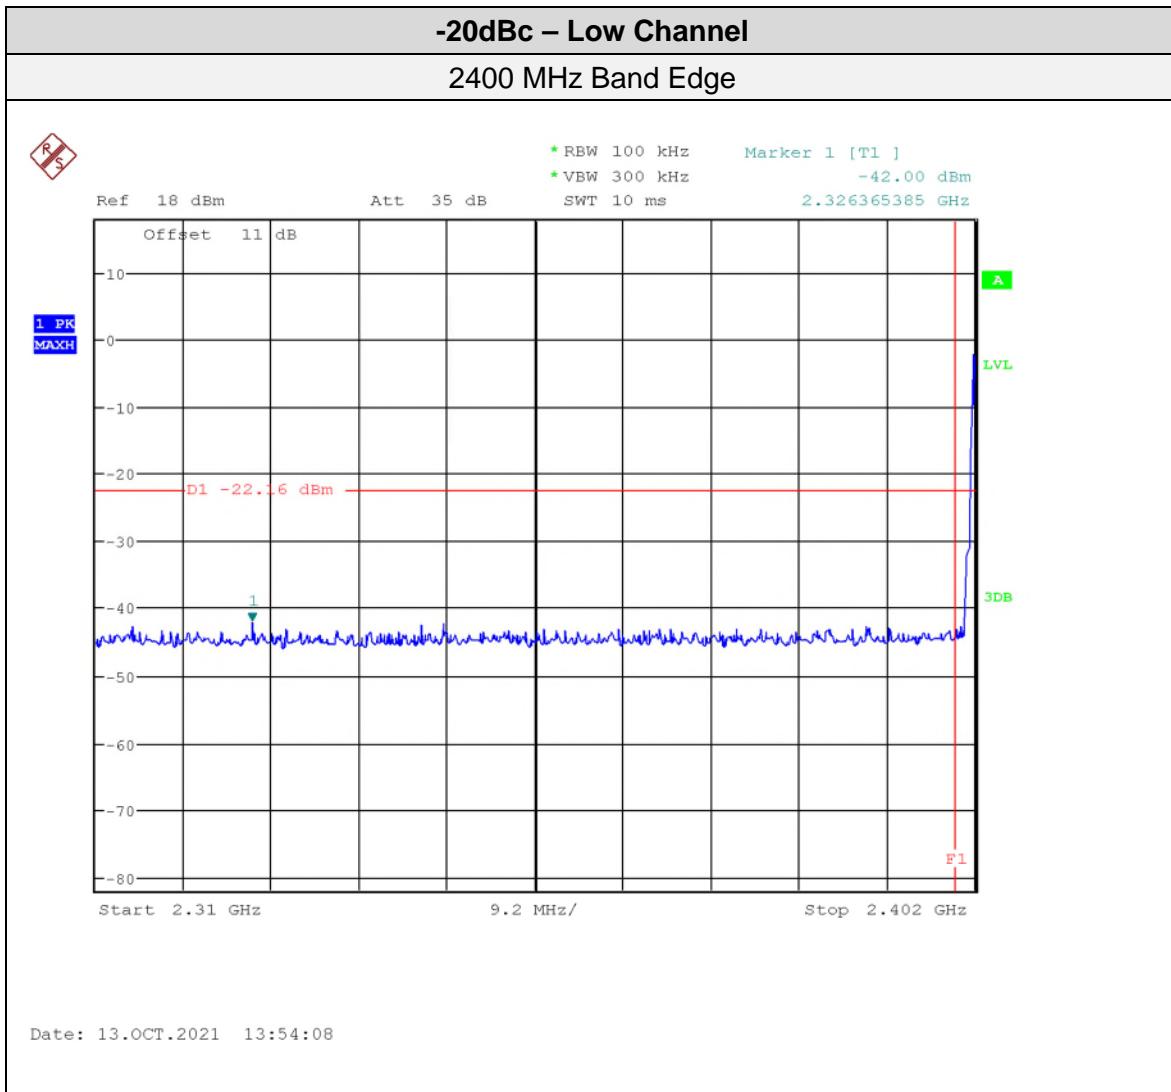


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

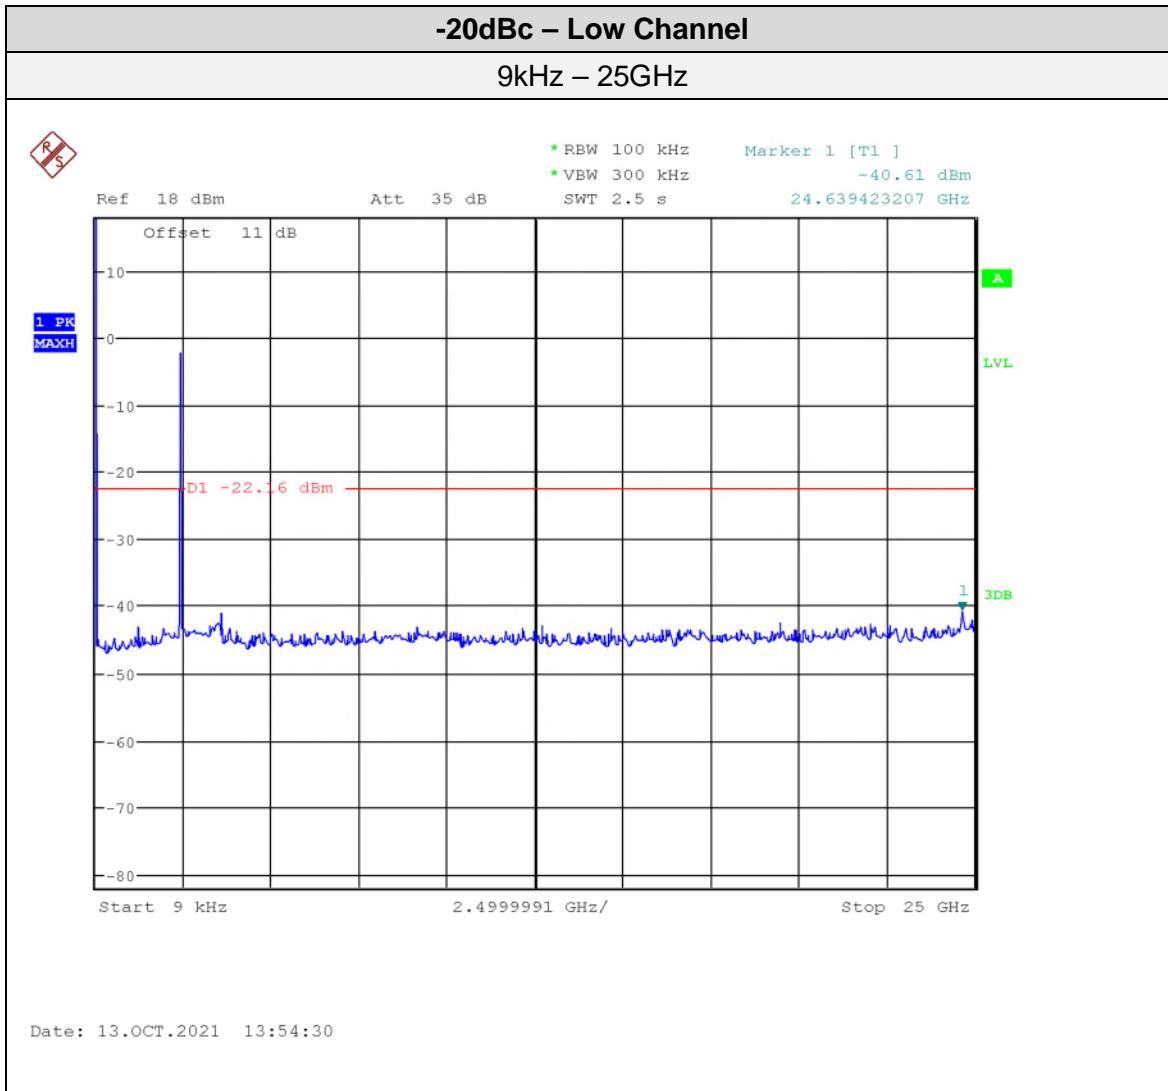


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

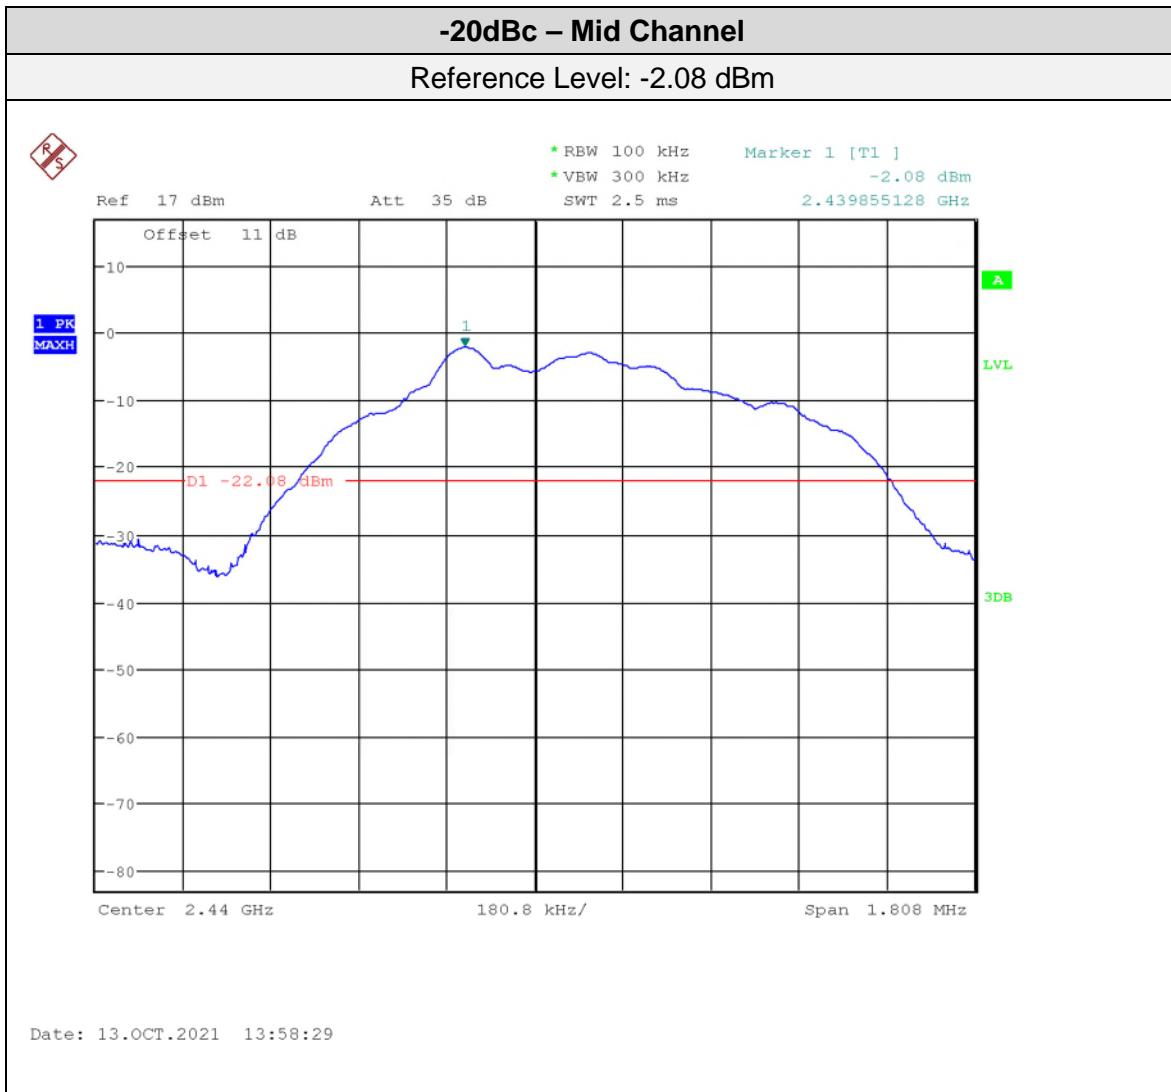


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

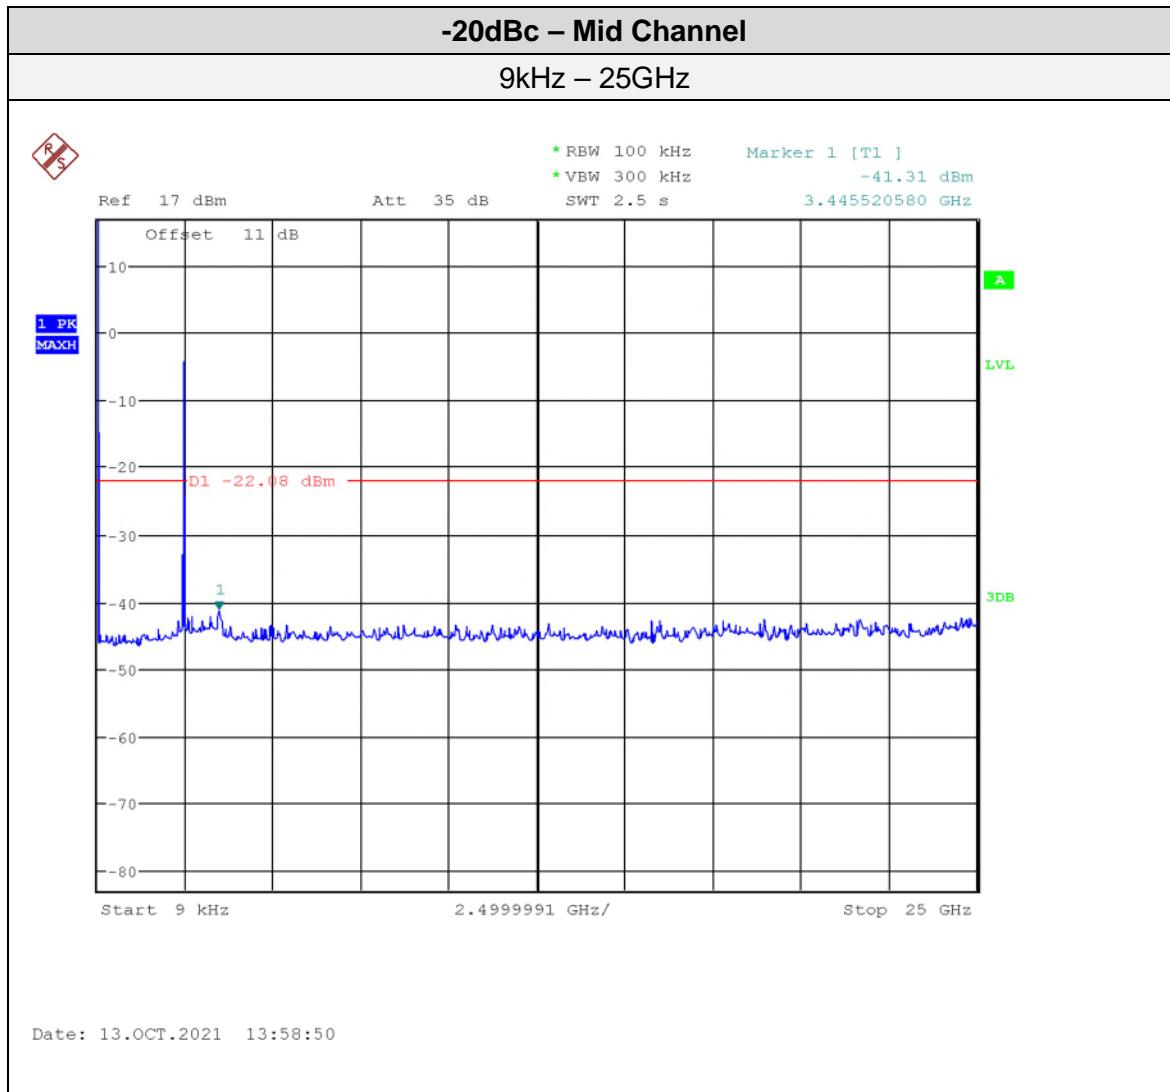


Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247

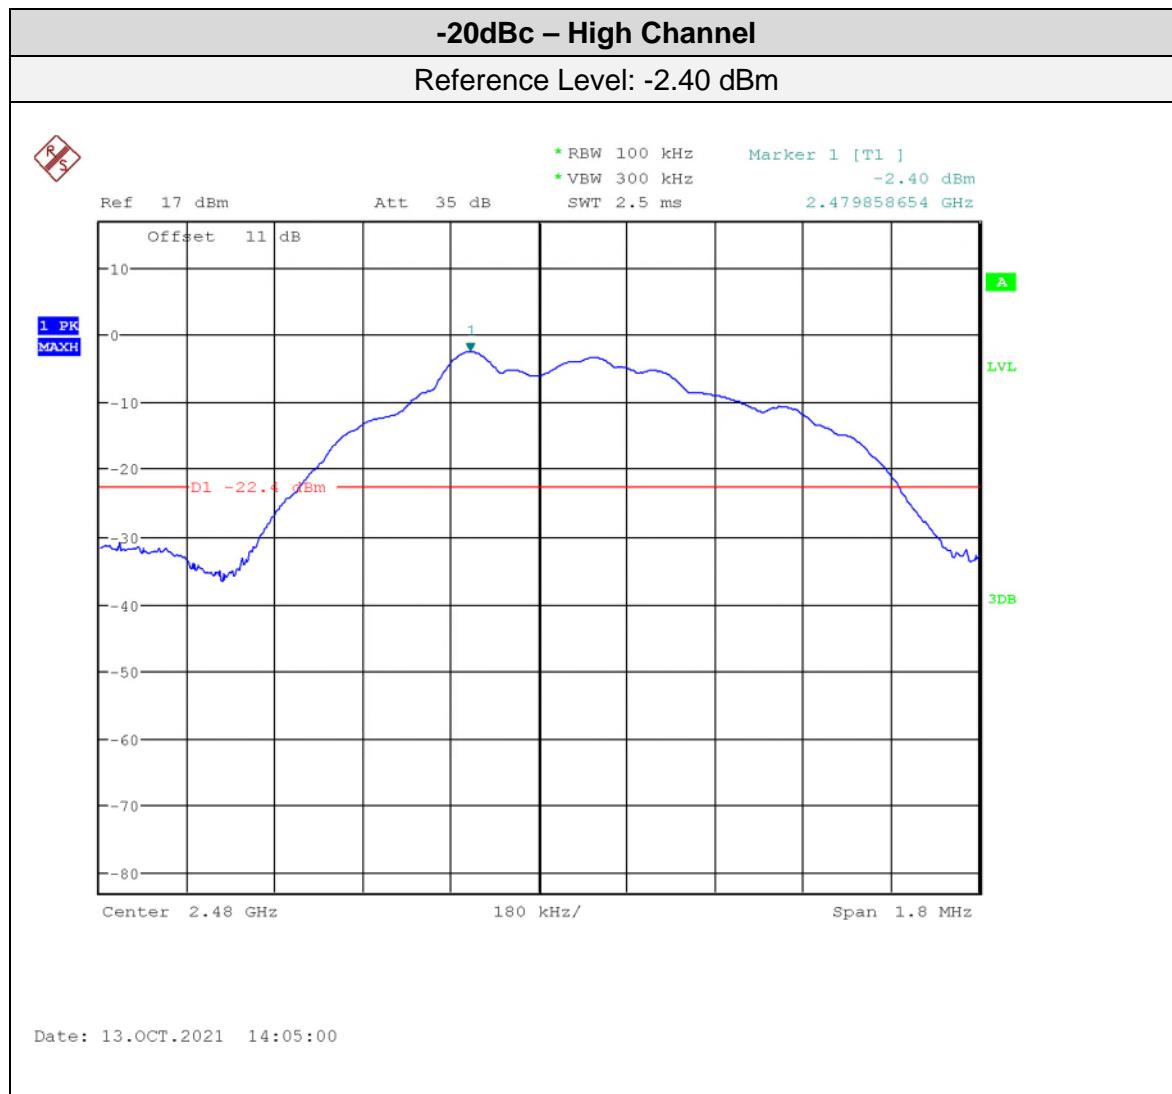

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

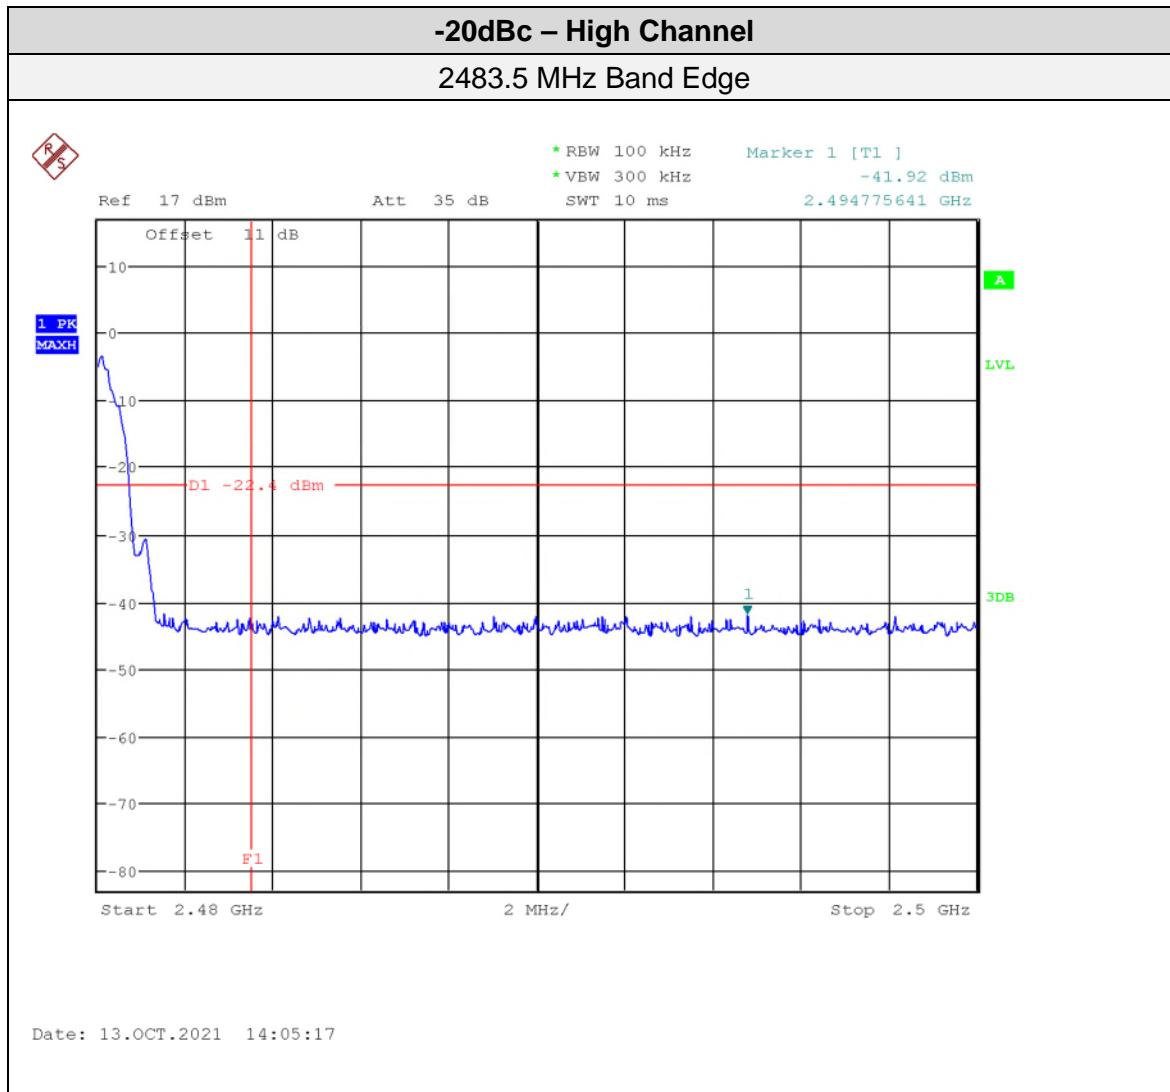

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

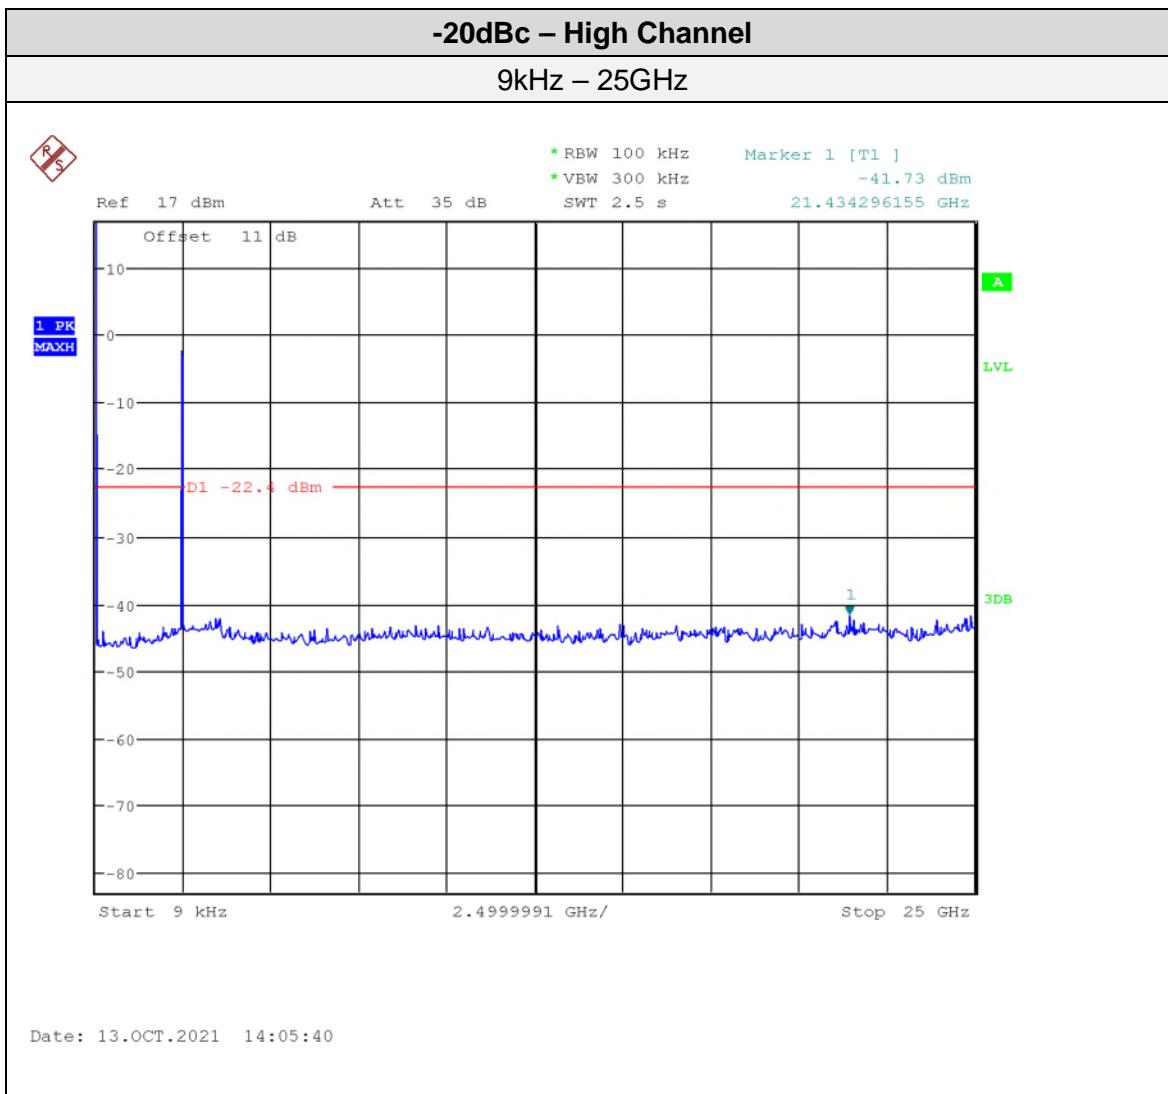

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Signal Analyzer	FSQ 26	Rohde & Schwarz	Oct. 25, 2019	Oct. 25, 2021	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

Client	4iii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Transmitter Spurious Radiated Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limits and Method

The method is as defined in FCC KDB 558074 Section 12.2 and ANSI C63.10.

The limits, as defined in 15.247(d) for unintentional radiated emissions, apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the ‘Spurious Conducted Emissions’ requirements of -20 dBc or greater. See also ‘Antenna Spurious Conducted Emissions (-20dBc)’ for further details.

Frequency	Field Strength Limit (μ V/m)	Field Strength at 3m (dB μ V/m)
0.009 MHz – 0.490 MHz	2400/F(kHz) ^a (at 300m)	128.5 to 93.8 ^a
0.490 MHz – 1.705 MHz	24000/F(kHz) ^a (at 30m)	73.8 to 63.0 ^a
1.705 MHz – 30 MHz	30 ^a (at 30m)	69.5 ^a
30 MHz – 88 MHz	100 ^a (at 3m)	40.0 ^a
88 MHz – 216 MHz	150 ^a (at 3m)	43.5 ^a
216 MHz – 960 MHz	200 ^a (at 3m)	46.0 ^a
Above 960 MHz	500 ^a (at 3m)	54.0 ^a
Above 1000 MHz	500 ^b (at 3m)	54.0 ^b
Above 1000 MHz	5 mV/m ^c (at 3m)	74.0 ^c

^aLimit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1


^bLimit is with 1 MHz measurement bandwidth and using an Average detector

^cLimit is with 1 MHz measurement bandwidth and using a Peak detector

Based on ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, where defined, then the EUT is deemed to have passed the requirements.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Typical Radiated Emissions Setup

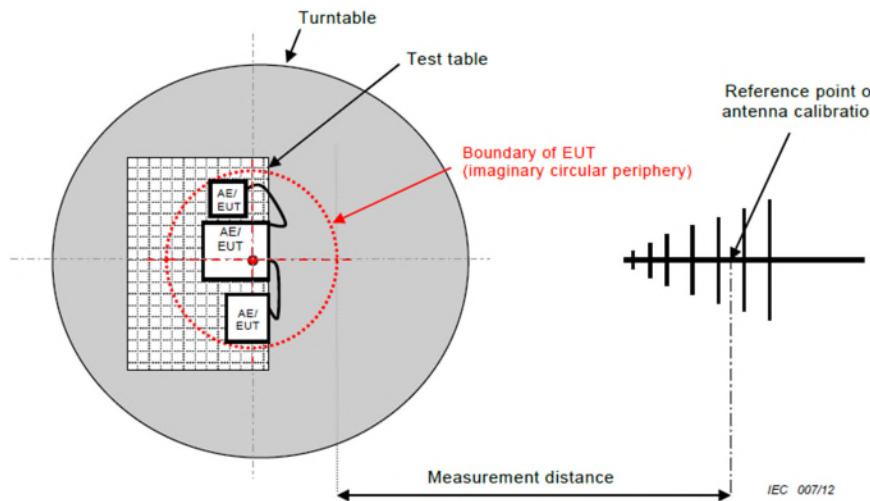

IEC 007/12

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is $\pm 5.67\text{dB}$ for 30MHz – 1GHz and $\pm 4.58\text{dB}$ for 1GHz – 18GHz with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector over a full 0-360°. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic (a minimum of 24.835 GHz).

Devices scanned may be scanned at alternate test distances and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.

Peak output power was checked in three orthogonal axes and the worst case was used to measure low, middle and high channels. The worst case was used for the spurious emissions which was on the low channel and in the X-axis.


Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Band-edge measurement graphs are shown for illustration purposes. See final measurement section for all measurements. Graphs for the worst-case, X-axis, are presented.


Spurious Emissions

Low Channel
9 kHz – 150 kHz
Peak Emission Graph

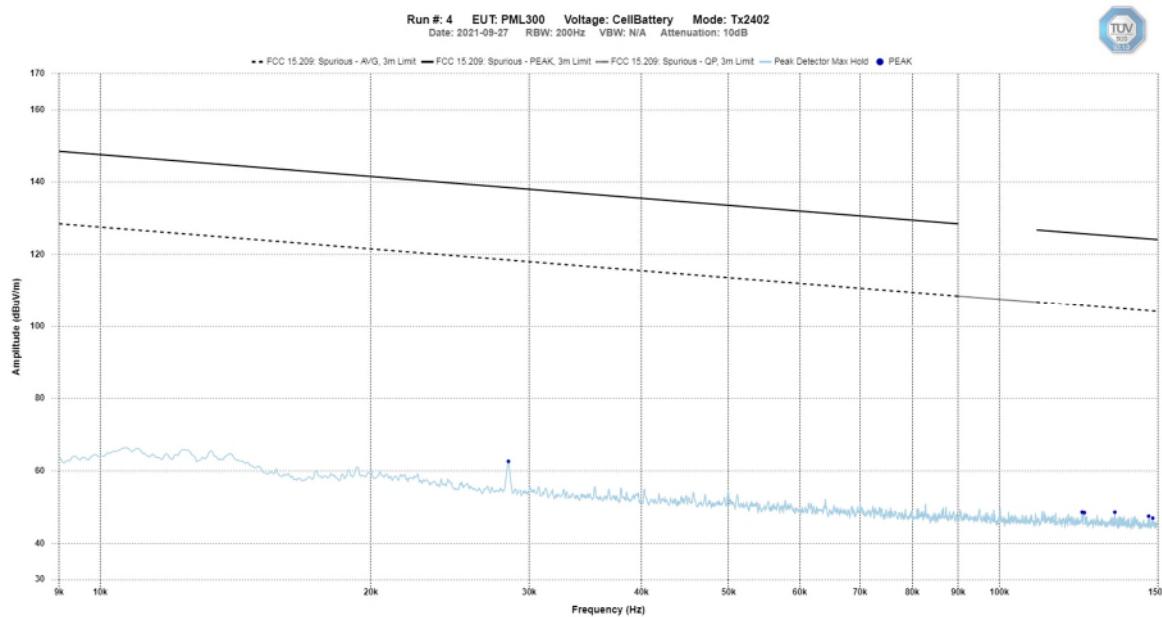


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Low Channel
150 kHz – 30 MHz
Peak Emission Graph

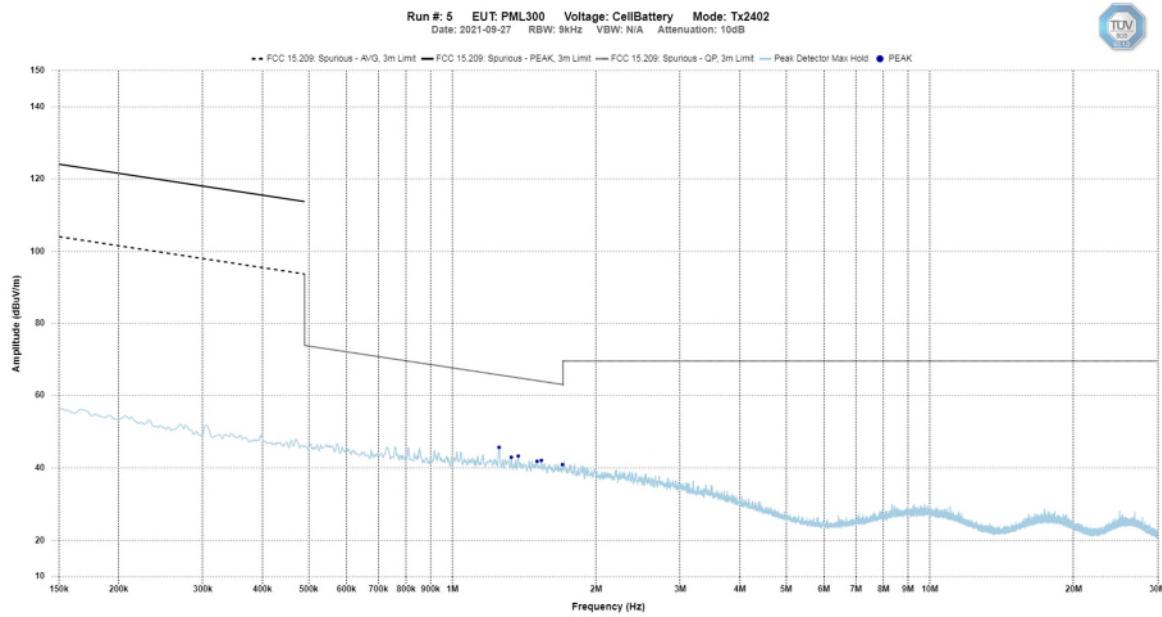


Client	4iii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Low Channel – 30 MHz – 1 GHz Horizontal - Peak Emission Graph

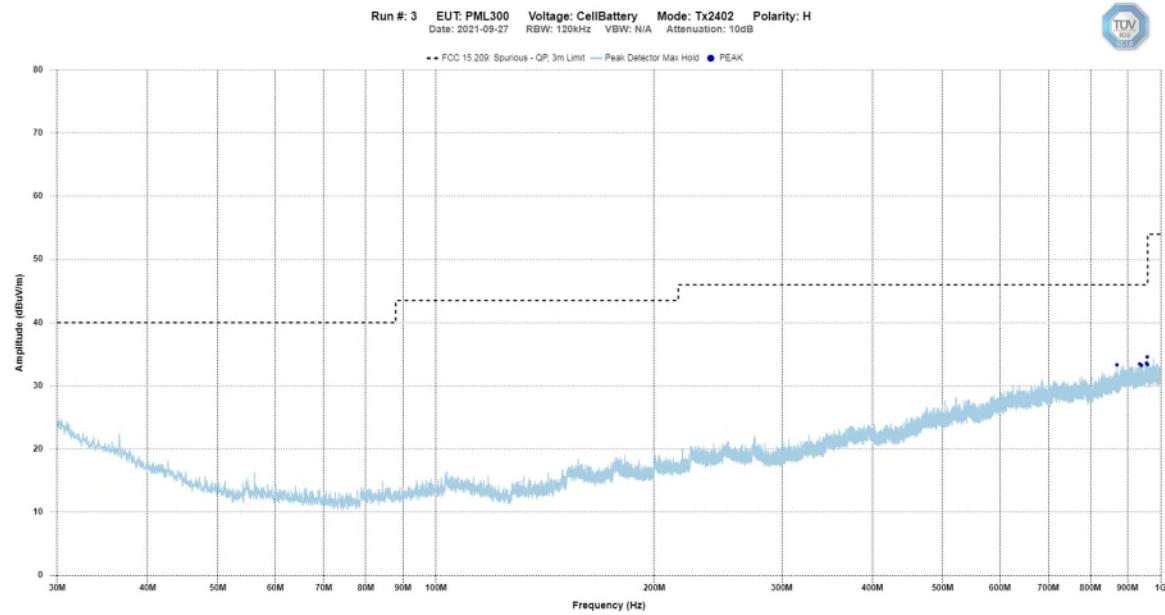


Low Channel – 1 GHz – 6 GHz Horizontal - Peak Emission Graph

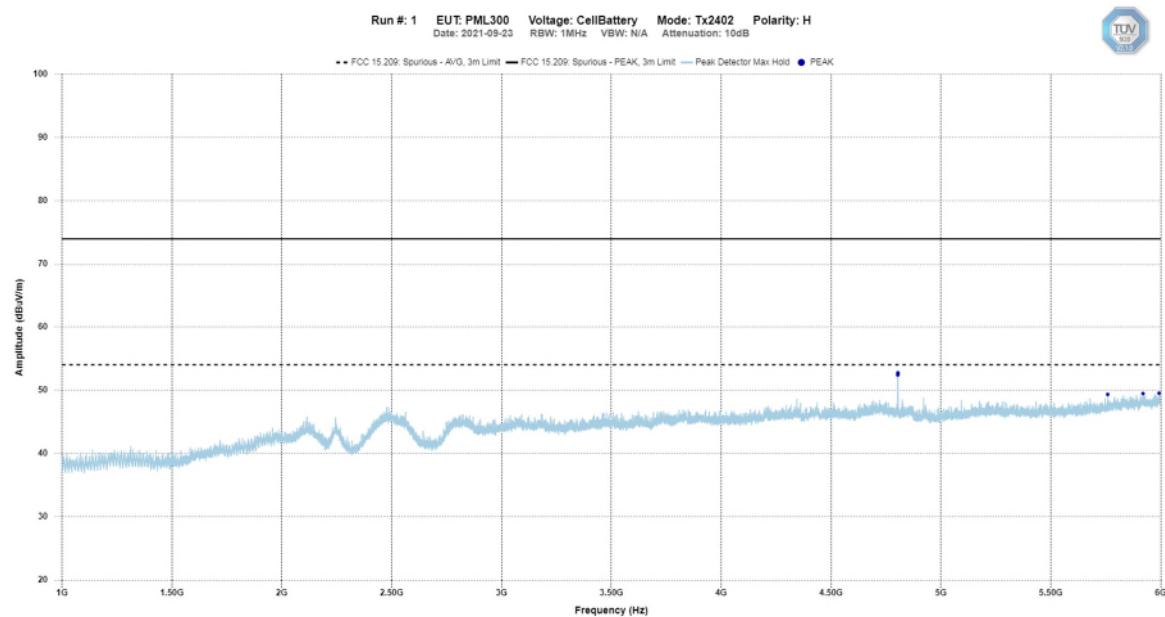


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Low Channel – 6 GHz – 10 GHz Horizontal - Peak Emission Graph

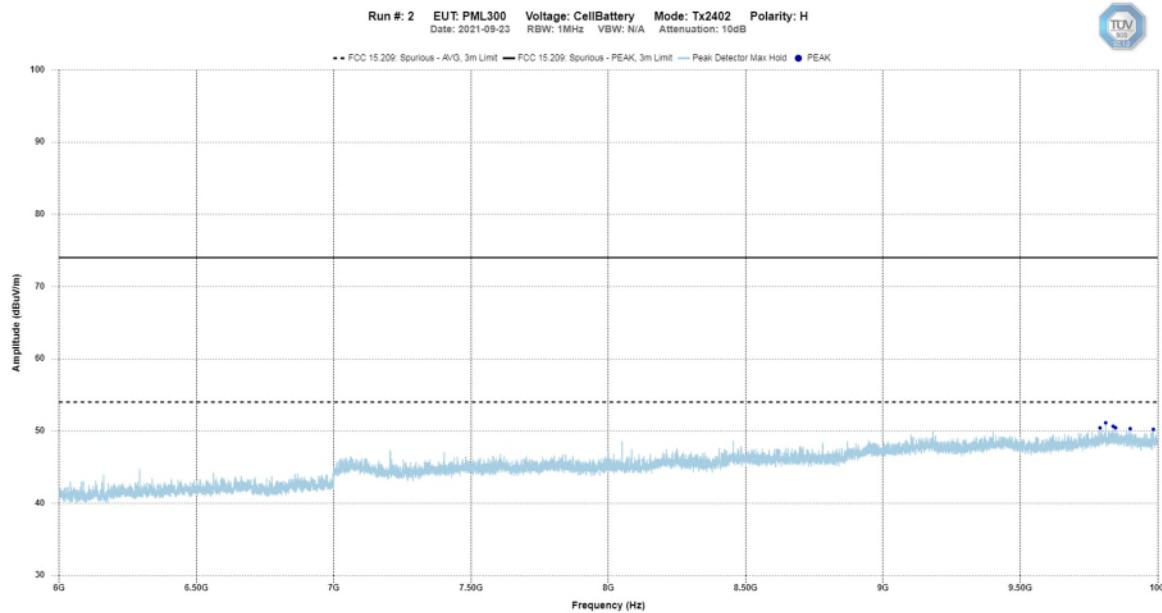

Low Channel – 10 GHz – 18 GHz Horizontal - Peak Emission Graph

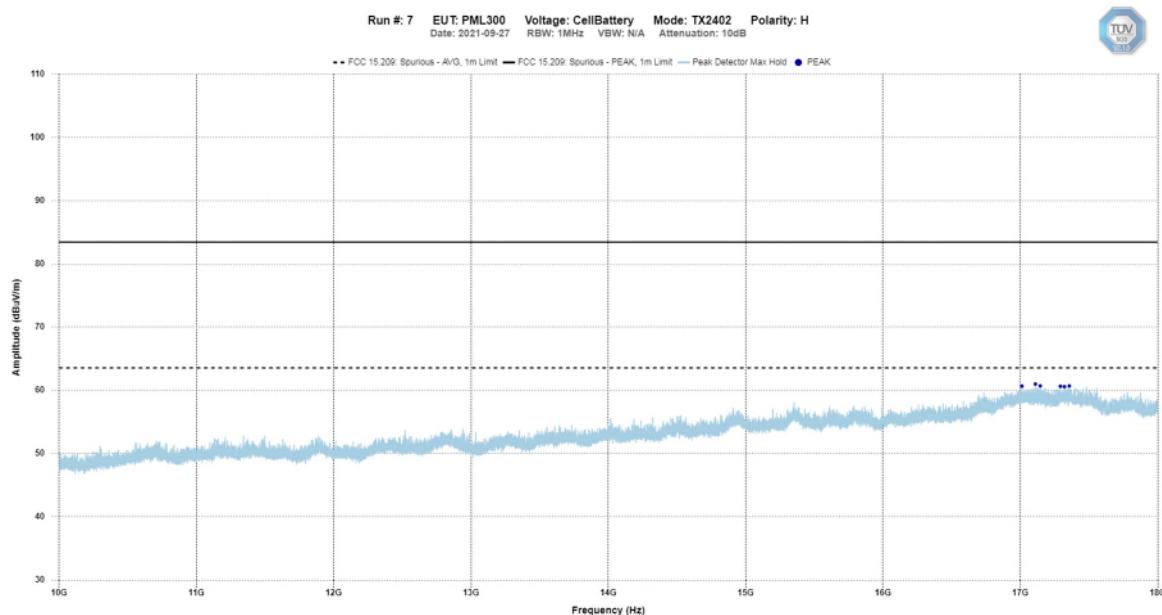


Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247




Low Channel – 18 GHz – 25 GHz Horizontal - Peak Emission Graph

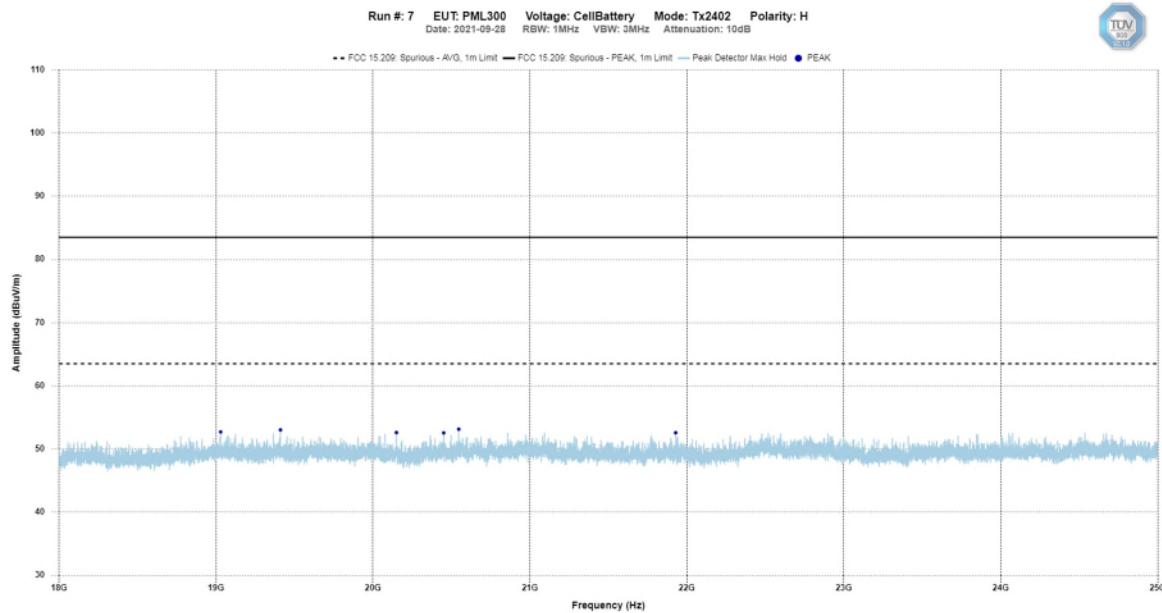


Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Low Channel – 30 MHz – 1 GHz Vertical - Peak Emission Graph

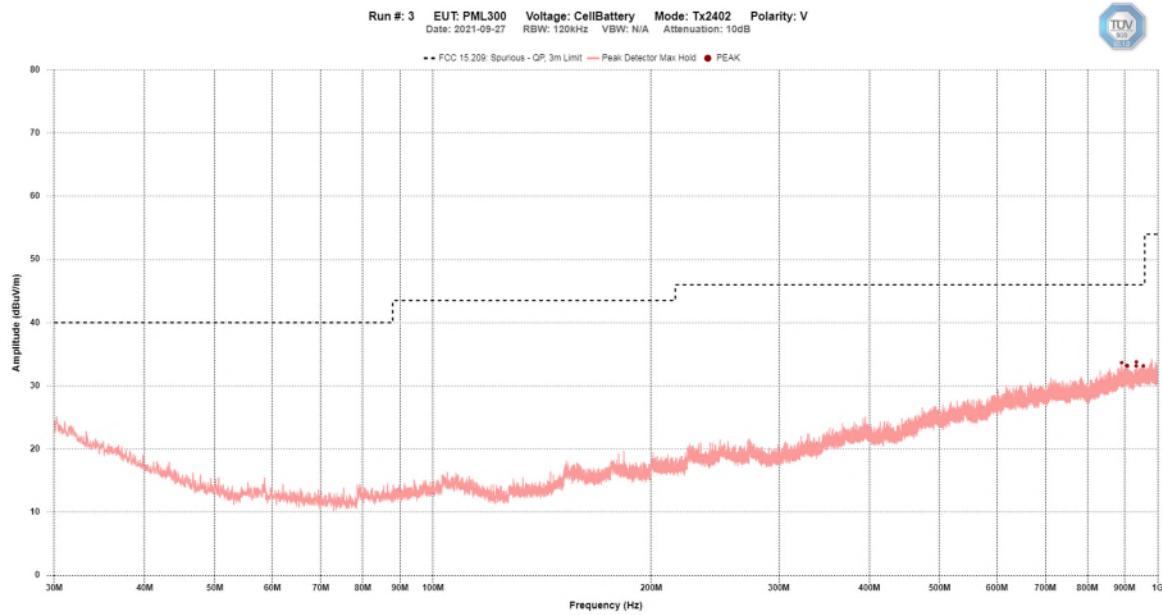


Low Channel – 1 GHz – 6 GHz Vertical - Peak Emission Graph

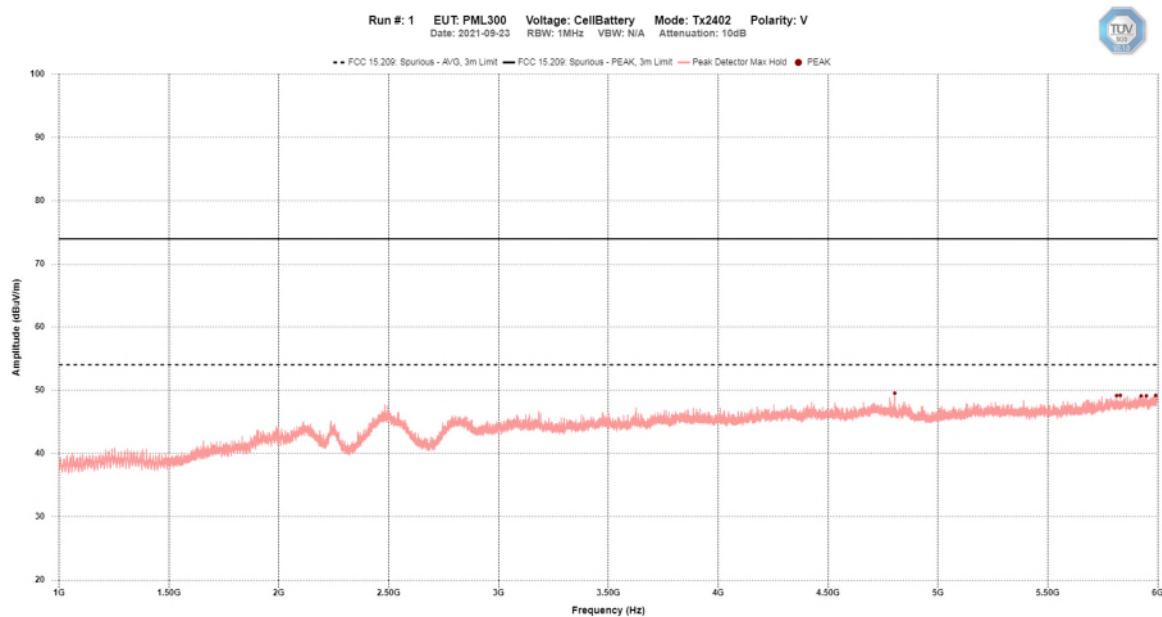


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Low Channel – 6 GHz – 10 GHz Vertical - Peak Emission Graph

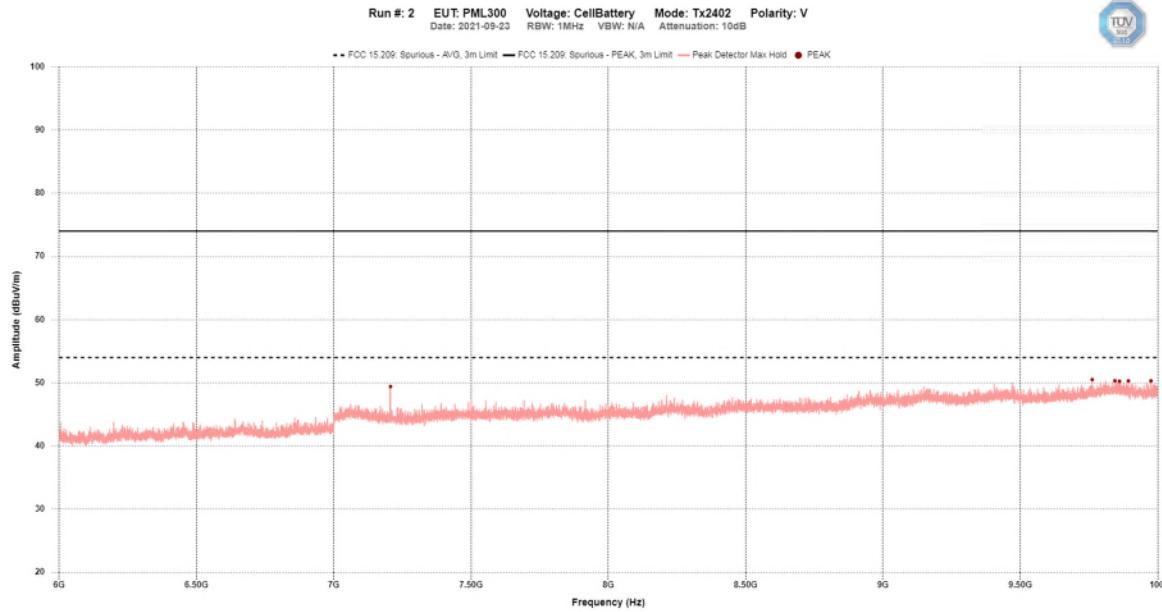

Low Channel – 10 GHz – 18 GHz Vertical - Peak Emission Graph

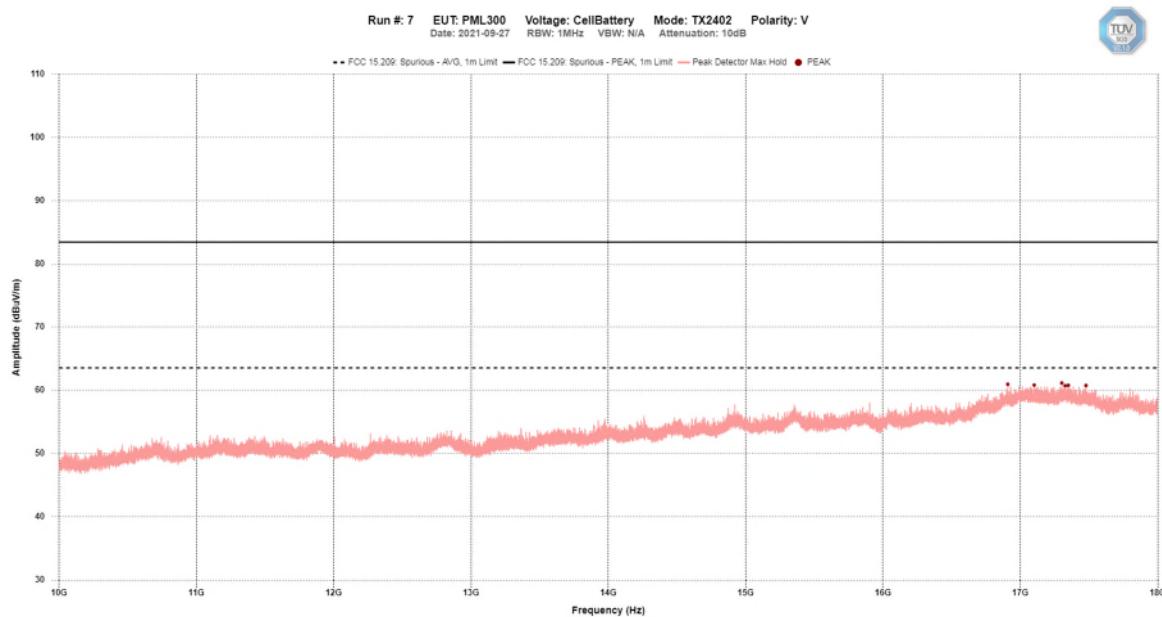


Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Low Channel – 18 GHz – 25 GHz Vertical - Peak Emission Graph

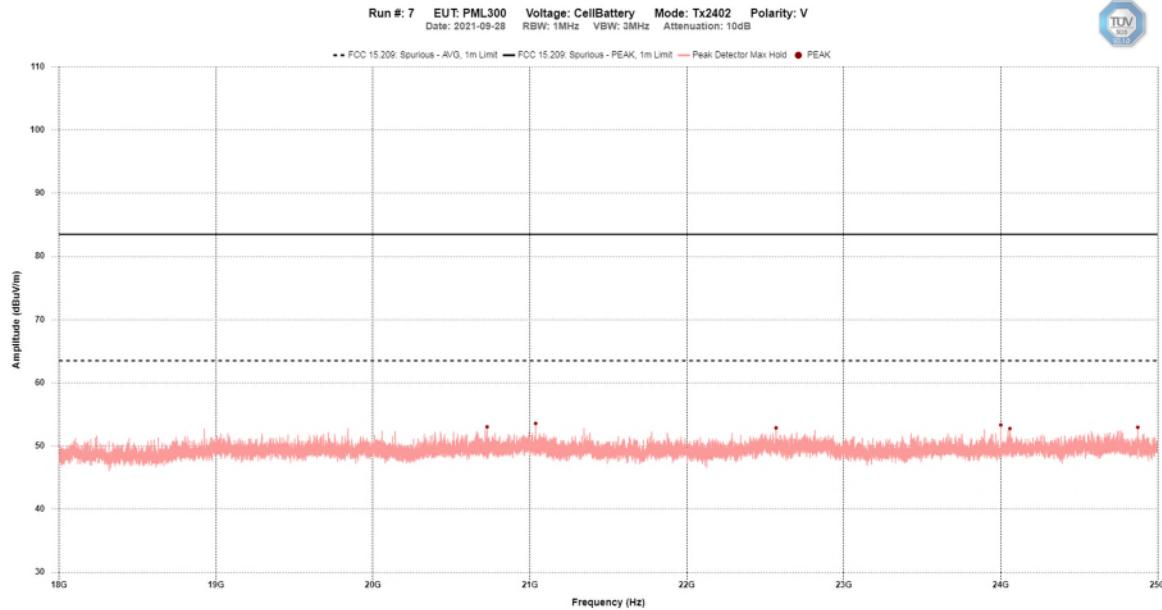


Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Band Edges

Band Edge – Low Channel
Horizontal - Peak Emission

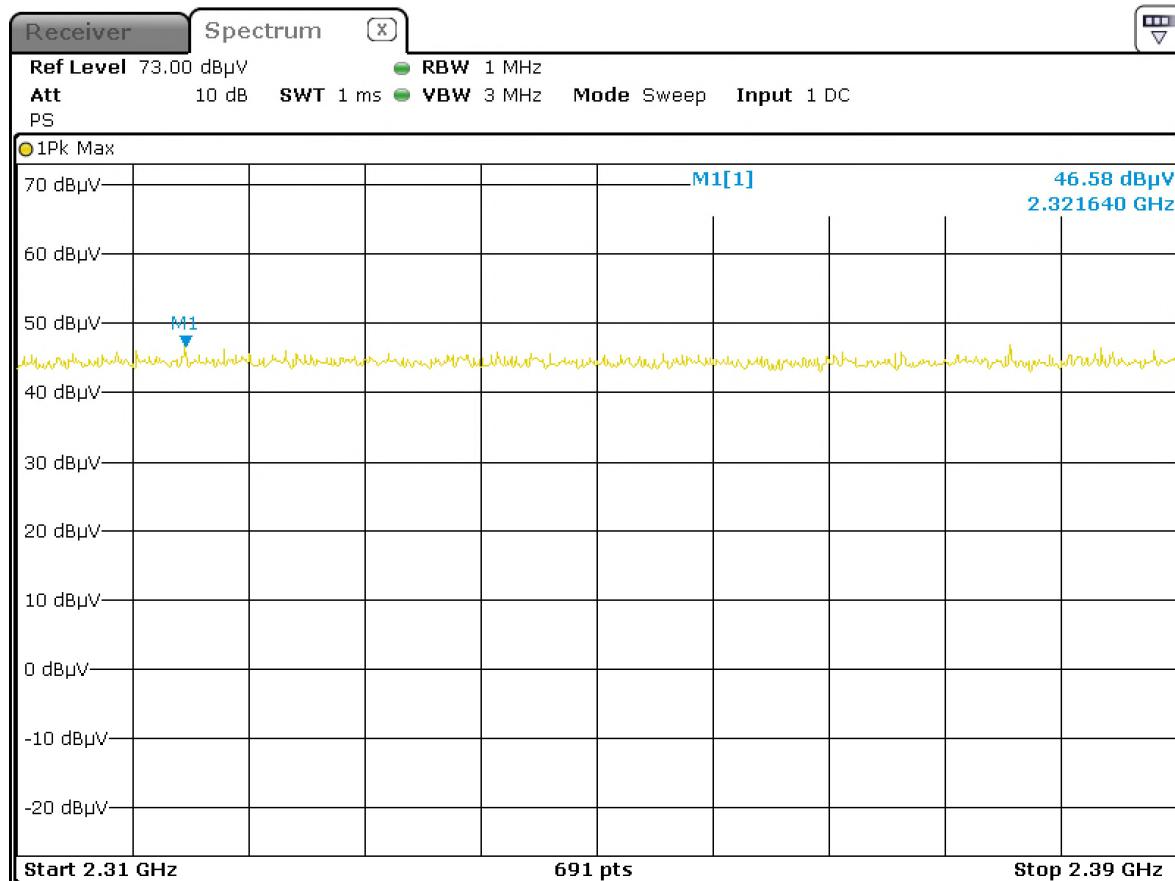


Date: 28.SEP.2021 14:32:42

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Low Channel
Vertical - Peak Emission

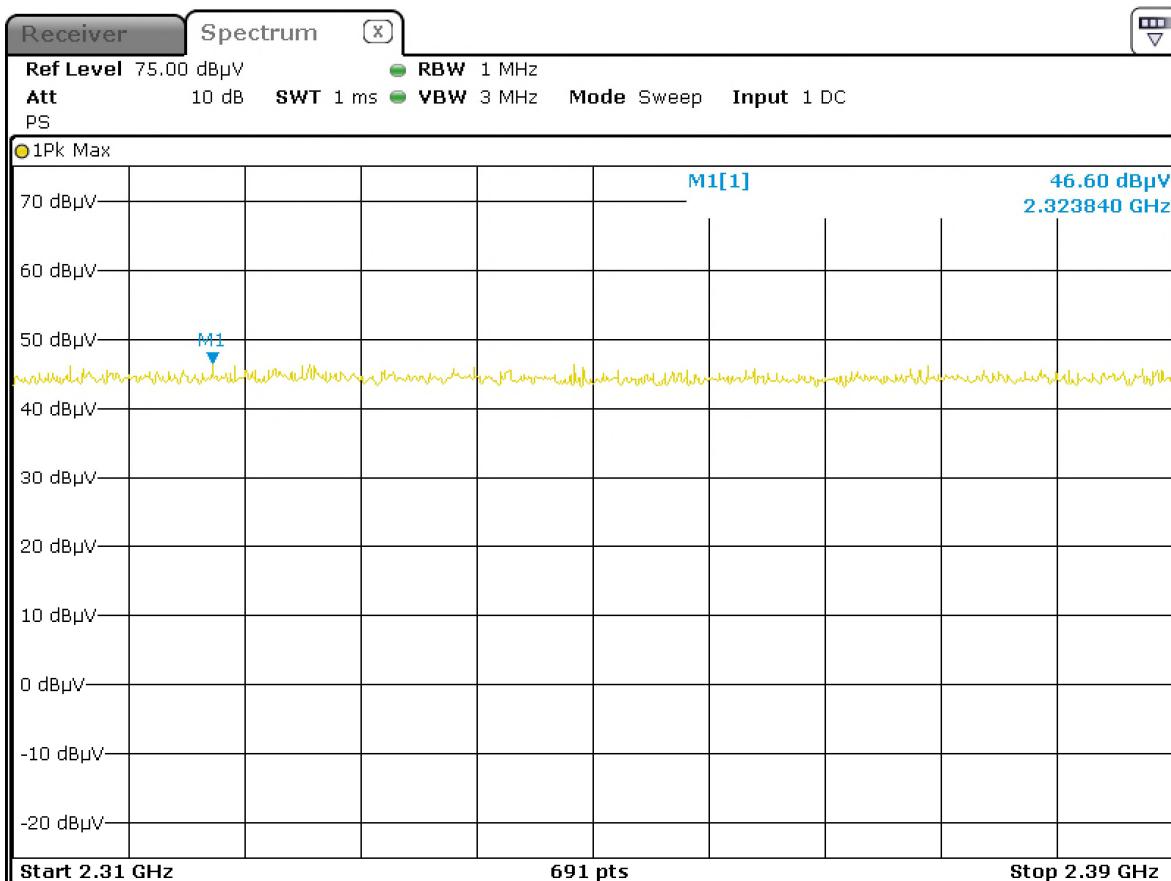


Date: 28.SEP.2021 14:39:39

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Low Channel
Horizontal - Average Emission

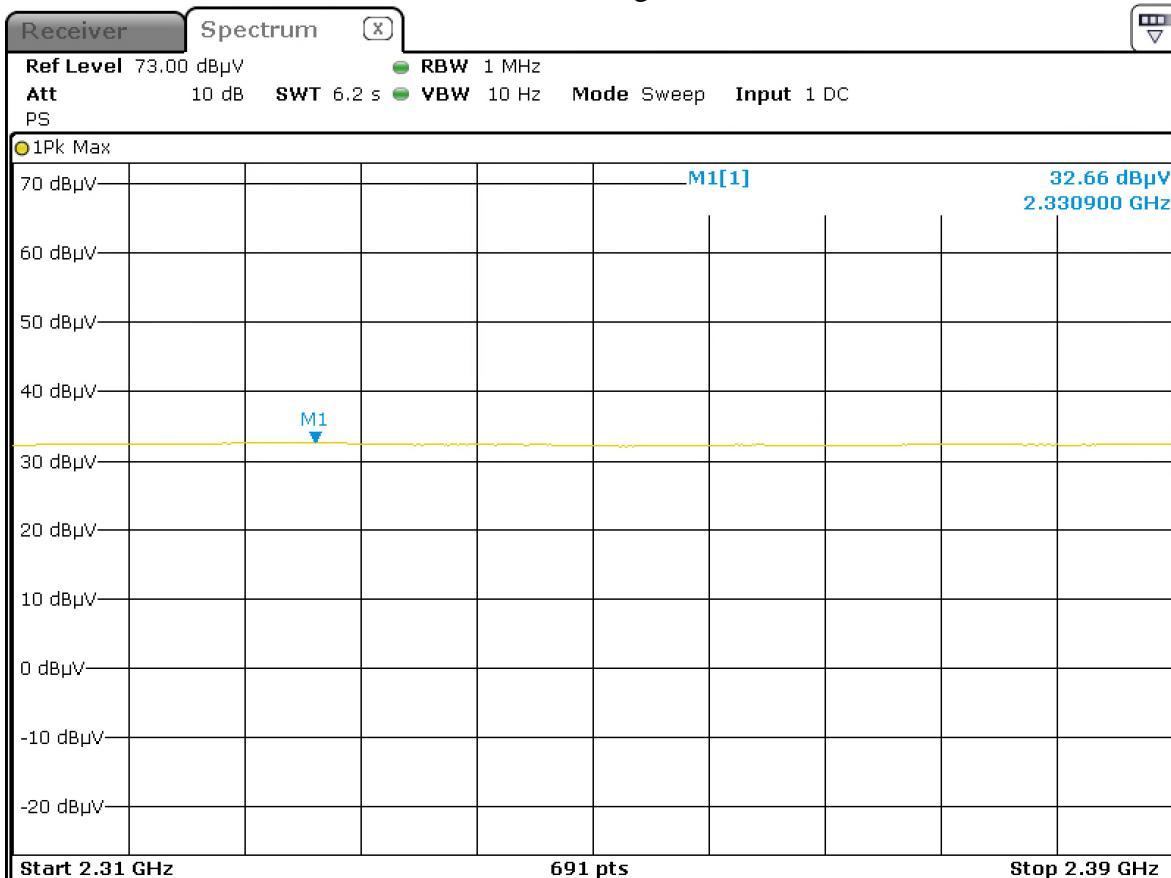

Date: 28.SEP.2021 14:33:08

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Low Channel
Vertical – Average Emission




Date: 28.SEP.2021 14:40:05

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – High Channel
Horizontal - Peak Emission

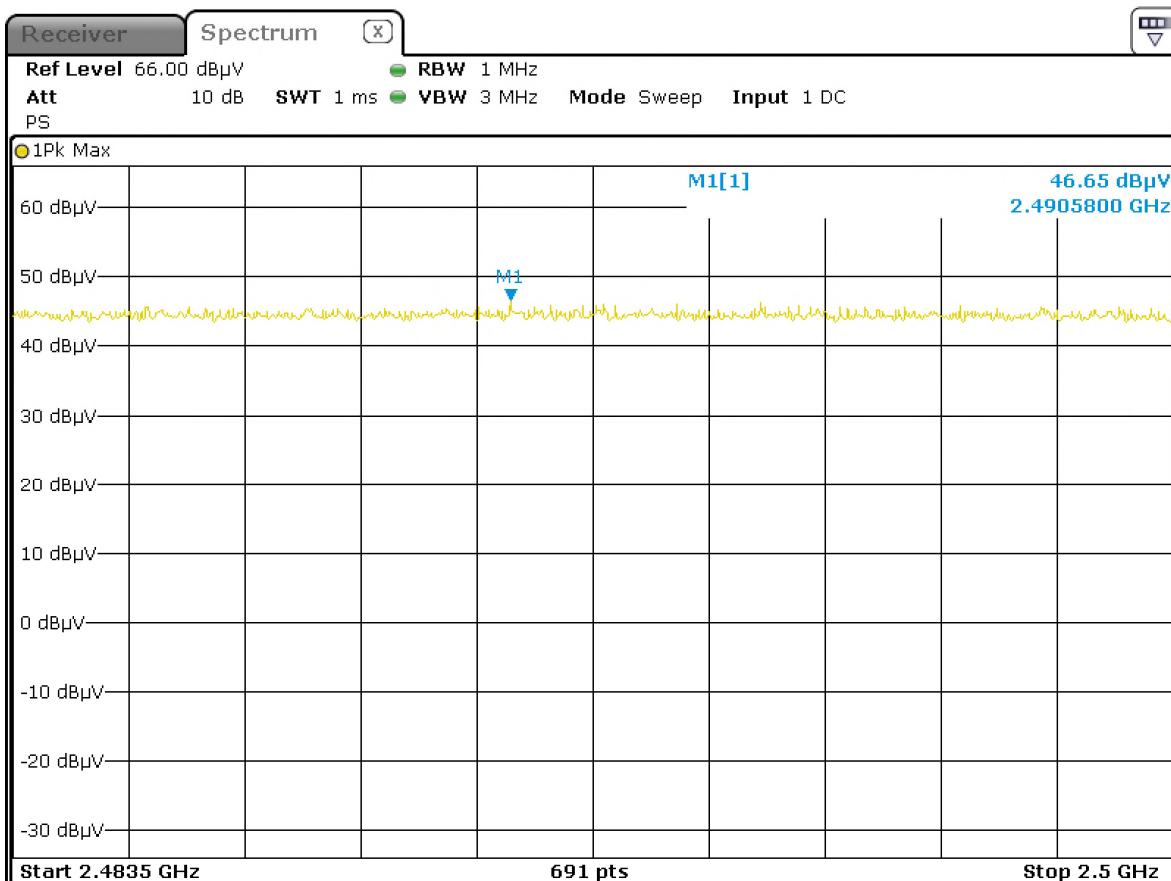


Date: 28.SEP.2021 15:17:40

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – High Channel
Vertical - Peak Emission

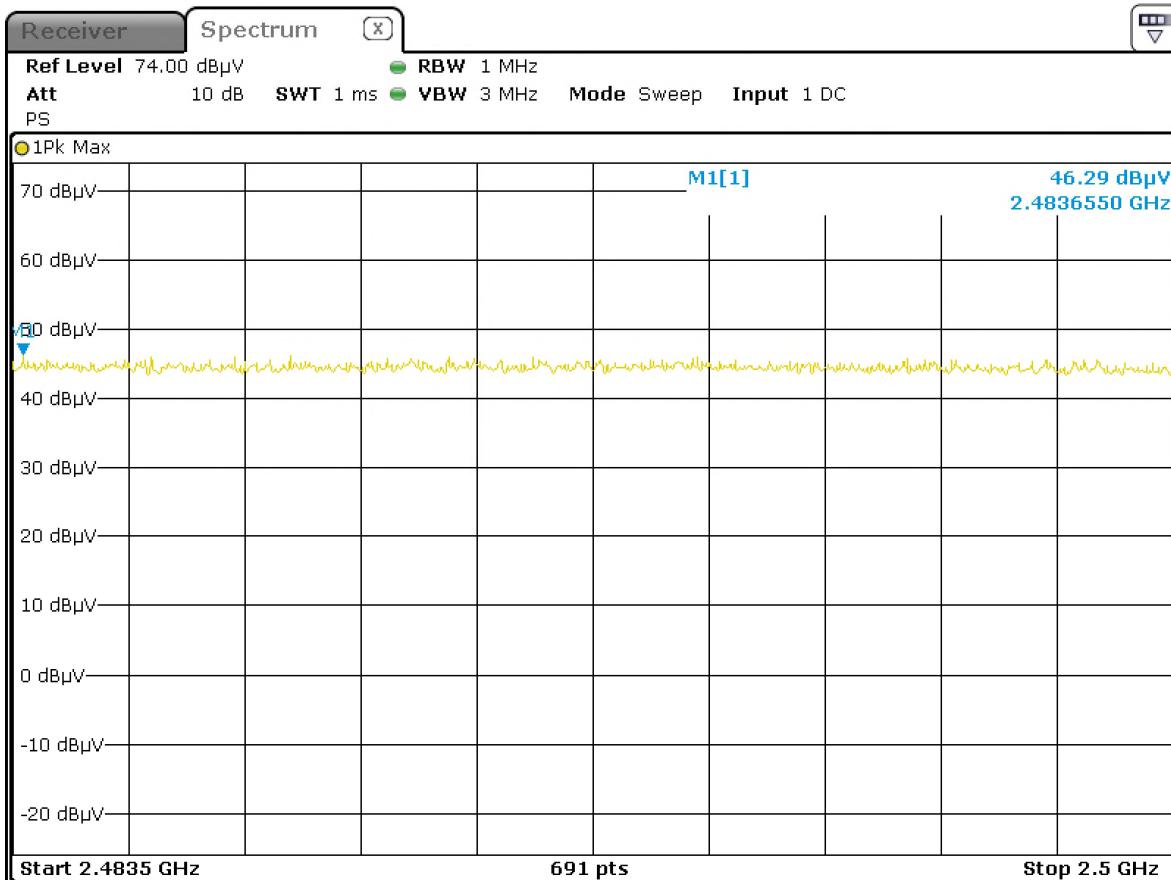


Date: 28.SEP.2021 15:08:32

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – High Channel
Horizontal - Average Emission

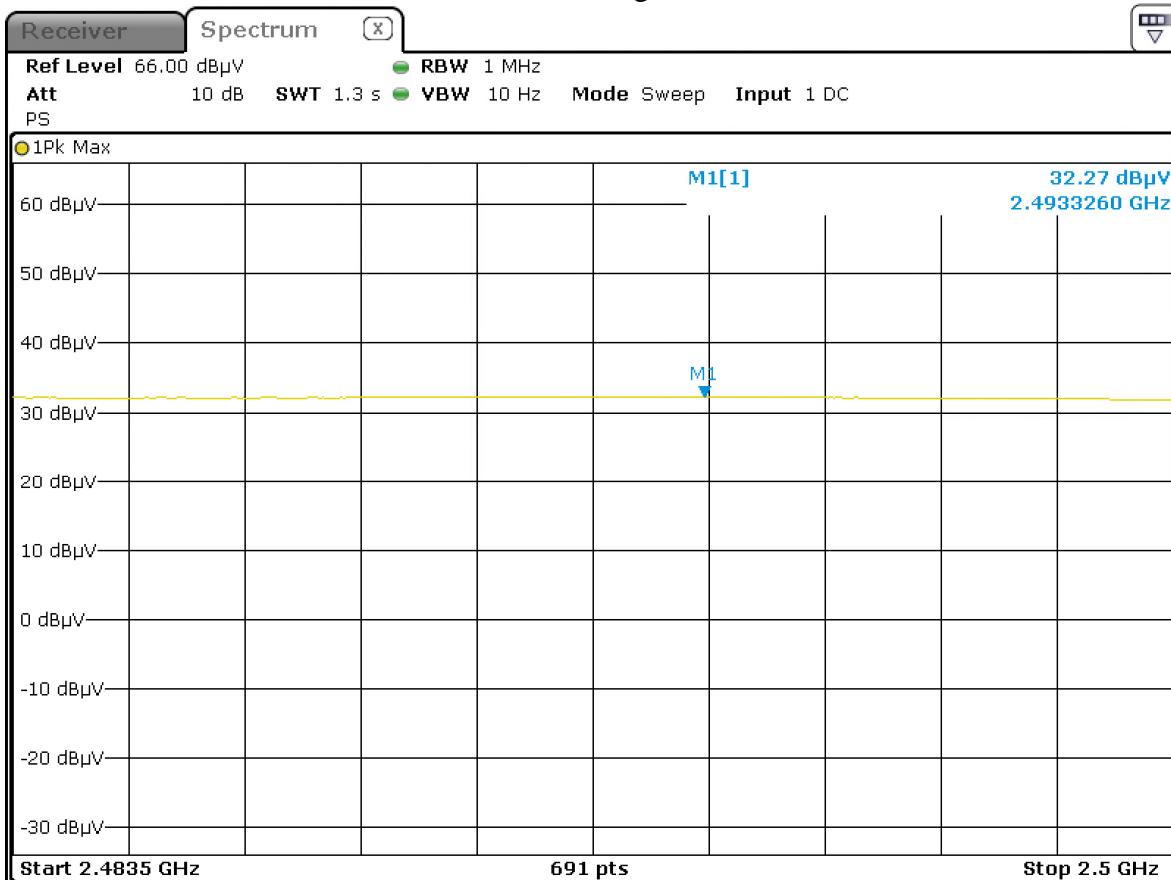


Date: 28.SEP.2021 15:17:46

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – High Channel
Vertical – Average Emission

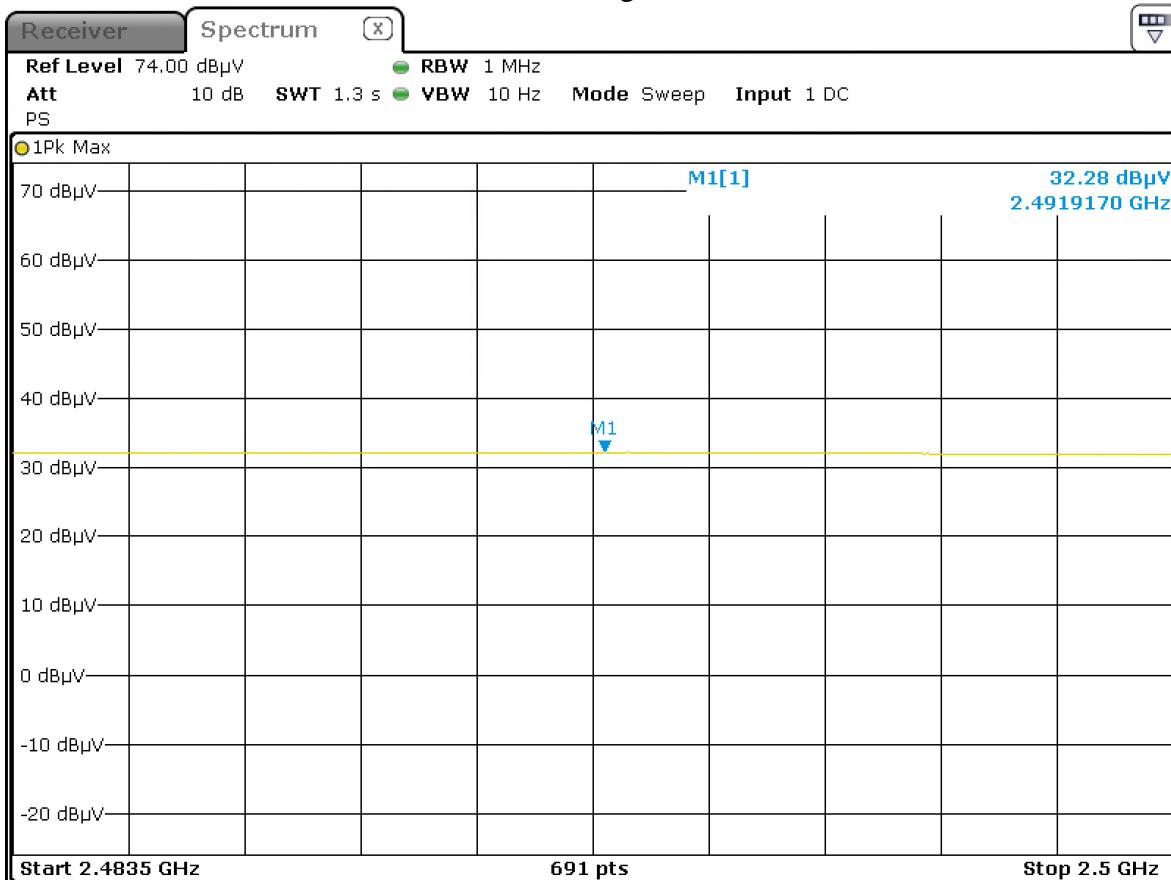

Date: 28.SEP.2021 15:08:38

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Final Measurements and Results

The EUT passed. Low, middle, and high bands were measured.

In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205 need to be verified with a final detector. Emissions outside the restricted bands were measured for informational purposes.

The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

Client	4iii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dB μ V)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp Gain (dB)	Level (dB μ V/m)	Emission Limit (dB μ V/m)	Margin (dB)	Result
Low Channel - Z-Axis										
2402	Peak	Horz	72.0	32.0	3.9	-36.4	71.5			PASS
2402	Avg	Horz	71.2	32.0	3.9	-36.4	70.6			PASS
2402	Peak	Vert	80.7	32.0	3.9	-36.4	80.2			PASS
2402	Avg	Vert	80.1	32.0	3.9	-36.4	79.5			PASS
2328.7	Peak	Horz	46.2	31.8	3.8	-36.4	45.4	74.0	28.6	PASS
2329.2	Avg	Horz	32.5	31.8	3.8	-36.4	31.8	54.0	22.2	PASS
2388	Peak	Vert	46.7	32.0	3.9	-36.4	46.1	74.0	27.9	PASS
2330.3	Avg	Vert	32.5	31.8	3.8	-36.4	31.7	54.0	22.3	PASS
2486.8	Peak	Horz	46.5	32.2	4.0	-36.4	46.4	74.0	27.6	PASS
2492.6	Avg	Horz	32.2	32.2	4.0	-36.4	32.1	54.0	21.9	PASS
2494.8	Peak	Vert	46.3	32.2	4.0	-36.4	46.2	74.0	27.8	PASS
2492.4	Avg	Vert	32.2	32.2	4.0	-36.4	32.1	54.0	21.9	PASS
Low Channel - X-Axis										
2402	Peak	Horz	77.7	32.0	3.9	-36.4	77.1			PASS
2402	Avg	Horz	77.0	32.0	3.9	-36.4	76.5			PASS
2402	Peak	Vert	84.5	32.0	3.9	-36.4	83.9			PASS
2402	Avg	Vert	83.9	32.0	3.9	-36.4	83.3			PASS
2321.6	Peak	Horz	46.6	31.8	3.8	-36.4	45.8	74.0	28.2	PASS
2330.9	Avg	Horz	32.7	31.8	3.8	-36.4	31.9	54.0	22.1	PASS
2323.8	Peak	Vert	46.6	31.8	3.8	-36.4	45.8	74.0	28.2	PASS
2328.4	Avg	Vert	32.6	31.8	3.8	-36.4	31.9	54.0	22.1	PASS
2487.3	Peak	Horz	46.5	32.2	4.0	-36.4	46.3	74.0	27.7	PASS
2480.7	Avg	Horz	32.4	32.2	4.0	-36.4	32.3	54.0	21.7	PASS
2493.3	Peak	Vert	46.3	32.2	4.0	-36.4	46.1	74.0	27.9	PASS
2480.2	Avg	Vert	32.4	32.2	4.0	-36.4	32.3	54.0	21.7	PASS
4804	Peak	Horz	50.0	34.2	5.5	-35.2	54.5	74.0	19.5	PASS
4804	Avg	Horz	42.5	34.2	5.5	-35.2	47.0	54.0	7.0	PASS
4804	Peak	Vert	47.4	34.2	5.5	-35.2	51.9	74.0	22.1	PASS
4804	Avg	Vert	38.8	34.2	5.5	-35.2	43.3	54.0	10.7	PASS
7206	Peak	Horz	48.1	35.7	7.2	-35.3	55.6	74.0	18.4	PASS
7206	Avg	Horz	36.5	35.7	7.2	-35.3	44.0	54.0	10.0	PASS
7206	Peak	Vert	47.1	35.7	7.2	-35.3	54.6	74.0	19.4	PASS
7206	Avg	Vert	31.7	35.7	7.2	-35.3	39.2	54.0	14.8	PASS
9608	Peak	Horz	46.8	36.7	8.1	-35.7	55.8	74.0	18.2	PASS
9608	Avg	Horz	32.4	36.7	8.1	-35.7	41.4	54.0	12.6	PASS
9608	Peak	Vert	46.7	36.7	8.1	-35.7	55.7	74.0	18.3	PASS
9608	Avg	Vert	32.4	36.7	8.1	-35.7	41.4	54.0	12.6	PASS
12010	Peak	Horz	47.4	38.8	9.2	-34.7	60.7	74.0	13.3	PASS
12010	Avg	Horz	32.6	38.8	9.2	-34.7	45.9	54.0	8.1	PASS
12010	Peak	Vert	47.0	38.8	9.2	-34.7	60.3	74.0	13.7	PASS
12010	Avg	Vert	32.6	38.8	9.2	-34.7	45.9	54.0	8.1	PASS
Low Channel - Y-Axis										
2402	Peak	Horz	83.7	32.0	3.9	-36.4	83.2			PASS
2402	Avg	Horz	83.2	32.0	3.9	-36.4	82.6			PASS
2402	Peak	Vert	68.9	32.0	3.9	-36.4	68.3			PASS
2402	Avg	Vert	68.0	32.0	3.9	-36.4	67.4			PASS
2342.1	Peak	Horz	46.7	31.9	3.8	-36.4	46.0	74.0	28.0	PASS
2328.2	Avg	Horz	32.5	31.8	3.8	-36.4	31.7	54.0	22.3	PASS
2383.5	Peak	Vert	46.2	32.0	3.9	-36.4	45.6	74.0	28.4	PASS
2329.9	Avg	Vert	32.5	31.8	3.8	-36.4	31.7	54.0	22.3	PASS
2489.1	Peak	Horz	46.1	32.2	4.0	-36.4	46.0	74.0	28.0	PASS
2492.2	Avg	Horz	32.2	32.2	4.0	-36.4	32.1	54.0	21.9	PASS
2485.4	Peak	Vert	46.8	32.2	4.0	-36.4	46.6	74.0	27.4	PASS
2491.6	Avg	Vert	32.2	32.2	4.0	-36.4	32.1	54.0	21.9	PASS

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dB μ V)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp Gain (dB)	Level (dB μ V/m)	Emission Limit (dB μ V/m)	Margin (dB)	Result
Mid Channel - X-Axis										
2440	Peak	Horz	70.0	32.2	3.9	-36.4	69.8			PASS
2440	Avg	Horz	69.2	32.2	3.9	-36.4	68.9			PASS
2440	Peak	Vert	79.8	32.2	3.9	-36.4	79.5			PASS
2440	Avg	Vert	79.1	32.2	3.9	-36.4	78.9			PASS
High Channel - X-Axis										
2480	Peak	Horz	69.1	32.2	4.0	-36.4	68.9			PASS
2480	Avg	Horz	68.1	32.2	4.0	-36.4	67.9			PASS
2480	Peak	Vert	76.3	32.2	4.0	-36.4	76.1			PASS
2480	Avg	Vert	75.6	32.2	4.0	-36.4	75.4			PASS
2342.1	Peak	Horz	46.4	31.9	3.8	-36.4	45.7	74.0	28.3	PASS
2328.2	Avg	Horz	32.6	31.8	3.8	-36.4	31.8	54.0	22.2	PASS
2377.3	Peak	Vert	46.1	32.0	3.9	-36.4	45.5	74.0	28.5	PASS
2326.7	Avg	Vert	32.6	31.8	3.8	-36.4	31.8	54.0	22.2	PASS
2490.6	Peak	Horz	46.7	32.2	4.0	-36.4	46.5	74.0	27.5	PASS
2493.3	Avg	Horz	32.3	32.2	4.0	-36.4	32.1	54.0	21.9	PASS
2483.7	Peak	Vert	46.3	32.2	4.0	-36.4	46.2	74.0	27.8	PASS
2491.9	Avg	Vert	32.3	32.2	4.0	-36.4	32.1	54.0	21.9	PASS

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESR 26	Rohde & Schwarz	Mar. 6, 2020	Mar. 6, 2022	GEMC 341
Loop Antenna	EM 6871	Electro-Metrics	Feb 26, 2021	Feb 26, 2023	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 26, 2021	Feb 26, 2023	GEMC 71
BiLog Antenna	3142-C	ETS-Lindgren	Mar. 26, 2021	Mar. 26, 2023	GEMC 137
Horn Antenna 1 – 6 GHz	3117	ETS-Lindgren	Feb. 17, 2020	Feb. 17, 2022	GEMC 340
Horn Antenna 6 – 18 GHz	WBH218HN	Q-par	Apr. 1, 2020	Apr. 1, 2022	GEMC 6375
Horn Antenna 18 - 25 GHz	SAS-572	A.H. Systems	Dec. 1, 2020	Dec. 1, 2022	GEMC 6371
Attenuator 6 dB	612-6-1	Meca Electronics, Inc	NCR	NCR	GEMC 287
Pre-Amp 9 kHz – 1 GHz	LNA 6901	Teseq	Feb. 12, 2021	Feb. 12, 2023	GEMC 168
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Aug. 4, 2020	Aug. 4, 2022	GEMC 312
Pre-Amp 18 – 40 GHz	PAM-840A	Com-Power Corporation	May 13, 2021	May 13, 2023	GEMC 252
2.4GHz-2.5GHz Notch Filter	BRM50702	Micro-Tronics	NCR	NCR	GEMC 230
RF Cable <1GHz	LMR-400	LexTec	NCR	NCR	GEMC 27
RF Cable <1GHz	HP305S	Semflex	NCR	NCR	GEMC 310
RF Cable >1GHz	EMC2	MegaPhase	NCR	NCR	GEMC 370
Emissions Software	V2.1.0	TUV SUD Canada, Inc.	NCR	NCR	GEMC 361

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Power Spectral Density

Purpose

The purpose of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation.

Limits and Method

The limits are defined in 15.247(e) and RSS-247 5.2(b).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The method is given in FCC KDB 558074 Section 10.2.

Results


The EUT passed. Low, middle and high bands were measured.

Channel	Frequency (MHz)	PSD (dBm)
Low	2402	-14.04
Mid	2440	-14.02
High	2480	-14.32


Graphs

The graphs shown below show the power spectral density of the device during the conducted measurement operation of the EUT. Low, middle, and high channels were investigated. The external attenuator and cable loss are accounted for as reference offset in the spectrum analyzer.


Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

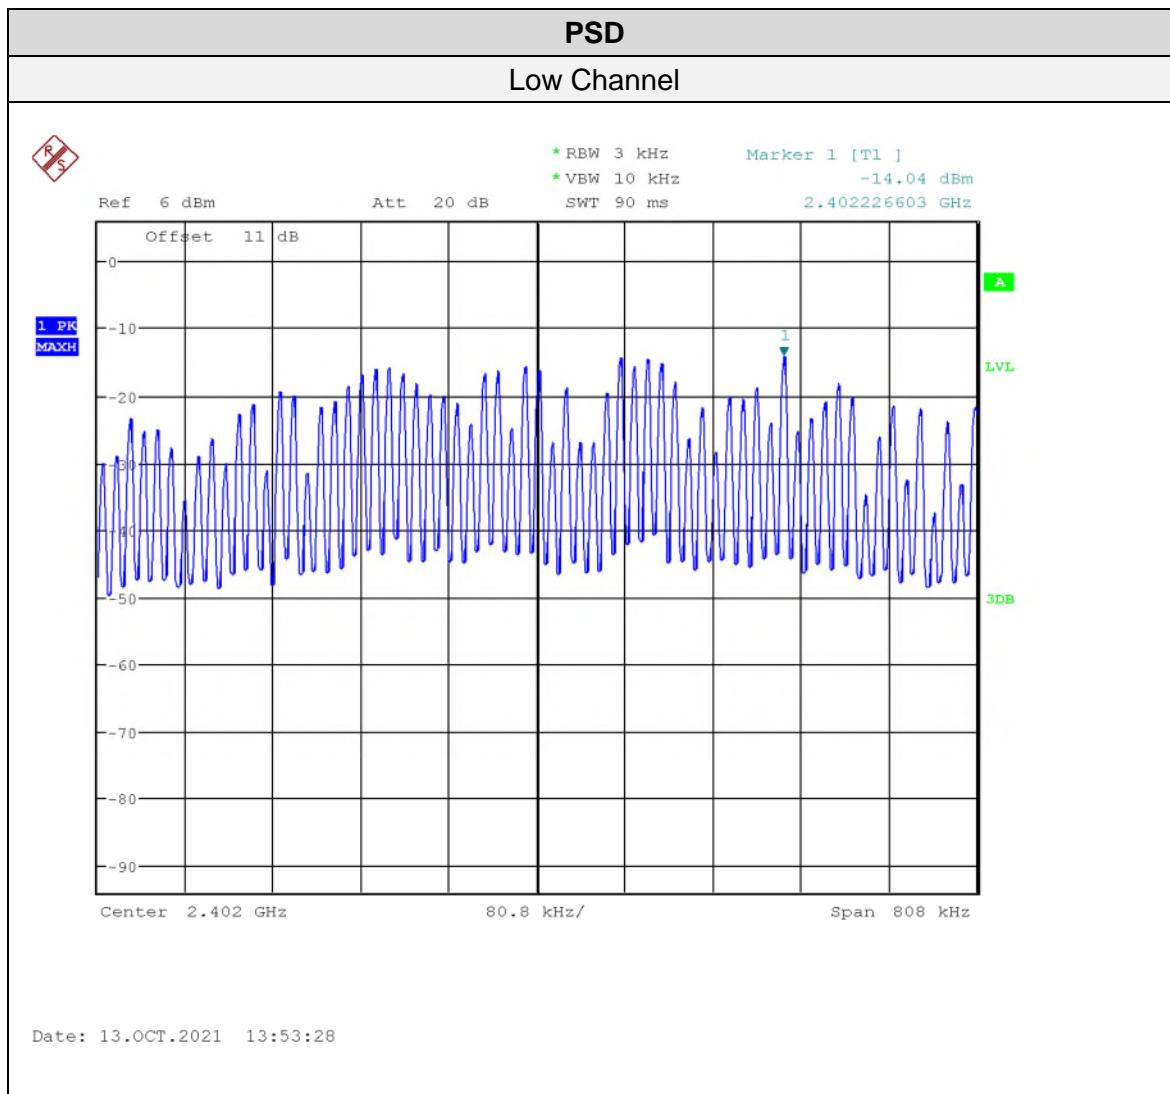

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

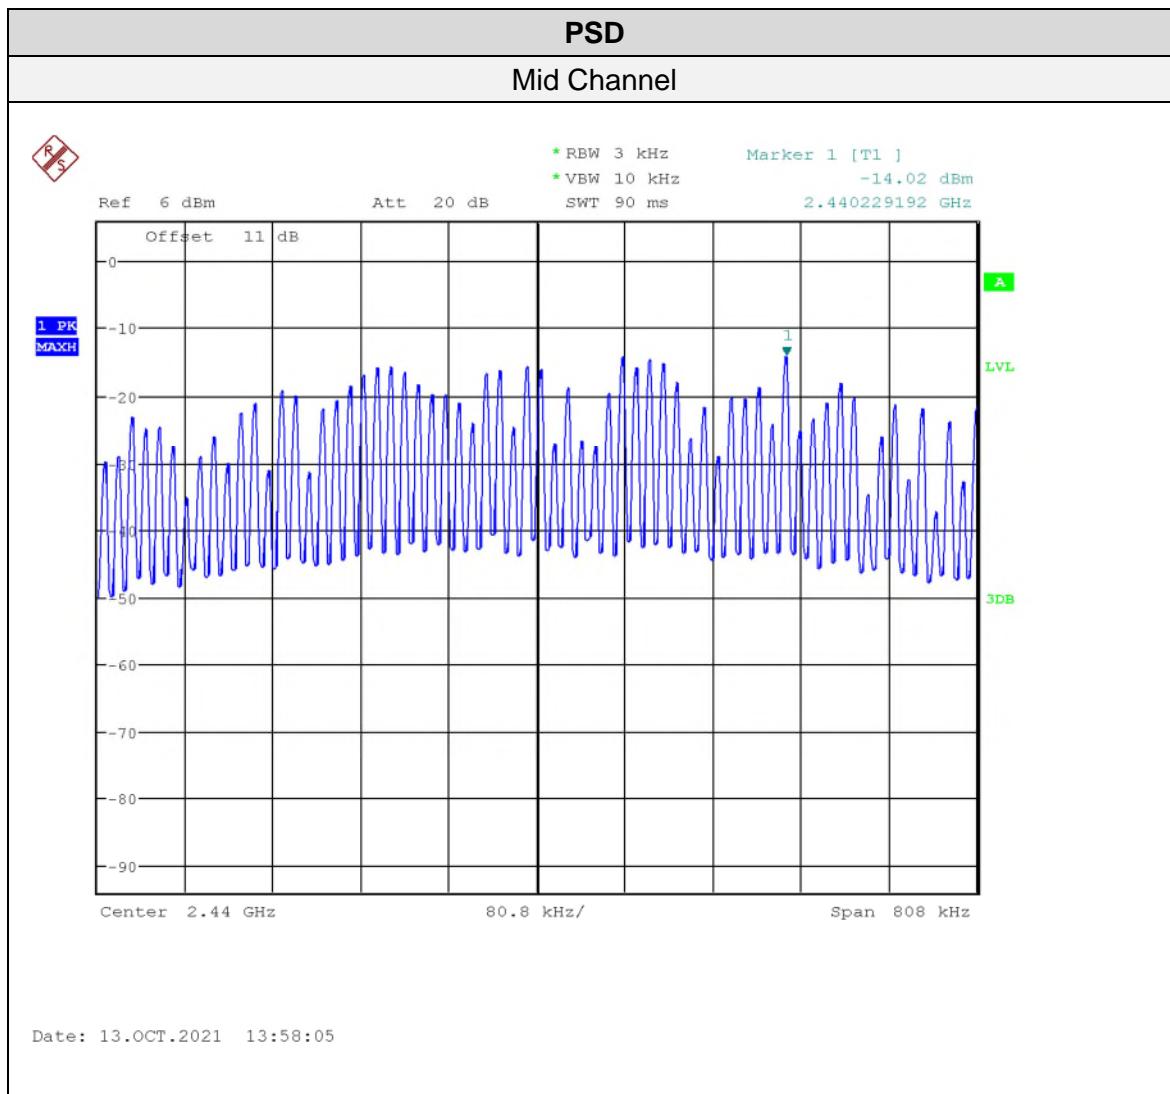

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

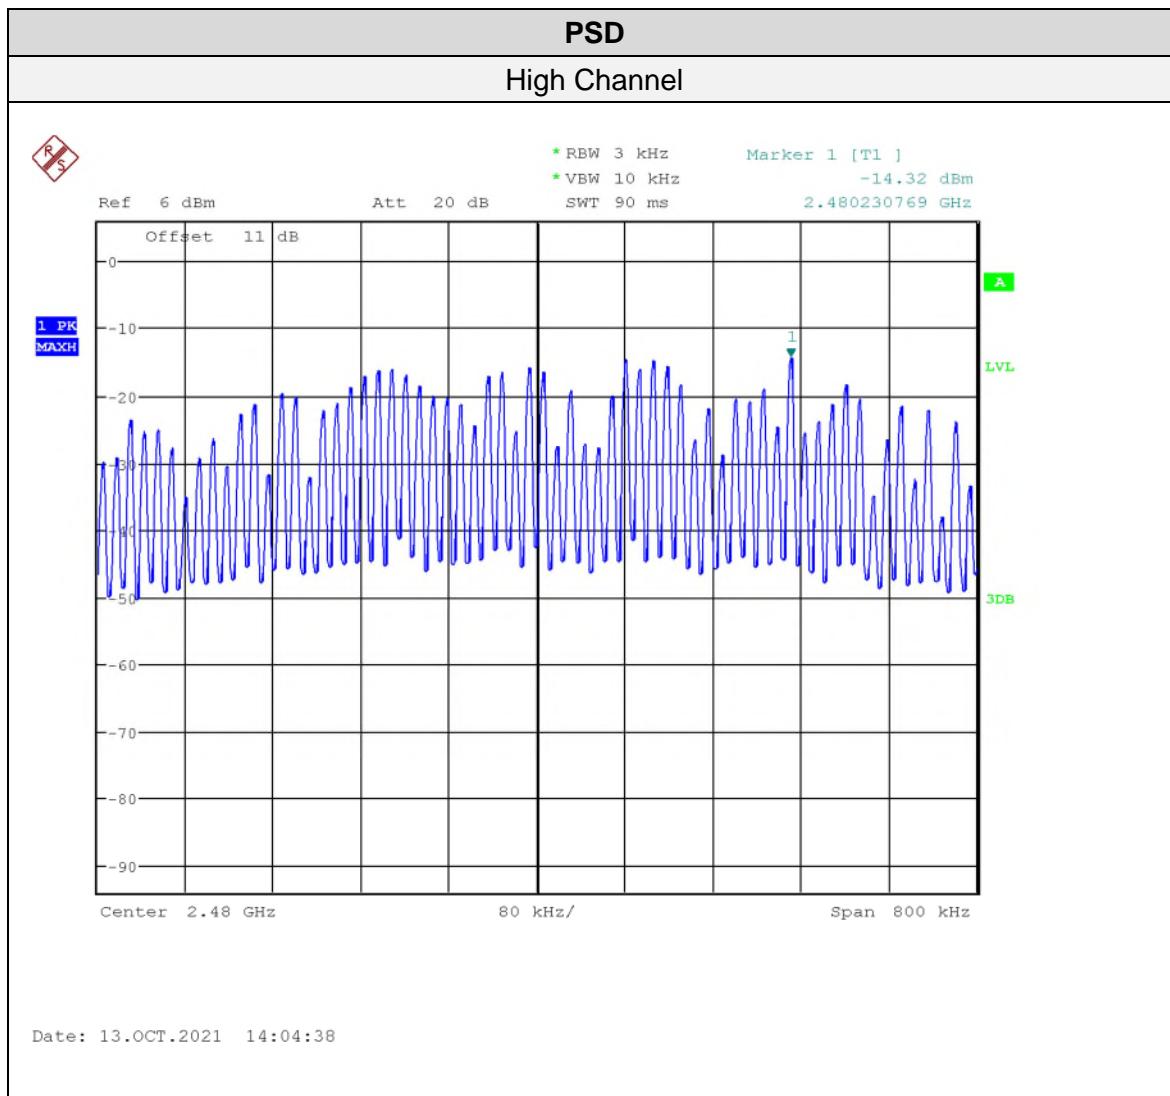

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Signal Analyzer	FSQ 26	Rohde & Schwarz	Oct. 25, 2019	Oct. 25, 2021	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Appendix A – EUT Summary

Client	4iiii Innovations Inc.	 Canada
Product	Precision 3 Powermeter – PML300	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

For further details for filing purposes, refer to filing package.

General EUT Description

Client	
Organization / Address	4iiii Innovations Inc. 141 2nd Ave East, Cochrane, AB, Canada, T4C 2B9
Contact	Michael Mercer
Phone	403-800-3095
Email	mike@4iiii.com
EUT Details	
EUT Name	PRECISION3 POWERMETER
EUT Model	PML300
FCC ID	ZZNPM300
IC	9896A-PM300
Equipment Category	ITE
Basic EUT Functionality	The PML300 power meter is an electronic device that is permanently attached to a bicycle crank and measures the amount of energy a rider imparts to the drive train. The device connects wirelessly to any BLE equipped smart phone as well as most ANT+® bicycle computer head units.
Input Voltage and Frequency	2.6 – 3.3 VDC
Rated Input Current	10mA
Connectors available on EUT	None
Peripherals Required for Test	Android phone with 4iiii configuration App
Release type	Final
Intentional Radiator Frequency	2400 – 2483.5 MHz for BLE applications as described above.
EUT Configuration	Wireless configured to transmit continuously at 100% duty cycle Power Setting: +0dBm

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT and Test Setup Photos’.

Client	4iiii Innovations Inc.
Product	Precision 3 Powermeter – PML300
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Appendix B – EUT and Test Setup Photos

Refer to the files separate from this test report