


FCC PART 22H/24E MEASURMENT AND TEST REPORT**For****CDM Miami Inc****3100 NW 72nd Ave., Unit 118, Miami FL 33122****E.U.T.: GSM Cell Phone****Model Name: LAVORUM, ULTRA, STAR, MEGA, MINI X PAD, HYPER, LUX, BOOM, MIO, STILO, IDEA****Trade name: OLA, FUN, COLA, DOLA****FCC ID: ZZRTM3458****Report Number: NTC1311477F****Test Date(s): November 11 2013 to December 16 2013****Report Date(s): December 17, 2013****Prepared by****Dongguan NTC Co., Ltd.****Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District,
Dongguan City, Guangdong Province, China****Tel: +86-769-22022444****Fax: +86-769-22022799****Prepared By**

Rose Hu / Engineer

Sunn Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan NTC Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1 GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	3
1.2 TEST METHODOLOGY	4
1.3 SPECIAL ACCESSORIES	4
1.4 EQUIPMENT MODIFICATIONS	4
1.5 OBJECTIVE	4
1.6 TEST FACILITY AND LOCATION	4
1.7 SUMMARY OF TEST RESULTS	5
2. RF OUTPUT POWER	6
2.1 APPLICABLE STANDARD	6
2.2 TEST PROCEDURE	6
3. TEST OCCUPIED BANDWIDTH	10
3.1 APPLICABLE STANDARD	10
3.2 TEST PROCEDURE	10
4. FREQUENCY STABILITY	18
4.1 APPLICABLE STANDARD	18
4.2 TEST PROCEDURE	18
5. BAND EDGES	21
5.1 APPLICABLE STANDARD	21
5.2 TEST PROCEDURE	21
6. MODULATION CHARACTERISTIC	25
7. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	26
7.1 APPLICABLE STANDARDS	26
7.2 TEST PROCEDURE	26
8. FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS	33
8.1 APPLICABLE STANDARDS	33
8.2 TEST OF BLOCK DIAGRAM OF CONFIGURATION	33
8.3 TEST PROCEDURE	34
9. RF EXPOSURE	37
9.1 APPLICABLE STANDARDS	37
9.2 TEST RESULT	37
10. TEST EQUIPMENT LIST	38

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This is a GSM cell phone with Bluetooth and WIFI functions. It's power by internal 3.7V rechargeable Li-lithium battery, and also can be charged by external adapter. For more details features, please refer to User's Manual.

Manufacturer	: Shenzhen Baili Yongxing Technologe Co., Ltd.
Address	: 5F, Building 10 East, Heng Mingzhu Ind Park, Tongfuyu Ind Zone, Shajing St., Bao'an Dist., Shenzhen, China
Frequency:	: Cellular Band: 824.2-848.8MHz (TX) 869.2-893.8MHz(RX) PCS Band: 1850.2-1909.8MHz (TX) 1930.2-1989.8MHz(RX) WIFI: 2412-2462MHz, Bluetooth: 2402-2480MHz
Modulation	: GMSK for GSM/PCS DSSS, OFDM for WIFI GFSK, π4/-DQPSK, 8DPSK for Bluetooth
Max RF Output Power	: 32.98dBm (Cellular Band) 28.64dBm (PCS Band)
Antenna Type	: PIFA
Antenna Gain	: 0.6dBi (peak) for Cellular Band 1.6dBi (peak) for PCS Band 2.3dBi (peak) for WIFI and Bluetooth band
Power Supply	: Li-lithium Battery 3.7V Input : AC 100-240V 50/60Hz 0.1A(Adapter) Output :DC 5V 500mA Model: US77002
Model name	: LAVORUM, ULTRA, STAR, MEGA, MINI X PAD, HYPER, LUX, BOOM, MIO, STILO, IDEA
Model difference	: All models are the same except appearance color, model name and trademark, we prepare LAVORUM for test.
Remark	: This measurement and test report only pertains to the GSM portion of the EUT. For measurement and test results to the Bluetooth and WIFI functions please refer to report number NTC1311477F-1, NTC1311477F-2.

1.2 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: ANSI/TIA/EIA-603-C, ANSI C63.4-2009.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters..

1.3 Special Accessories

Not available for this EUT intended for grant.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Objective

This type approval report is prepared on behalf of Everwise Ltd. in accordance with Part 2, Subpart J, Part 22 Subpart H, and Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for output power, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, band edge and radiated margin.

1.6 Test Facility and Location

Accredited by FCC, August 02, 2011

The Certificate Registration Number is 665078.

Accredited by Industry Canada, July 01, 2011

The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.

Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§2.1046 §22.913(a) §24.232(c)	RF Output Power	Compliant
§ 2.1049 § 22.905 § 22.917 § 24.238	Occupied Bandwidth	Compliant
§ 2.1055 § 22.355 § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
§ 22.917 (a) § 24.238 (a)	Out of band emission, Band Edge	Compliant
§ 2.1047	Modulation Characteristics	N/A
§ 2.1051 § 22.917 (a) § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053 § 22.917 (a) § 24.238 (a)	Field Strength of Spurious Radiation	Compliant
§1.1307, §2.1093	RF Exposure (SAR)	Compliant(refer to SAR report please)

* SAR report provide by SIEMIC Testing and Certification Services.

2. RF OUTPUT POWER

2.1 Applicable Standard


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), in no case may the peak output power of a base station transmitter exceed 2 watt EIRP.

2.2 Test Procedure




Conducted Method:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a spectrum analysis. Transmitter output was read off the spectrum analysis in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to spectrum analysis reading.

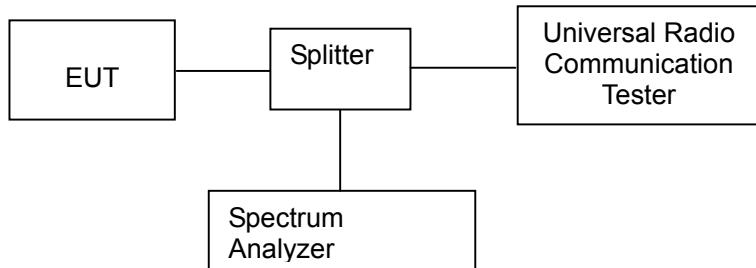

Radiated method:

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. During the measurement, the EUT was communicating with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 1m to 4m. The reading was recorded and the field strength (E in dBuV/m) was calculated. ERP in frequency band 824.2 – 848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: EIRP in frequency band 1850.2 – 1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $ERP = S.G. \text{ output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$

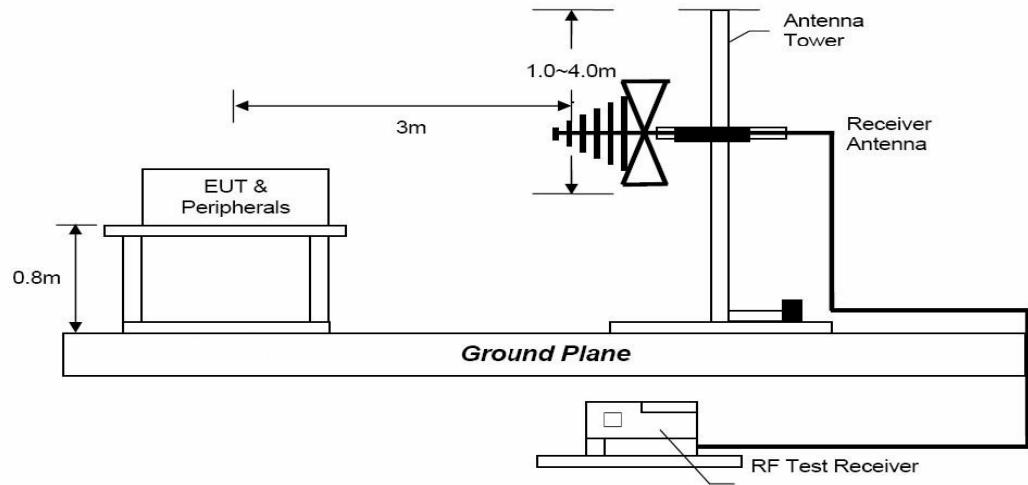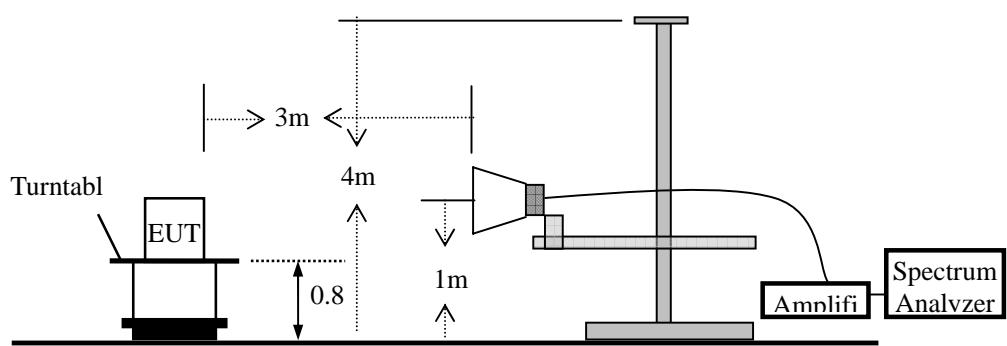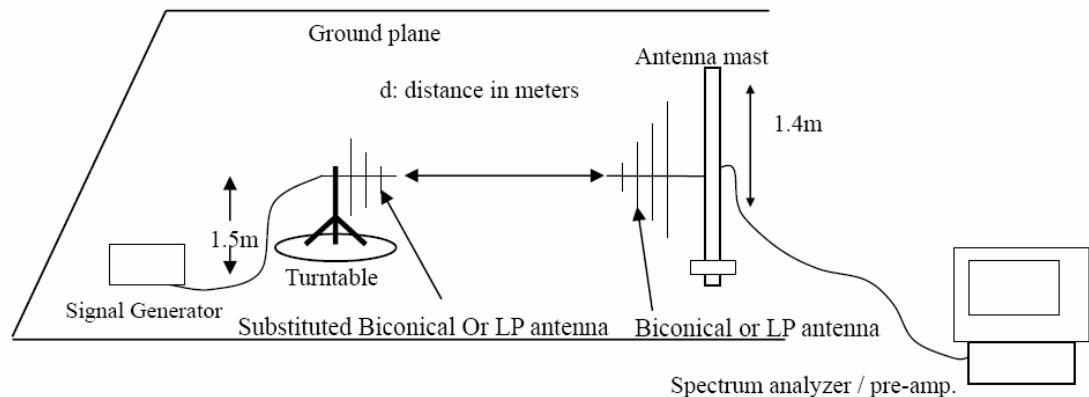Radiated Emission Test Set-Up, Frequency Below 1000MHz**Radiated Emission Test Set-Up, Frequency above 1GHz****Substituted Method Test Set-UP**

Conducted Power:

Cellular Band (Part 22H) GSM 850				
Humidity :		46 %	Temperature :	21 °C
Test Result:		PASS	Test By:	Sance
Mode	Channel	Frequency (MHz)	Output Power (dBm)	Tune up power tolerant
GSM (1 Uplink)	128	824.2	32.88	32±1
	189	836.4	32.95	32±1
	251	848.8	32.98	32±1
GPRS 8 (1 Uplink)	128	824.2	32.87	32±1
	189	836.4	32.93	32±1
	251	848.8	32.96	32±1
GPRS 10 (2 Uplink)	128	824.2	30.16	30±1
	189	836.4	30.21	30±1
	251	848.8	30.25	30±1
GPRS 12 (4 Uplink)	128	824.2	26.69	26±1
	189	836.4	26.75	26±1
	251	848.8	26.77	26±1

PCS Band (Part 24E) GSM 1900				
Humidity :		46 %	Temperature :	21 °C
Test Result:		PASS	Test By:	Sance
Mode	Channel	Frequency (MHz)	Output Power (dBm)	Tune up power tolerant
GSM (1 Uplink)	512	1850.2	28.64	29±1
	661	1880.0	28.29	29±1
	810	1909.8	28.45	29±1
GPRS 8 (1 Uplink)	512	1850.2	28.63	29±1
	661	1880.0	28.28	29±1
	810	1909.8	28.45	29±1
GPRS 10 (2 Uplink)	512	1850.2	26.98	26±1
	661	1880.0	26.87	26±1
	810	1909.8	26.92	26±1
GPRS 12 (4 Uplink)	512	1850.2	23.51	23±1
	661	1880.0	23.46	23±1
	810	1909.8	23.44	23±1

Radiated Power (ERP and EIRP)

Cellular Band (Part 22H)							
Humidity :		46 %	Temperature :			21 °C	
Mode:		GSM850	Test By:			Sance	
Test Result:		PASS					
Channel	Frequency (MHz)	Substituted level (dBm)	Polarization (H/V) Antenna	Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
128	824.2	21.72	H	7.86	0.9	28.68	38.45
		13.83	V	7.86	0.9	20.79	38.45
189	836.4	21.52	H	7.81	0.9	28.43	38.45
		13.48	V	7.81	0.9	20.39	38.45
251	848.8	21.61	H	7.81	0.9	28.52	38.45
		13.57	V	7.81	0.9	20.48	38.45

PCS Band (Part 24E)							
Humidity :		46 %	Temperature :			21 °C	
Mode:		GSM1900	Test By:			Sance	
Test Result:		PASS					
Channel	Frequency (MHz)	Substituted level (dBm)	Polarization (H/V) Antenna	Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
512	1850.2	18.68	H	8.04	2.3	24.42	33.0
		16.65	V	8.04	2.3	22.39	33.0
661	1880.0	18.85	H	8.06	2.3	24.61	33.0
		16.77	V	8.06	2.3	22.53	33.0
810	1909.8	16.79	H	8.09	2.3	22.58	33.0
		16.68	V	8.09	2.3	22.47	33.0

3. Test OCCUPIED BANDWIDTH


3.1 Applicable Standard

CFR 47 §2.1049, §22.917, §22.905 and §24.238.

3.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular /PCS) and the 26 dB & 99% bandwidth was recorded.

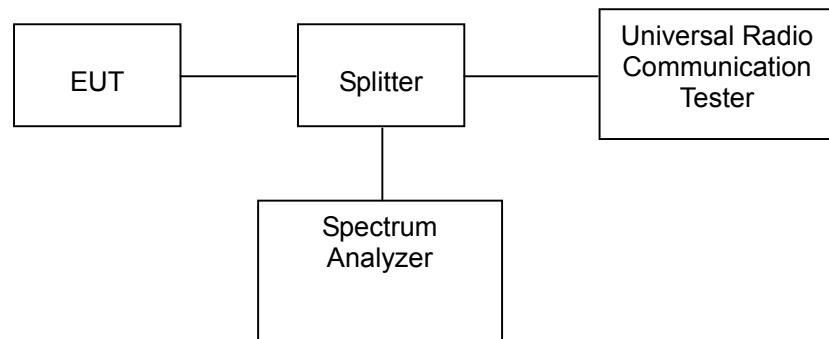


Cellular Band (Part 22H)				
Humidity :		46 %	Temperature :	21 °C
Test Result:		PASS	Test By:	Sance
Mode	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM850	128	824.2	241.6787	321.3000
	189	836.4	243.1259	319.8000
	251	848.8	243.1259	321.3000

PCS Band (Part 24E)				
Humidity :		46 %	Temperature :	21 °C
Test Result:		PASS	Test By:	Sance
Mode	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM1900	512	1850.2	246.0203	315.5000
	661	1880.0	243.1259	319.8000
	810	1909.8	244.5731	321.3000


Cellular Band (Part 22H)

26 dB Bandwidth (Channel 128)

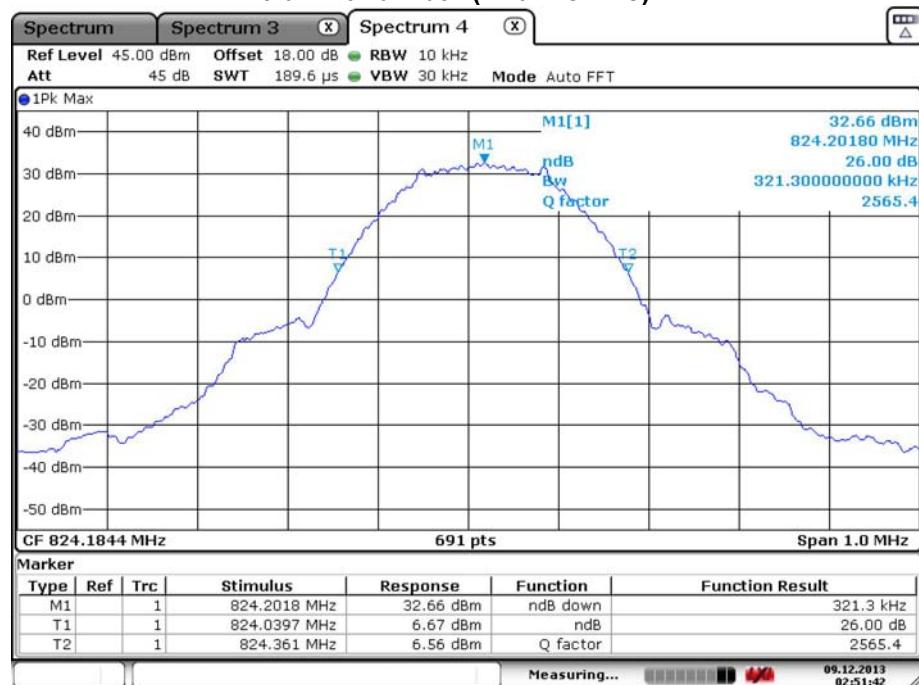

Date: 9.DEC.2013 02:51:43


99% Band width (Channel 128)

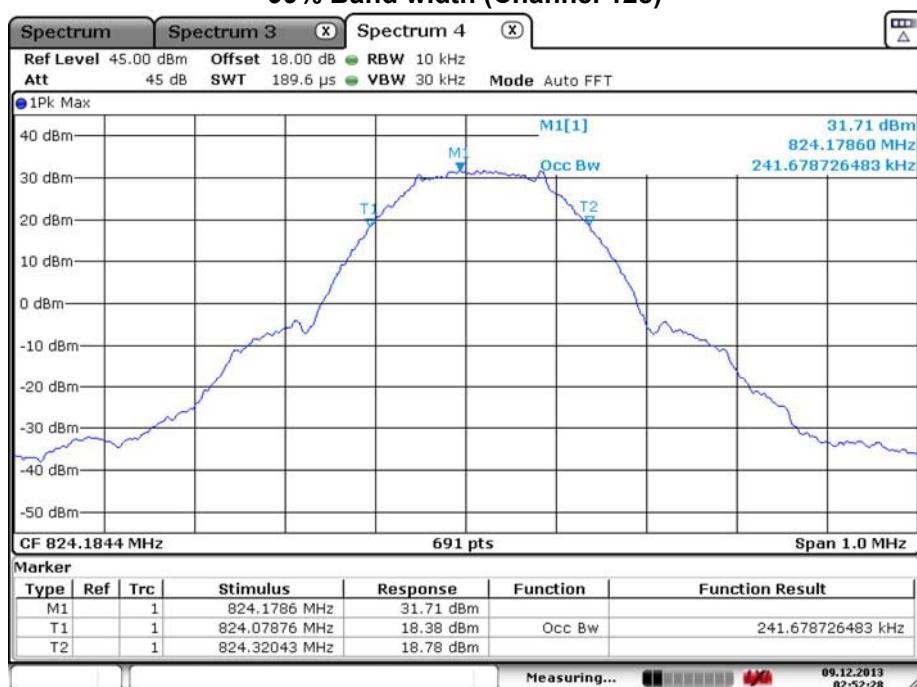

Date: 9.DEC.2013 02:52:28


Cellular Band (Part 22H)

26 dB Bandwidth (Channel 189)

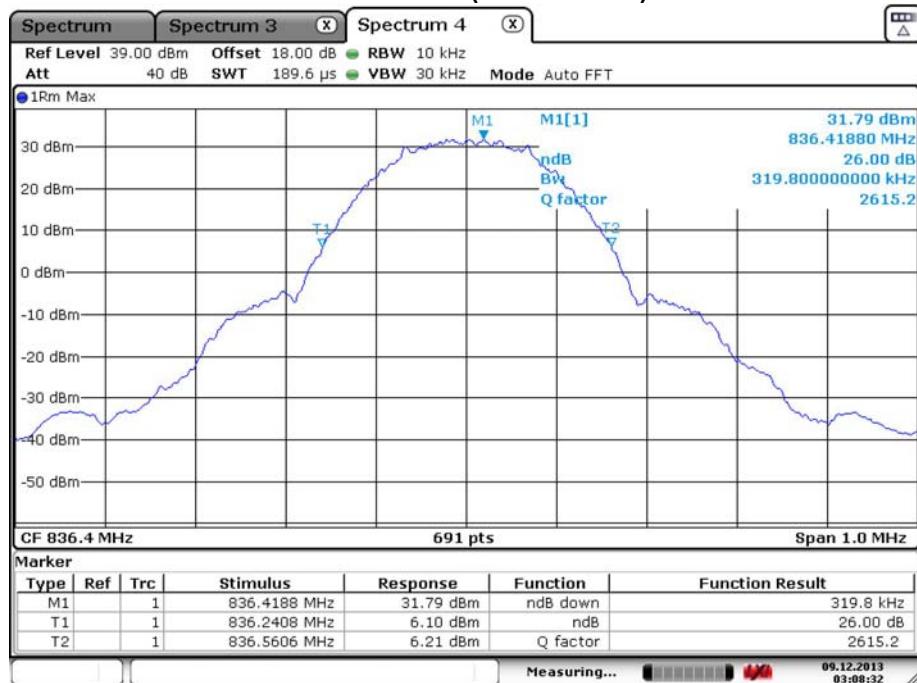

Date: 9.DEC.2013 03:08:32


99% Band width (Channel 189)

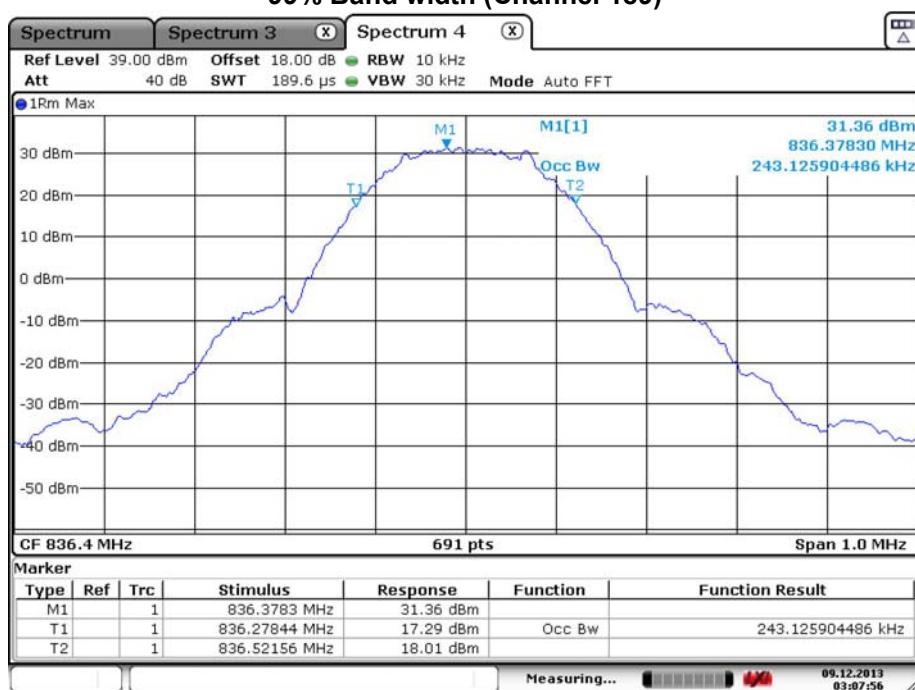

Date: 9.DEC.2013 03:07:57


Cellular Band (Part 22H)

26 dB Bandwidth (Channel 251)

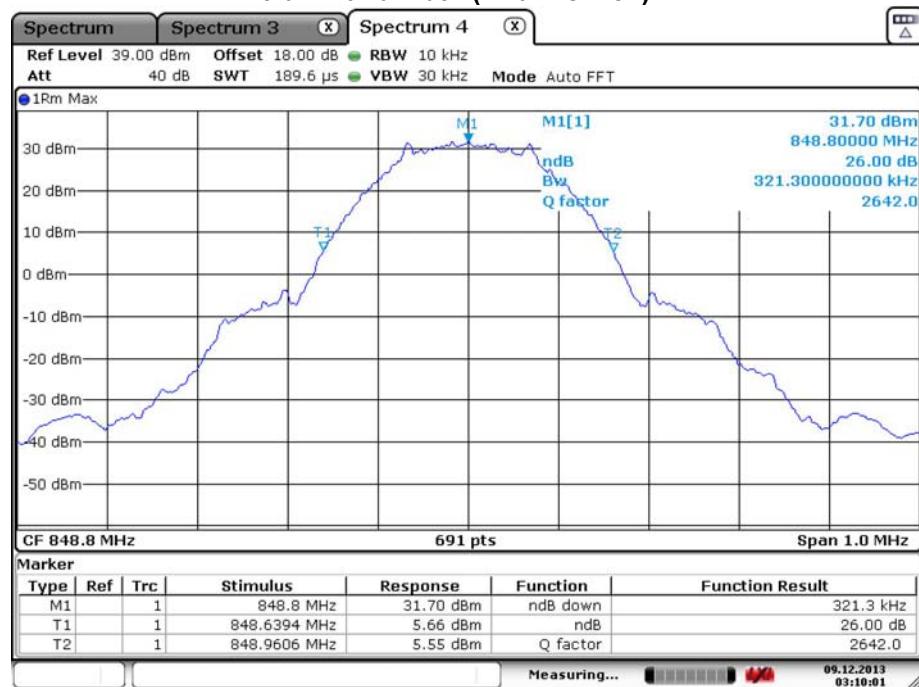

Date: 9.DEC.2013 03:10:02


99% Band width (Channel 251)

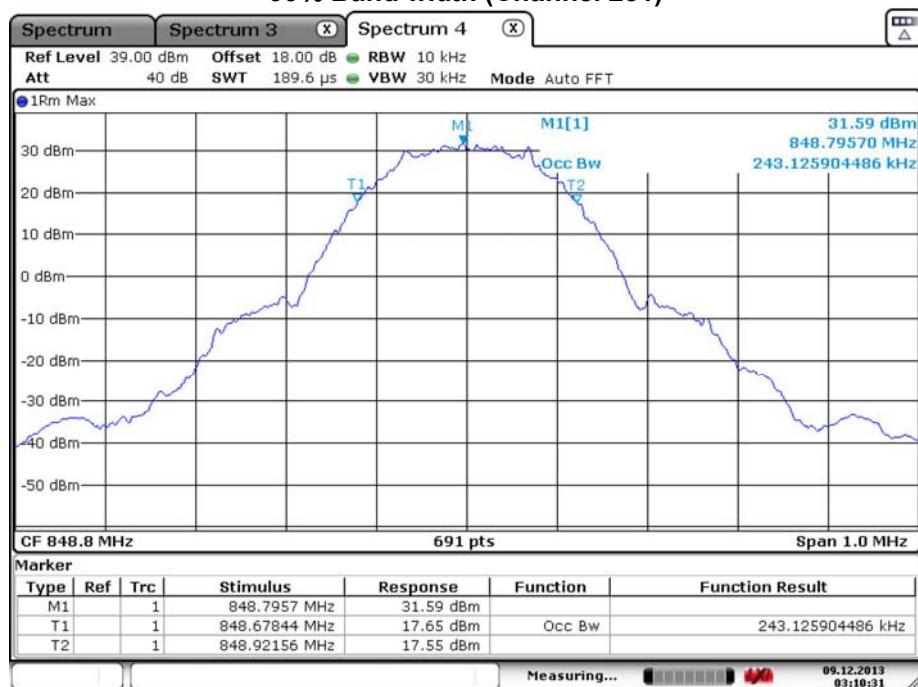

Date: 9.DEC.2013 03:10:31


PCS Band (Part 24H)

26 dB Bandwidth (Channel 512)

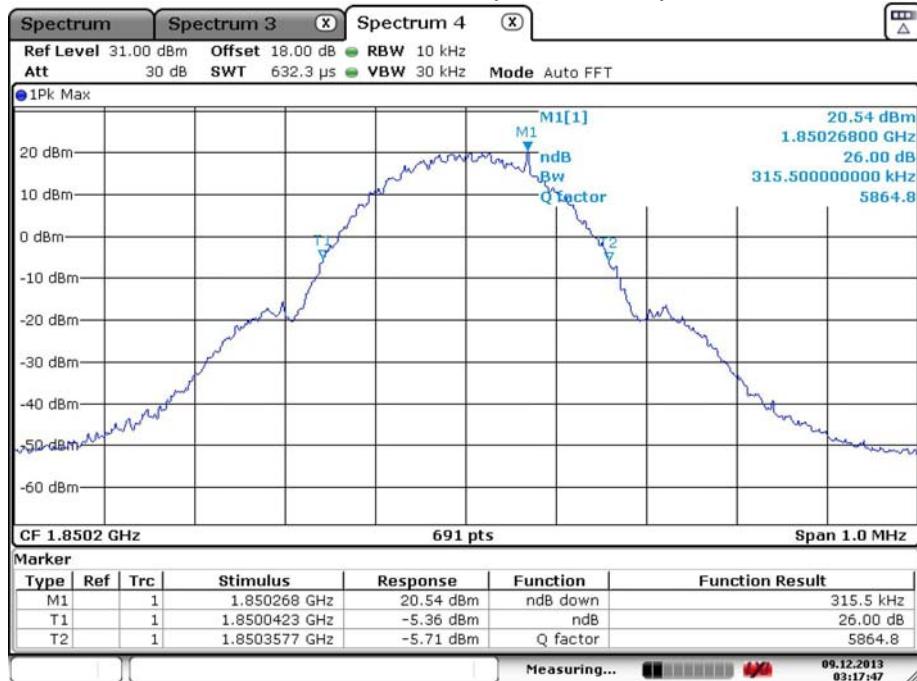

Date: 9.DEC.2013 03:17:47


99% Band width (Channel 512)

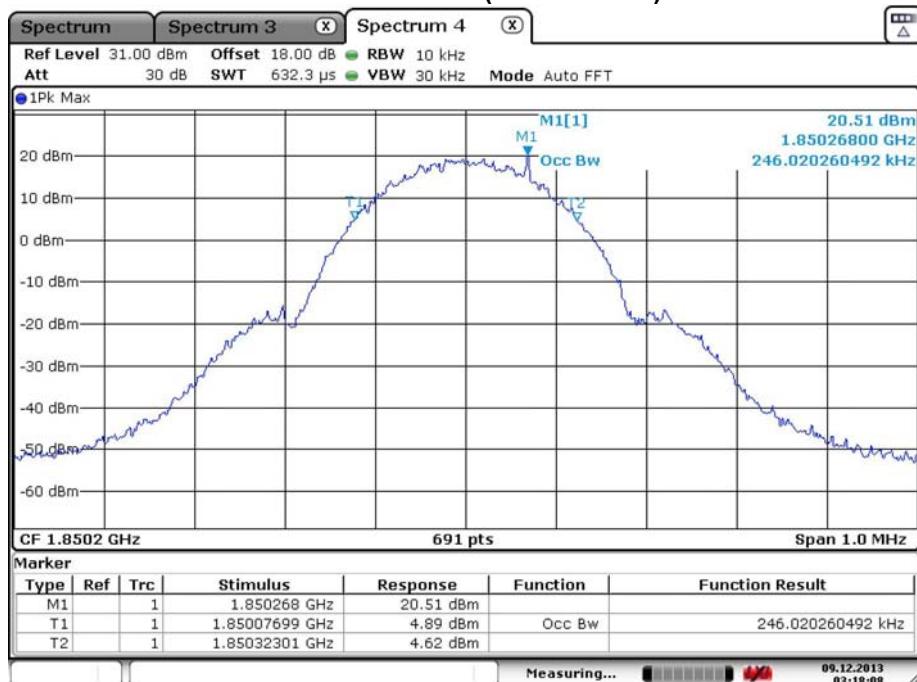

Date: 9.DEC.2013 03:18:09


PCS Band (Part 24H)

26 dB Bandwidth (Channel 661)

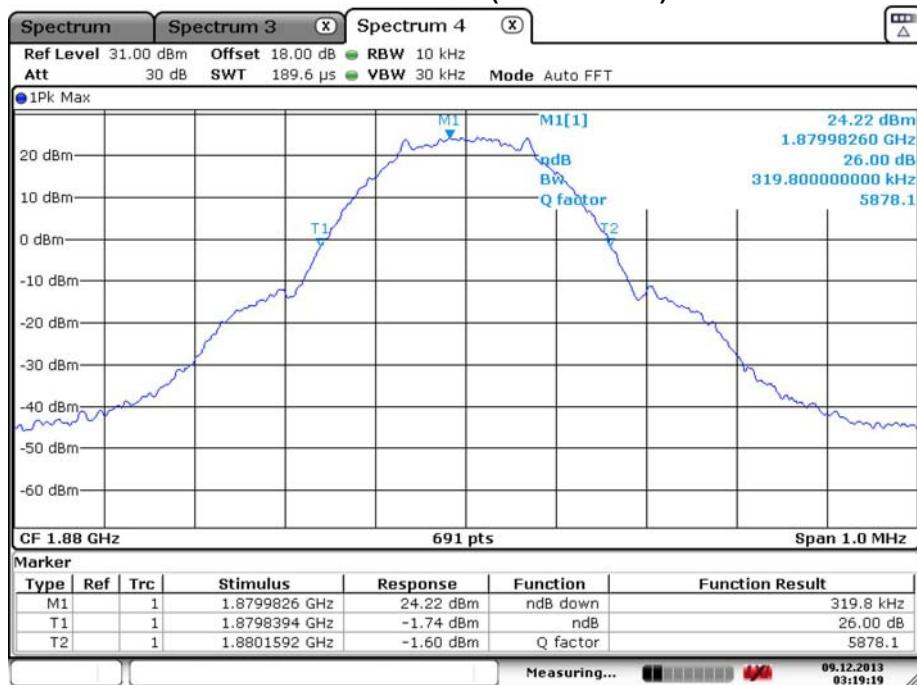

Date: 9.DEC.2013 03:19:20


99% Band width (Channel 661)

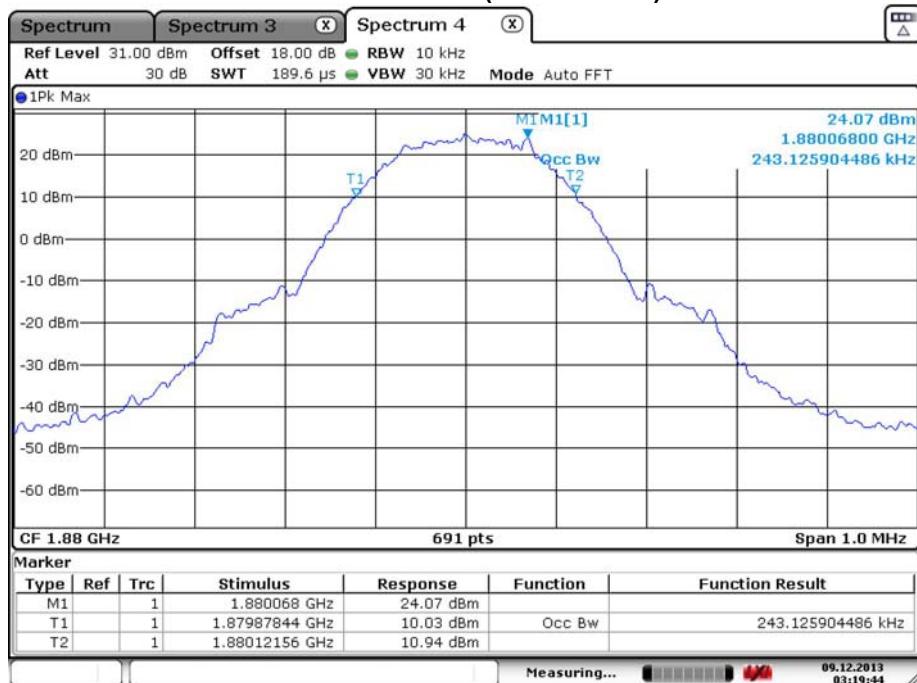

Date: 9.DEC.2013 03:19:44


PCS Band (Part 24H)

26 dB Bandwidth (Channel 810)

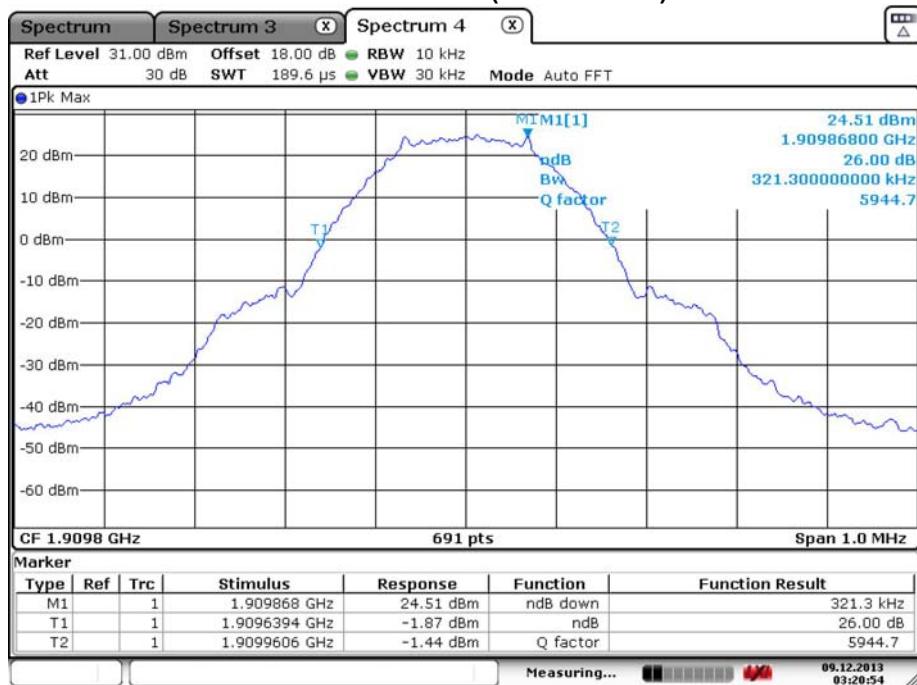

Date: 9.DEC.2013 03:20:55

99% Band width (Channel 810)

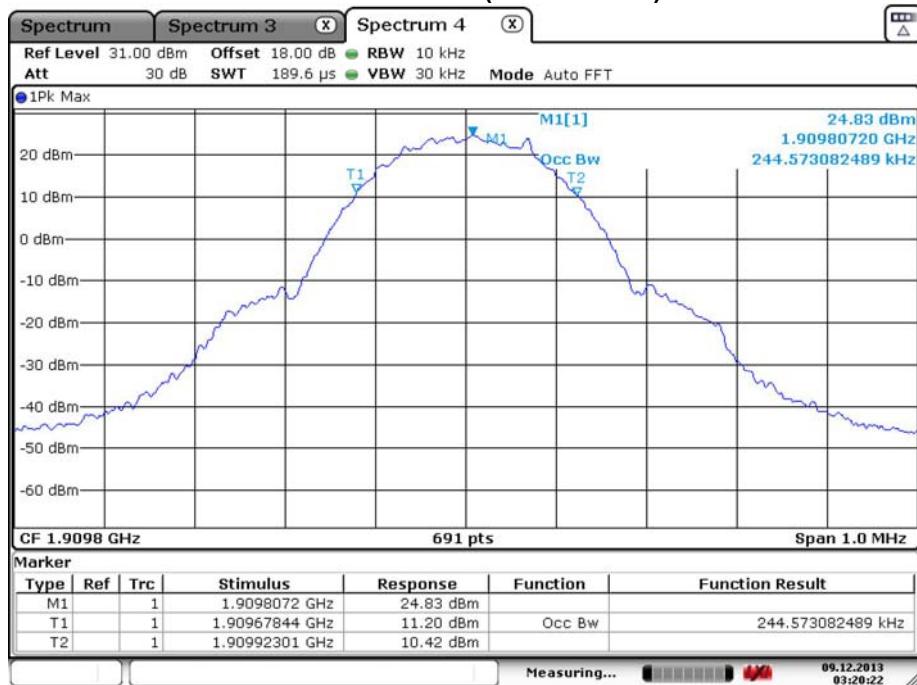

Date: 9.DEC.2013 03:20:23

4. FREQUENCY STABILITY

4.1 Applicable Standard

CFR47 § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

4.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 30 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

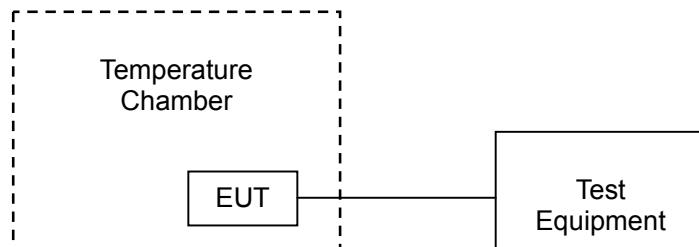

Cellular Band				
Humidity :	46 %	Temperature :	21 °C	
Mode:	GSM850	Test By:	Sance	
Test Result:	PASS			
Middle channel, $f_o = 836.4\text{MHz}$;				
Temperature (°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	25	0.030	2.5
0		19	0.023	2.5
10		22	0.026	2.5
20		16	0.019	2.5
30		8	0.010	2.5
40		10	0.012	2.5
50		17	0.020	2.5
55		23	0.028	2.5
25	3.7	8	0.010	2.5
	4.2	8	0.010	2.5
	3.5	12	0.014	2.5

Note: The manufacturer declared that the EUT could work within temperature range -10°C to 55°C and voltage range DC 3.5V to DC 4.2V. The nominal voltage is DC 3.7V.

PCS Band				
Humidity :	46 %	Temperature :	21 °C	
Mode:	GSM1900	Test By:	Sance	
Test Result:	PASS			
Middle channel, $f_o = 1880.0\text{MHz}$;				
Temperature (°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-29	-0.015	2.5
0		-31	-0.017	2.5
10		18	0.010	2.5
20		26	0.014	2.5
30		22	0.012	2.5
40		30	0.016	2.5
50		-19	-0.010	2.5
55		-21	-0.011	2.5
25	3.7	25	0.013	2.5
	4.2	31	0.017	2.5
	3.5	28	0.015	2.5

Note: The manufacturer declared that the EUT could work within temperature range -10°C to 55°C and voltage range DC 3.5V to DC 4.2V. The nominal voltage is DC 3.7V.

5. BAND EDGES

5.1 Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

5.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 3 kHz.

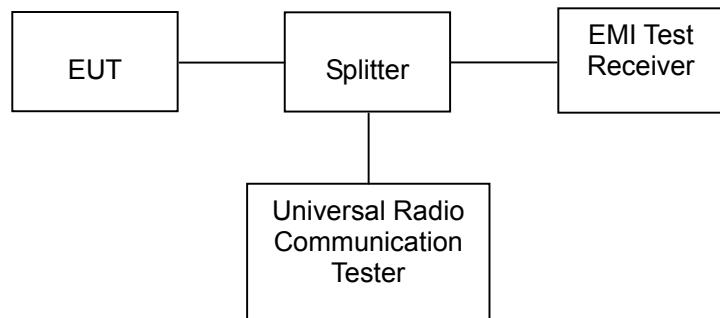

Cellular Band			
Humidity :	46 %	Temperature :	21 °C
Test Result:	PASS	Test By:	Sance
Mode	GSM850		
Frequency (MHz)	Emission (dBm)		Limit (dBm)
824	-14.95		-13
849	-21.79		-13

Note: 1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW}) \approx 0.3$

2. Band Edge= Measurement Value + Correction Factor (dB)

3. Offset= External attenuator+cable loss+ $10\log(1\% \text{ Emission BW}/\text{RBW})=18.0\text{dB}$


PCS Band			
Humidity :	46 %	Temperature :	21 °C
Test Result:	PASS	Test By:	Sance
Mode	GSM1900		
Frequency (MHz)	Emission (dBm)		Limit (dBm)
1850	-15.11		-13
1910	-15.54		-13

Note: 1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW}) \approx 0.3$

2. Band Edge= Measurement Value + Correction Factor (dB)


3. Offset=External attenuator+cable loss+ $10\log(1\% \text{ Emission BW}/\text{RBW})=18.0\text{dB}$

Cellular Band, Low Channel (GSM)

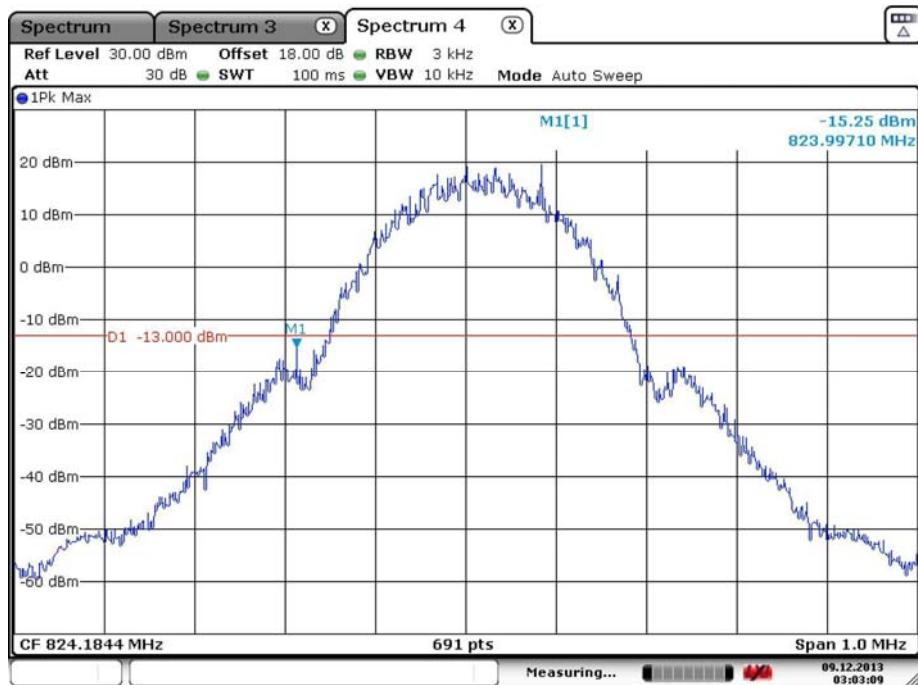


Date: 9.DEC.2013 03:03:09

Cellular Band, High Channel (GSM)

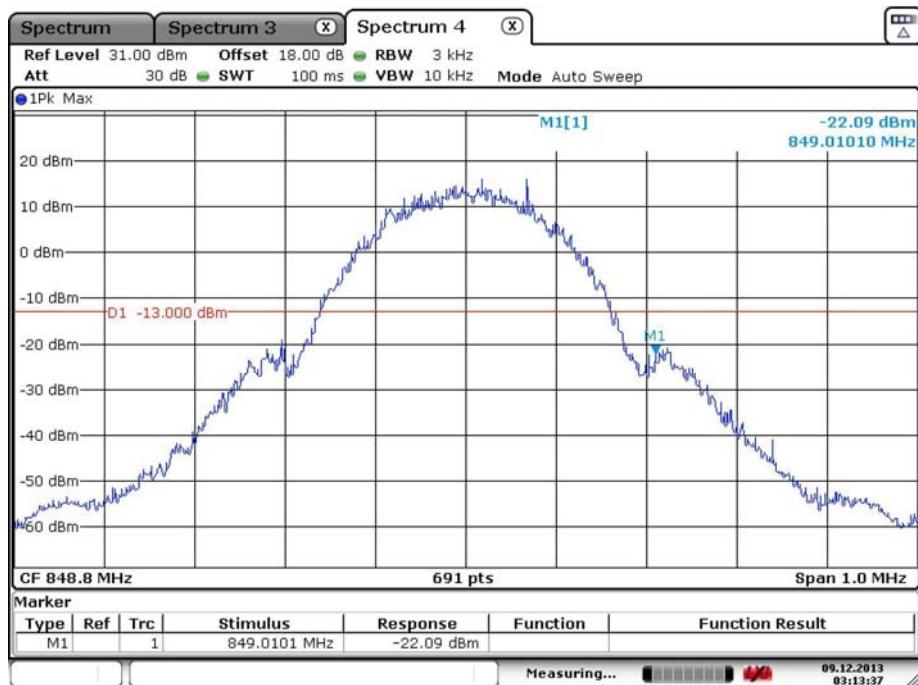


Date: 9.DEC.2013 03:13:38

PCS Band, Low Channel (GSM)

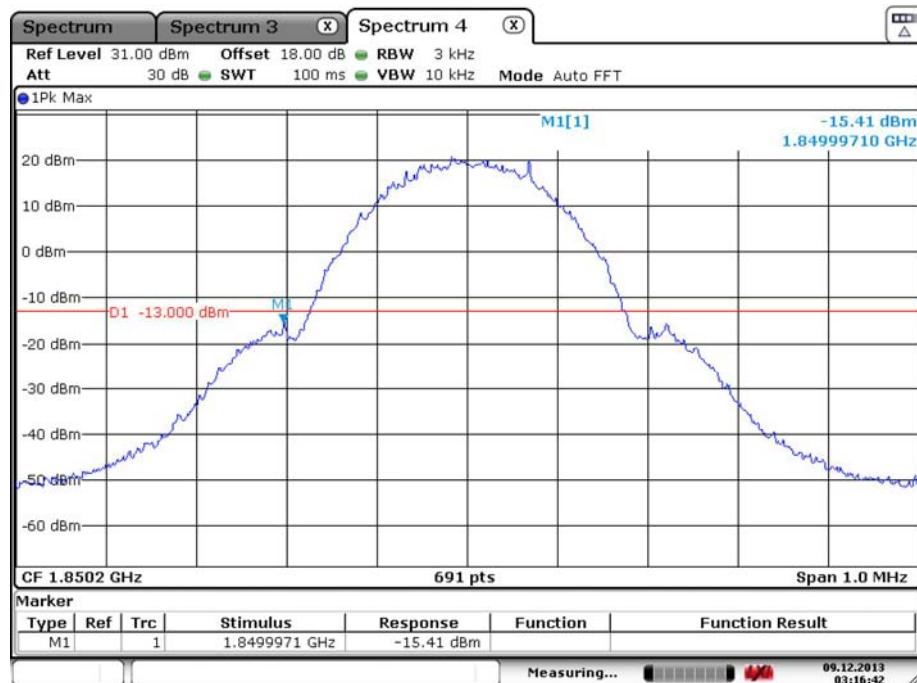

Date: 9.DEC.2013 03:16:43

PCS Band, High Channel (GSM)

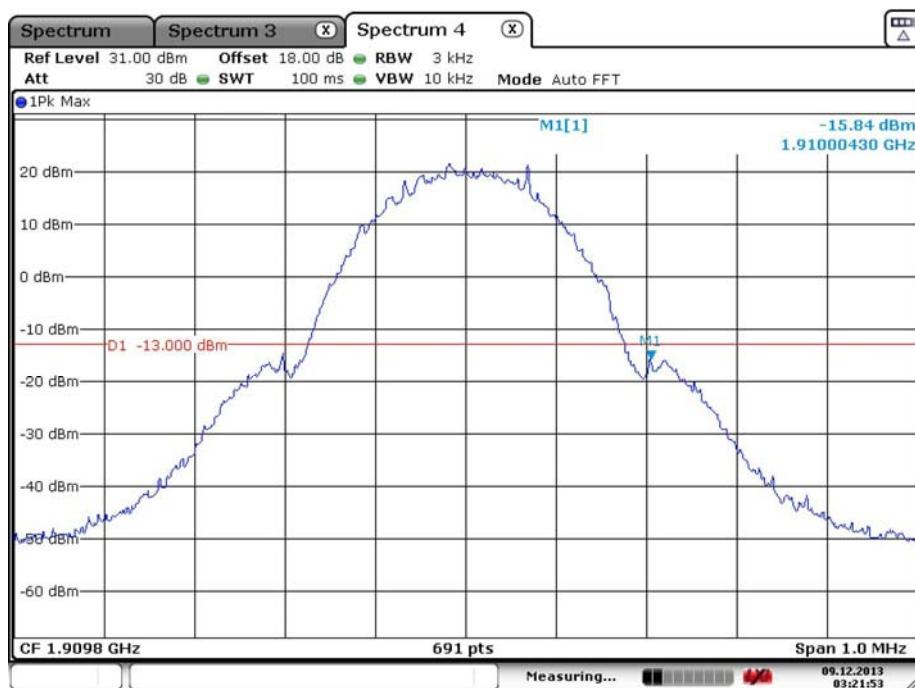

Date: 9.DEC.2013 03:21:53

6. MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

7. SPURIOUS EMISSIONS AT ANTENNA TERMINALS


7.1 Applicable Standards

CFR 47 §2.1051, §22.917(a) and §24.238(a).


The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

7.2 Test Procedure


The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1000 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

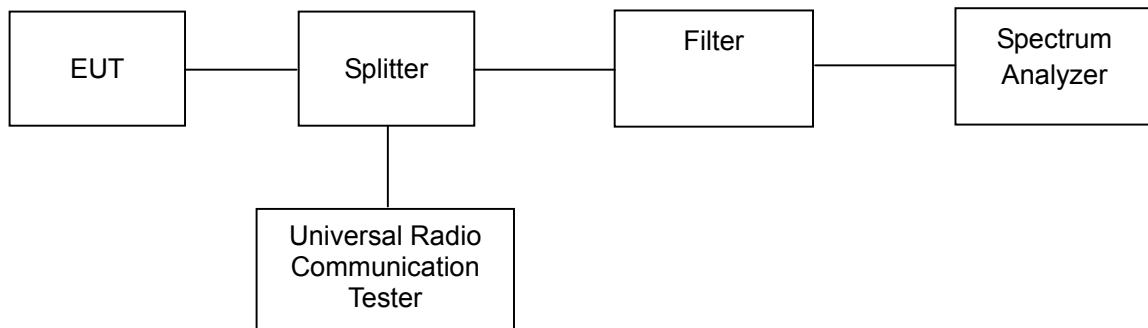


Cellular Band (Part 22H)
30 – 1000 MHz - Channel 128(GSM)

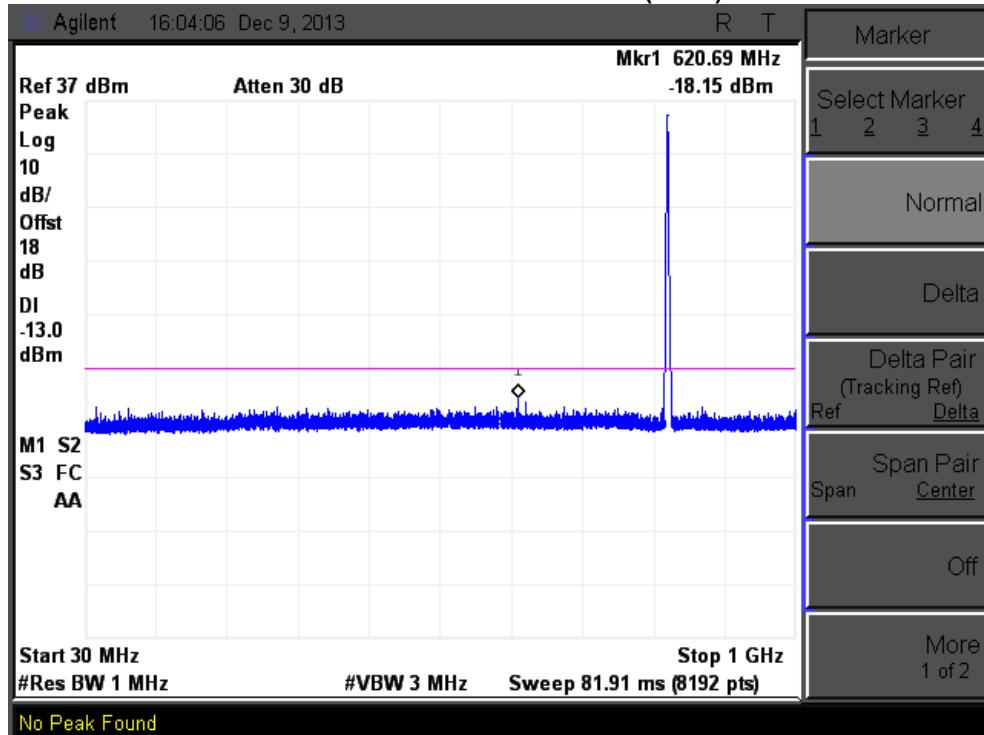


1GHz – 20GHz - Channel 128(GSM)

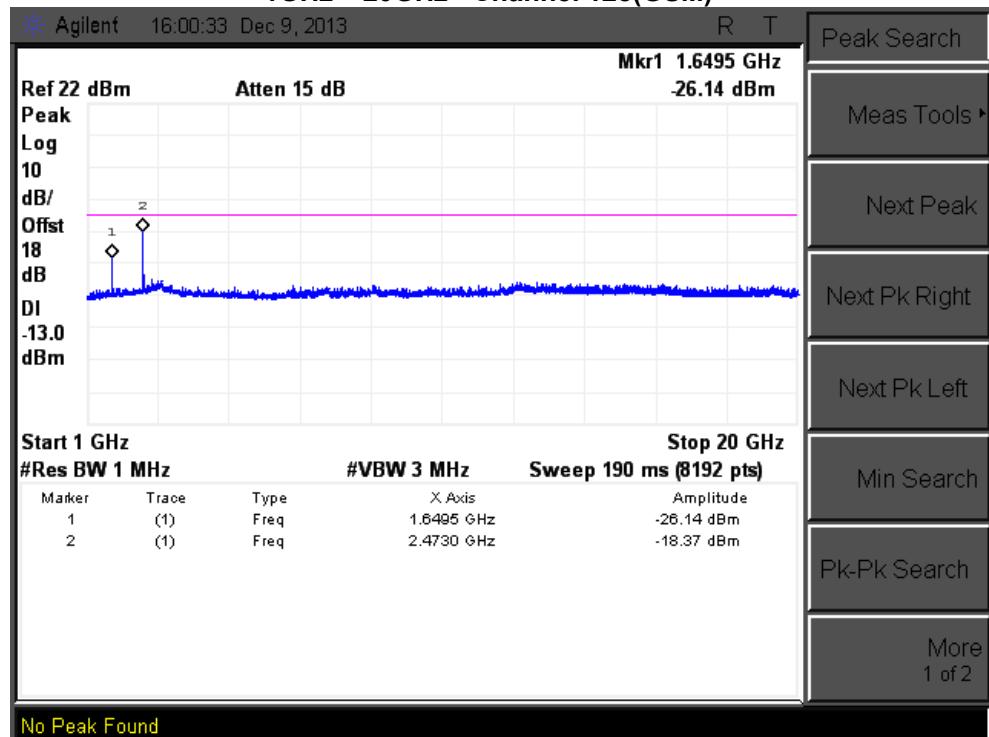


30MHz – 1GHz - Channel 189(GSM)

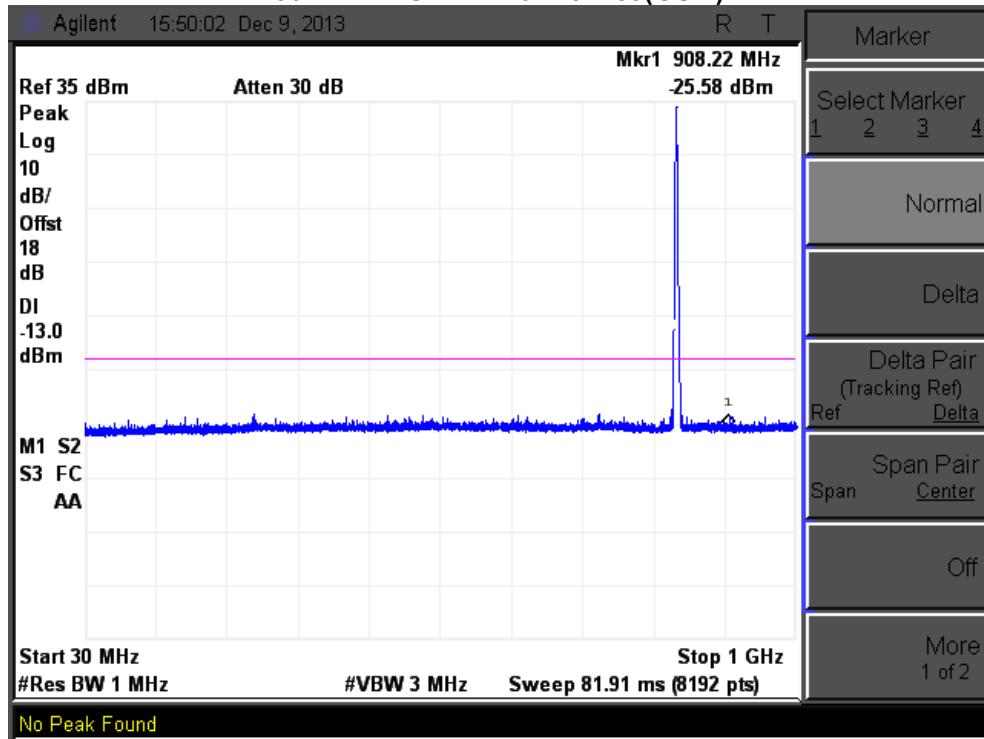


1GHz – 20GHz - Channel 189(GSM)

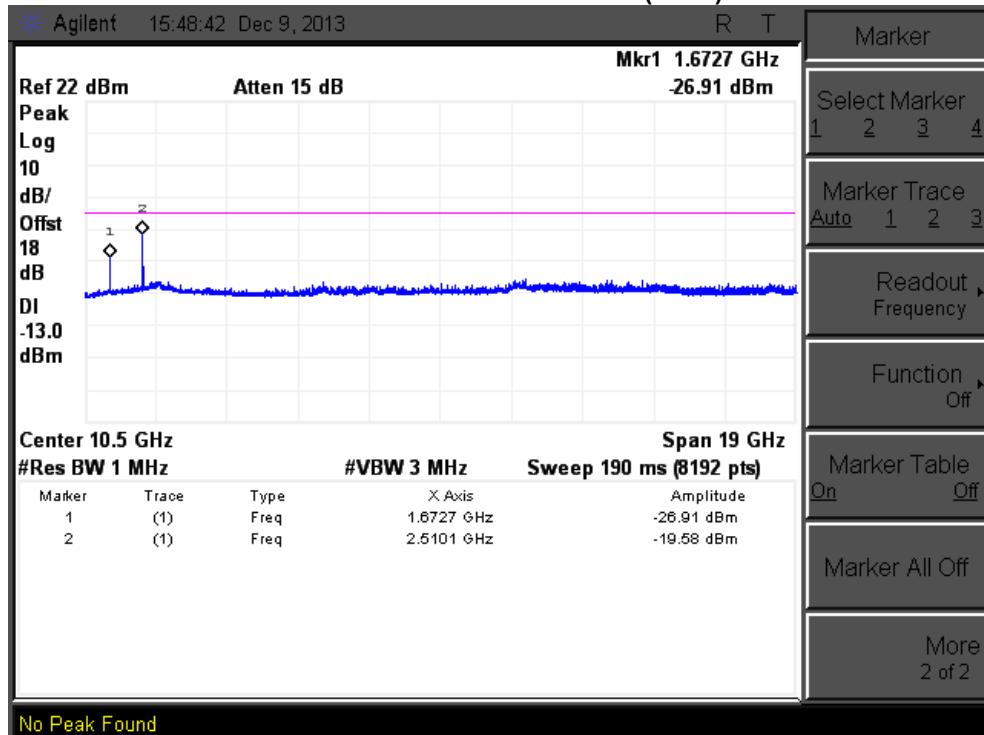


30MHz – 1GHz - Channel 251(GSM)

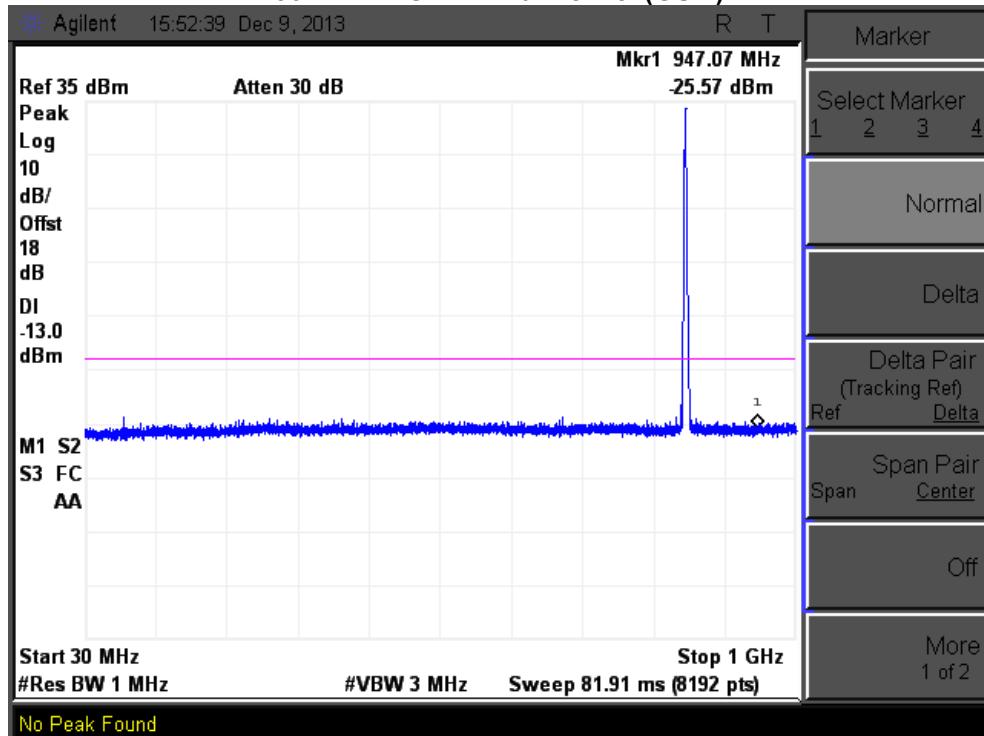


1GHz – 20GHz - Channel 251(GSM)


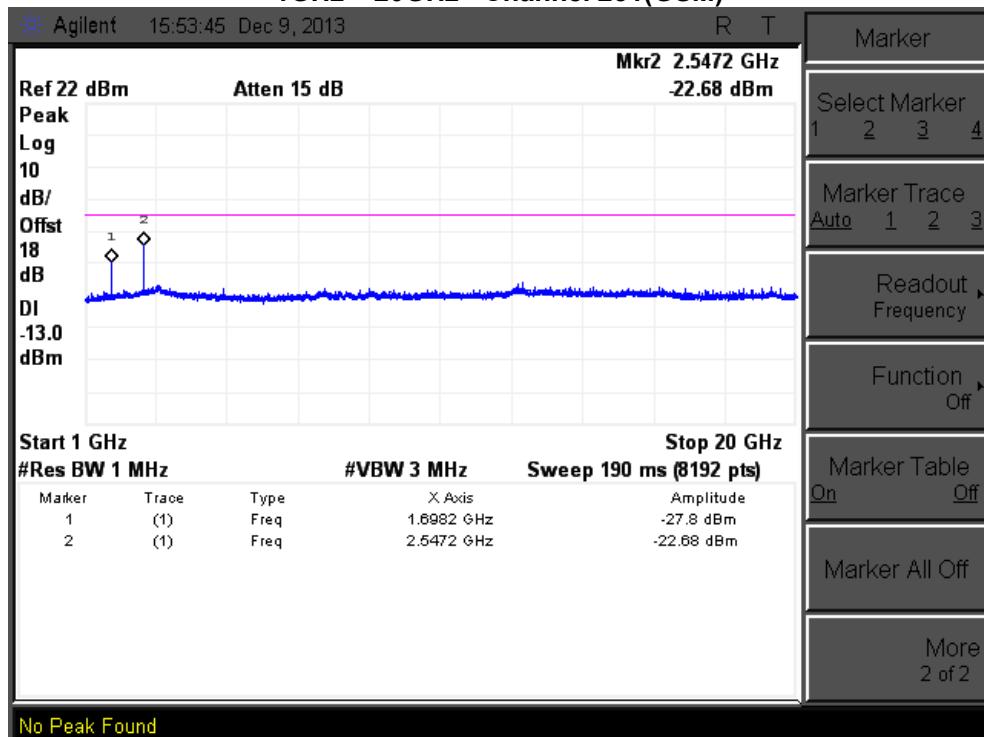


PCS Band (Part24E)
30 – 1000 MHz - Channel 512(GSM)

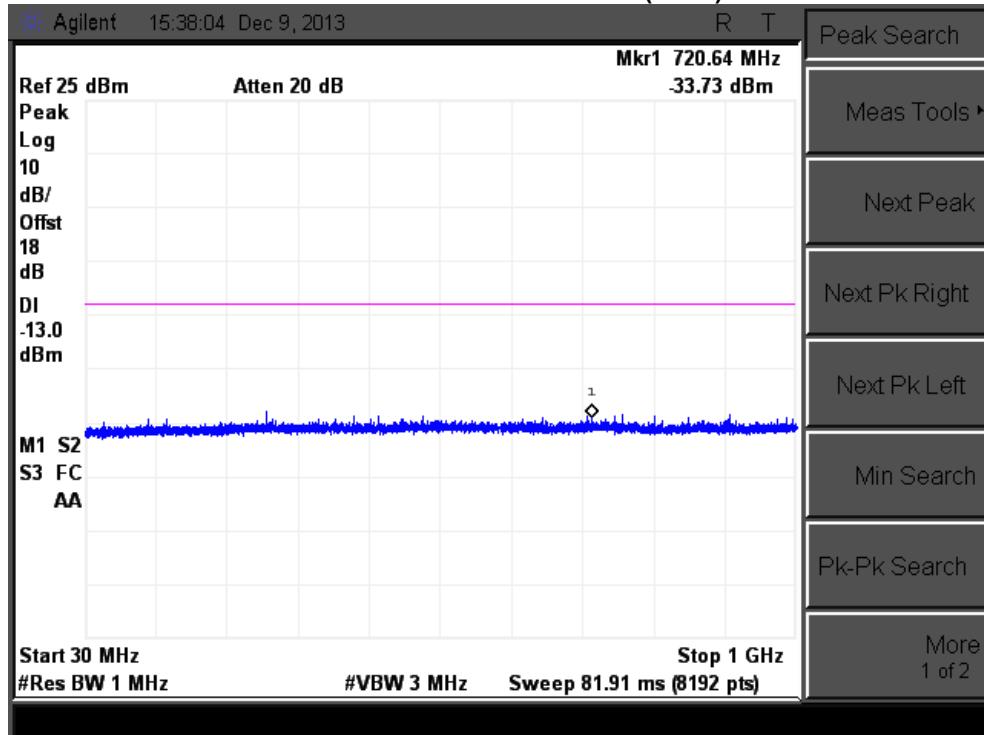


1GHz – 20GHz - Channel 512(GSM)

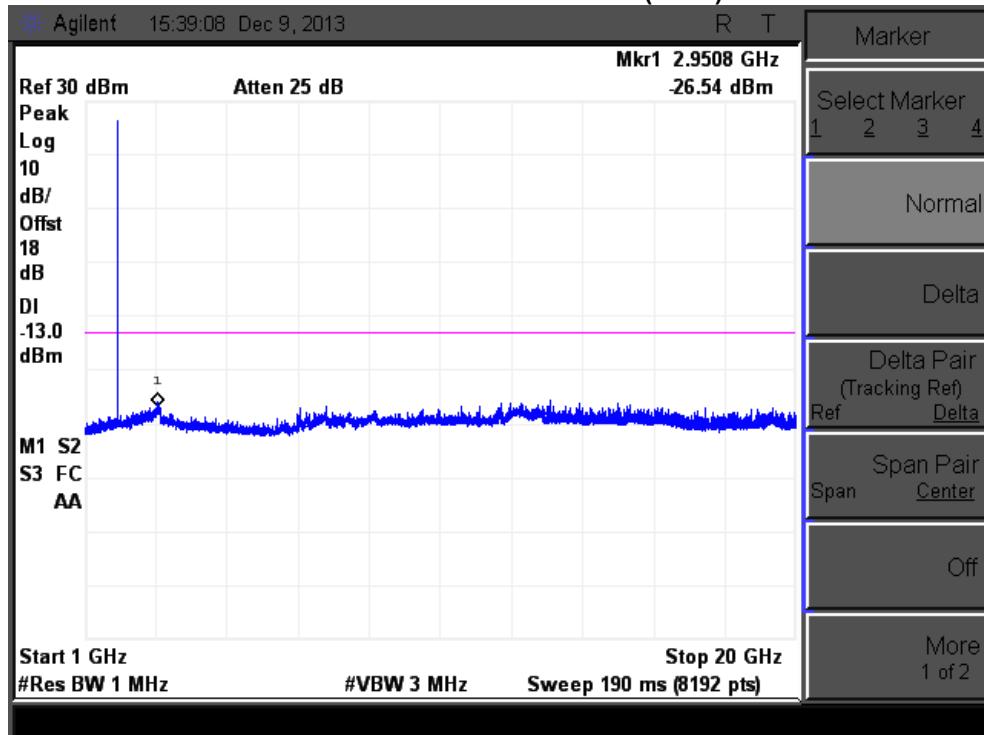


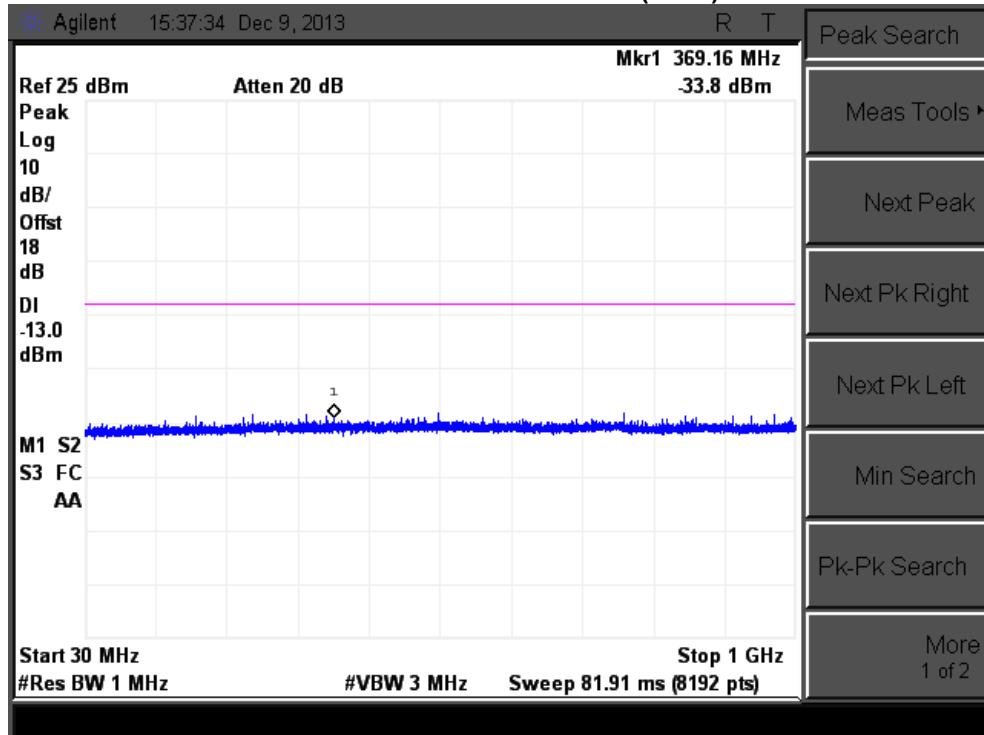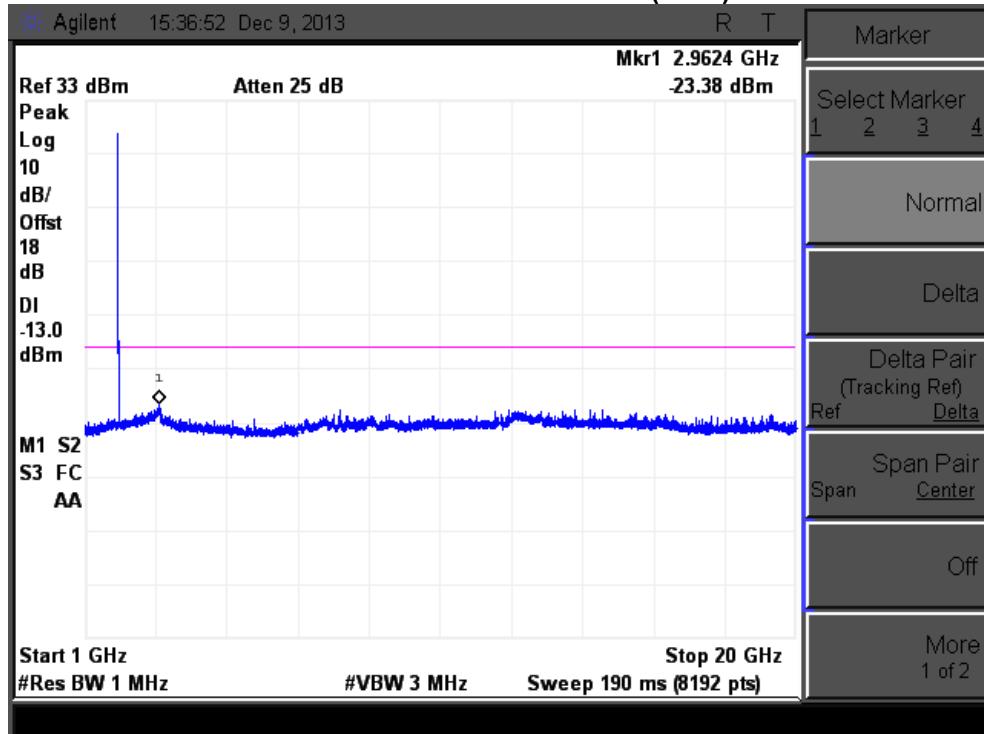30 – 1000MHz - Channel 661(GSM)**1GHz – 20GHz - Channel 661(GSM)**

30 – 1000MHz - Channel 810(GSM)

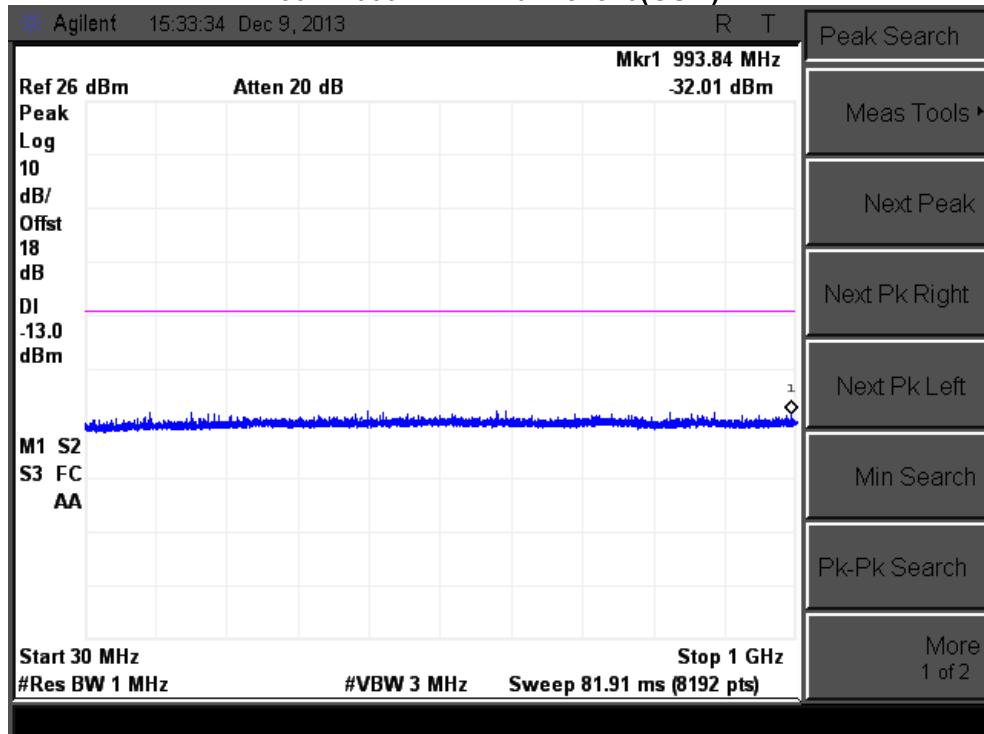

1GHz – 20GHz - Channel 810(GSM)

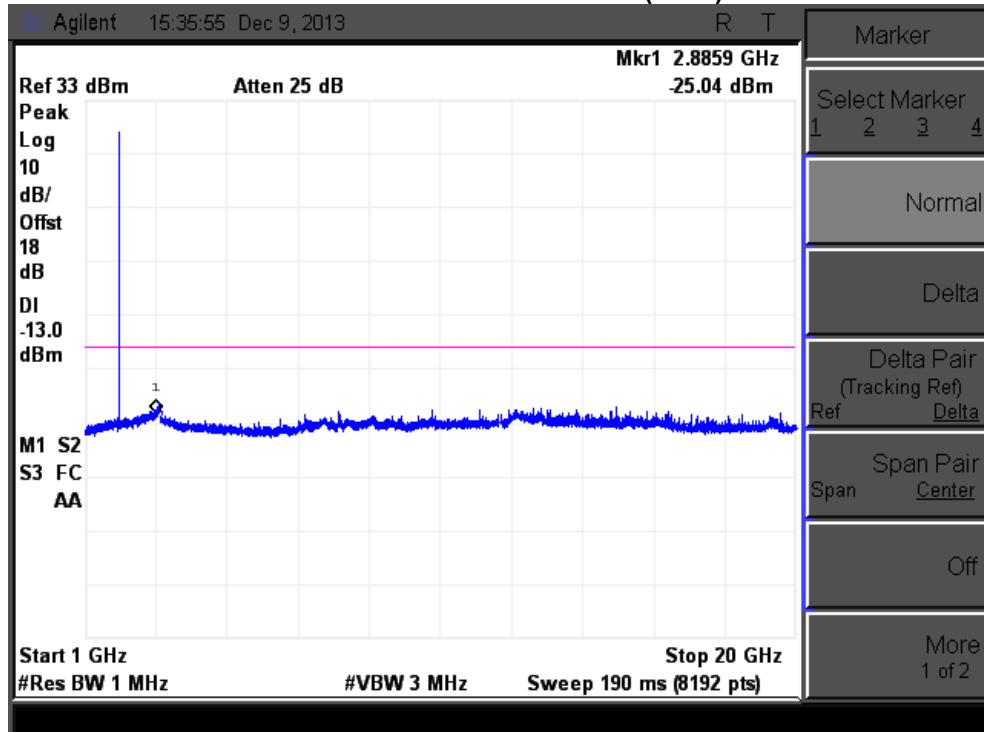

8. FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS


8.1 Applicable Standards

According to FCC §2.1053


FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)


8.2 Test of Block Diagram of configuration

Radiated Emission Test Set-Up, Frequency Below 1000MHz

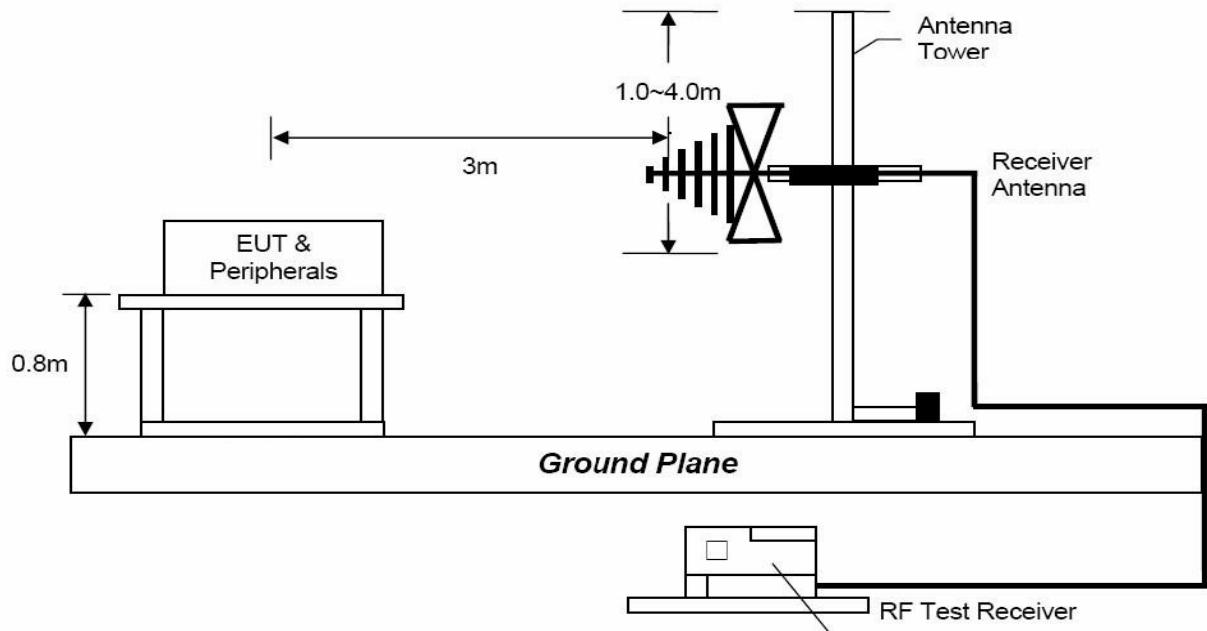

Radiated Emission Test Set-Up, Frequency above 1GHz

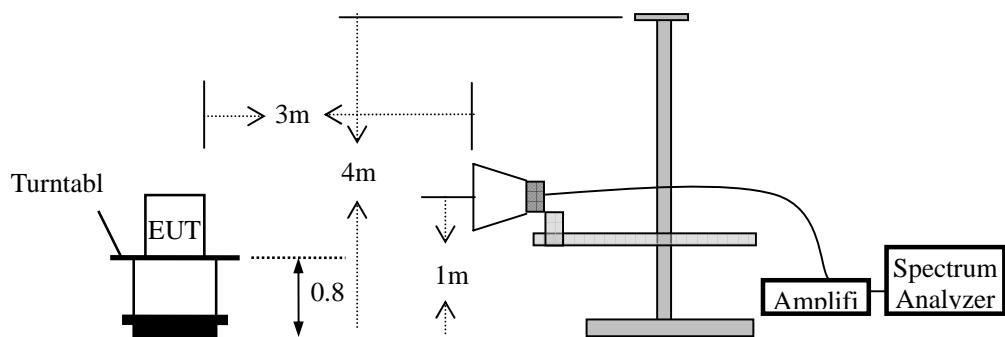

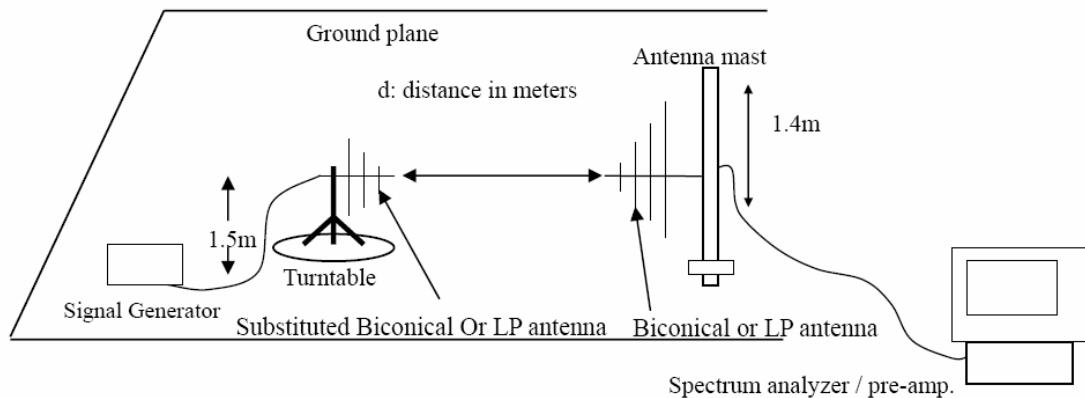Substituted Method Test Set-UP**8.3 Test Procedure**

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$

Cellular Band (Part 22H)							
Humidity :		46 %	Temperature :			21 °C	
Mode:		GSM850	Test By:			Sance	
Test Result:		PASS					
Channel	Frequency (MHz)	Substituted level (dBm)	Polarization (H/V) Antenna	Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
128	1648.4	-41.64	H	8.26	2.1	-35.48	-13.00
	1648.4	-43.32	V	8.26	2.1	-37.16	-13.00
	2472.6	-40.02	H	9.2	2.6	-33.42	-13.00
	2472.6	-42.21	V	9.2	2.6	-35.61	-13.00
	3296.8	-62.62	H	10.2	3.4	-55.82	-13.00
	3296.8	-63.53	V	10.2	3.4	-56.73	-13.00
189	1672.4	-40.35	H	8.26	2.1	-34.19	-13.00
	1672.4	-42.95	V	8.26	2.1	-36.79	-13.00
	2509.2	-43.44	H	9.2	2.6	-36.84	-13.00
	2509.2	-44.11	V	9.2	2.6	-37.51	-13.00
	3345.6	-63.38	H	10.2	3.5	-56.68	-13.00
	3345.6	-62.90	V	10.2	3.5	-56.20	-13.00
251	1697.6	-40.25	H	8.24	2.1	-34.11	-13.00
	1697.6	-42.78	V	8.24	2.1	-36.64	-13.00
	2546.4	-42.89	H	9.3	2.6	-36.19	-13.00
	2546.4	-46.34	V	9.3	2.6	-39.64	-13.00
	3395.2	-63.60	H	10.3	3.5	-56.80	-13.00
	3395.2	-63.72	V	10.3	3.5	-56.92	-13.00

Note: Spurious emissions below 1000MHz were found more than 20dB below limit line.

PCS Band (Part 24E)							
Humidity :		46 %	Temperature :			21 °C	
Mode:		GSM1900	Test By:			Sance	
Test Result:		PASS					
Channel	Frequency (MHz)	Substituted level (dBm)	Polarization (H/V) Antenna	Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
512	3700.4	-46.55	H	10.5	3.8	-39.85	-13.00
	3700.4	-48.96	V	10.5	3.8	-42.26	-13.00
	5550.6	-43.88	H	11.1	5.2	-37.98	-13.00
	5550.6	-45.61	V	11.1	5.2	-39.71	-13.00
	7400.8	-50.74	H	10.1	6.5	-47.14	-13.00
	7400.8	-50.45	V	10.1	6.5	-46.85	-13.00
661	3760	-45.06	H	10.5	3.9	-38.46	-13.00
	3760	-46.70	V	10.5	3.9	-40.10	-13.00
	5640	-43.81	H	11.1	5.3	-38.01	-13.00
	5640	-44.72	V	11.1	5.3	-38.92	-13.00
	7520	-51.19	H	10.1	6.6	-47.69	-13.00
	7520	-50.75	V	10.1	6.6	-47.25	-13.00
810	3819.6	-44.93	H	10.6	4.0	-38.33	-13.00
	3819.6	-47.89	V	10.6	4.0	-41.29	-13.00
	5729.4	-44.78	H	11.2	5.3	-38.88	-13.00
	5729.4	-45.87	V	11.2	5.3	-39.97	-13.00
	7639.2	-50.39	H	10.2	6.7	-46.89	-13.00
	7639.2	-50.54	V	10.2	6.7	-47.04	-13.00

Note: Spurious emissions below 1000MHz were found more than 20dB below limit line.

9. RF Exposure

9.1 Applicable Standards

§1.1307 and §2.1093.

9.2 Test Result

Compliance

The EUT is a portable device, thus requires SAR evaluation; please refer to SAR Report that issue by SIEMIC Testing and Certification Services.

10. Test Equipment List

Description	Manfucaturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Receiver	Rohde & Schwarz	ESCI7	100837	Nov.05, 2013	Nov.04 2014
DC Power Source	HUA YI	HY5003-2	N/A	Nov. 05, 2013	Nov. 04, 2014
Temperature & Humidity Chamber	TOS STAR	TOS-831B	20071117	May 23, 2013	May 22, 2014
Spectrum Analyzer	Agilent	E7405A	MY45118807	May. 14, 2013	May. 13, 2014
Spectrum Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 26, 2013	Nov. 25, 2014
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	123259	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier	HP	8447D	1145A00203	Nov. 05, 2013	Nov. 04, 2014
Broadband Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2013	Nov. 27, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct. 24, 2013	Oct. 23, 2014
Horn Antenna	COM-Power	AH-118	071078	Nov. 17, 2013	Nov. 16, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	Dec. 19, 2012	Dec. 18, 2013
Cable	HUBER+SUHNER	CBL2-NN-1M	22320001	Nov. 05, 2013	Nov. 04, 2014

---End of report---