



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170100039202  
Page: 1 of 52

# TEST REPORT

**Application No.:** SZEM1701000392CR  
**Applicant:** Camino International Limited  
**Address of Applicant:** Flat A, 3rd Floor, International Industrial Building, 501-503 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong  
**Manufacturer:** Camino International Limited  
**Address of Manufacturer:** Flat A, 3rd Floor, International Industrial Building, 501-503 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong  
**Factory:** Camino Industrial (Huizhou) Co. Ltd.  
**Address of Factory:** Lidong Industrial Estate, Jiutan, Yuanzhou, Boluo, Huizhou, Guangdong, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Beauty and the Beast Wireless Bluetooth Speaker  
**Model No.:** 761579  
**Trade Mark:** Disney  
**FCC ID:** ZZX579  
**Standards:** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2017-01-16  
**Date of Test:** 2017-01-20 to 2017-02-21  
**Date of Issue:** 2017-02-24

<b>Test Result :</b>	Pass*
----------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**



Report No.: SZEM170100039202  
 Page: 2 of 52

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
01		2017-02-24		Original
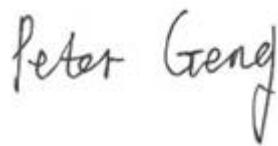
<b>Authorized for issue by:</b>			
<b>Tested By</b>		 <hr/> Peter Geng	2017-02-21
		<b>Peter Geng /Project Engineer</b>	<b>Date</b>
<b>Checked By</b>		 <hr/> Eric Fu	2017-02-24
		<b>Eric Fu /Reviewer</b>	<b>Date</b>

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Conducted Disturbance at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass



### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 GENERAL INFORMATION .....</b>	<b>6</b>
4.1 DETAILS OF E.U.T. .....	6
4.2 DESCRIPTION OF SUPPORT UNITS .....	6
4.3 MEASUREMENT UNCERTAINTY .....	6
4.4 STANDARDS APPLICABLE FOR TESTING.....	7
4.5 TEST LOCATION.....	8
4.6 TEST FACILITY .....	8
4.7 DEVIATION FROM STANDARDS .....	8
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
<b>5 EQUIPMENT LIST.....</b>	<b>9</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>	<b>11</b>
6.1 ANTENNA REQUIREMENT .....	11
6.1.1 <i>Test Requirement:</i> .....	11
6.1.2 <i>Conclusion</i> .....	11
<b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>	<b>12</b>
7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) .....	12
7.1.1 <i>E.U.T. Operation</i> .....	13
7.1.2 <i>Test Setup Diagram</i> .....	13
7.1.3 <i>Measurement Data</i> .....	13
7.2 CONDUCTED PEAK OUTPUT POWER .....	16
7.2.1 <i>E.U.T. Operation</i> .....	17
7.2.2 <i>Test Setup Diagram</i> .....	17
7.2.3 <i>Measurement Data</i> .....	17
7.3 MINIMUM 6dB BANDWIDTH.....	18
7.3.1 <i>E.U.T. Operation</i> .....	18
7.3.2 <i>Test Setup Diagram</i> .....	18
7.3.3 <i>Measurement Data</i> .....	18
7.4 POWER SPECTRUM DENSITY.....	19
7.4.1 <i>E.U.T. Operation</i> .....	19
7.4.2 <i>Test Setup Diagram</i> .....	19
7.4.3 <i>Measurement Data</i> .....	19
7.5 CONDUCTED SPURIOUS EMISSIONS.....	20
7.5.1 <i>E.U.T. Operation</i> .....	20
7.5.2 <i>Test Setup Diagram</i> .....	20
7.5.3 <i>Measurement Data</i> .....	20
7.6 RADIATED SPURIOUS EMISSIONS.....	21
7.6.1 <i>E.U.T. Operation</i> .....	22
7.6.2 <i>Test Setup Diagram</i> .....	22
7.6.3 <i>Measurement Data</i> .....	23
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....	29
7.7.1 <i>E.U.T. Operation</i> .....	29
7.7.2 <i>Test Setup Diagram</i> .....	29
7.7.3 <i>Measurement Data</i> .....	30
7.8 CONDUCTED BAND EDGES MEASUREMENT.....	35



7.8.1	<i>E.U.T. Operation</i> .....	35
7.8.2	<i>Test Setup Diagram</i> .....	35
7.8.3	<i>Measurement Data</i> .....	35
<b>8</b>	<b>PHOTOGRAPHS</b> .....	<b>36</b>
8.1	RADIATED DISTURBANCE(30MHz-1GHz) TEST SETUP .....	36
8.2	RADIATED DISTURBANCE(ABOVE 1GHz) TEST SETUP .....	36
8.3	CONDUCTED EMISSIONS TEST SETUP.....	37
8.4	EUT CONSTRUCTIONAL DETAILS.....	38
<b>9</b>	<b>APPENDIX</b> .....	<b>39</b>
9.1	APPENDIX 15.247 .....	39-52

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 3.7V 1000mAh rechargeable battery which charged by AC adapter
Cable:	USB charging line: 75cm, unshielded
Bluetooth version:	V 4.0 dual mode, this report is for BLE.
Operation frequency:	2402-2480MHz
Modulation type:	GFSK
Channel number:	40
Antenna type:	Integral antenna
Antenna Gain:	0dBi

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No. SEA0500

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 <sup>-8</sup>
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.75dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
9	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
10	Temperature test	1 °C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%



#### 4.4 Standards Applicable for Testing

**Table 1 : Tests Carried Out Under 47 CFR Part 15, Subpart C 15.247**

Item	Status
Conducted Disturbance at AC Power Line(150kHz-30MHz)	✓
20dB Bandwidth	✗
Conducted Peak Output Power	✓
Carrier Frequencies Separation	✗
Hopping Channel Number	✗
Dwell Time	✗
Minimum 6dB Bandwidth	✓
Power Spectrum Density	✓
Conducted Spurious Emissions	✓
Radiated Spurious Emissions	✓
Radiated Emissions which fall in the restricted bands	✓
Conducted Band Edges Measurement	✓
Antenna Requirement	✓
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	✗

✗ Indicates that the test is not applicable  
✓ Indicates that the test is applicable



#### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.  
Tel: +86 755 2601 2053      Fax: +86 755 2671 0594  
No tests were sub-contracted.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.7 Deviation from Standards**

None

#### **4.8 Abnormalities from Standard Conditions**

None



## 5 Equipment List

<b>Conducted Disturbance at AC Power Line(150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

<b>Conducted tests</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

<b>Radiated Disturbance(30MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESR	SEM004-03	2016-04-25	2017-04-25
Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06



<b>General used equipment</b>						
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12	
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12	
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2016-05-18	2017-05-18	

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

#### 6.1.2 Conclusion

Standard Requirment:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Test mode: b: Tx +Charging mode (BLE)


### 7.1.2 Test Setup Diagram

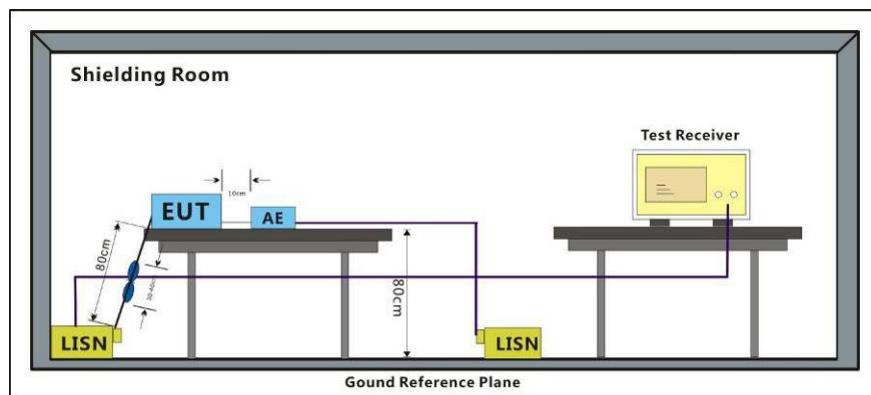

### 7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.


Mode:b;Line:Live Line

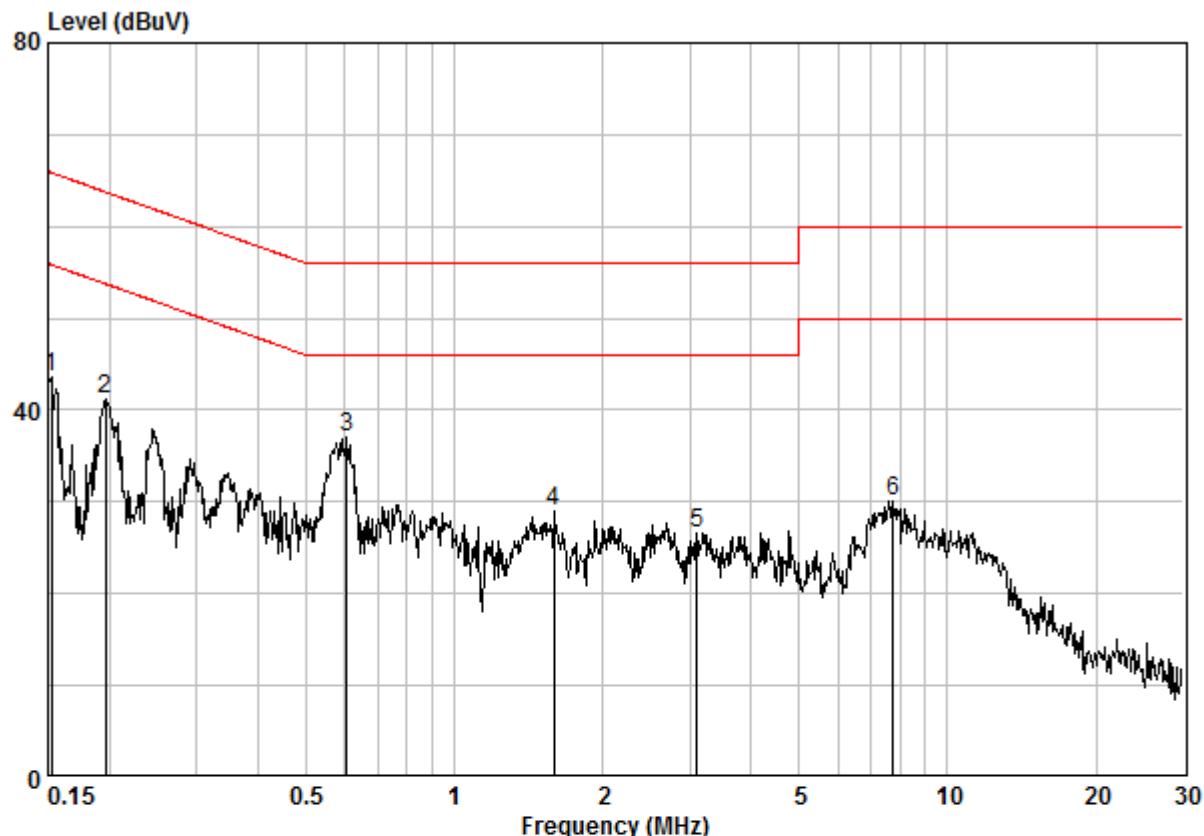

Site : Shielding Room  
Condition : CE LINE  
Job NO : 0392CR  
Mode : b

	Freq	Cable	LISN	Read	Limit		Over	Remark
		Loss	Factor	Level	Level	Line	Limit	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15240	0.02	9.64	34.00	43.66	55.87	-12.21	Peak
2	0.19654	0.02	9.64	31.49	41.15	53.76	-12.60	Peak
3	0.60431	0.02	9.65	27.39	37.07	46.00	-8.93	Peak
4	1.593	0.03	9.66	19.32	29.01	46.00	-16.99	Peak
5	3.107	0.03	9.69	16.97	26.68	46.00	-19.32	Peak
6	7.769	0.10	9.81	20.27	30.17	50.00	-19.83	Peak

Mode:b;Line:Neutral Line

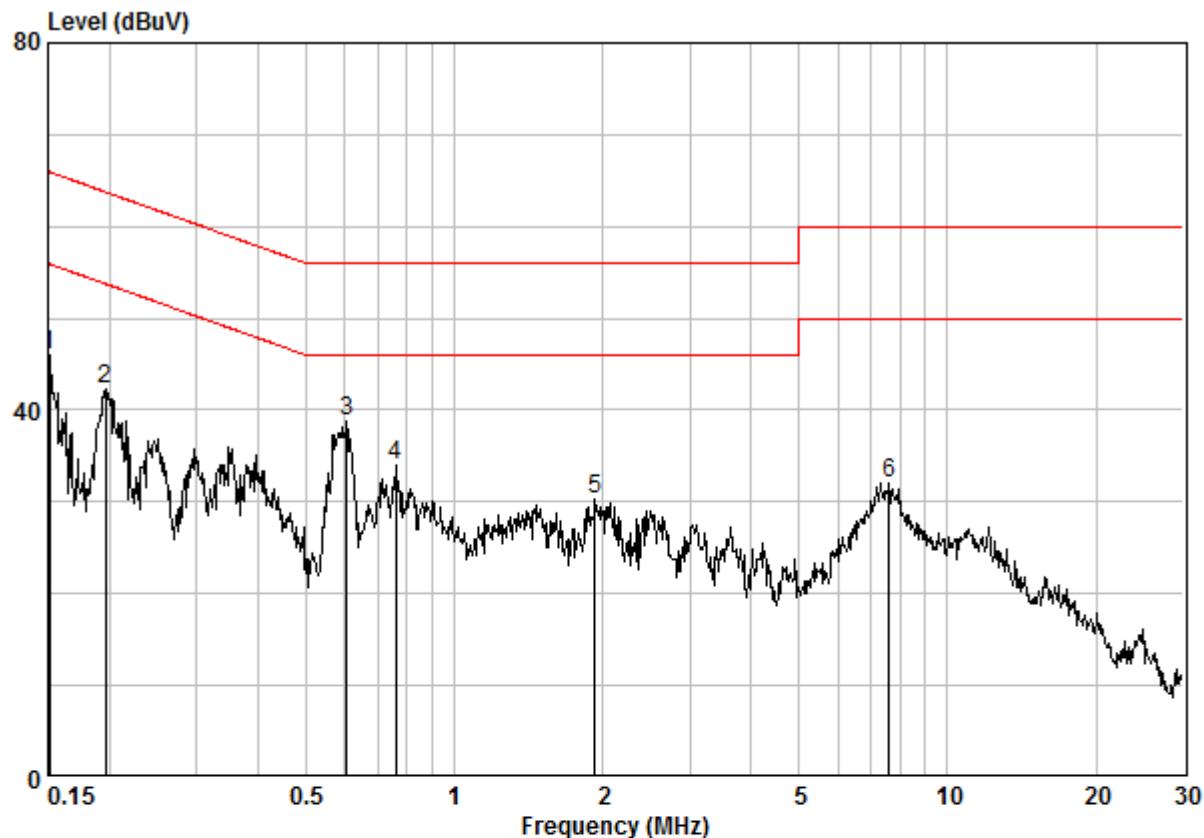

Site : Shielding Room  
Condition : CE NEUTRAL  
Job NO : 0392CR  
Mode : b

	Freq	Cable	LISN	Read	Limit		Over	Remark
		Loss	Factor	Level	Level	Line	Limit	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15080	0.02	9.64	36.42	46.08	55.96	-9.87	Peak
2	0.19654	0.02	9.63	32.56	42.21	53.76	-11.54	Peak
3	0.60431	0.02	9.63	29.11	38.76	46.00	-7.24	Peak
4	0.75894	0.03	9.64	24.27	33.94	46.00	-12.06	Peak
5	1.928	0.03	9.66	20.62	30.31	46.00	-15.69	Peak
6	7.606	0.09	9.79	22.19	32.07	50.00	-17.93	Peak



## 7.2 Conducted Peak Output Power

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
 Test Method: ANSI C63.10 (2013) Section 11.9.1.2  
 Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $< 50$ hopping channels
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)

The worst case for final test:  
a: Tx mode (BLE)

### 7.2.2 Test Setup Diagram

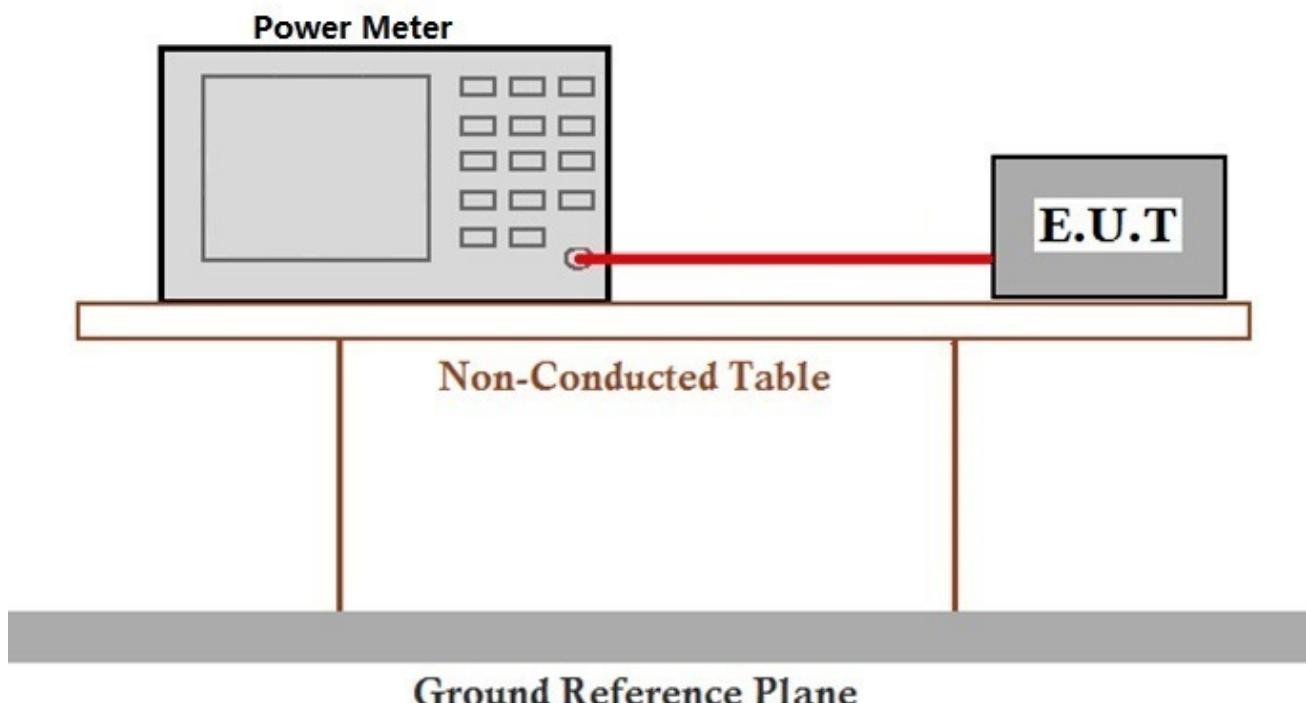

### 7.2.3 Measurement Data

The detailed test data see: Appendix 15.247


### 7.3 Minimum 6dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 11.8.1  
Limit:  $\geq 500$  kHz

#### 7.3.1 E.U.T. Operation

Operating Environment:  
Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar  
Pretest these mode to find the worst case:  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)  
The worst case for final test:  
a: Tx mode (BLE)

#### 7.3.2 Test Setup Diagram

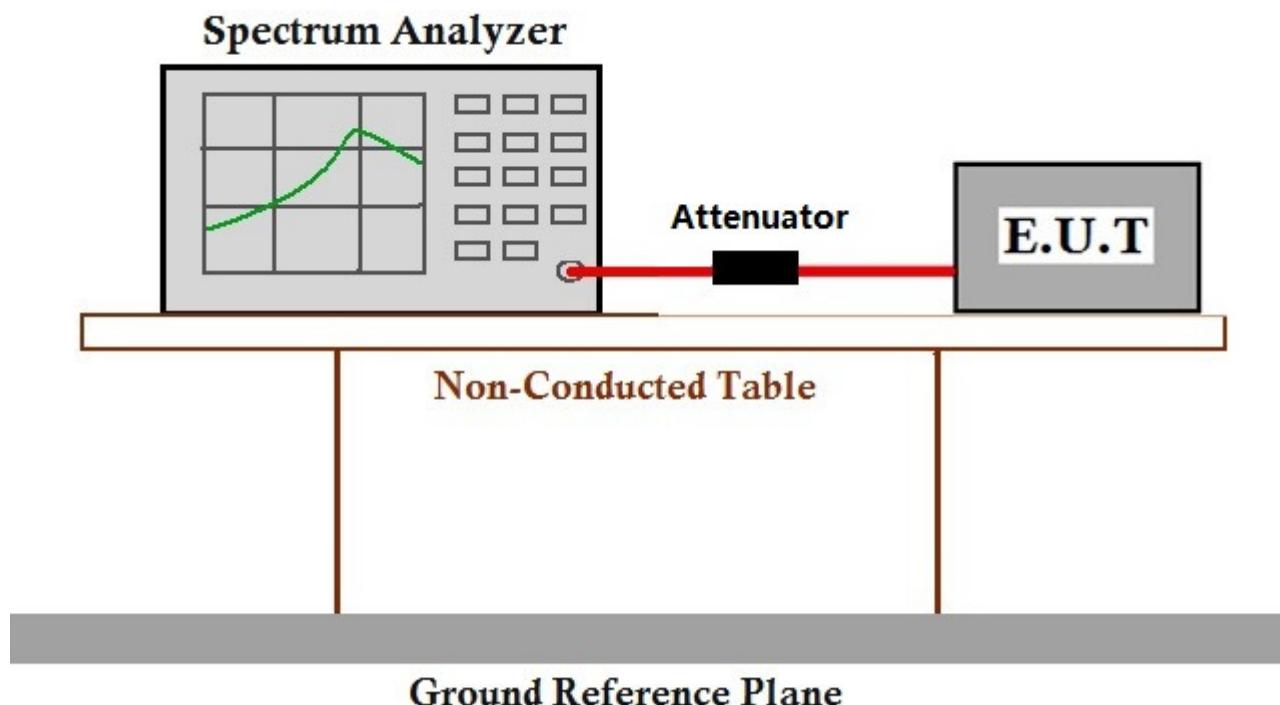

#### 7.3.3 Measurement Data

The detailed test data see: Appendix 15.247


## 7.4 Power Spectrum Density

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 11.10.2  
Limit:  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

### 7.4.1 E.U.T. Operation

Operating Environment:  
Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar  
Pretest these mode to find the worst case:  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)  
The worst case for final test:  
a: Tx mode (BLE)

### 7.4.2 Test Setup Diagram

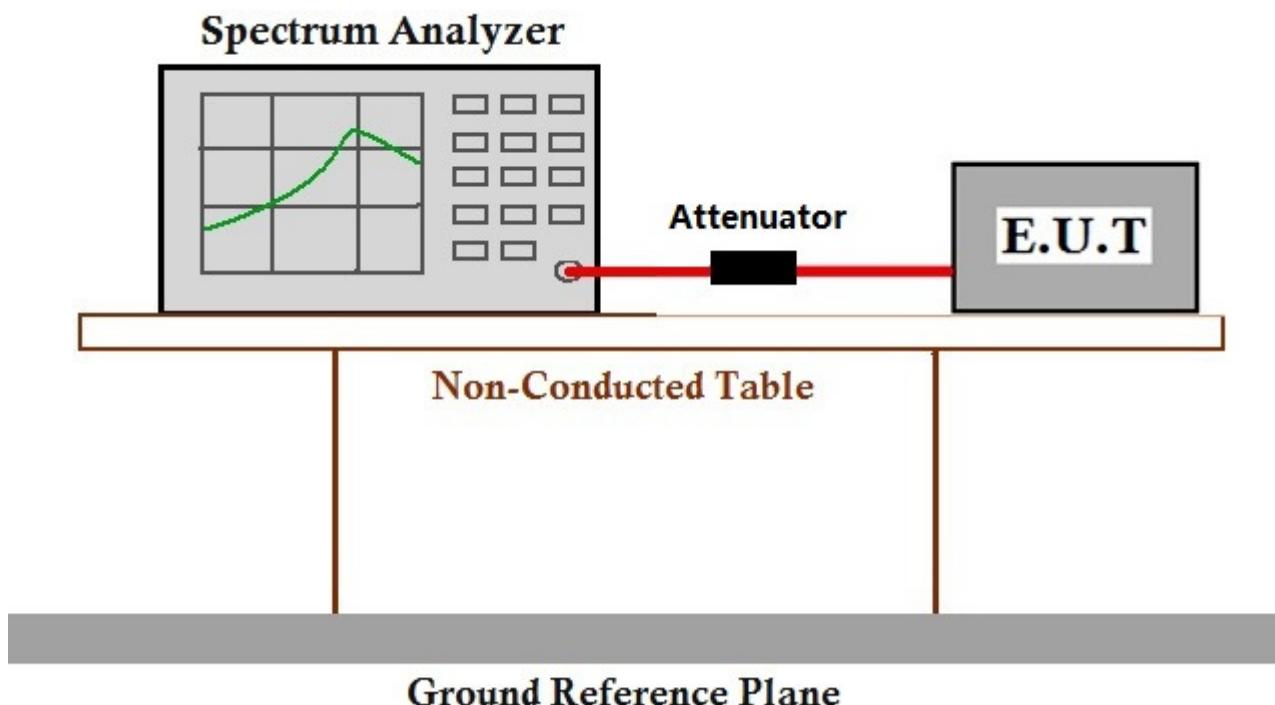

### 7.4.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.5 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)

The worst case for final test:  
a: Tx mode (BLE)

### 7.5.2 Test Setup Diagram

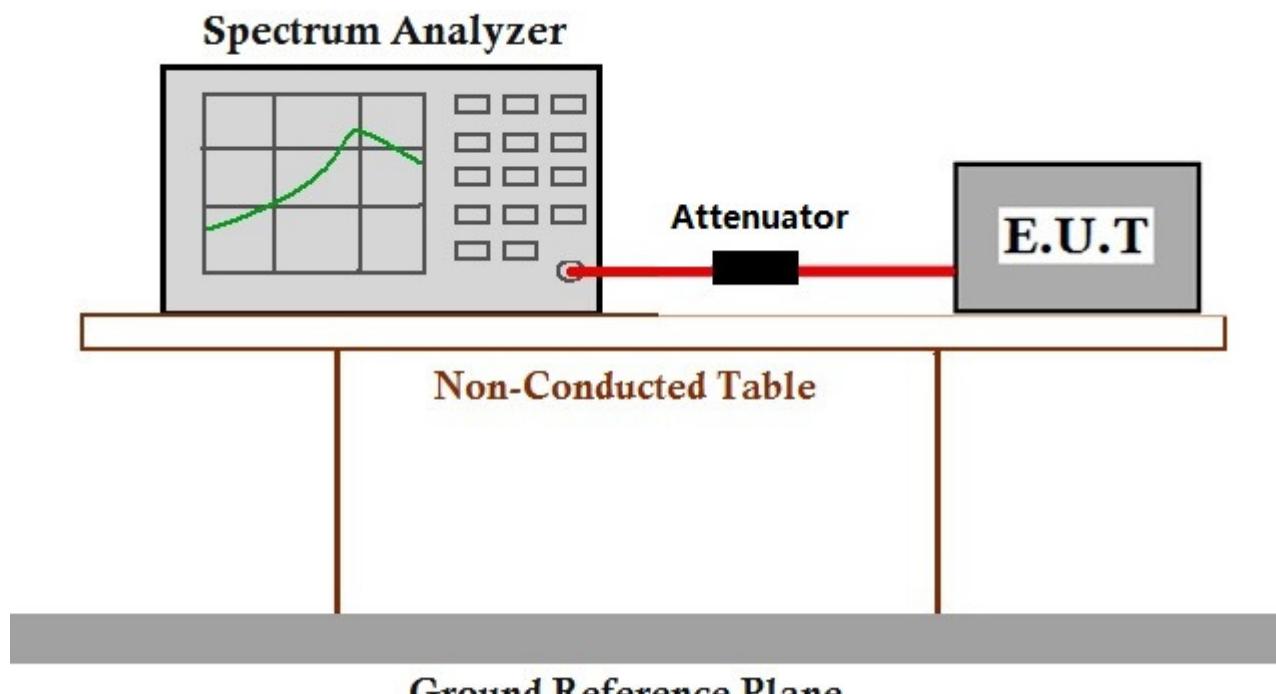

### 7.5.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.6 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6  
Measurement Distance: 10m  
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 24.0 °C      Humidity: 54 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case::  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)

The worst case for final test:  
b: Tx +Charging mode (BLE)

### 7.6.2 Test Setup Diagram

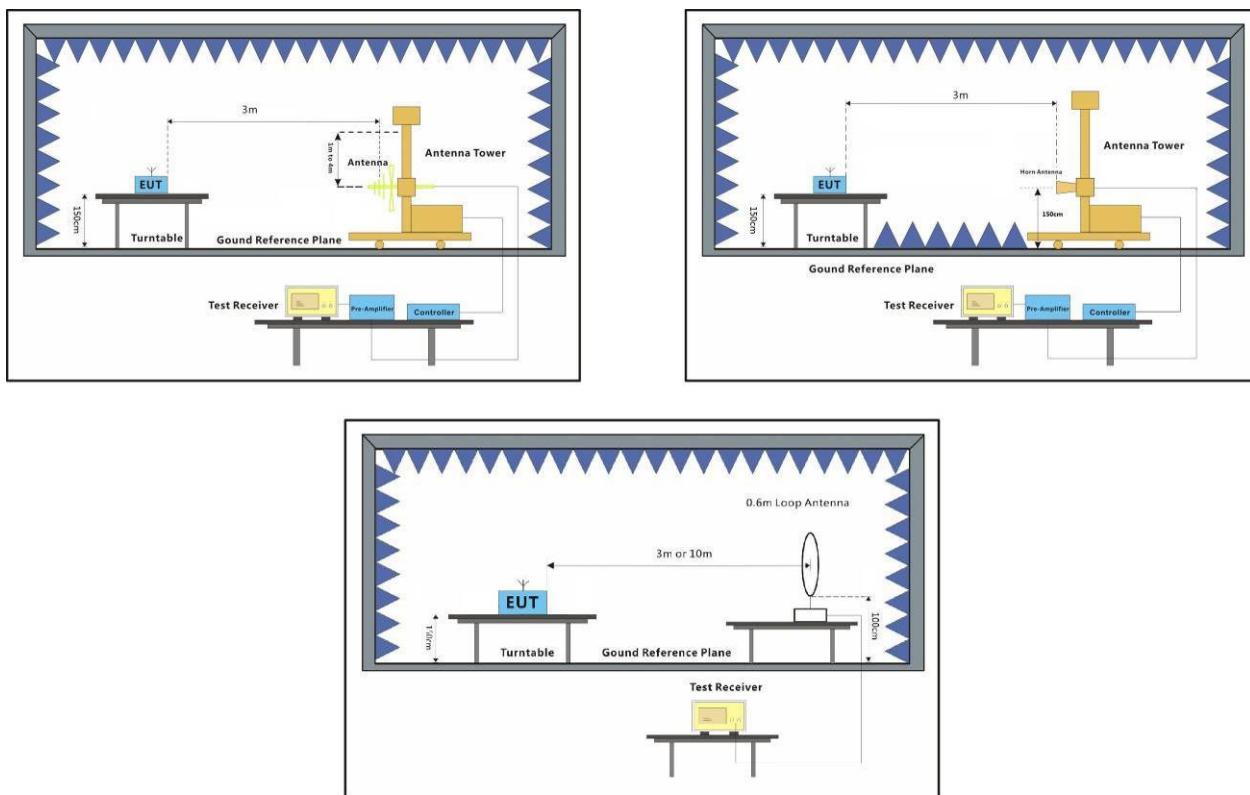




### 7.6.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Mode:b;Polarization:Horizontal

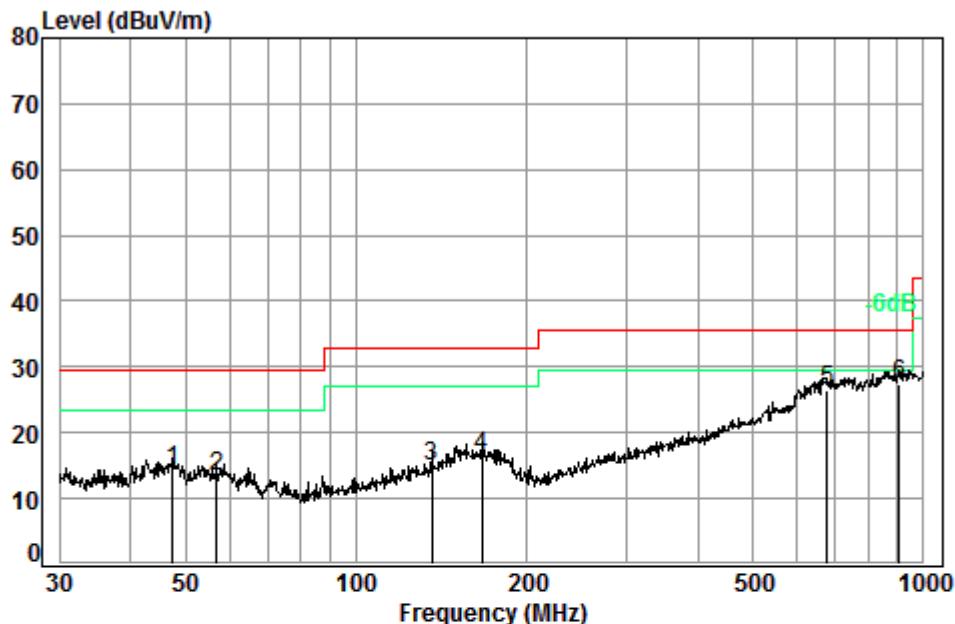


Condition: 10m HORIZONTAL

Job No. : 00392CR

Test Mode: b

Freq	Cable	Ant	Preamp	Read	Limit		Over	
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	47.49	6.85	12.47	33.00	27.87	14.19	29.50	-15.31
2	56.79	7.00	12.36	32.96	26.84	13.24	29.50	-16.26
3	135.98	7.38	12.20	32.76	28.14	14.96	33.00	-18.04
4	166.65	7.50	12.53	32.73	29.21	16.51	33.00	-16.49
5	675.21	9.09	21.25	32.60	28.60	26.34	35.60	-9.26
6 pp	906.48	9.50	23.03	32.50	27.35	27.38	35.60	-8.22

Mode:b;Polarization:Vertical

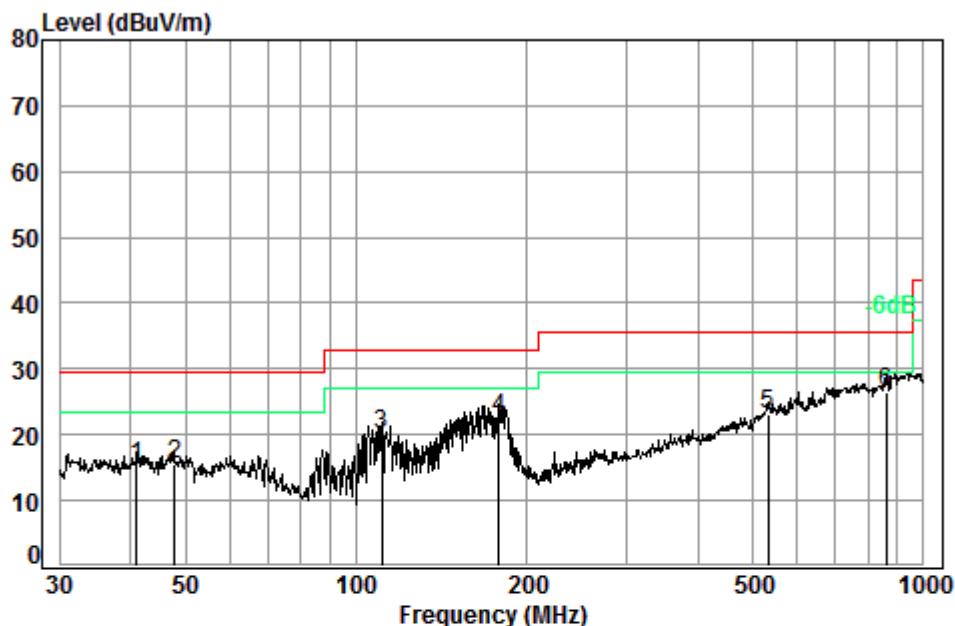

Condition: 10m VERTICAL

Job No. : 00392CR

Test Mode: b

Freq	Cable	Ant	Preamp	Read	Limit		Over	
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	40.99	6.80	12.20	32.99	29.31	15.32	29.50	-14.18
2	47.83	6.86	12.49	33.00	29.06	15.41	29.50	-14.09
3	110.96	7.26	10.48	32.78	35.01	19.97	33.00	-13.03
4	178.76	7.50	11.62	32.72	36.22	22.62	33.00	-10.38
5	531.96	8.73	18.80	32.60	28.13	23.06	35.60	-12.54
6 pp	860.04	9.40	22.70	32.54	26.75	26.31	35.60	-9.29



**Below 1GHz**

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

$L_3$ : Level @ 3m distance. Unit: uV/m;

$L_{10}$ : Level @ 10m distance. Unit: uV/m;

$D_3$ : 3m distance. Unit: m

$D_{10}$ : 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
40.99	15.32	5.83	19.45	25.78	40.00	-14.22	V
47.83	15.41	5.90	19.65	25.87	40.00	-14.13	V
110.96	19.97	9.97	33.22	30.43	43.50	-13.07	V
178.76	22.62	13.52	45.07	33.08	43.50	-10.42	V
531.96	23.06	14.22	47.41	33.52	46.00	-12.48	V
860.04	26.31	20.68	68.93	36.77	46.00	-9.23	V
47.49	14.19	5.12	17.08	24.65	40.00	-15.35	H
56.79	13.24	4.59	15.31	23.70	40.00	-16.30	H
135.98	14.96	5.60	18.66	25.42	43.50	-18.08	H
166.65	16.51	6.69	22.30	26.97	43.50	-16.53	H
675.21	26.34	20.75	69.16	36.80	46.00	-9.20	H
906.48	27.38	23.39	77.96	37.84	46.00	-8.16	H

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch



Report No.: SZEM170100039202  
Page: 27 of 52

Above 1GHz

Test mode:		GFSK		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
3599.965	32.50	7.67	37.96	44.19	46.40	74	-27.60	Vertical		
4804.000	34.16	8.87	38.40	47.29	51.92	74	-22.08	Vertical		
5769.698	34.57	9.91	38.35	44.29	50.42	74	-23.58	Vertical		
7206.000	36.42	10.68	37.11	41.93	51.92	74	-22.08	Vertical		
9608.000	37.52	12.50	35.10	37.18	52.10	74	-21.90	Vertical		
12297.040	38.78	14.31	36.31	36.87	53.65	74	-20.35	Vertical		
3881.276	33.28	7.77	37.99	44.10	47.16	74	-26.84	Horizontal		
4804.000	34.16	8.87	38.40	46.82	51.45	74	-22.55	Horizontal		
5769.698	34.57	9.91	38.35	44.76	50.89	74	-23.11	Horizontal		
7206.000	36.42	10.68	37.11	41.89	51.88	74	-22.12	Horizontal		
9608.000	37.52	12.50	35.10	37.65	52.57	74	-21.43	Horizontal		
12050.440	38.63	14.52	35.72	35.87	53.30	74	-20.70	Horizontal		

Test mode:		GFSK		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Cable Loss (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization		
3732.570	32.87	7.72	37.97	44.13	46.75	74	-27.25	Vertical		
4880.000	34.29	8.97	38.44	46.10	50.92	74	-23.08	Vertical		
6025.661	34.72	10.53	38.27	45.09	52.07	74	-21.93	Vertical		
7320.000	36.37	10.72	37.01	43.73	53.81	74	-20.19	Vertical		
9760.000	37.55	12.58	35.02	38.24	53.35	74	-20.65	Vertical		
12350.530	38.81	14.27	36.44	36.90	53.54	74	-20.46	Vertical		
3737.975	32.89	7.72	37.97	44.27	46.91	74	-27.09	Horizontal		
4880.000	34.29	8.97	38.44	44.18	49.00	74	-25.00	Horizontal		
6087.002	34.77	10.45	38.21	43.65	50.66	74	-23.34	Horizontal		
7320.000	36.37	10.72	37.01	41.10	51.18	74	-22.82	Horizontal		
9760.000	37.55	12.58	35.02	38.47	53.58	74	-20.42	Horizontal		
12067.890	38.64	14.50	35.76	36.04	53.42	74	-20.58	Horizontal		



Test mode:		GFSK		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization		
3814.467	33.10	7.75	37.98	43.94	46.81	74	-27.19	Vertical		
4960.000	34.43	9.09	38.48	45.84	50.88	74	-23.12	Vertical		
6034.386	34.73	10.52	38.27	44.47	51.45	74	-22.55	Vertical		
7440.000	36.32	10.77	36.90	43.52	53.71	74	-20.29	Vertical		
9920.000	37.58	12.67	34.94	36.91	52.22	74	-21.78	Vertical		
12137.940	38.68	14.45	35.93	35.93	53.13	74	-20.87	Vertical		
3870.060	33.25	7.77	37.99	44.20	47.23	74	-26.77	Horizontal		
4960.000	34.43	9.09	38.48	45.30	50.34	74	-23.66	Horizontal		
6078.201	34.76	10.46	38.22	44.43	51.43	74	-22.57	Horizontal		
7440.000	36.32	10.77	36.90	41.53	51.72	74	-22.28	Horizontal		
9920.000	37.58	12.67	34.94	38.07	53.38	74	-20.62	Horizontal		
11877.340	38.48	14.43	35.58	36.42	53.75	74	-20.25	Horizontal		

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.10.5

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case::  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)

The worst case for final test:  
b: Tx +Charging mode (BLE)

### 7.7.2 Test Setup Diagram

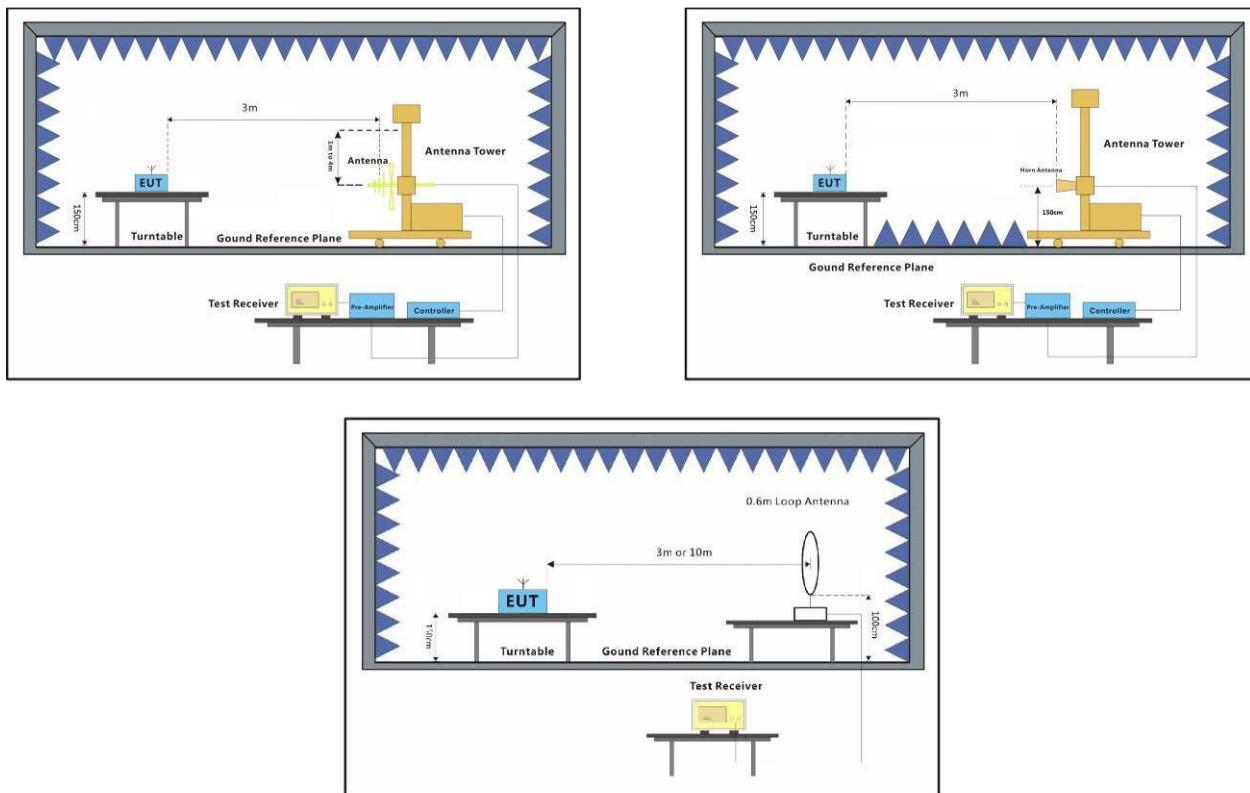





### 7.7.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Mode:b; Polarization:Horizontal

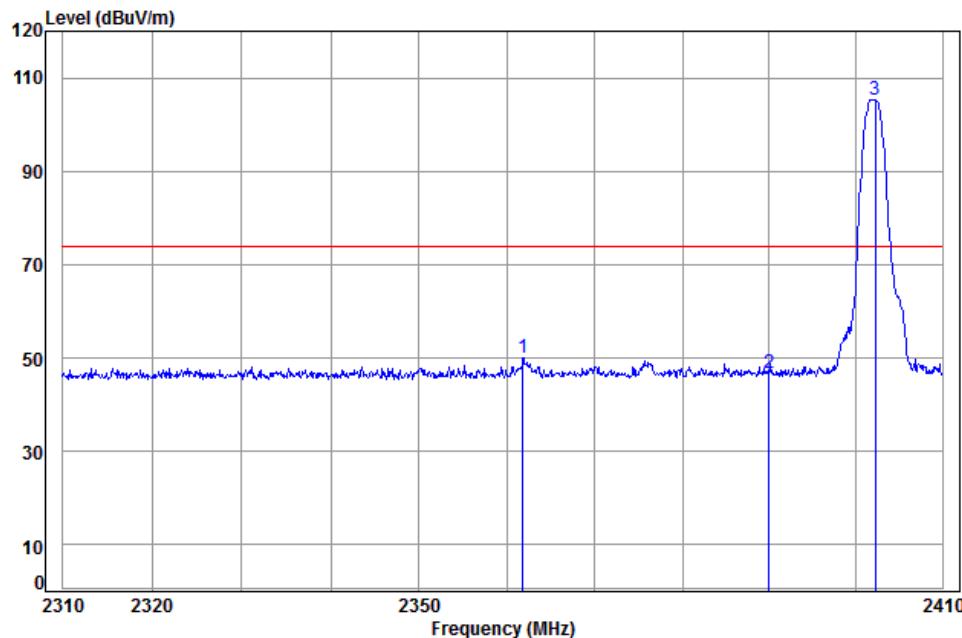

Mode:b; Polarization:Vertical

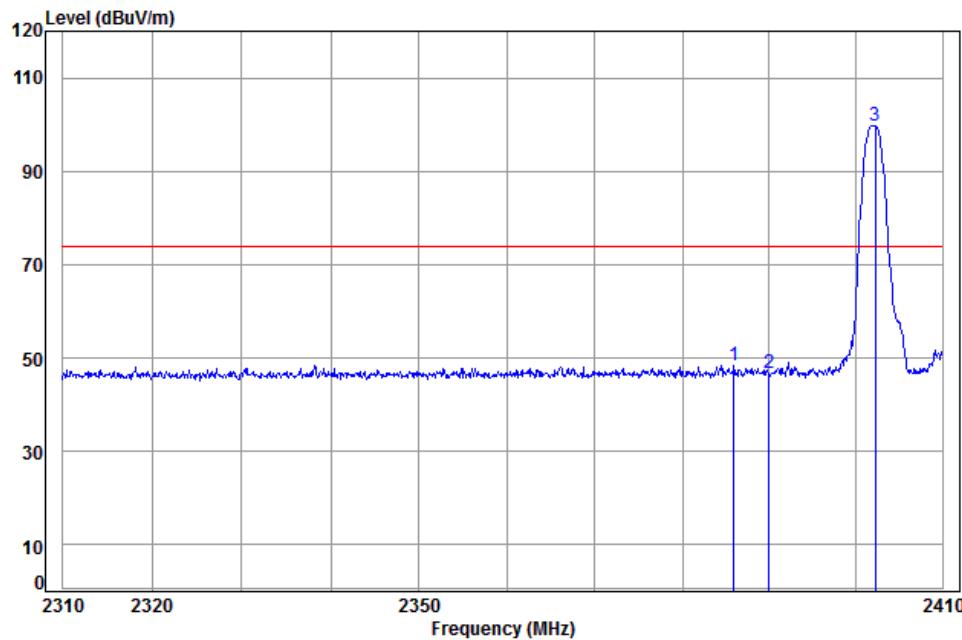

Condition: 3m VERTICAL


Job No: : 0392CR

Mode: : 2402 Bandedge


: BLE

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2385.916	5.33	29.07	37.96	51.98	48.42	74.00	-25.58	
2	2390.000	5.34	29.08	37.96	50.25	46.71	74.00	-27.29	
3 pp	2402.250	5.35	29.11	37.96	103.20	99.70	74.00	25.70	

Mode:b; Polarization:Horizontal

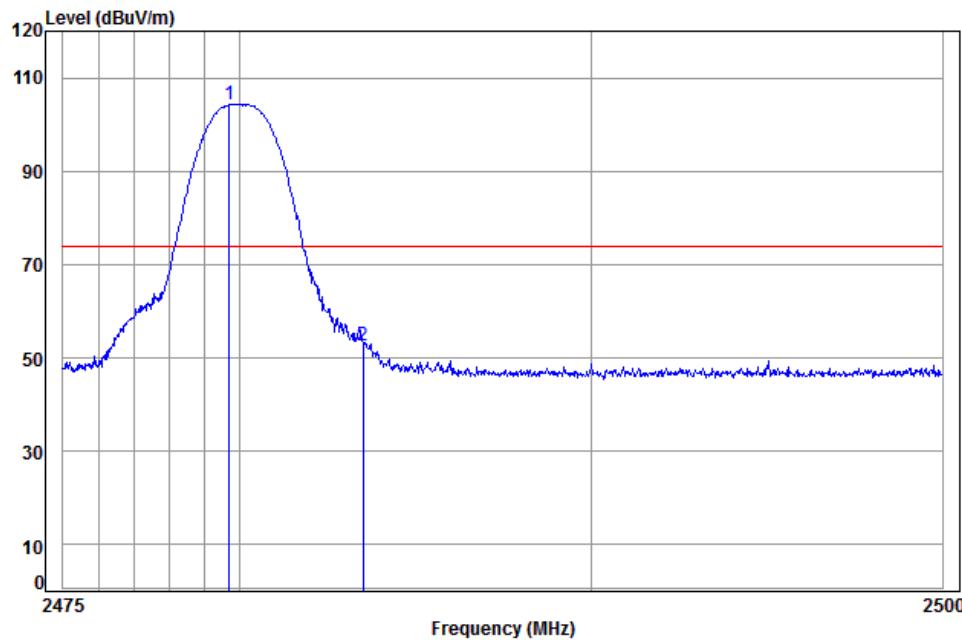

Mode:b; Polarization:Vertical

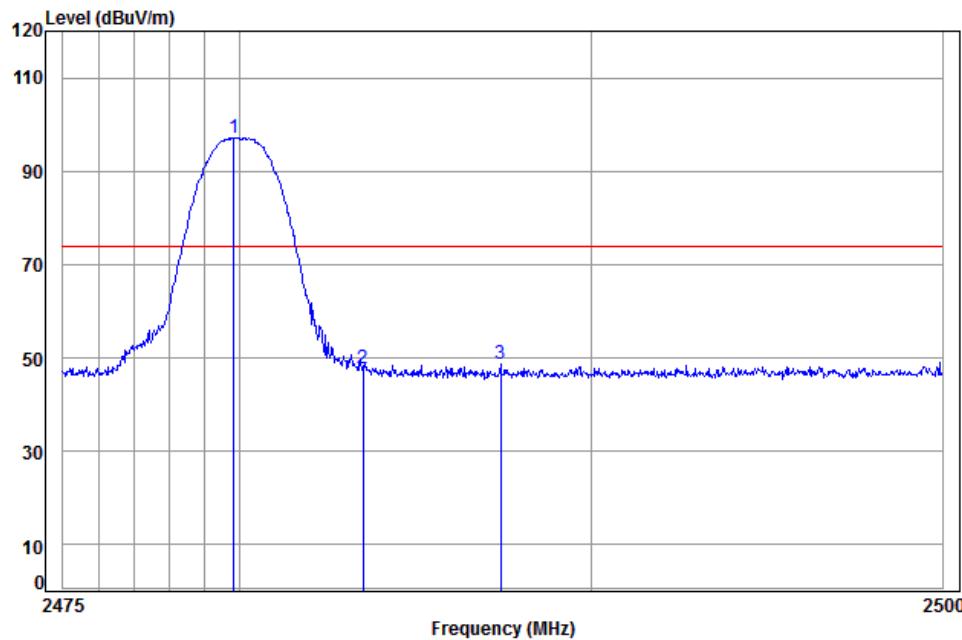

## 7.8 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

### 7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: Tx mode (BLE)  
b: Tx +Charging mode (BLE)

The worst case for final test:  
a: Tx mode (BLE)

### 7.8.2 Test Setup Diagram

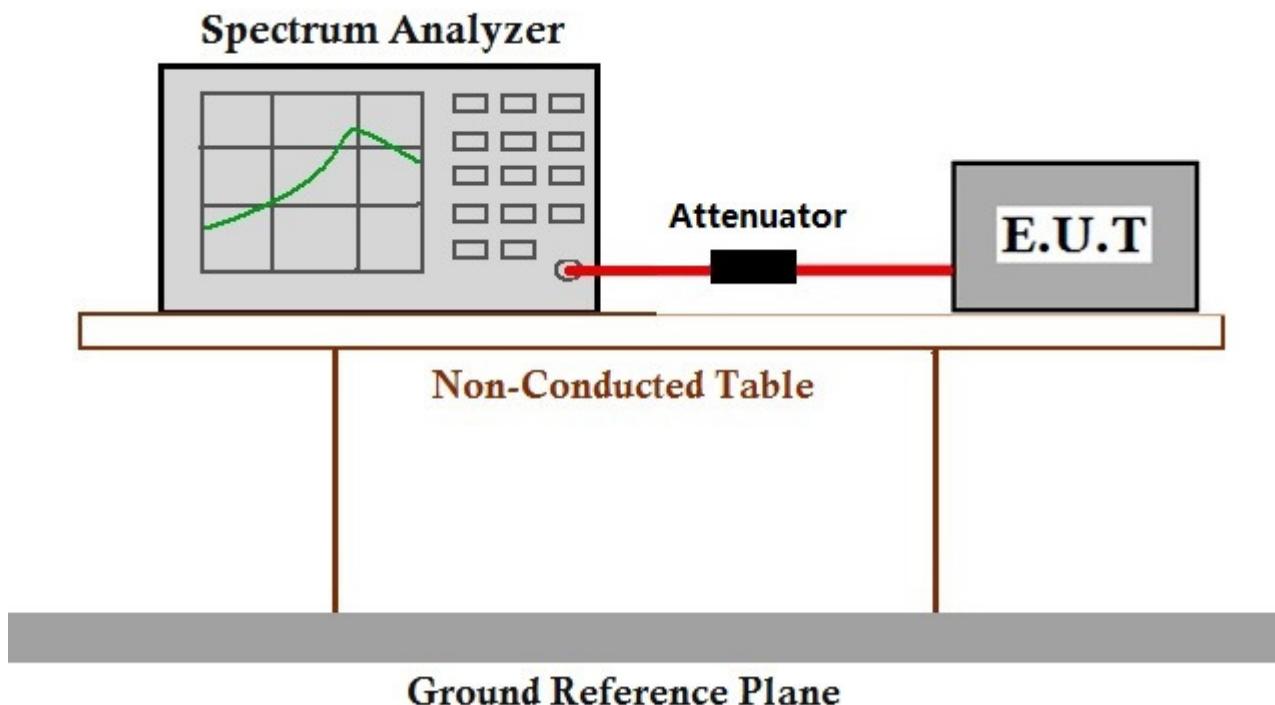

### 7.8.3 Measurement Data


The detailed test data see: Appendix 15.247

## 8 Photographs

### 8.1 Radiated Disturbance(30MHz-1GHz) Test Setup



### 8.2 Radiated Disturbance(above 1GHz) Test Setup

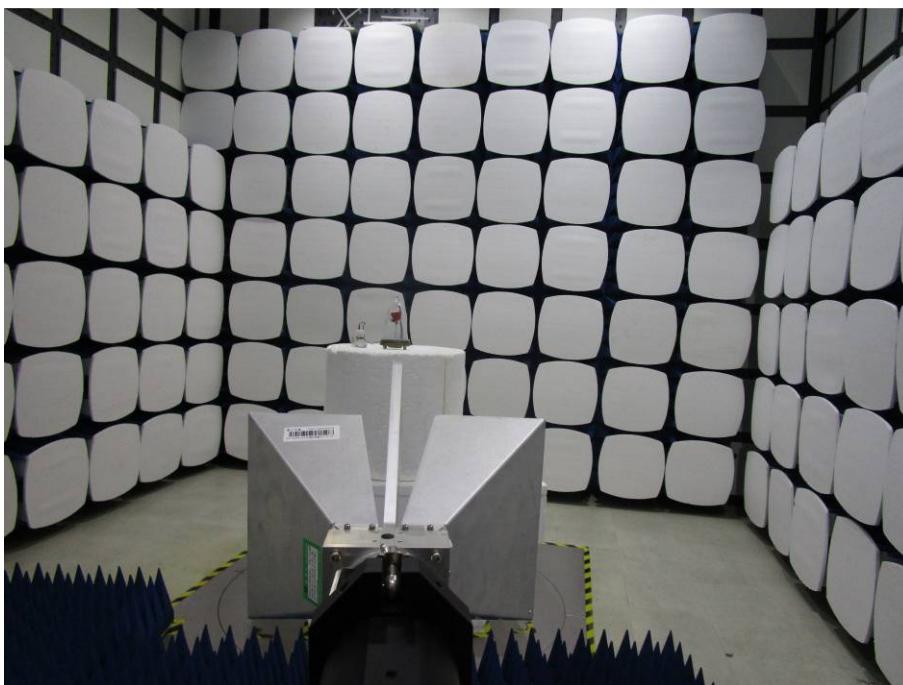

### 8.3 Conducted emissions Test Setup





## 8.4 EUT Constructional Details


Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1701000392CR.



## 9 Appendix

### 9.1 Appendix 15.247

#### 1.6dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
BLE	2402	0.699	>=0.5	PASS
BLE	2440	0.696	>=0.5	PASS
BLE	2480	0.699	>=0.5	PASS

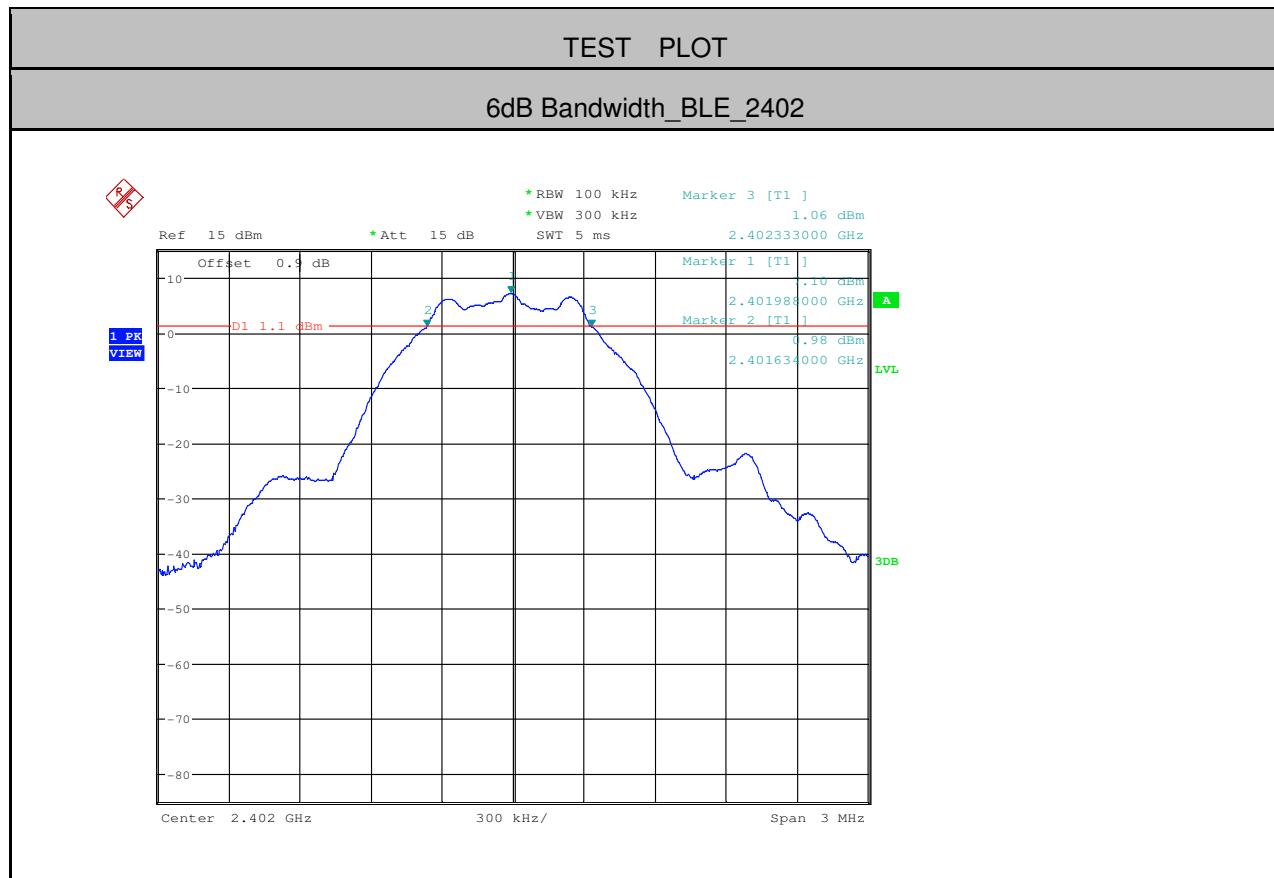

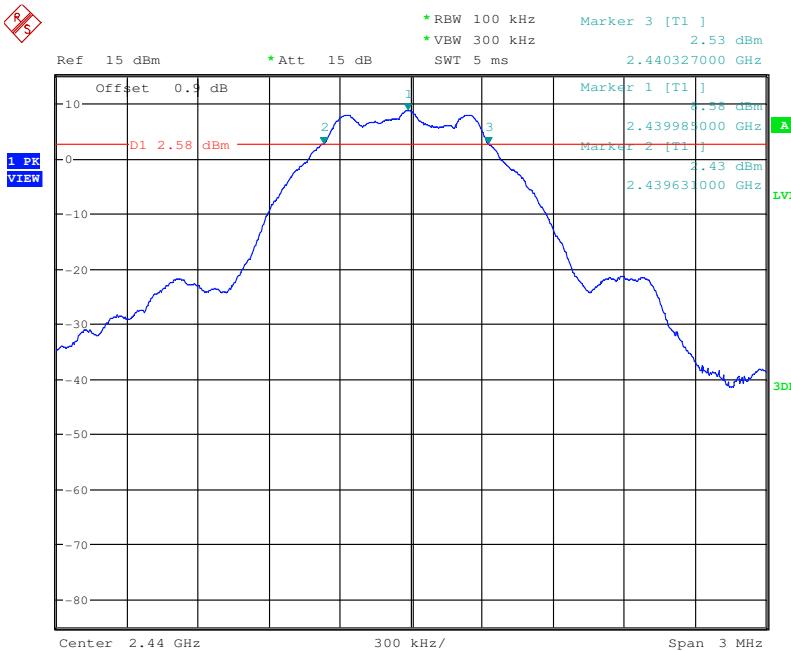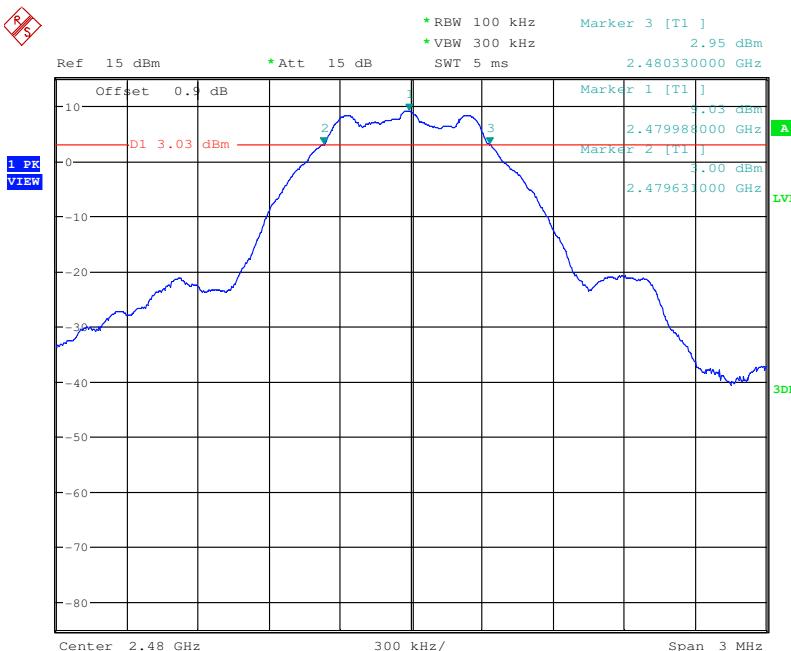
**6dB Bandwidth\_BLE\_2440**

**6dB Bandwidth\_BLE\_2480**


## 2. Maximum peak conducted output power

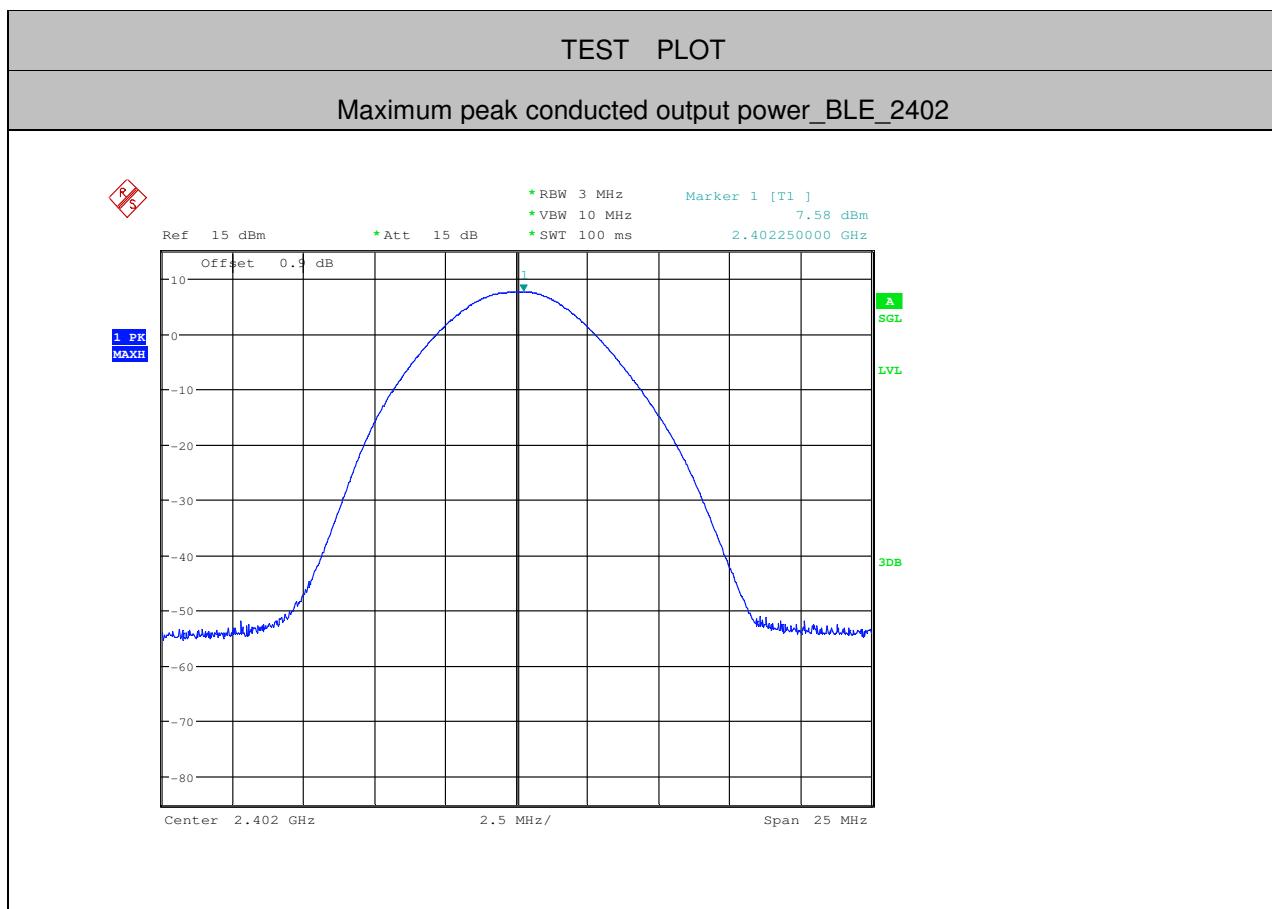
Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	7.58	<30	PASS
BLE	2440	9.01	<30	PASS
BLE	2480	9.46	<30	PASS

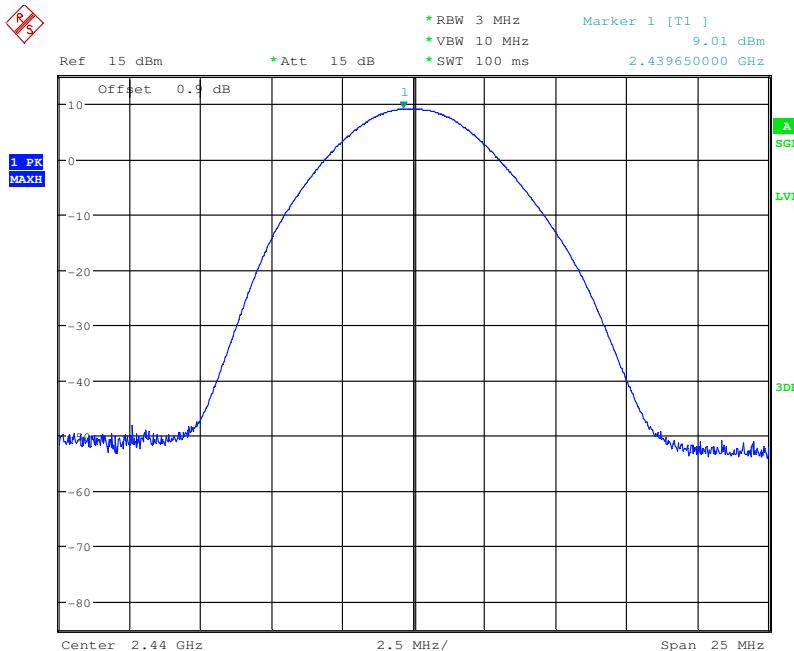

Maximum peak conducted output power\_BLE\_2440




Maximum peak conducted output power\_BLE\_2480

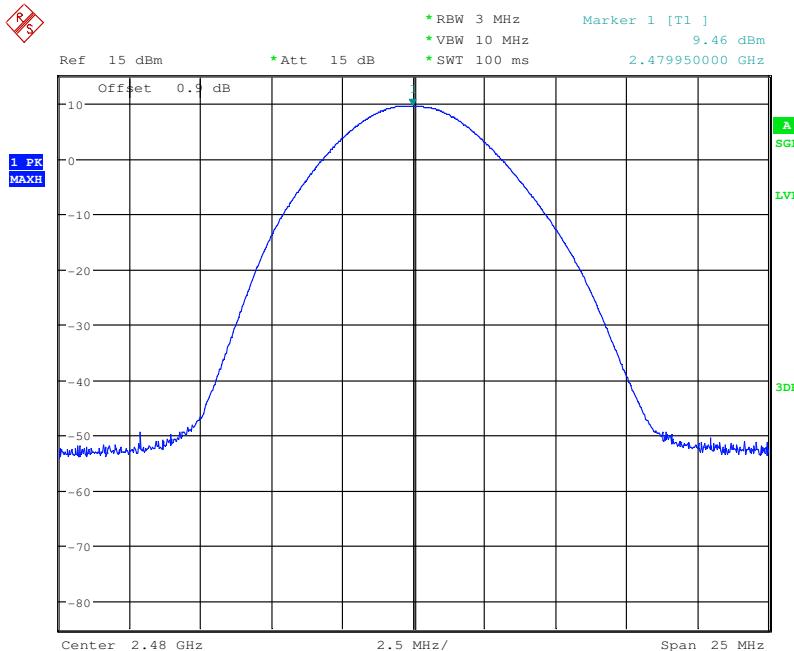


### 3. Maximum Peak power spectral density


Test Mode	Test Channel	PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
BLE	2402	-8.42	<8.00	PASS
BLE	2440	-6.71	<8.00	PASS
BLE	2480	-6.29	<8.00	PASS

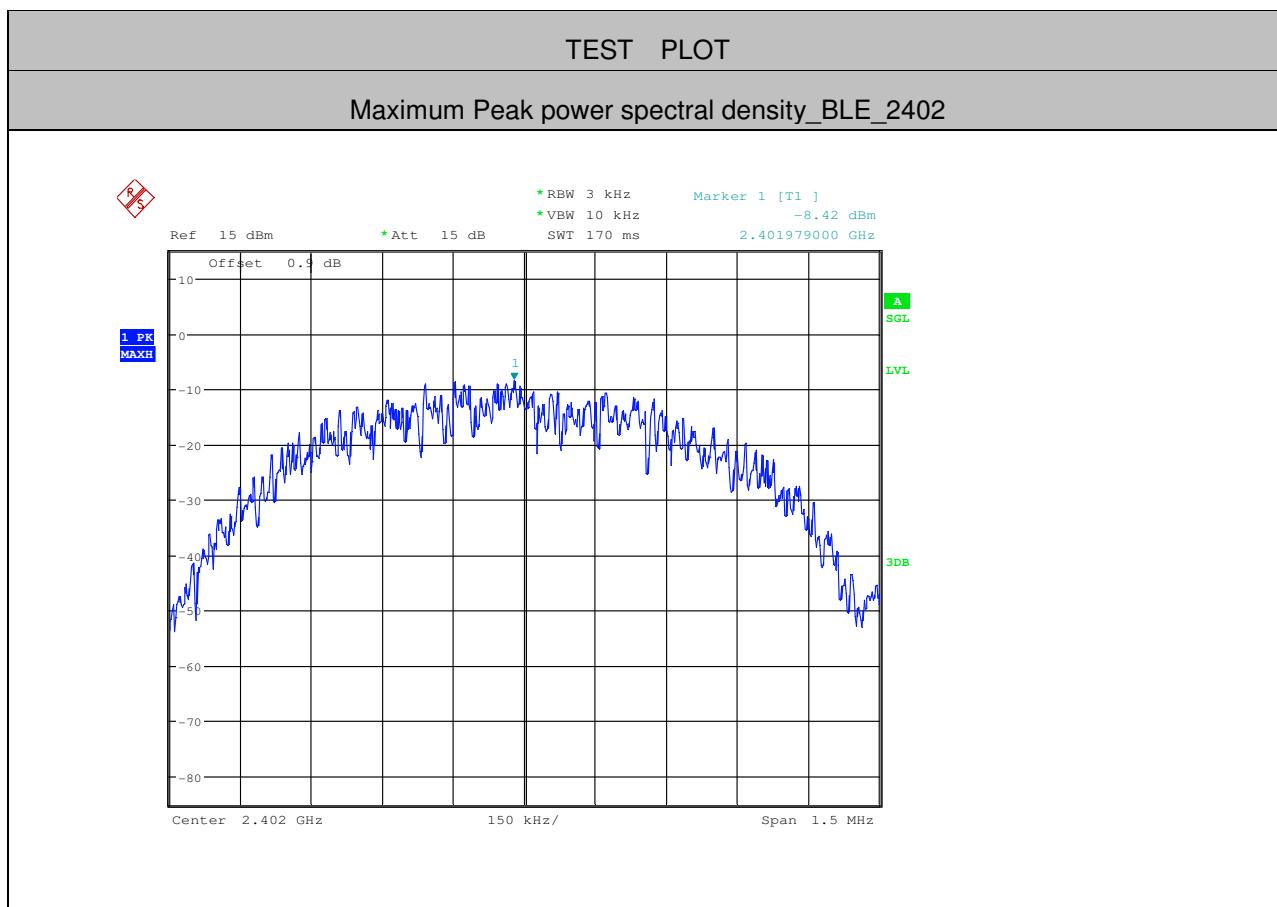

Maximum Peak power spectral density\_BLE\_2440

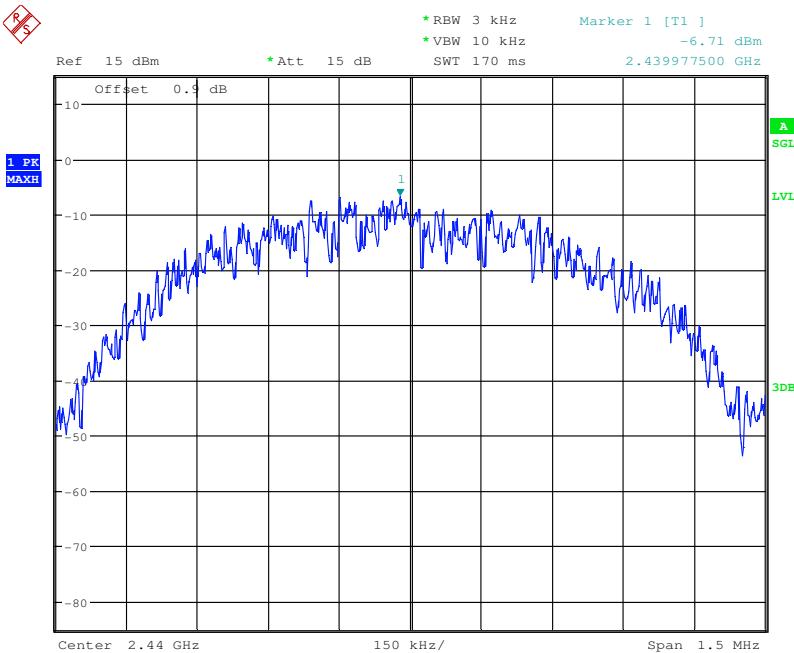


Maximum Peak power spectral density\_BLE\_2480

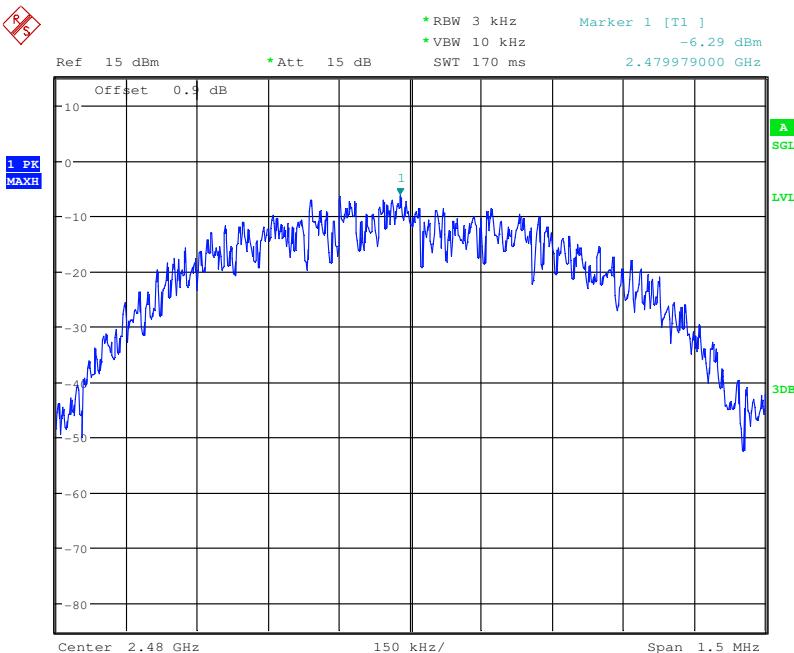



#### 4. Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
BLE	2402	7.180	-56.481	<-12.82	PASS
BLE	2480	8.880	-49.694	<-11.12	PASS

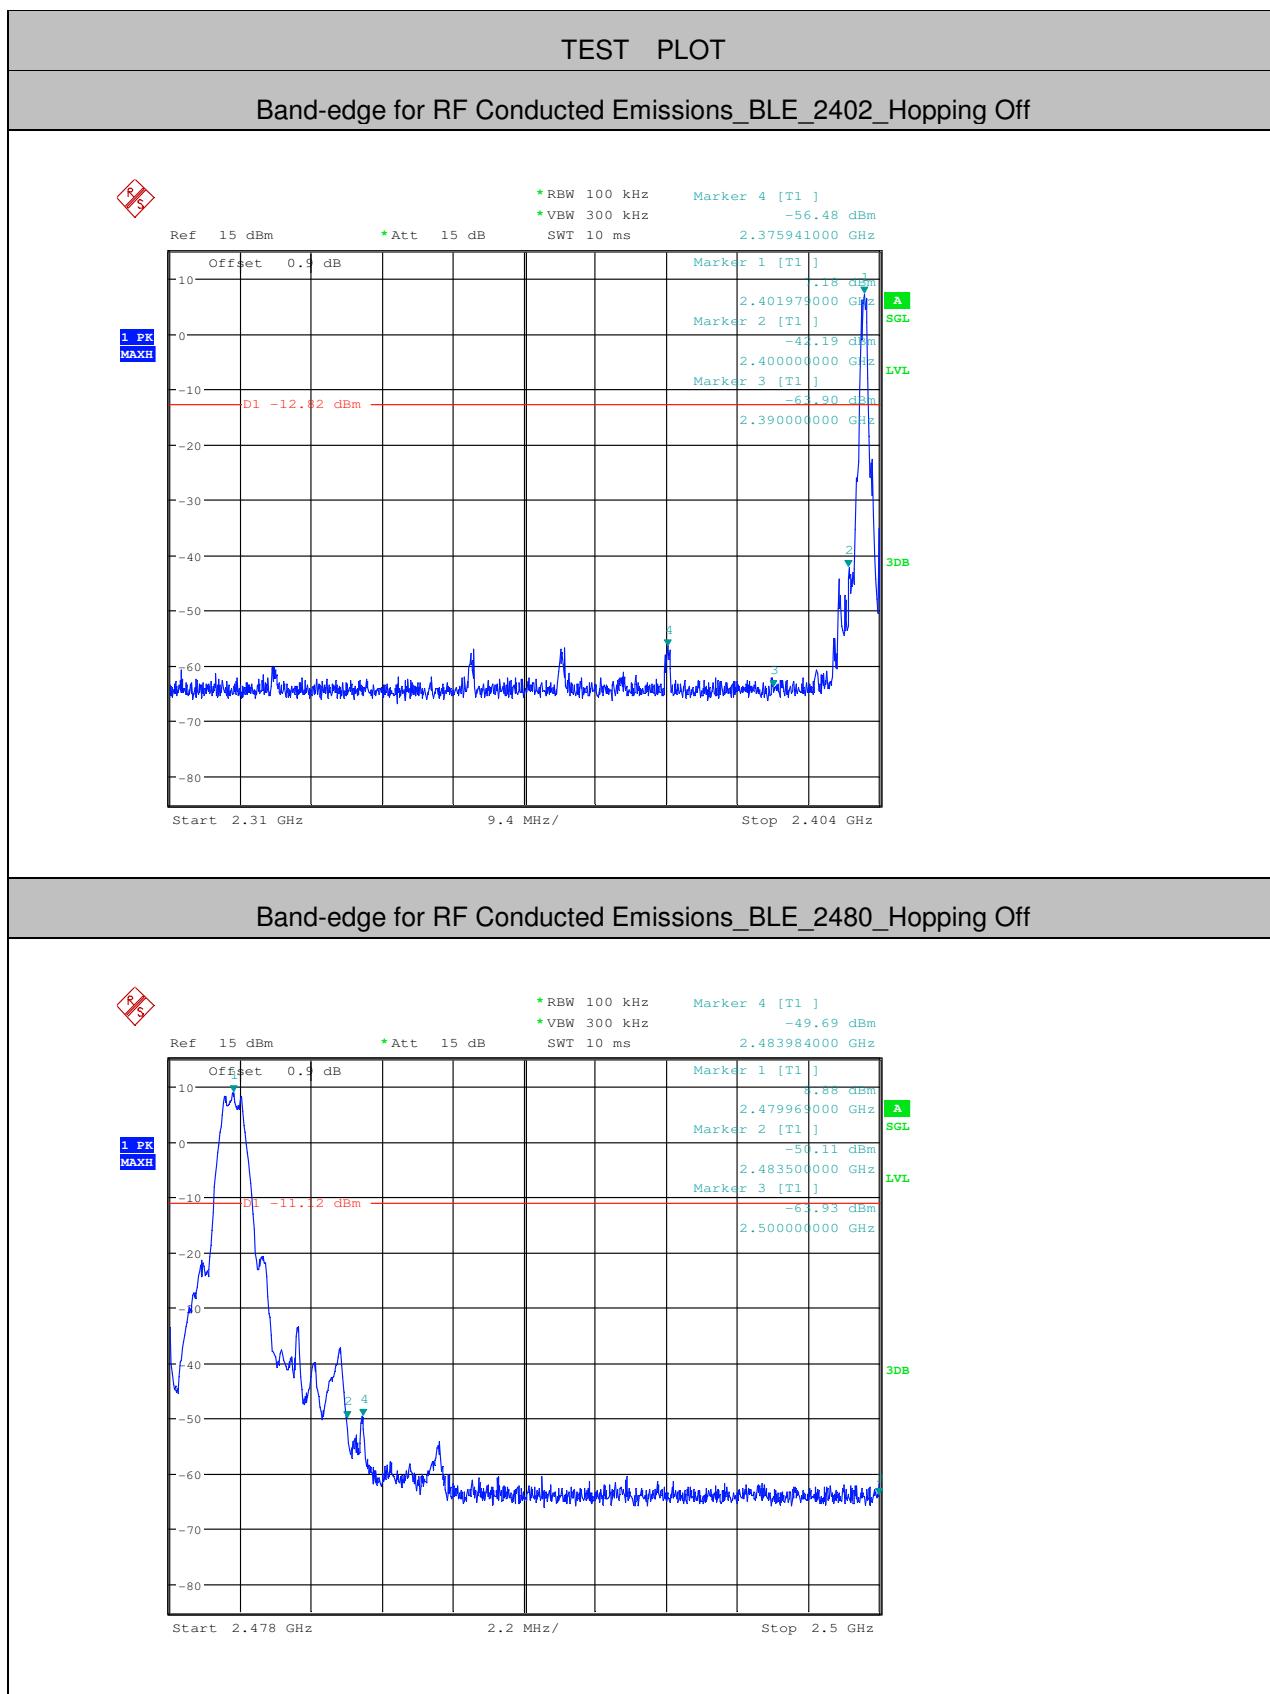



## 5. RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	30	10000	1000	3000	7.22	-42.580	<-12.78	PASS
BLE	2402	10000	25000	1000	3000	7.22	-59.630	<-12.78	PASS
BLE	2440	30	10000	1000	3000	8.58	-40.270	<-11.42	PASS
BLE	2440	10000	25000	1000	3000	8.58	-58.980	<-11.42	PASS
BLE	2480	30	10000	1000	3000	9.13	-38.970	<-10.87	PASS
BLE	2480	10000	25000	1000	3000	9.13	-60.130	<-10.87	PASS

