



**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250400032008  
Rev.: 01  
Page: 153 of 309

**7. Channel Loading (Payload)**

**7.1 Test Result**

**7.1.1 Payload**

| Band: 2A            |                    |                    |                               |       |         |
|---------------------|--------------------|--------------------|-------------------------------|-------|---------|
| Mode                | Bandwidth<br>(MHz) | Frequency<br>(MHz) | Channel Loading (Payload) (%) |       | Verdict |
|                     |                    |                    | Result                        | Limit |         |
| 802.11ac<br>(VHT80) | 80                 | 5290               | 30.77                         | >=17  | Pass    |

**7.1.2 Payload**

| Band: 2C            |                    |                    |                               |       |         |
|---------------------|--------------------|--------------------|-------------------------------|-------|---------|
| Mode                | Bandwidth<br>(MHz) | Frequency<br>(MHz) | Channel Loading (Payload) (%) |       | Verdict |
|                     |                    |                    | Result                        | Limit |         |
| 802.11ac<br>(VHT80) | 80                 | 5530               | 21.57                         | >=17  | Pass    |




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 154 of 309

7.2 Test Graph

7.2.1 Payload

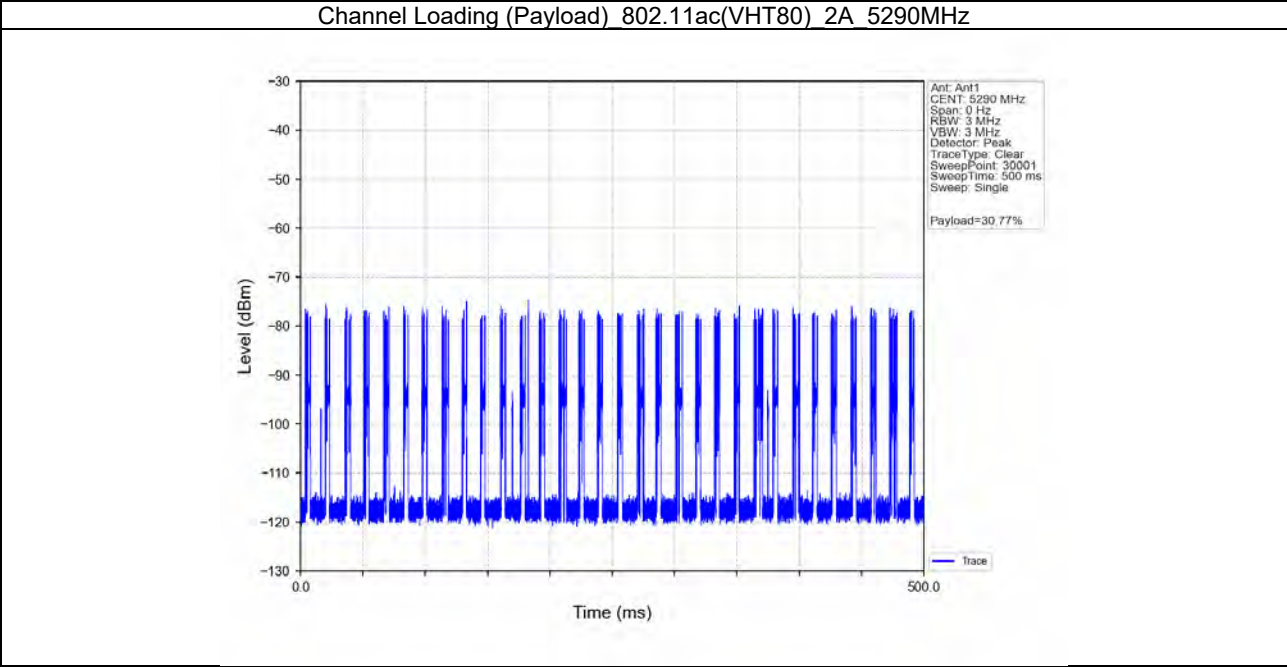




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 155 of 309

7.2.2 Payload

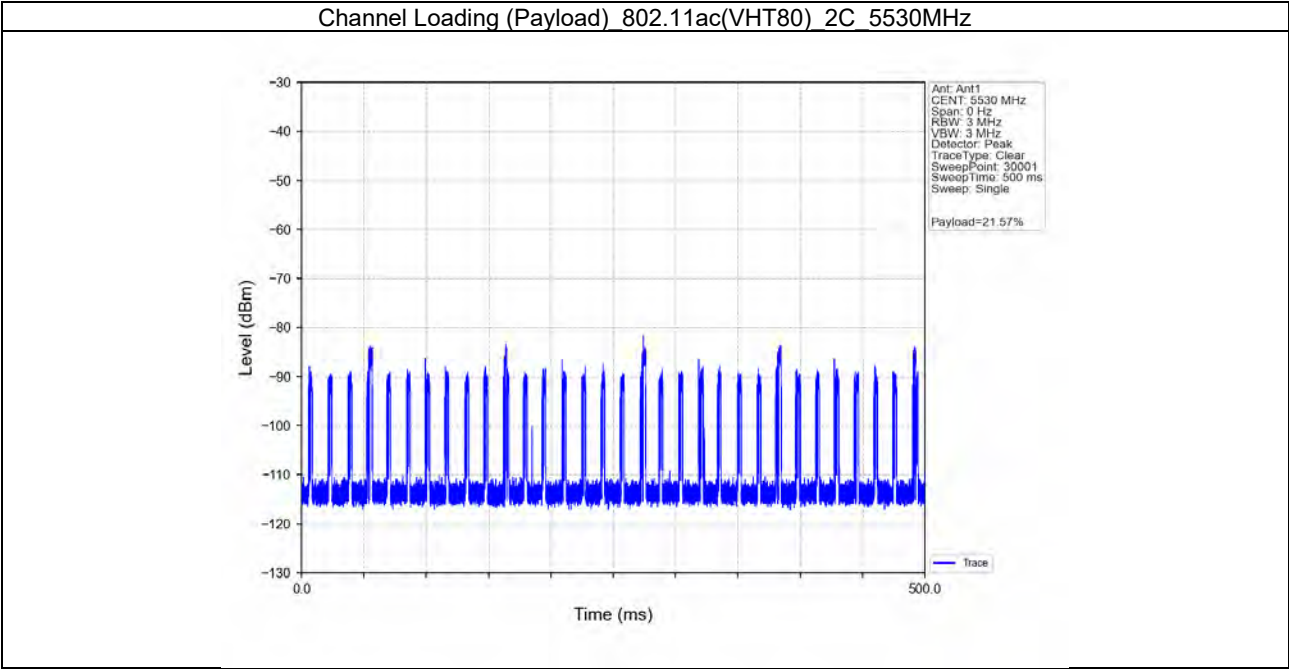



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 156 of 309

### 8. Channel Move Time and Closing Transmission Time

#### 8.1 Test Result

##### 8.1.1 CMT\_CTT

| Band: 2A         |                 |                 |                                                 |       |         |
|------------------|-----------------|-----------------|-------------------------------------------------|-------|---------|
| Mode             | Bandwidth (MHz) | Frequency (MHz) | Channel Move Time and Closing Transmission Time |       | Verdict |
|                  |                 |                 | Result                                          | Limit |         |
| 802.11ac (VHT80) | 80              | 5290            | Refer To Test Graph                             |       | Pass    |

##### 8.1.2 CMT\_CTT

| Band: 2C         |                 |                 |                                                 |       |         |
|------------------|-----------------|-----------------|-------------------------------------------------|-------|---------|
| Mode             | Bandwidth (MHz) | Frequency (MHz) | Channel Move Time and Closing Transmission Time |       | Verdict |
|                  |                 |                 | Result                                          | Limit |         |
| 802.11ac (VHT80) | 80              | 5530            | Refer To Test Graph                             |       | Pass    |




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 157 of 309

8.2 Test Graph

8.2.1 CMT\_CTT

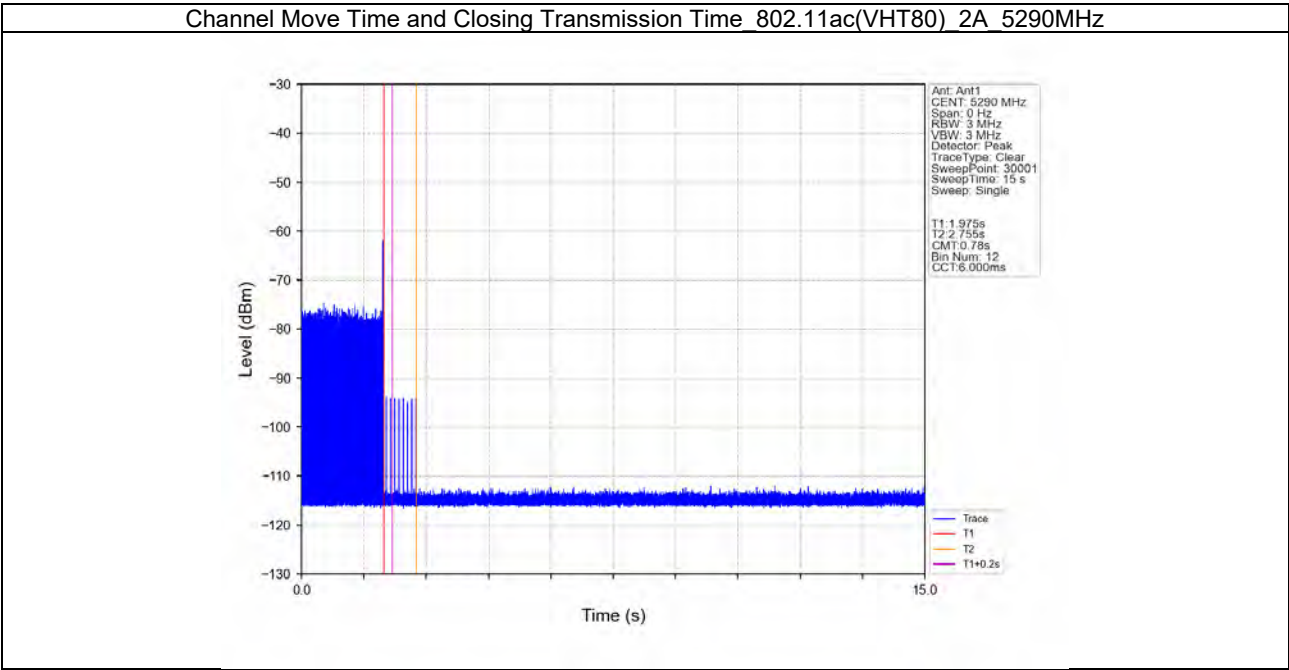




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 158 of 309

8.2.2 CMT\_CTT

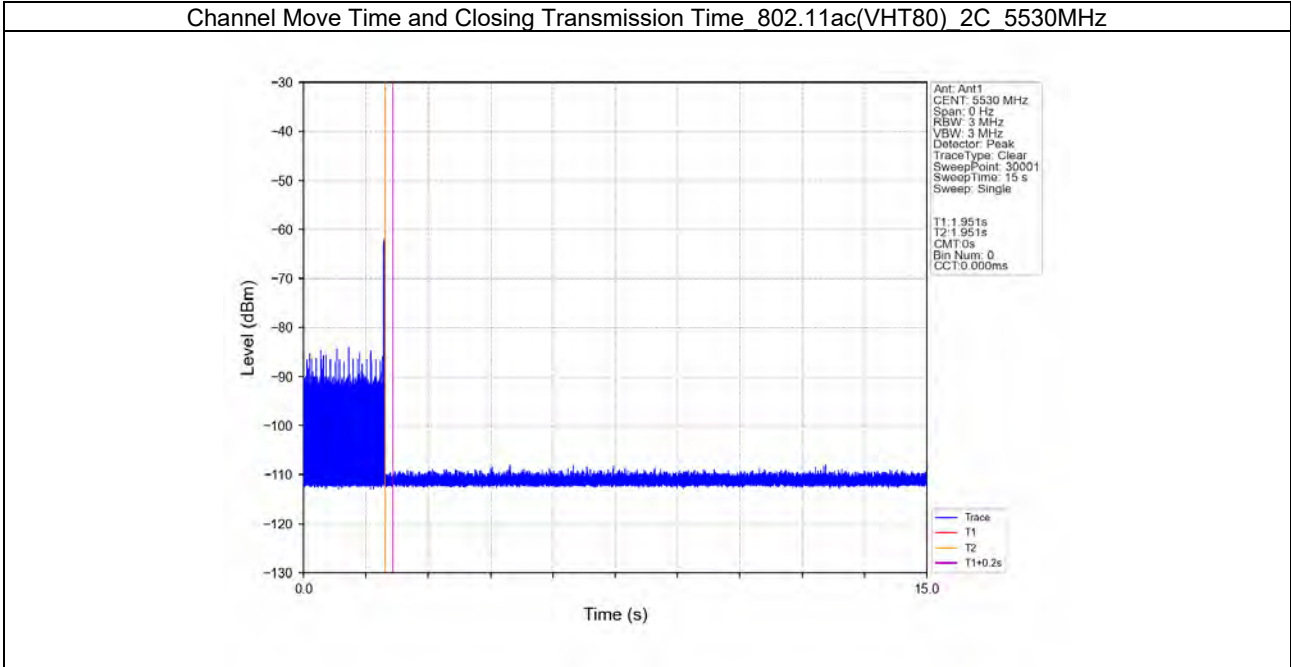



**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250400032008  
Rev.: 01  
Page: 159 of 309

**9. Non-Occupancy Period**

**9.1 Test Result**

**9.1.1 Period**

| Band: 2A         |                 |                 |                      |       |         |
|------------------|-----------------|-----------------|----------------------|-------|---------|
| Mode             | Bandwidth (MHz) | Frequency (MHz) | Non-Occupancy Period |       | Verdict |
|                  |                 |                 | Result               | Limit |         |
| 802.11ac (VHT80) | 80              | 5290            | Refer To Test Graph  |       | Pass    |

**9.1.2 Period**

| Band: 2C            |                    |                    |                      |       |         |
|---------------------|--------------------|--------------------|----------------------|-------|---------|
| Mode                | Bandwidth<br>(MHz) | Frequency<br>(MHz) | Non-Occupancy Period |       | Verdict |
|                     |                    |                    | Result               | Limit |         |
| 802.11ac<br>(VHT80) | 80                 | 5530               | Refer To Test Graph  |       | Pass    |




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 160 of 309

9.2 Test Graph

9.2.1 Period

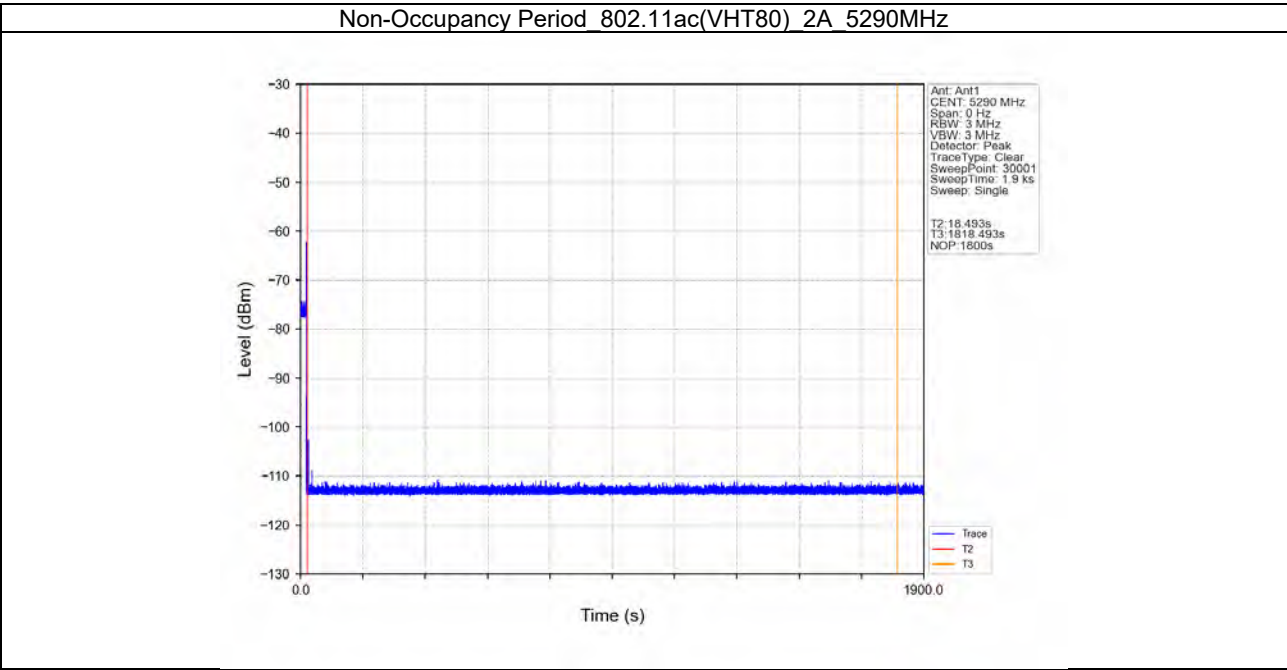




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 161 of 309

9.2.2 Period

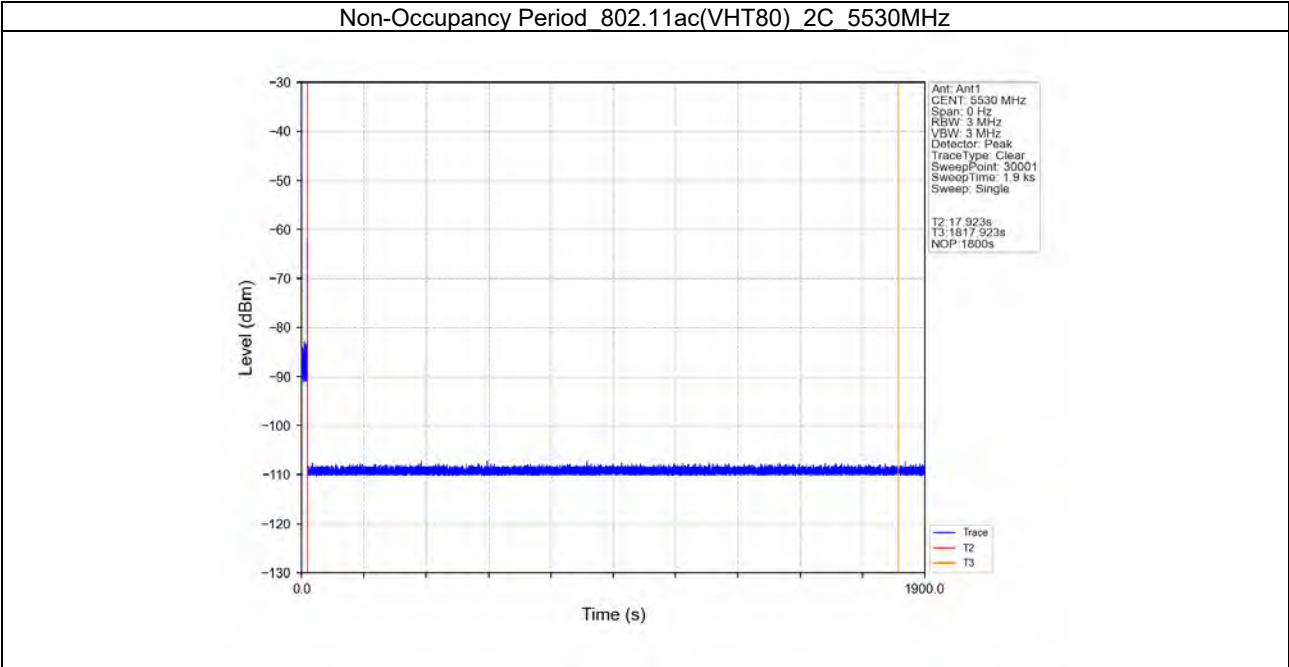



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008


Rev.: 01

Page: 162 of 309


### Radiated Spurious Emissions

#### Radiated emission below 1GHz

Worst case Mode: 802.11ac80\_Channel 106

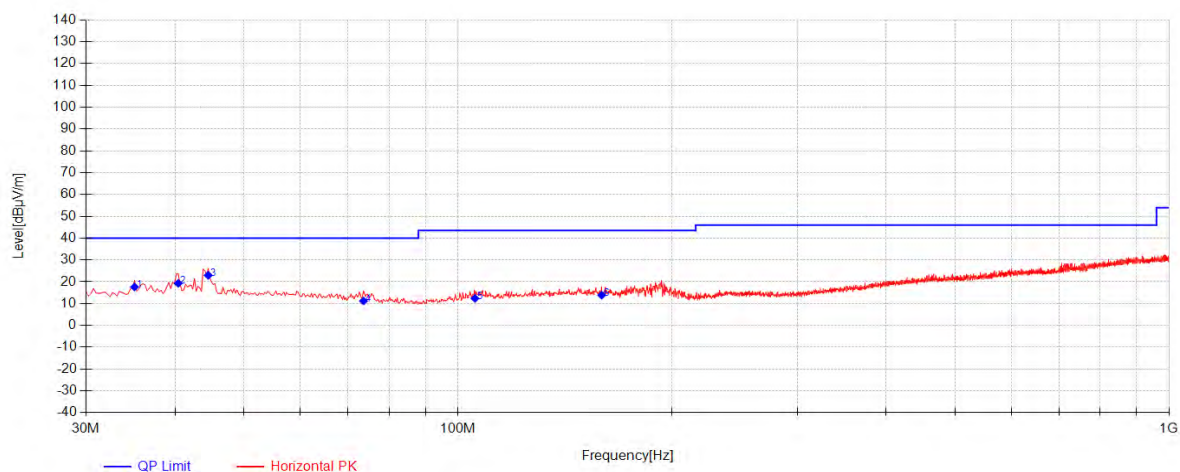

| Final Data List |                 |                |             |           |                   |                   |                |            |
|-----------------|-----------------|----------------|-------------|-----------|-------------------|-------------------|----------------|------------|
| NO.             | Frequency [MHz] | Reading [dBμV] | Factor [dB] | AF [dB/m] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Polarity   |
| 1               | 35.0925         | 41.26          | -42.36      | 18.72     | 17.62             | 40.00             | 22.38          | Horizontal |
| 2               | 40.4275         | 42.03          | -42.32      | 19.57     | 19.28             | 40.00             | 20.72          | Horizontal |
| 3               | 44.55           | 46.02          | -42.35      | 19.28     | 22.95             | 40.00             | 17.05          | Horizontal |
| 4               | 73.65           | 36.59          | -41.99      | 16.58     | 11.18             | 40.00             | 28.82          | Horizontal |
| 5               | 105.66          | 38.00          | -41.72      | 16.10     | 12.37             | 43.50             | 31.13          | Horizontal |
| 6               | 159.2525        | 36.16          | -40.80      | 18.50     | 13.86             | 43.50             | 29.64          | Horizontal |

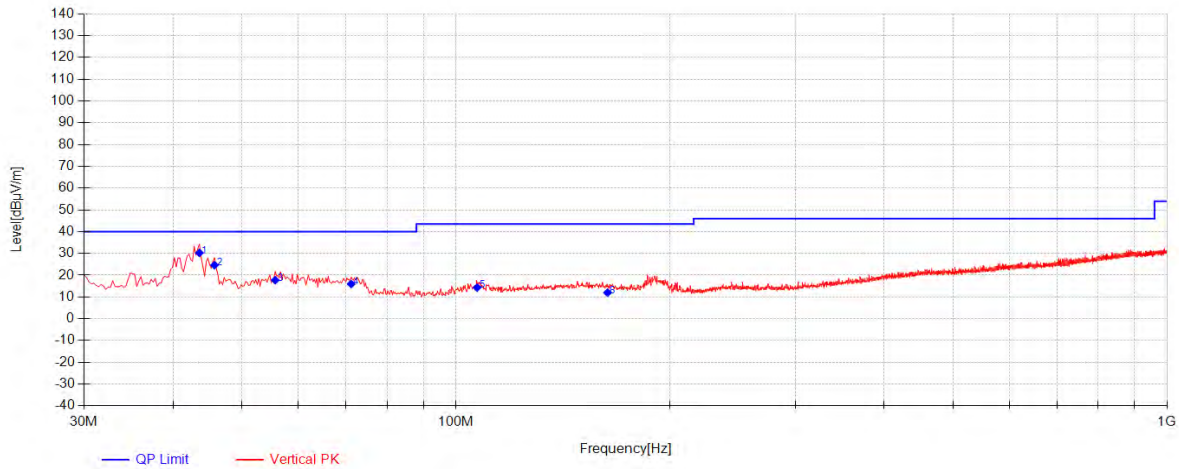

| Final Data List |                 |                |             |           |                   |                   |                |          |
|-----------------|-----------------|----------------|-------------|-----------|-------------------|-------------------|----------------|----------|
| NO.             | Frequency [MHz] | Reading [dBμV] | Factor [dB] | AF [dB/m] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Polarity |
| 1               | 43.58           | 53.26          | -42.34      | 19.35     | 30.27             | 40.00             | 9.73           | Vertical |
| 2               | 45.7625         | 47.77          | -42.35      | 19.20     | 24.61             | 40.00             | 15.39          | Vertical |
| 3               | 55.705          | 41.30          | -42.30      | 18.73     | 17.73             | 40.00             | 22.27          | Vertical |
| 4               | 71.225          | 41.02          | -42.05      | 16.99     | 15.96             | 40.00             | 24.04          | Vertical |
| 5               | 107.115         | 39.88          | -41.74      | 16.20     | 14.34             | 43.50             | 29.16          | Vertical |
| 6               | 163.375         | 34.63          | -40.83      | 18.20     | 11.99             | 43.50             | 31.51          | Vertical |

### Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:  

$$\text{Value} = \text{Reading}(\text{dB}\mu\text{V}) + \text{AF}(\text{dB}/\text{m}) + \text{Factor}(\text{dB})$$

$$\text{AF} = \text{Antenna Factor}(\text{dB}/\text{m})$$

$$\text{Factor} = \text{Cable Factor}(\text{dB}) - \text{Preamplifier gain}(\text{dB})$$

$$\text{Margin} = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Value}(\text{dB}\mu\text{V}/\text{m})$$
- All channels have been tested, but only the worst case data displayed in this report.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032008

Rev.: 01

Page: 164 of 309

### Transmitter emission Above 1GHz

#### 802.11a\_Channel 36

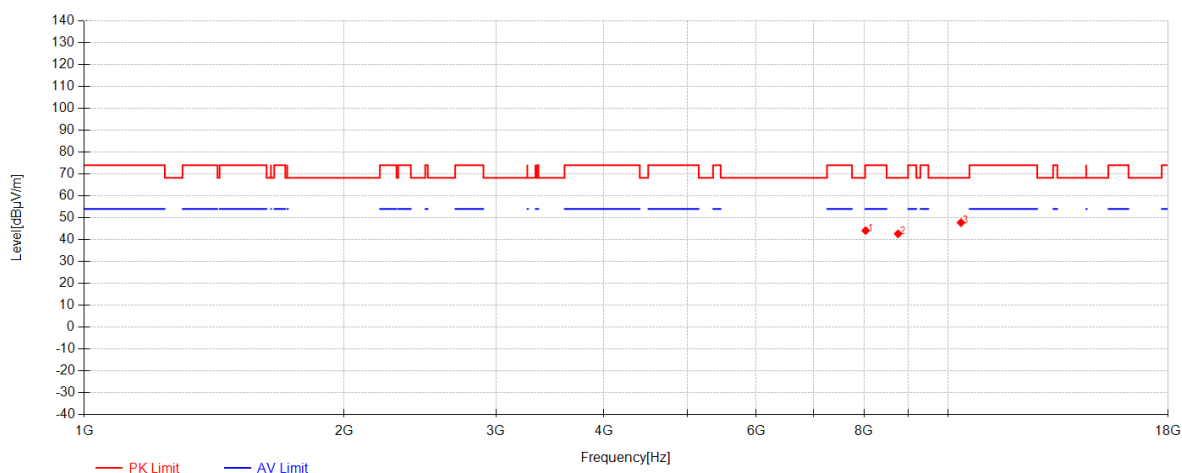

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8037.1667       | 48.89          | 37.08     | -41.84      | 44.13          | 74.00          | 29.87       | Horizontal |
| 2         | 8762.625        | 47.22          | 36.64     | -41.21      | 42.65          | 68.30          | 25.65       | Horizontal |
| 3         | 10363.5208      | 48.04          | 38.54     | -38.81      | 47.77          | 68.30          | 20.53       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 165 of 309

### 802.11a\_Channel 36

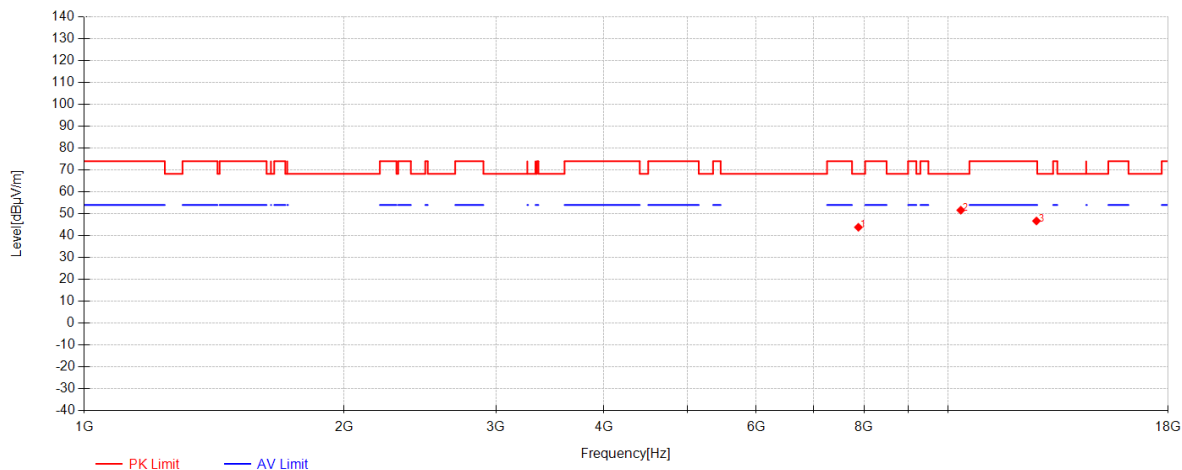

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7882.875        | 49.60          | 36.94     | -42.71      | 43.82          | 68.30          | 24.48       | Vertical |
| 2         | 10358.25        | 51.93          | 38.54     | -38.82      | 51.64          | 68.30          | 16.66       | Vertical |
| 3         | 12673.1042      | 44.34          | 39.30     | -36.93      | 46.71          | 74.00          | 27.29       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 166 of 309

### 802.11a\_Channel 44

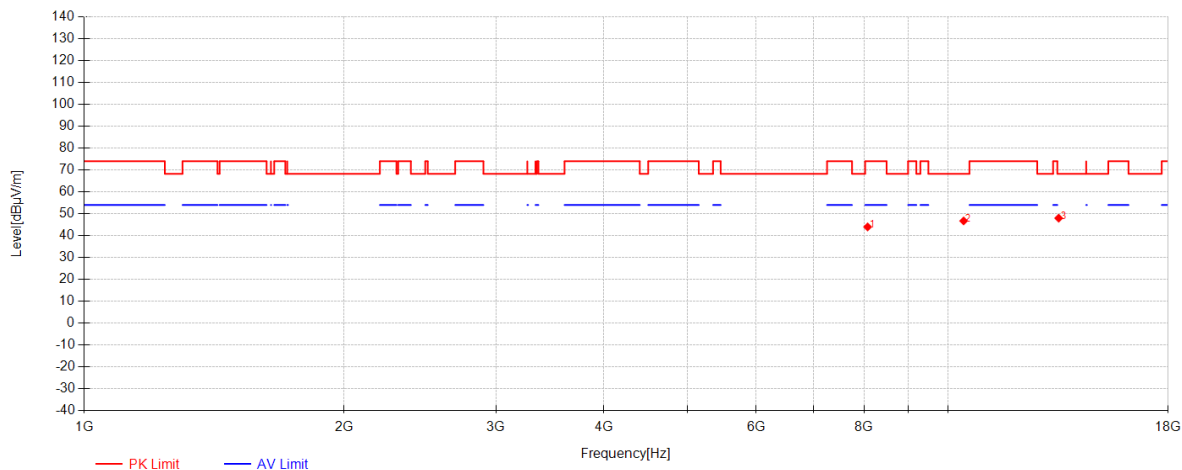

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8078.8542       | 48.43          | 37.05     | -41.51      | 43.98          | 74.00          | 30.02       | Horizontal |
| 2         | 10436.3542      | 46.93          | 38.54     | -38.73      | 46.74          | 68.30          | 21.56       | Horizontal |
| 3         | 13447.9167      | 44.31          | 40.03     | -36.35      | 47.99          | 68.30          | 20.31       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 167 of 309

### 802.11a\_Channel 44

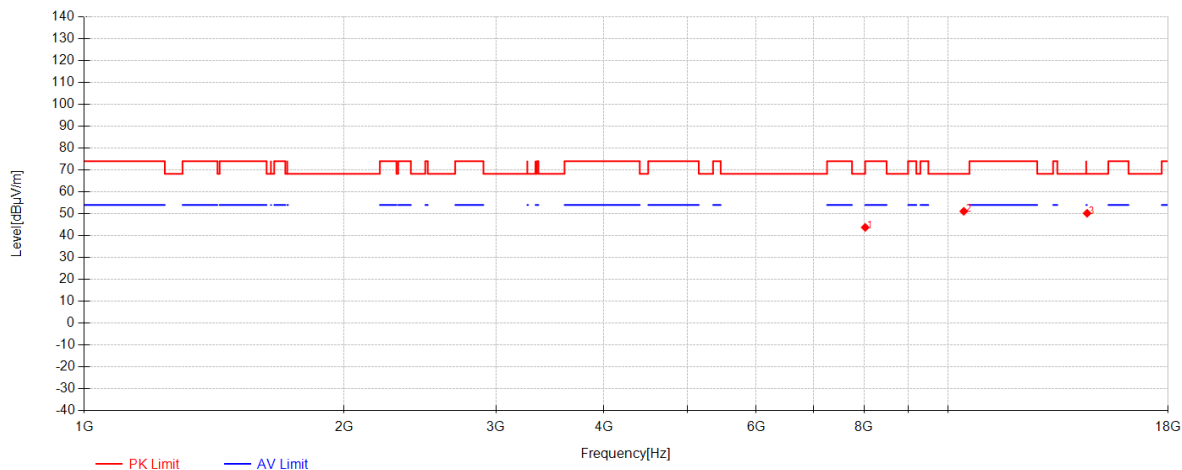

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8027.1042       | 48.59          | 37.08     | -41.92      | 43.76          | 74.00          | 30.24       | Vertical |
| 2         | 10440.6667      | 51.33          | 38.54     | -38.74      | 51.14          | 68.30          | 17.16       | Vertical |
| 3         | 14506.3958      | 43.32          | 41.21     | -34.30      | 50.22          | 68.30          | 18.08       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 168 of 309

### 802.11a\_Channel 48

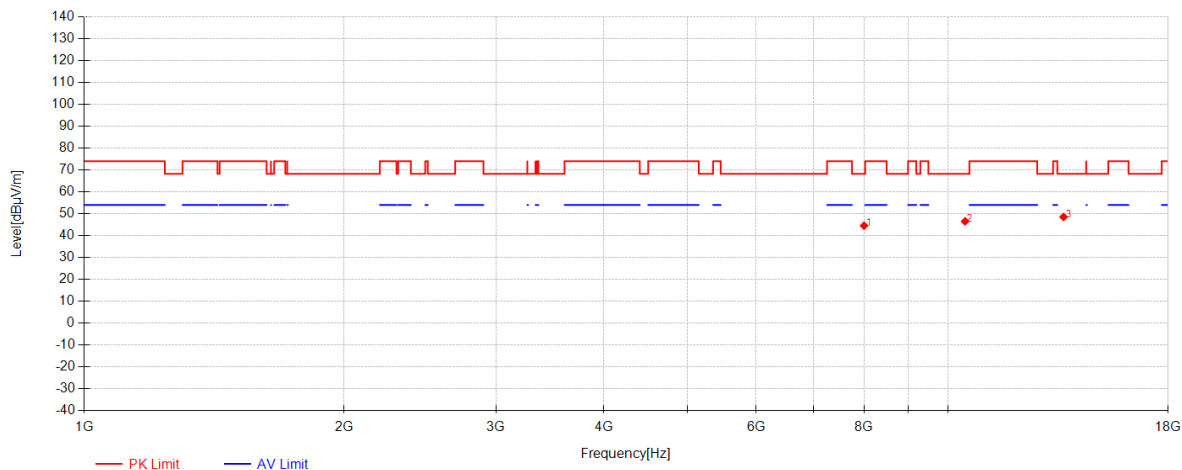

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8002.6667       | 49.56          | 37.10     | -42.11      | 44.55          | 68.30          | 23.75       | Horizontal |
| 2         | 10477.5625      | 46.75          | 38.55     | -38.75      | 46.55          | 68.30          | 21.75       | Horizontal |
| 3         | 13623.2917      | 44.28          | 40.27     | -36.03      | 48.52          | 68.30          | 19.78       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 169 of 309

### 802.11a\_Channel 48

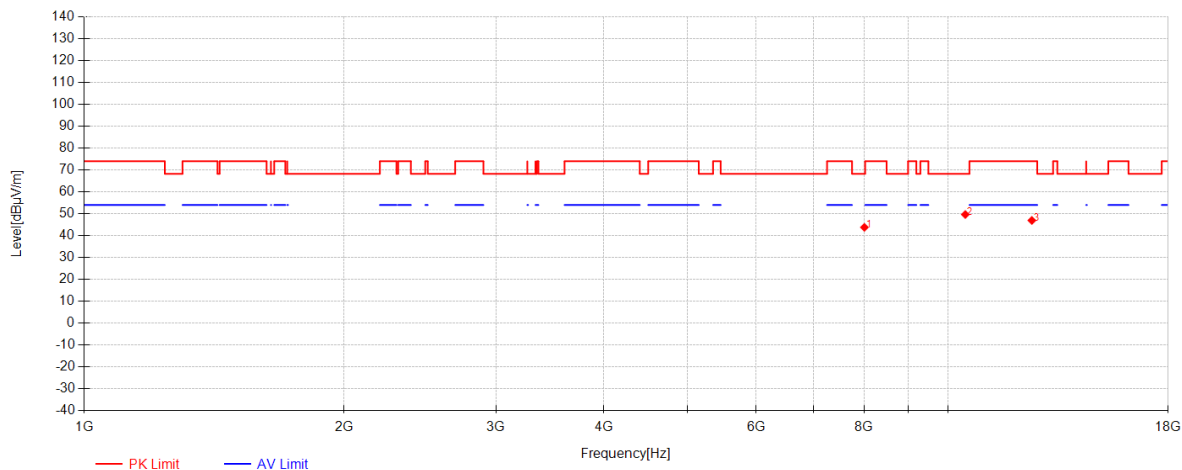

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8009.8542       | 48.75          | 37.09     | -42.05      | 43.79          | 68.30          | 24.51       | Vertical |
| 2         | 10482.8333      | 49.86          | 38.55     | -38.75      | 49.66          | 68.30          | 18.64       | Vertical |
| 3         | 12518.8125      | 44.69          | 39.26     | -37.00      | 46.95          | 74.00          | 27.05       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 170 of 309

### 802.11a\_Channel 52

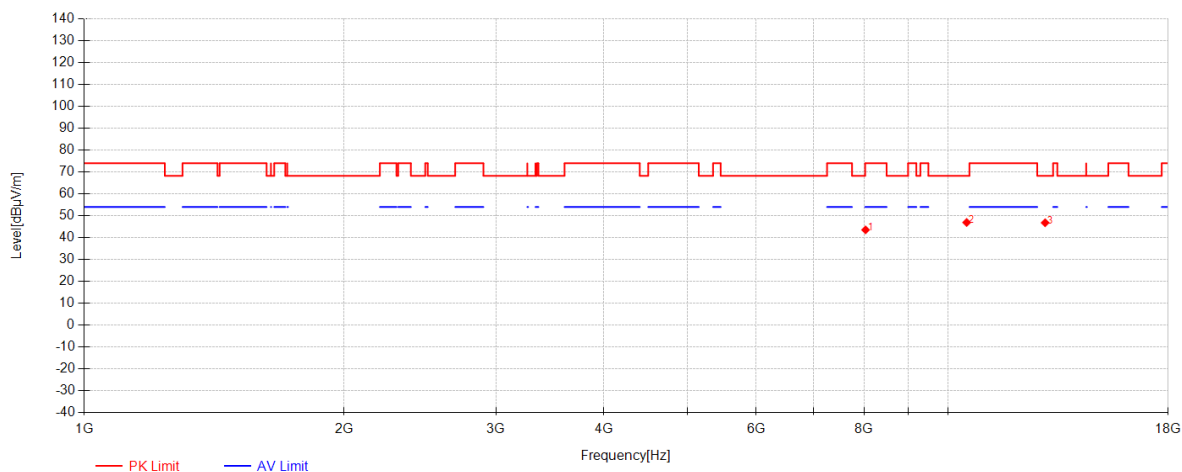

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8034.7708       | 48.32          | 37.08     | -41.86      | 43.54          | 74.00          | 30.46       | Horizontal |
| 2         | 10521.6458      | 47.00          | 38.55     | -38.60      | 46.95          | 68.30          | 21.35       | Horizontal |
| 3         | 12969.7083      | 44.58          | 39.39     | -37.17      | 46.80          | 68.30          | 21.50       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 171 of 309

### 802.11a\_Channel 52

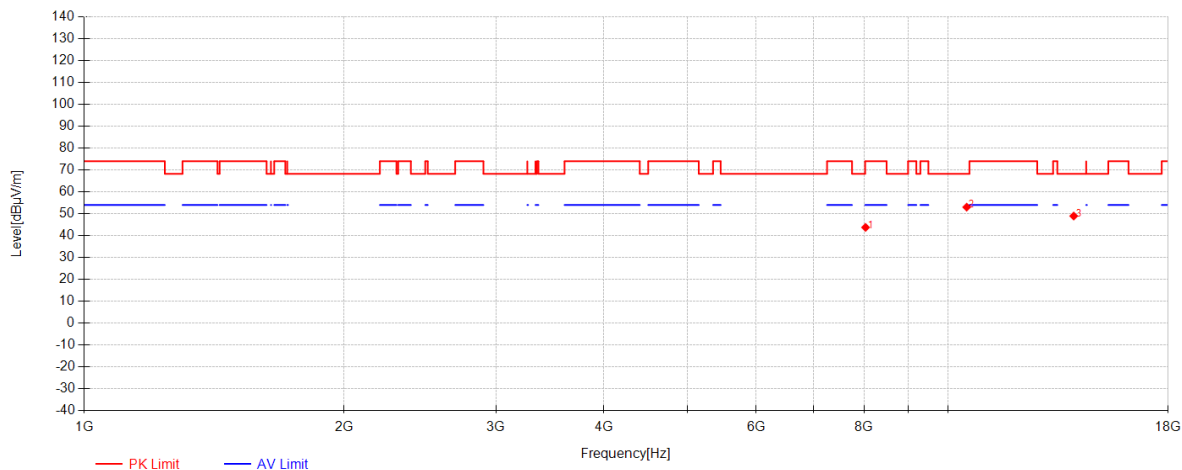

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8034.2917       | 48.54          | 37.08     | -41.86      | 43.76          | 74.00          | 30.24       | Vertical |
| 2         | 10522.6042      | 53.08          | 38.55     | -38.59      | 53.04          | 68.30          | 15.26       | Vertical |
| 3         | 13997.5208      | 42.95          | 40.80     | -34.80      | 48.95          | 68.30          | 19.35       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 172 of 309

### 802.11a\_Channel 60

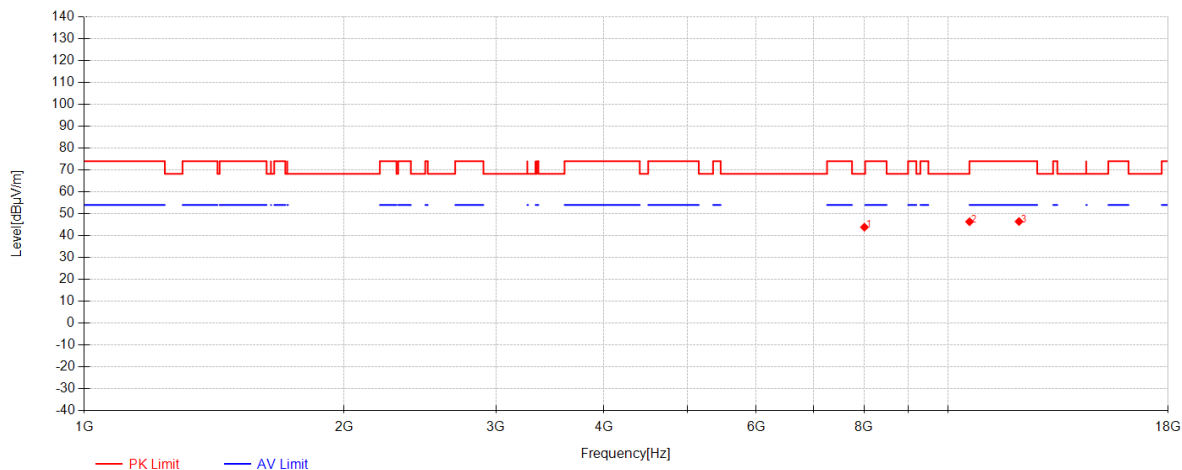

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8009.8542       | 48.81          | 37.09     | -42.05      | 43.85          | 68.30          | 24.45       | Horizontal |
| 2         | 10601.6667      | 45.79          | 38.56     | -38.00      | 46.35          | 74.00          | 27.65       | Horizontal |
| 3         | 12099.0625      | 44.52          | 39.13     | -37.19      | 46.46          | 74.00          | 27.54       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 173 of 309

### 802.11a\_Channel 60

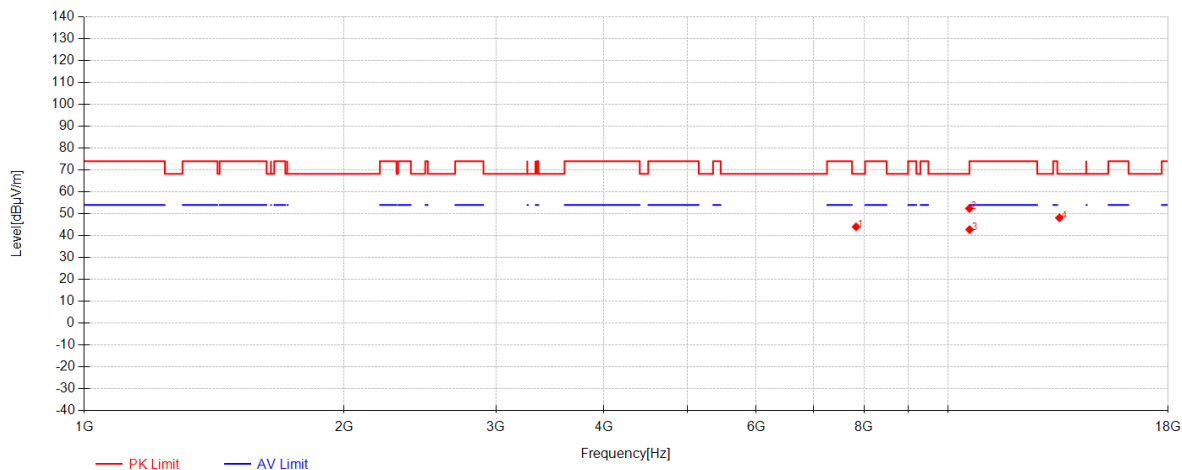

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7834.9583       | 49.80          | 36.87     | -42.64      | 44.03          | 68.30          | 24.27       | Vertical |
| 2         | 10596.875       | 51.86          | 38.56     | -38.03      | 52.39          | 68.30          | 15.91       | Vertical |
| 3         | 10605.0208      | 42.17          | 38.56     | -37.98      | 42.75          | 54.00          | 11.25       | Vertical |
| 4         | 13473.7917      | 44.56          | 40.06     | -36.50      | 48.13          | 68.30          | 20.17       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 174 of 309

### 802.11a\_Channel 64

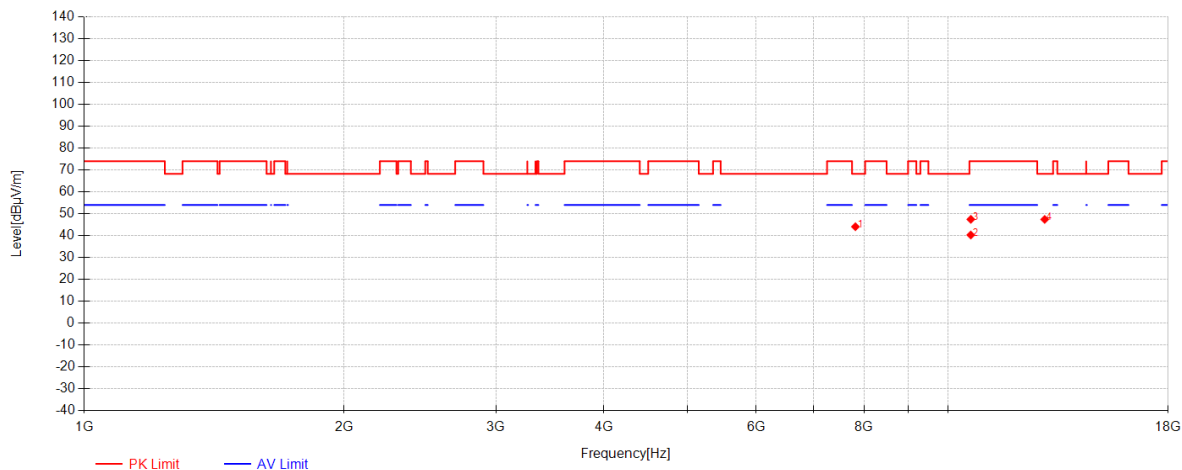

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7820.1042       | 49.83          | 36.85     | -42.61      | 44.07          | 68.30          | 24.23       | Horizontal |
| 2         | 10637.6042      | 39.53          | 38.56     | -37.81      | 40.28          | 54.00          | 13.72       | Horizontal |
| 3         | 10638.5625      | 46.71          | 38.56     | -37.81      | 47.46          | 74.00          | 26.54       | Horizontal |
| 4         | 12954.375       | 45.14          | 39.39     | -37.10      | 47.42          | 68.30          | 20.88       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 175 of 309

### 802.11a\_Channel 64

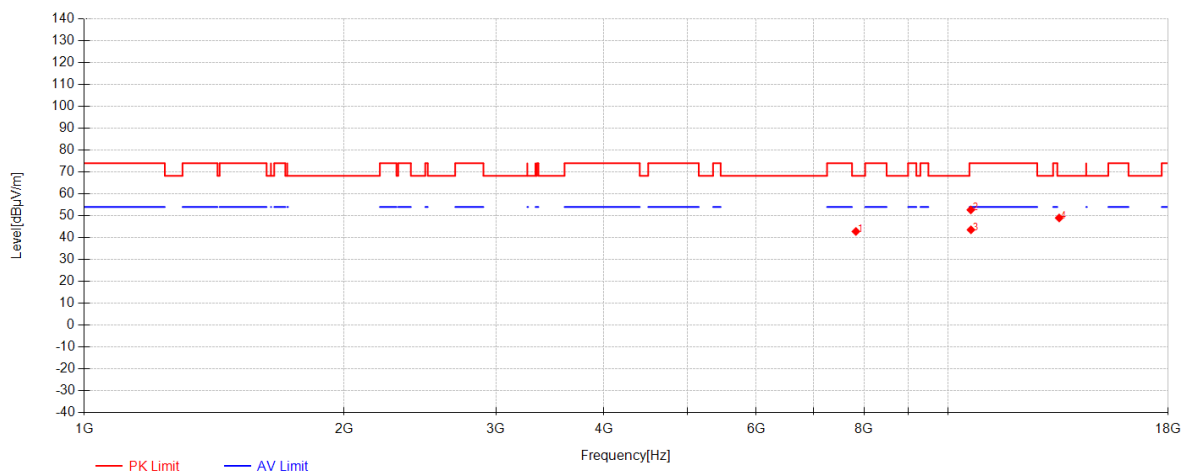

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7830.6458       | 48.59          | 36.86     | -42.63      | 42.82          | 68.30          | 25.48       | Vertical |
| 2         | 10638.0833      | 51.93          | 38.56     | -37.81      | 52.68          | 74.00          | 21.32       | Vertical |
| 3         | 10642.3958      | 42.79          | 38.56     | -37.79      | 43.56          | 54.00          | 10.44       | Vertical |
| 4         | 13466.125       | 45.39          | 40.05     | -36.45      | 48.99          | 68.30          | 19.31       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 176 of 309

### 802.11a\_Channel 100

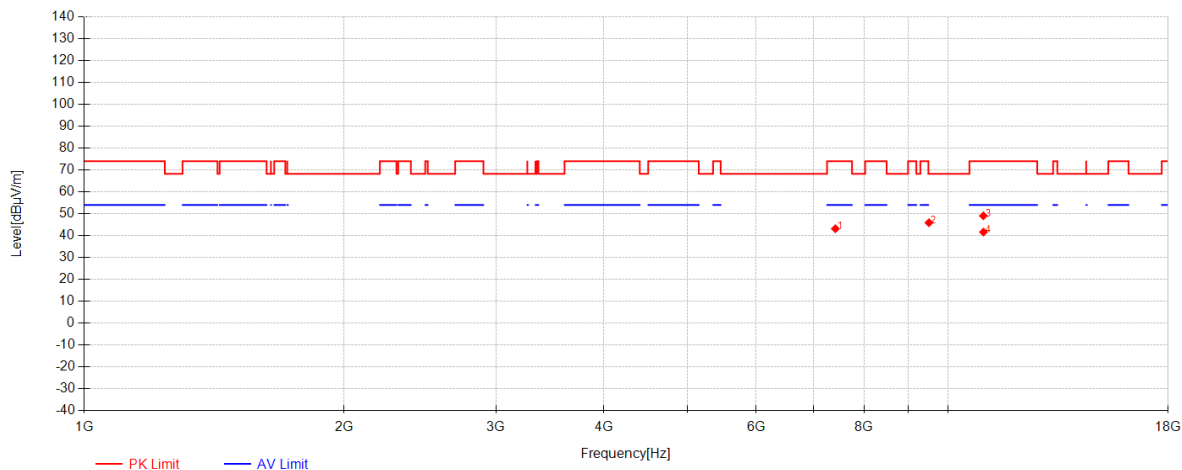

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7412.3333       | 49.84          | 36.15     | -42.84      | 43.16          | 74.00          | 30.84       | Horizontal |
| 2         | 9514.4375       | 48.22          | 37.53     | -39.85      | 45.90          | 68.30          | 22.40       | Horizontal |
| 3         | 11000.3333      | 48.06          | 38.60     | -37.59      | 49.07          | 74.00          | 24.93       | Horizontal |
| 4         | 11003.2083      | 40.63          | 38.60     | -37.60      | 41.64          | 54.00          | 12.36       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 177 of 309

### 802.11a\_Channel 100

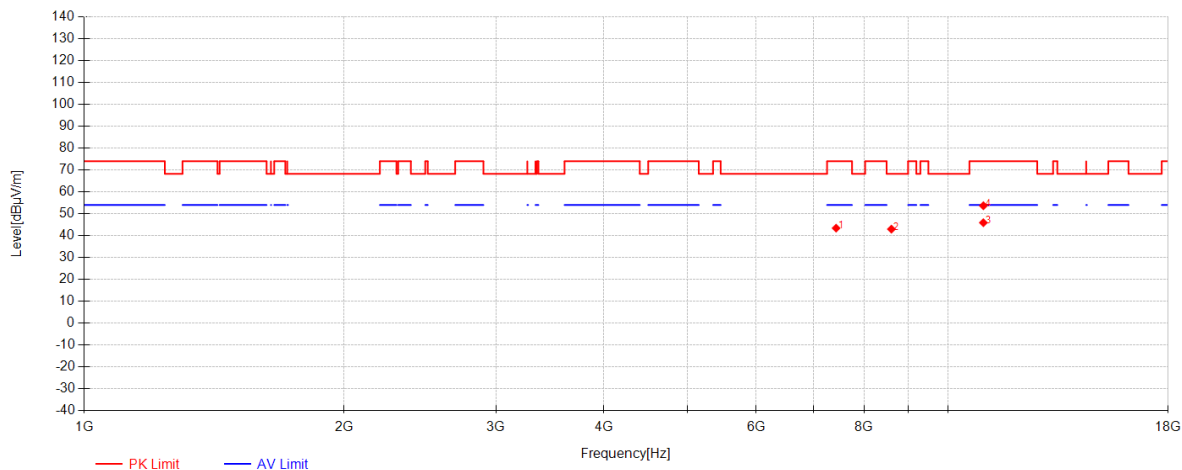

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7427.6667       | 50.12          | 36.20     | -42.90      | 43.42          | 74.00          | 30.58       | Vertical |
| 2         | 8607.8542       | 47.15          | 36.74     | -40.93      | 42.96          | 68.30          | 25.34       | Vertical |
| 3         | 10999.8542      | 44.90          | 38.60     | -37.59      | 45.91          | 54.00          | 8.09        | Vertical |
| 4         | 11000.8125      | 52.67          | 38.60     | -37.59      | 53.68          | 74.00          | 20.32       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 178 of 309

### 802.11a\_Channel 116

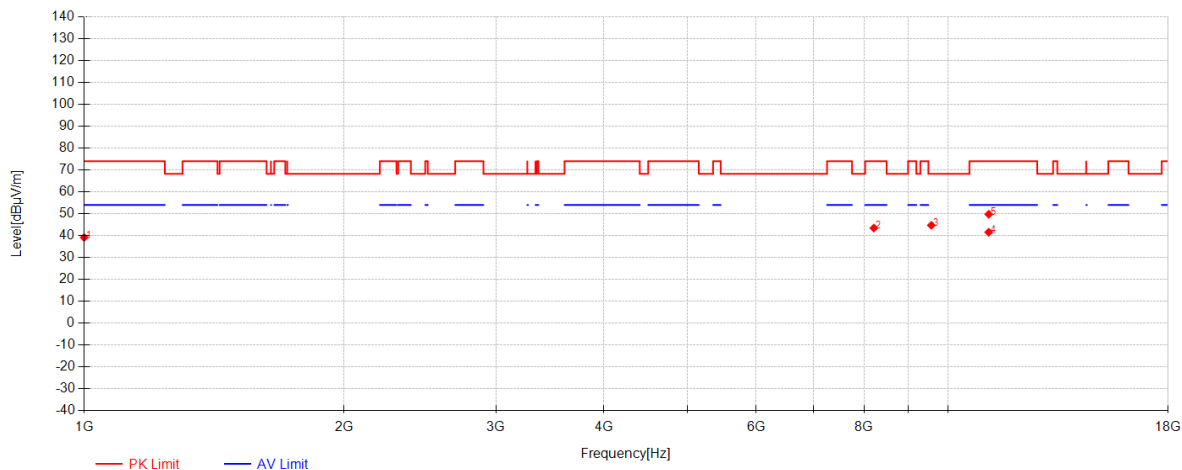

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 1000            | 37.70          | 25.40     | -23.97      | 39.13          | 74.00          | 34.87       | Horizontal |
| 2         | 8213.9792       | 48.60          | 36.97     | -42.11      | 43.46          | 74.00          | 30.54       | Horizontal |
| 3         | 9575.7708       | 46.46          | 37.65     | -39.38      | 44.73          | 68.30          | 23.57       | Horizontal |
| 4         | 11158.4583      | 39.95          | 38.68     | -37.08      | 41.55          | 54.00          | 12.45       | Horizontal |
| 5         | 11160.375       | 48.16          | 38.68     | -37.06      | 49.78          | 74.00          | 24.22       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 179 of 309

### 802.11a\_Channel 116

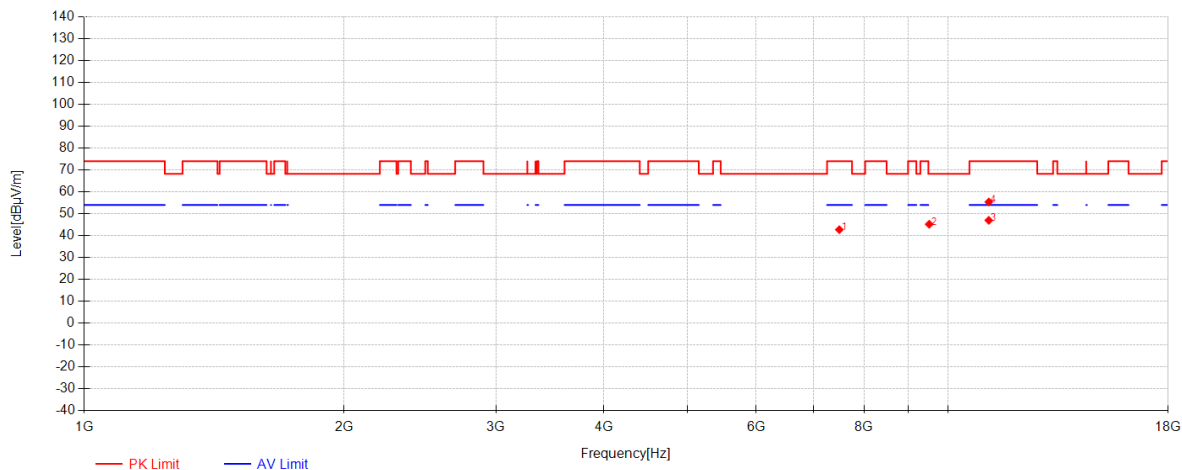

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7491.875        | 49.50          | 36.38     | -43.14      | 42.74          | 74.00          | 31.26       | Vertical |
| 2         | 9521.625        | 47.45          | 37.54     | -39.80      | 45.20          | 68.30          | 23.10       | Vertical |
| 3         | 11160.8542      | 45.37          | 38.68     | -37.05      | 47.00          | 54.00          | 7.00        | Vertical |
| 4         | 11161.8125      | 53.77          | 38.68     | -37.04      | 55.41          | 74.00          | 18.59       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 180 of 309

### 802.11a\_Channel 140

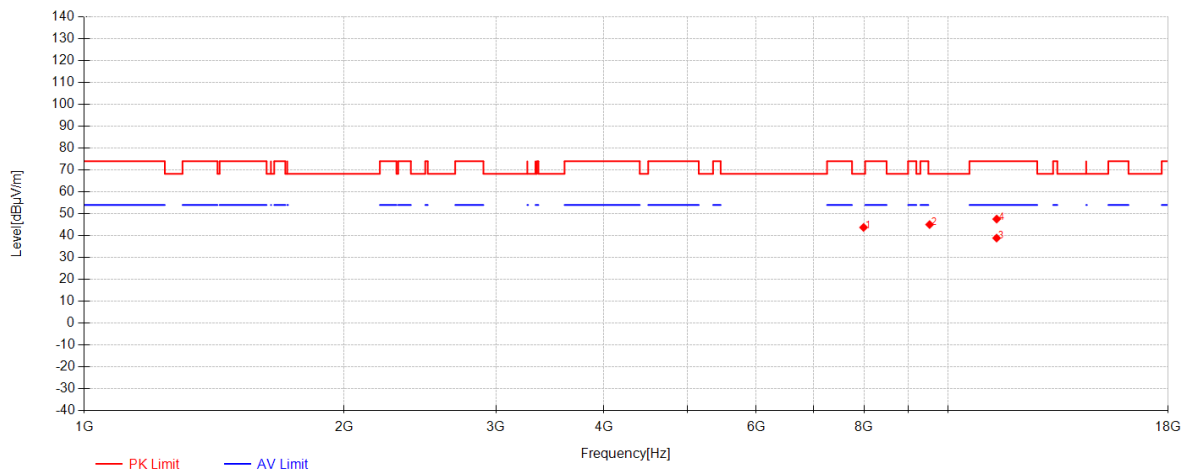

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7992.125        | 48.84          | 37.09     | -42.18      | 43.75          | 68.30          | 24.55       | Horizontal |
| 2         | 9531.2083       | 47.23          | 37.56     | -39.72      | 45.07          | 68.30          | 23.23       | Horizontal |
| 3         | 11395.6458      | 37.59          | 38.80     | -37.50      | 38.89          | 54.00          | 15.11       | Horizontal |
| 4         | 11398.0417      | 46.29          | 38.80     | -37.50      | 47.58          | 74.00          | 26.42       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 181 of 309

### 802.11a\_Channel 140

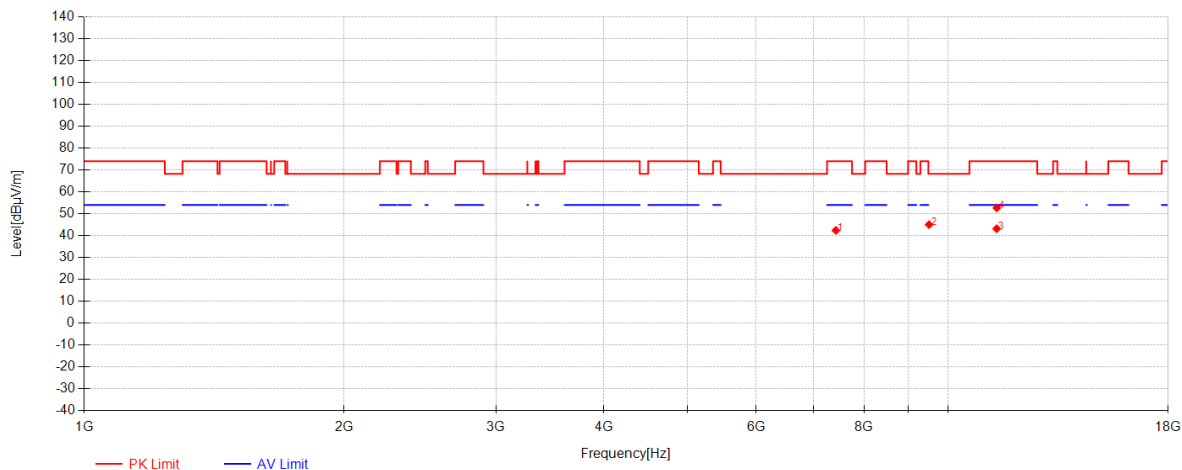

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7423.3542       | 49.09          | 36.19     | -42.88      | 42.40          | 74.00          | 31.60       | Vertical |
| 2         | 9516.8333       | 47.35          | 37.53     | -39.83      | 45.05          | 68.30          | 23.25       | Vertical |
| 3         | 11397.0833      | 41.87          | 38.80     | -37.50      | 43.17          | 54.00          | 10.83       | Vertical |
| 4         | 11401.875       | 51.37          | 38.80     | -37.49      | 52.68          | 74.00          | 21.32       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 182 of 309

### 802.11a\_Channel 149

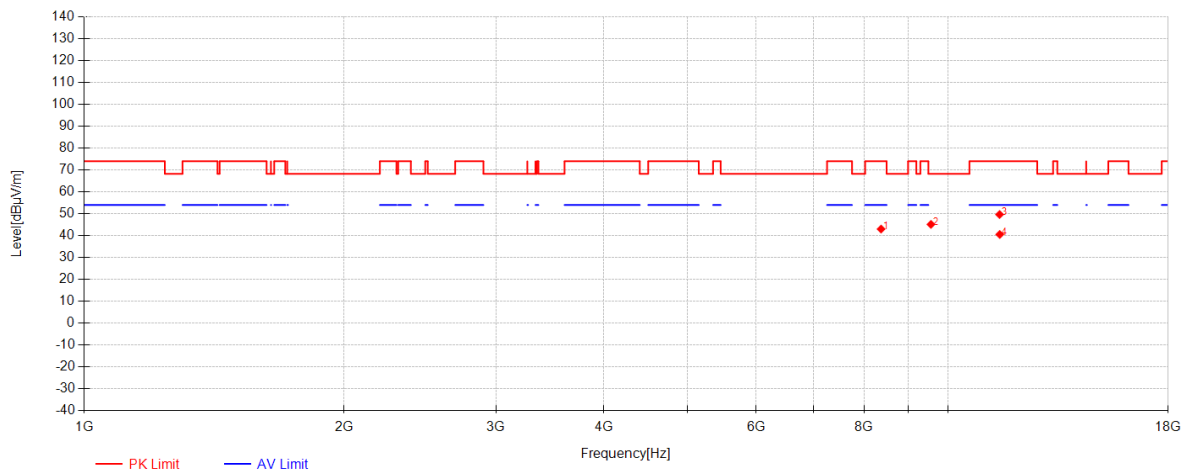

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8374.0208       | 47.63          | 36.88     | -41.50      | 43.01          | 74.00          | 30.99       | Horizontal |
| 2         | 9565.7083       | 46.98          | 37.63     | -39.46      | 45.15          | 68.30          | 23.15       | Horizontal |
| 3         | 11487.1667      | 47.46          | 38.84     | -36.64      | 49.67          | 74.00          | 24.33       | Horizontal |
| 4         | 11491.4792      | 38.28          | 38.85     | -36.60      | 40.53          | 54.00          | 13.47       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 183 of 309

### 802.11a\_Channel 149

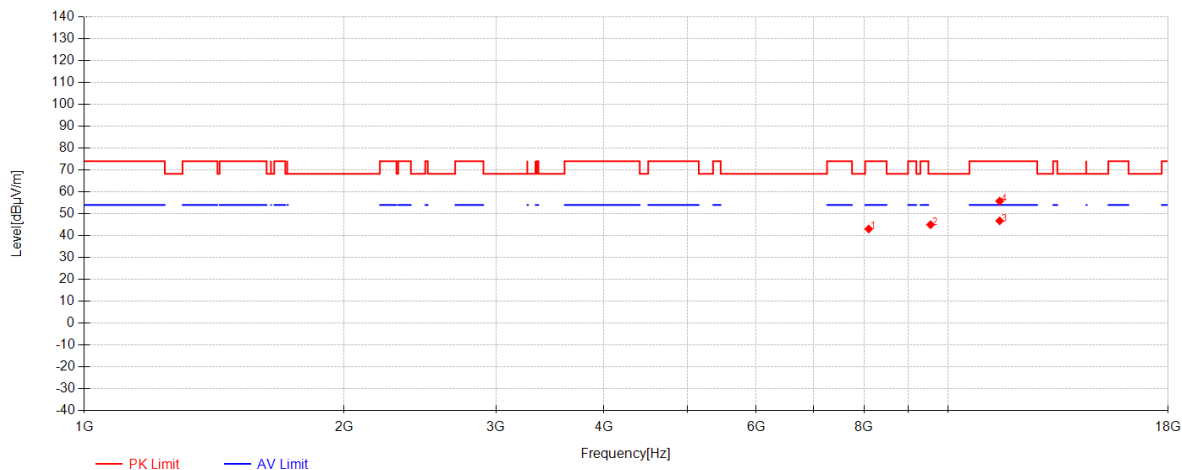


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8102.3333       | 47.35          | 37.04     | -41.36      | 43.03          | 74.00          | 30.97       | Vertical |
| 2         | 9555.1667       | 46.93          | 37.61     | -39.54      | 45.00          | 68.30          | 23.30       | Vertical |
| 3         | 11489.5625      | 44.55          | 38.84     | -36.61      | 46.78          | 54.00          | 7.22        | Vertical |
| 4         | 11490.0417      | 53.55          | 38.85     | -36.61      | 55.79          | 74.00          | 18.21       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 184 of 309

802.11a\_Channel 157

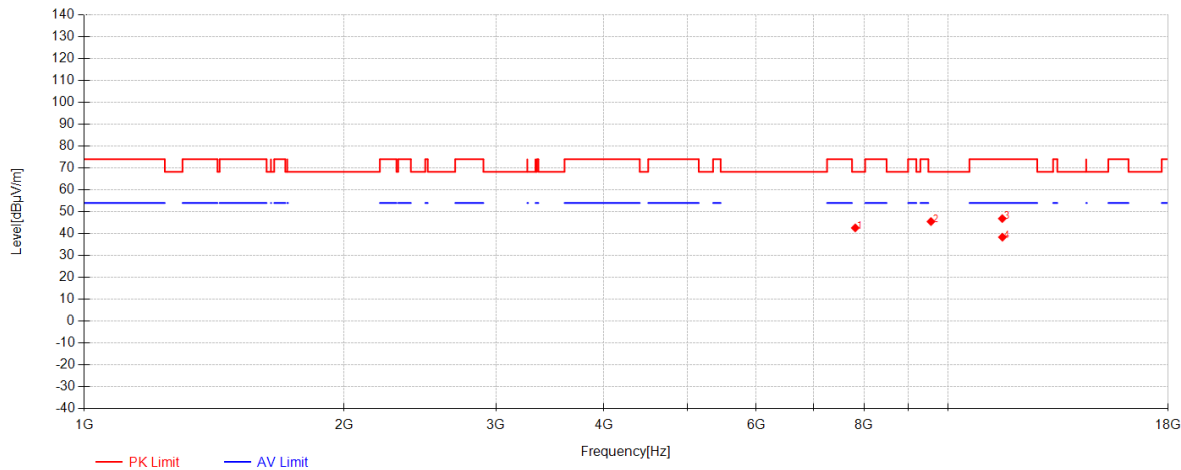

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7817.2292       | 48.38          | 36.84     | -42.61      | 42.62          | 68.30          | 25.68       | Horizontal |
| 2         | 9566.6667       | 47.34          | 37.63     | -39.45      | 45.52          | 68.30          | 22.78       | Horizontal |
| 3         | 11569.1042      | 44.85          | 38.88     | -36.83      | 46.90          | 74.00          | 27.10       | Horizontal |
| 4         | 11573.4167      | 36.34          | 38.89     | -36.86      | 38.37          | 54.00          | 15.63       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 185 of 309

### 802.11a\_Channel 157

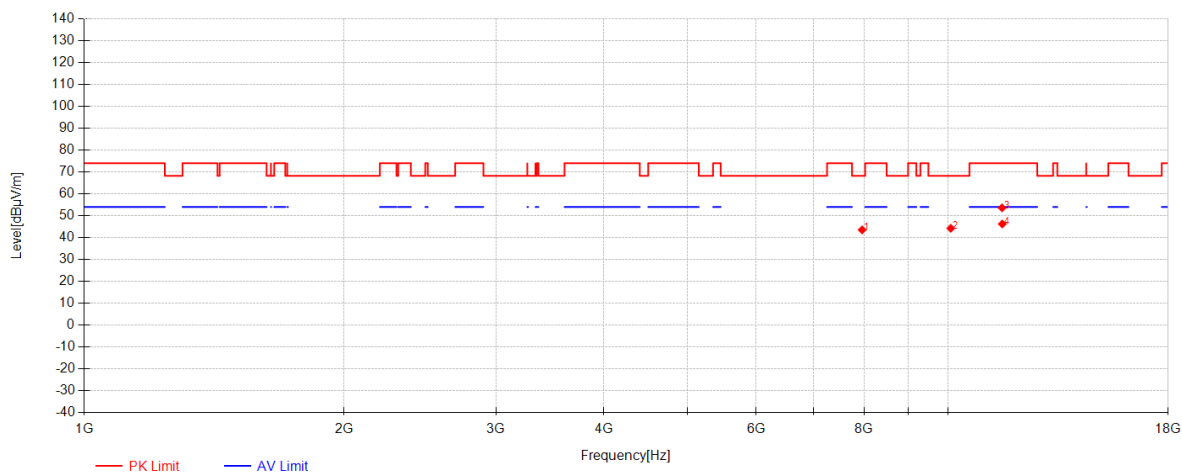

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7960.9792       | 48.87          | 37.05     | -42.37      | 43.55          | 68.30          | 24.75       | Vertical |
| 2         | 10083.6875      | 44.56          | 38.51     | -38.81      | 44.26          | 68.30          | 24.04       | Vertical |
| 3         | 11561.4375      | 51.55          | 38.88     | -36.80      | 53.63          | 74.00          | 20.37       | Vertical |
| 4         | 11569.1042      | 44.20          | 38.88     | -36.83      | 46.25          | 54.00          | 7.75        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 186 of 309

### 802.11a\_Channel 165

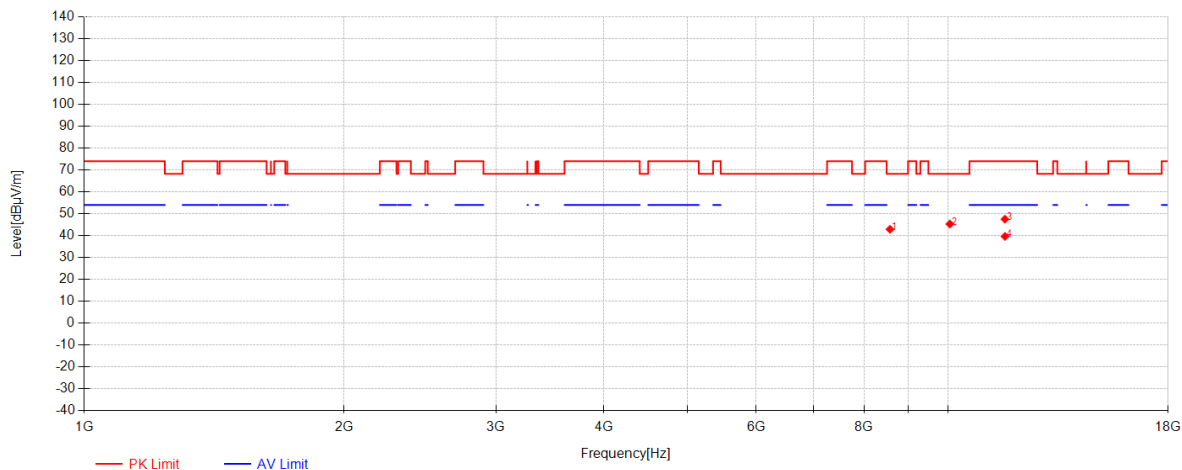

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8575.2708       | 47.24          | 36.75     | -41.12      | 42.88          | 68.30          | 25.42       | Horizontal |
| 2         | 10059.7292      | 45.77          | 38.51     | -38.97      | 45.30          | 68.30          | 23.00       | Horizontal |
| 3         | 11651.0417      | 45.12          | 38.93     | -36.53      | 47.52          | 74.00          | 26.48       | Horizontal |
| 4         | 11652.9583      | 37.22          | 38.93     | -36.51      | 39.64          | 54.00          | 14.36       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 187 of 309

### 802.11a\_Channel 165

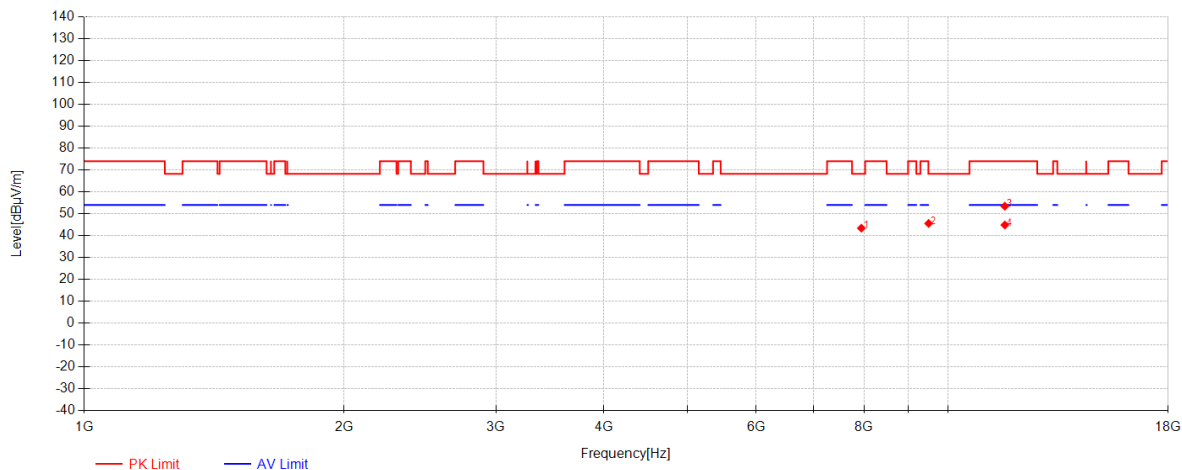

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7945.1667       | 48.85          | 37.02     | -42.46      | 43.41          | 68.30          | 24.89       | Vertical |
| 2         | 9507.25         | 47.96          | 37.51     | -39.90      | 45.57          | 68.30          | 22.73       | Vertical |
| 3         | 11647.6875      | 51.09          | 38.92     | -36.56      | 53.46          | 74.00          | 20.54       | Vertical |
| 4         | 11648.1667      | 42.50          | 38.92     | -36.55      | 44.87          | 54.00          | 9.13        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 188 of 309

### 802.11c20\_Channel 36

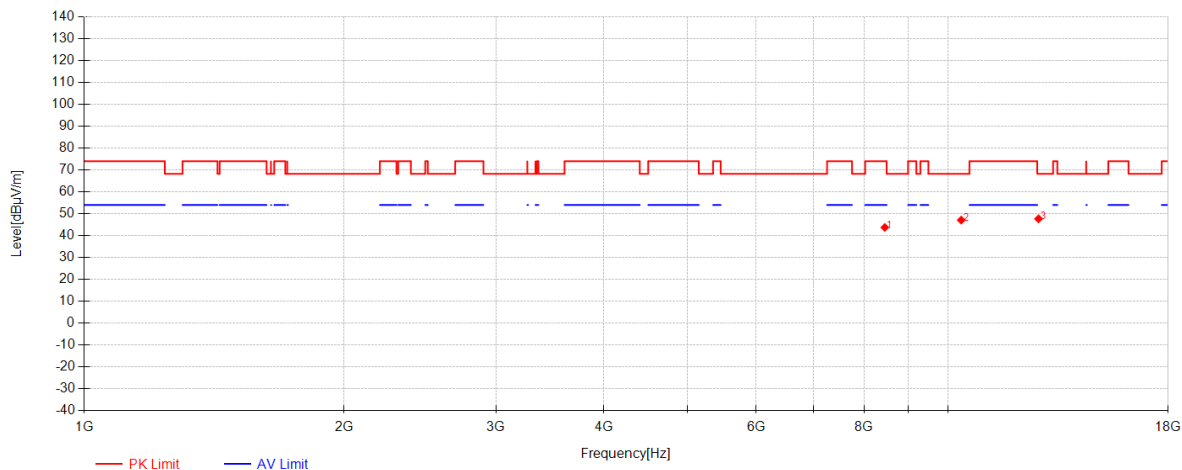

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8457.875        | 48.53          | 36.83     | -41.62      | 43.74          | 74.00          | 30.26       | Horizontal |
| 2         | 10368.7917      | 47.37          | 38.54     | -38.80      | 47.11          | 68.30          | 21.19       | Horizontal |
| 3         | 12743.0625      | 45.11          | 39.32     | -36.74      | 47.69          | 68.30          | 20.61       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 189 of 309

### 802.11c20\_Channel 36

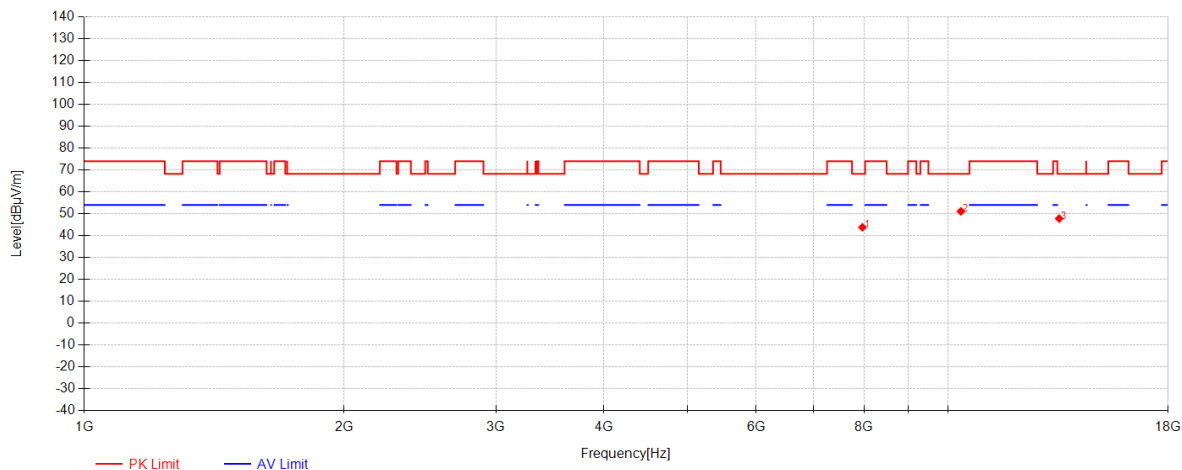

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7968.1667       | 49.07          | 37.06     | -42.32      | 43.80          | 68.30          | 24.50       | Vertical |
| 2         | 10360.6458      | 51.39          | 38.54     | -38.82      | 51.11          | 68.30          | 17.19       | Vertical |
| 3         | 13465.6458      | 44.19          | 40.05     | -36.45      | 47.79          | 68.30          | 20.51       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 190 of 309

### 802.11c20\_Channel 44

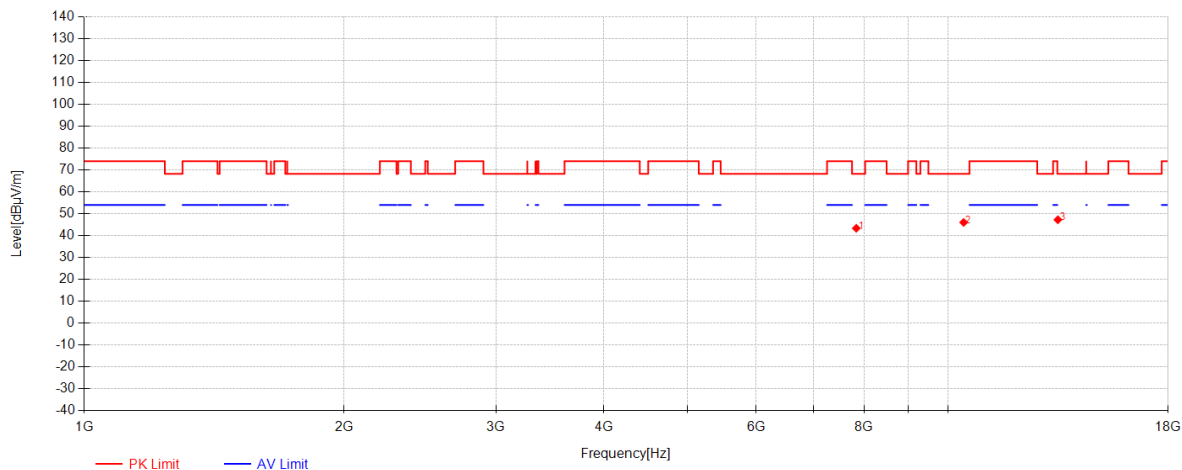

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7838.3125       | 49.14          | 36.87     | -42.64      | 43.37          | 68.30          | 24.93       | Horizontal |
| 2         | 10436.3542      | 46.22          | 38.54     | -38.73      | 46.03          | 68.30          | 22.27       | Horizontal |
| 3         | 13418.2083      | 43.45          | 39.99     | -36.18      | 47.26          | 68.30          | 21.04       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 191 of 309

### 802.11c20\_Channel 44

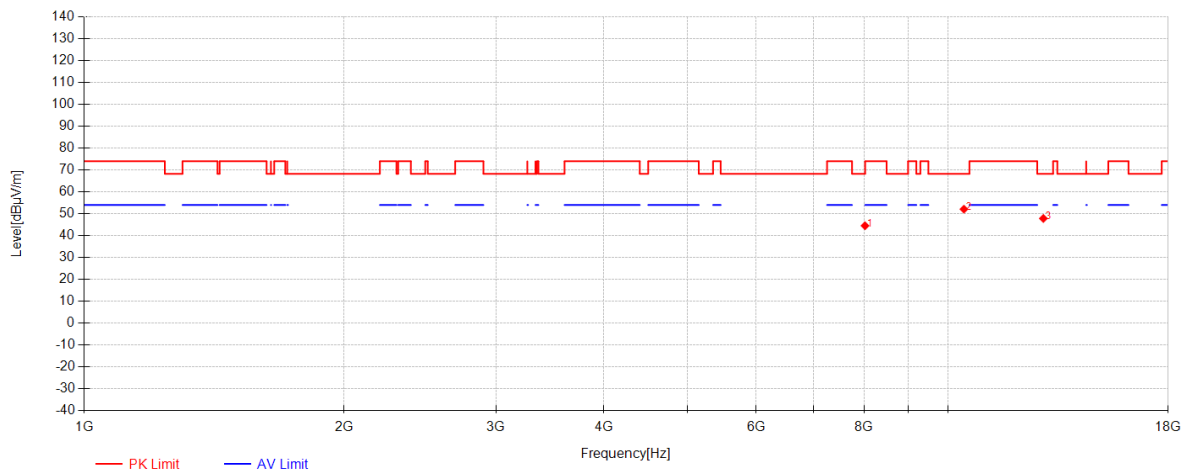

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8022.7917       | 49.38          | 37.09     | -41.95      | 44.52          | 68.30          | 23.78       | Vertical |
| 2         | 10444.5         | 52.31          | 38.54     | -38.74      | 52.12          | 68.30          | 16.18       | Vertical |
| 3         | 12908.375       | 45.38          | 39.37     | -36.91      | 47.85          | 68.30          | 20.45       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 192 of 309

### 802.11c20\_Channel 48

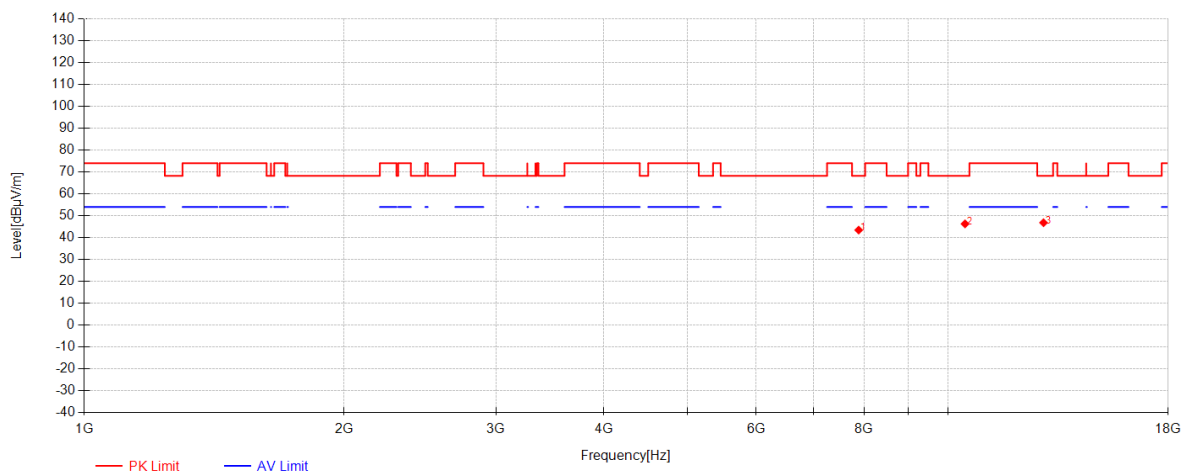


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7888.625        | 49.23          | 36.94     | -42.72      | 43.45          | 68.30          | 24.85       | Horizontal |
| 2         | 10475.1667      | 46.49          | 38.55     | -38.75      | 46.29          | 68.30          | 22.01       | Horizontal |
| 3         | 12915.5625      | 44.39          | 39.37     | -36.94      | 46.83          | 68.30          | 21.47       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 193 of 309

802.11c20\_Channel 48

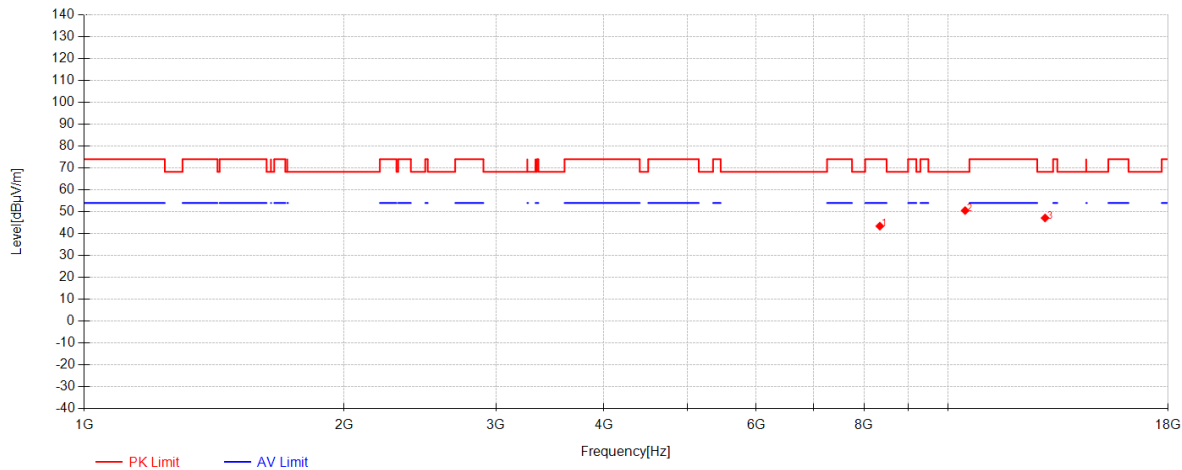

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8346.2292       | 48.18          | 36.89     | -41.64      | 43.43          | 74.00          | 30.57       | Vertical |
| 2         | 10478.5208      | 50.75          | 38.55     | -38.75      | 50.55          | 68.30          | 17.75       | Vertical |
| 3         | 12968.2708      | 44.93          | 39.39     | -37.16      | 47.16          | 68.30          | 21.14       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 194 of 309

### 802.11c20\_Channel 52

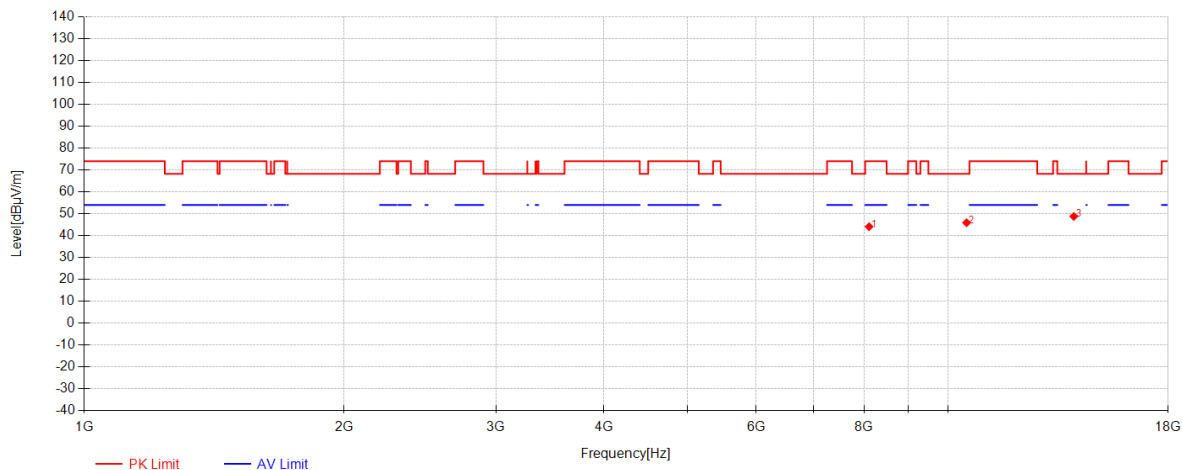

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8110.4792       | 48.47          | 37.03     | -41.42      | 44.08          | 74.00          | 29.92       | Horizontal |
| 2         | 10520.2083      | 45.97          | 38.55     | -38.61      | 45.91          | 68.30          | 22.39       | Horizontal |
| 3         | 13998.4792      | 42.78          | 40.80     | -34.79      | 48.79          | 68.30          | 19.51       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 195 of 309

### 802.11c20\_Channel 52

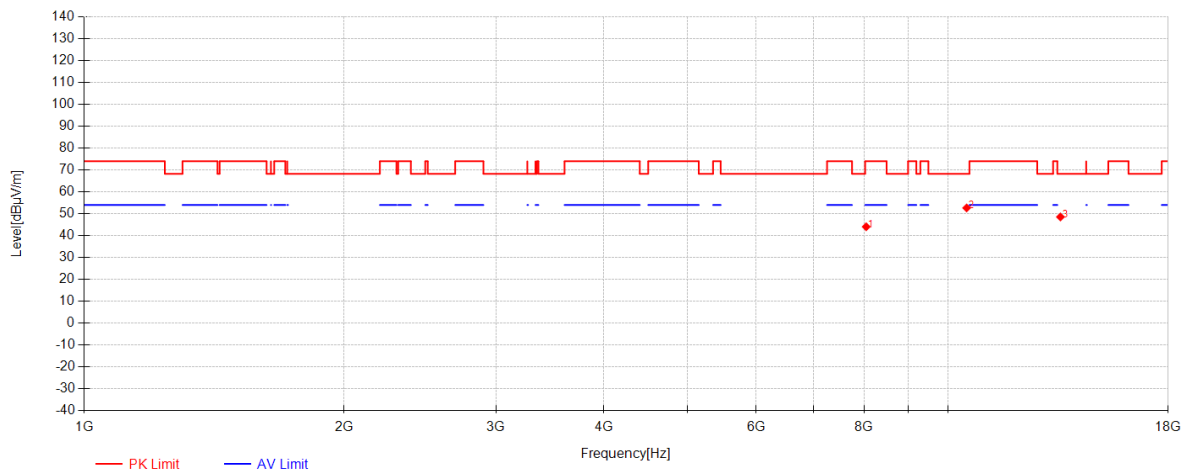

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8049.1458       | 48.72          | 37.07     | -41.74      | 44.05          | 74.00          | 29.95       | Vertical |
| 2         | 10520.6875      | 52.72          | 38.55     | -38.60      | 52.67          | 68.30          | 15.63       | Vertical |
| 3         | 13511.1667      | 45.02          | 40.12     | -36.58      | 48.55          | 68.30          | 19.75       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 196 of 309

### 802.11c20\_Channel 60

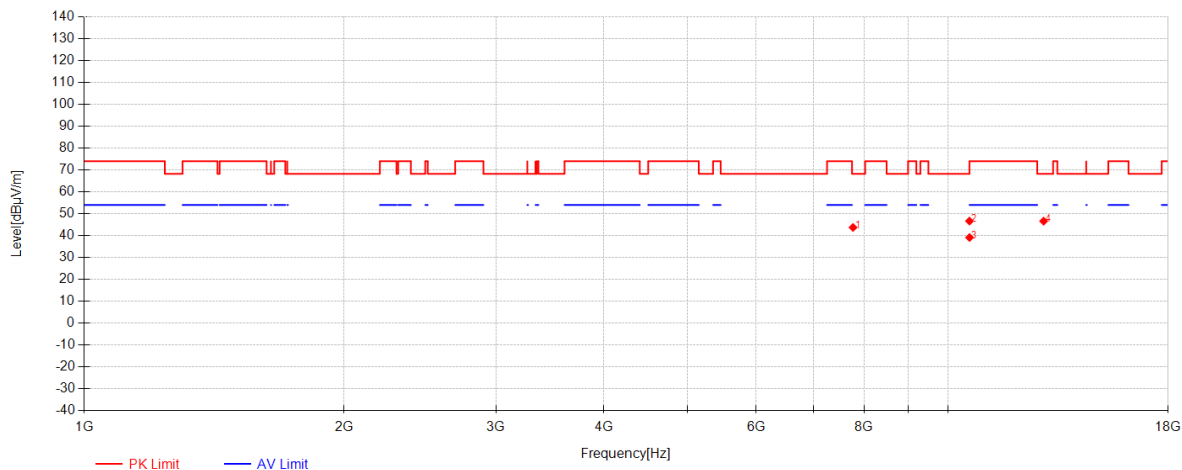

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7771.2292       | 49.65          | 36.78     | -42.69      | 43.74          | 68.30          | 24.56       | Horizontal |
| 2         | 10599.2708      | 46.12          | 38.56     | -38.02      | 46.66          | 68.30          | 21.64       | Horizontal |
| 3         | 10601.6667      | 38.59          | 38.56     | -38.00      | 39.15          | 54.00          | 14.85       | Horizontal |
| 4         | 12917.9583      | 44.20          | 39.38     | -36.95      | 46.63          | 68.30          | 21.67       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 197 of 309

### 802.11c20\_Channel 60

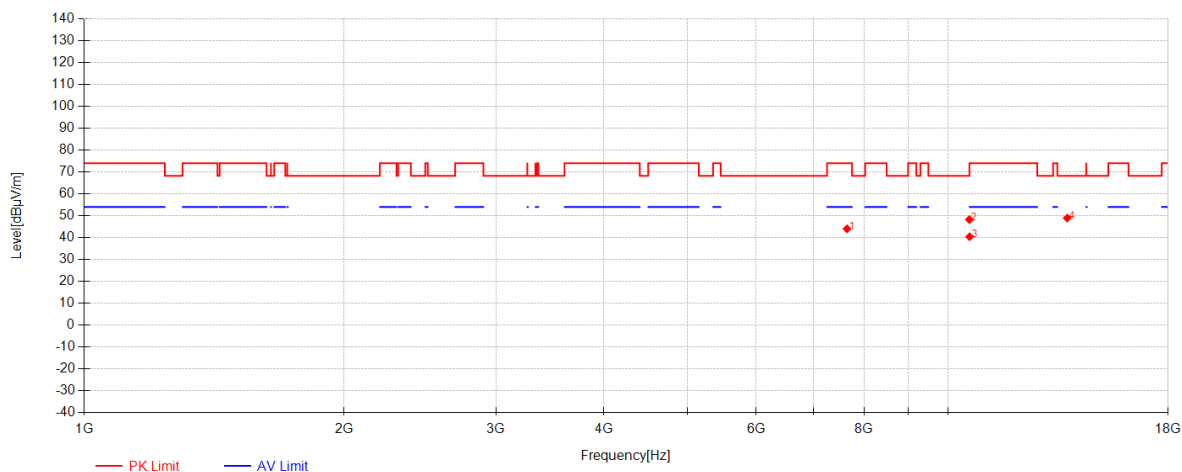

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7646.6458       | 50.26          | 36.61     | -42.84      | 44.03          | 74.00          | 29.97       | Vertical |
| 2         | 10596.875       | 47.74          | 38.56     | -38.03      | 48.27          | 68.30          | 20.03       | Vertical |
| 3         | 10604.0625      | 39.83          | 38.56     | -37.99      | 40.40          | 54.00          | 13.60       | Vertical |
| 4         | 13756.0208      | 44.63          | 40.46     | -36.14      | 48.95          | 68.30          | 19.35       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 198 of 309

### 802.11c20\_Channel 64

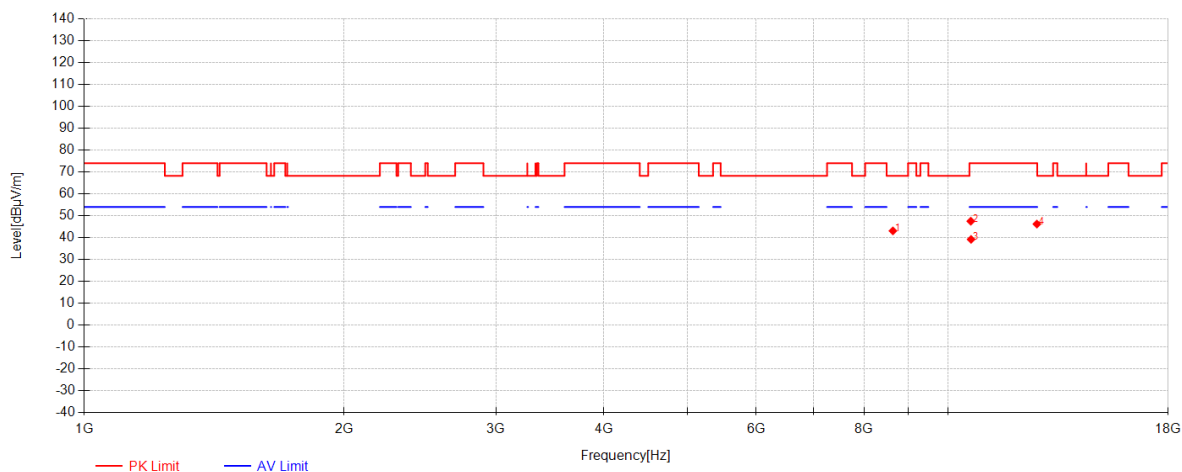

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8642.3542       | 47.47          | 36.71     | -41.08      | 43.10          | 68.30          | 25.20       | Horizontal |
| 2         | 10638.0833      | 46.77          | 38.56     | -37.81      | 47.52          | 74.00          | 26.48       | Horizontal |
| 3         | 10645.2708      | 38.41          | 38.56     | -37.77      | 39.20          | 54.00          | 14.80       | Horizontal |
| 4         | 12687.4792      | 43.77          | 39.31     | -36.88      | 46.20          | 74.00          | 27.80       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 199 of 309

### 802.11c20\_Channel 64

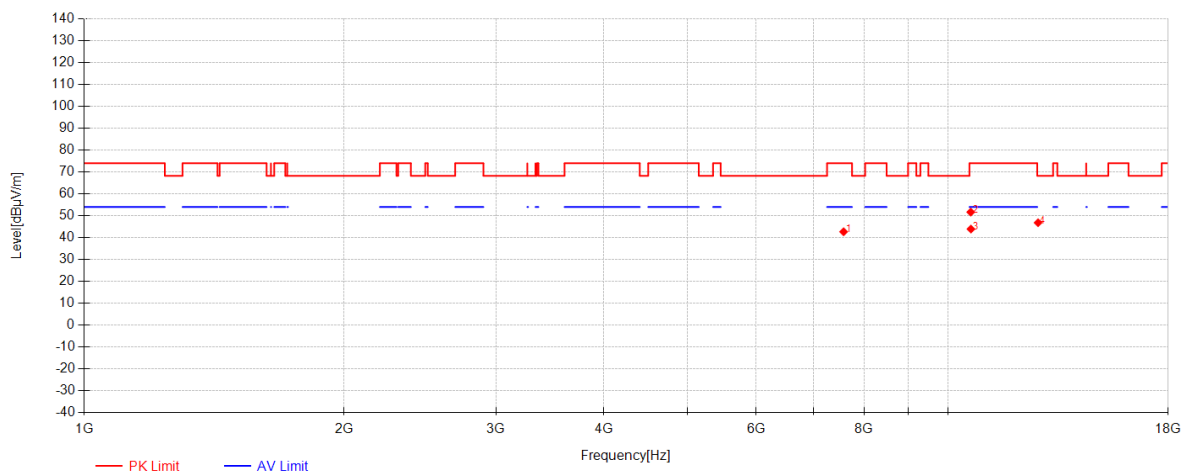

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7577.6458       | 49.02          | 36.51     | -42.84      | 42.69          | 74.00          | 31.31       | Vertical |
| 2         | 10636.6458      | 50.93          | 38.56     | -37.82      | 51.67          | 74.00          | 22.33       | Vertical |
| 3         | 10641.9167      | 43.15          | 38.56     | -37.79      | 43.92          | 54.00          | 10.08       | Vertical |
| 4         | 12728.2083      | 44.28          | 39.32     | -36.77      | 46.83          | 68.30          | 21.47       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 200 of 309

### 802.11c20\_Channel 100

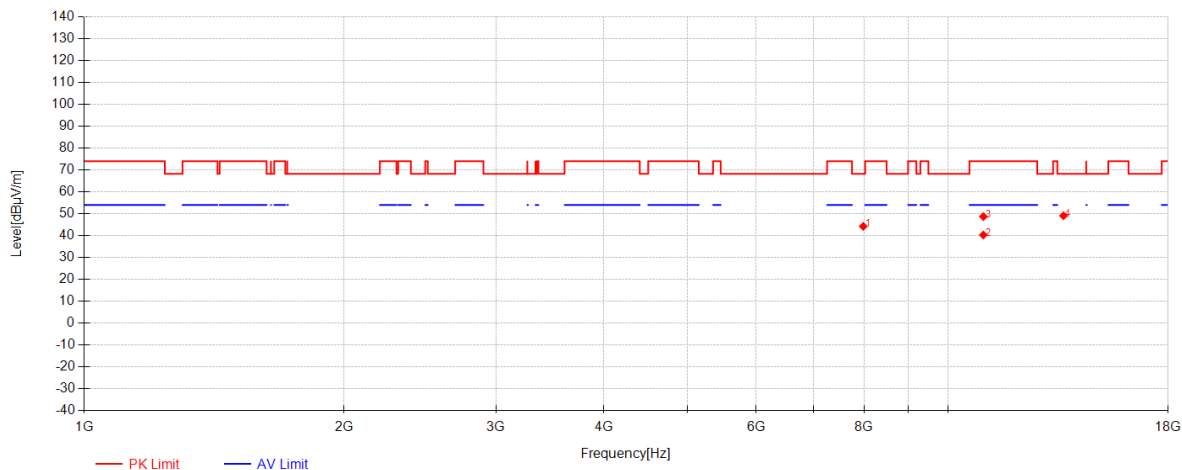

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7984.9375       | 49.39          | 37.08     | -42.22      | 44.25          | 68.30          | 24.05       | Horizontal |
| 2         | 11000.8125      | 39.28          | 38.60     | -37.59      | 40.29          | 54.00          | 13.71       | Horizontal |
| 3         | 11002.25        | 47.71          | 38.60     | -37.59      | 48.72          | 74.00          | 25.28       | Horizontal |
| 4         | 13619.9375      | 44.86          | 40.27     | -36.03      | 49.10          | 68.30          | 19.20       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 201 of 309

### 802.11c20\_Channel 100

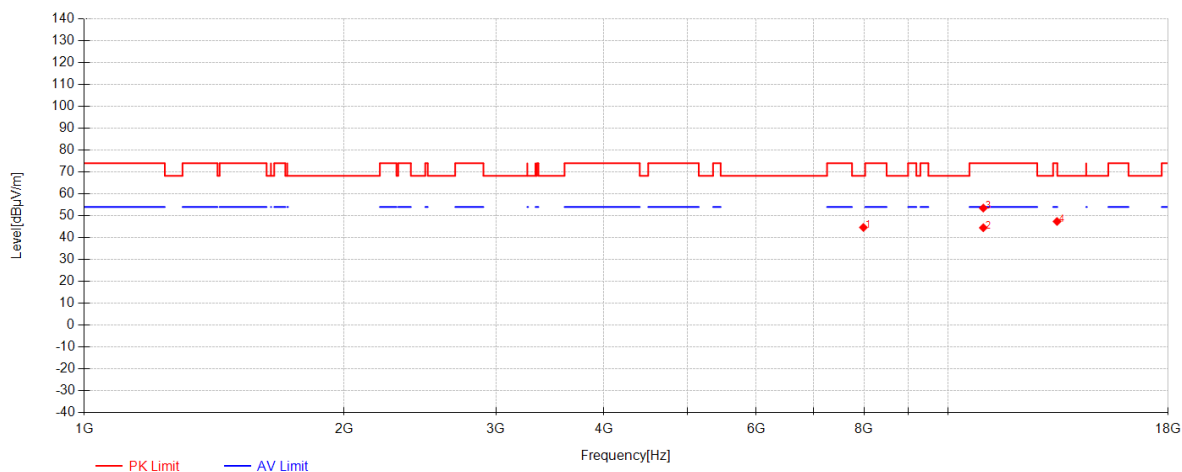

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7988.7708       | 49.78          | 37.08     | -42.20      | 44.67          | 68.30          | 23.63       | Vertical |
| 2         | 10998.4167      | 43.51          | 38.60     | -37.59      | 44.52          | 54.00          | 9.48        | Vertical |
| 3         | 10998.4167      | 52.50          | 38.60     | -37.59      | 53.51          | 74.00          | 20.49       | Vertical |
| 4         | 13388.5         | 43.62          | 39.94     | -36.18      | 47.38          | 74.00          | 26.62       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 202 of 309

### 802.11c20\_Channel 116

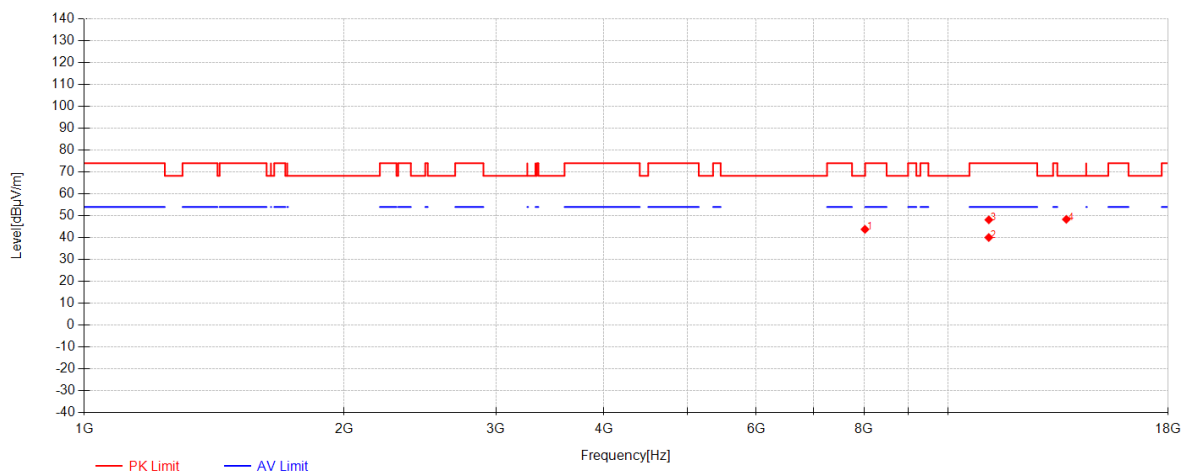

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8022.3125       | 48.66          | 37.09     | -41.95      | 43.79          | 68.30          | 24.51       | Horizontal |
| 2         | 11159.8958      | 38.44          | 38.68     | -37.06      | 40.06          | 54.00          | 13.94       | Horizontal |
| 3         | 11161.8125      | 46.50          | 38.68     | -37.04      | 48.14          | 74.00          | 25.86       | Horizontal |
| 4         | 13724.875       | 44.01          | 40.41     | -36.05      | 48.37          | 68.30          | 19.93       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 203 of 309

### 802.11c20\_Channel 116

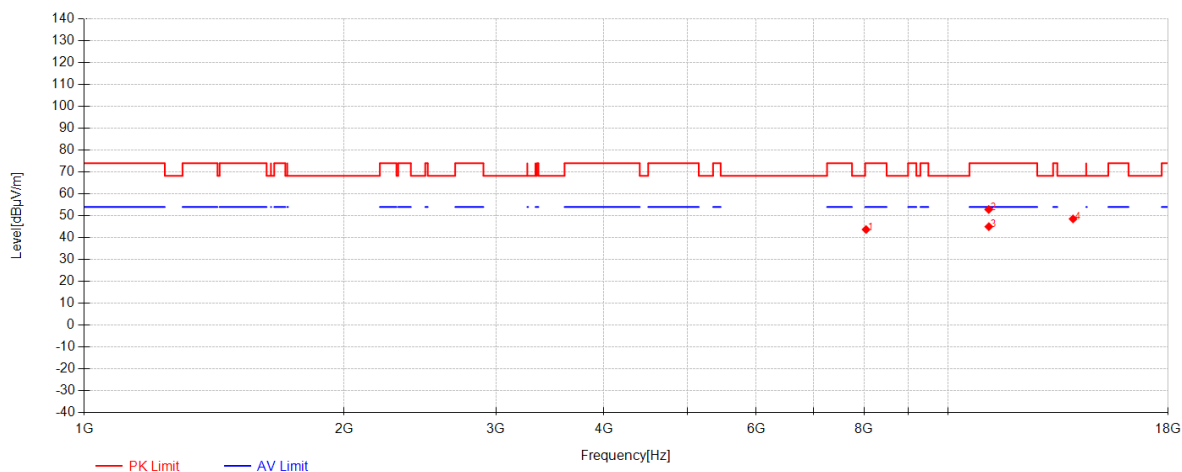

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8045.3125       | 48.41          | 37.07     | -41.77      | 43.71          | 74.00          | 30.29       | Vertical |
| 2         | 11158.9375      | 51.28          | 38.68     | -37.07      | 52.89          | 74.00          | 21.11       | Vertical |
| 3         | 11162.7708      | 43.38          | 38.68     | -37.03      | 45.03          | 54.00          | 8.97        | Vertical |
| 4         | 13972.6042      | 42.79          | 40.76     | -35.00      | 48.56          | 68.30          | 19.74       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 204 of 309

### 802.11c20\_Channel 140

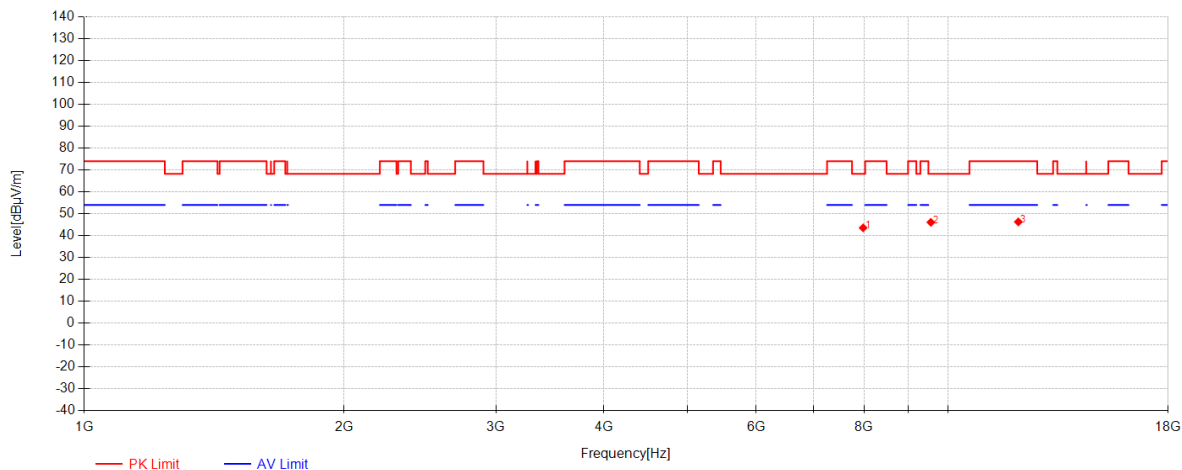

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7983.5          | 48.71          | 37.08     | -42.23      | 43.56          | 68.30          | 24.74       | Horizontal |
| 2         | 9562.8333       | 47.94          | 37.63     | -39.48      | 46.08          | 68.30          | 22.22       | Horizontal |
| 3         | 12077.0208      | 44.35          | 39.12     | -37.19      | 46.29          | 74.00          | 27.71       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 205 of 309

### 802.11c20\_Channel 140

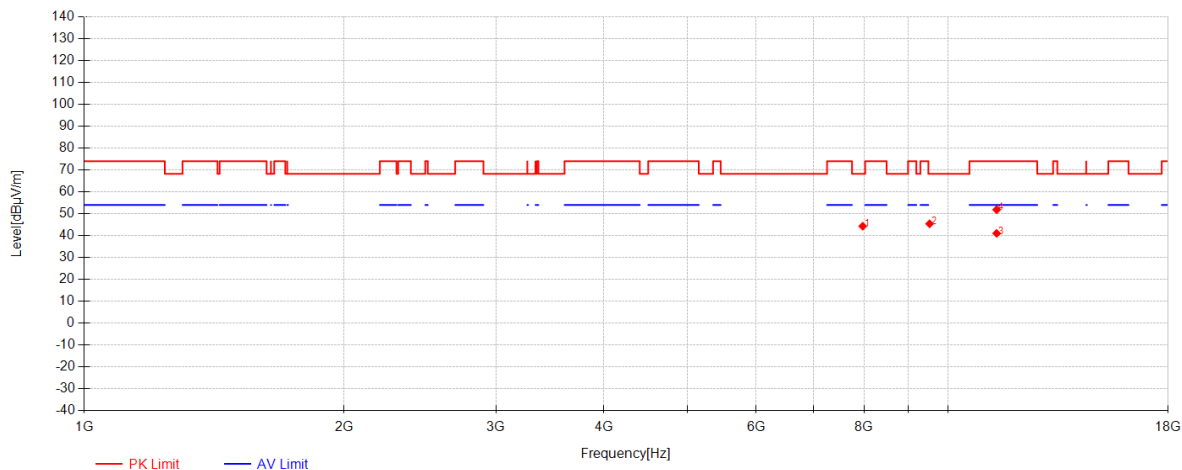

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7973.9167       | 49.54          | 37.06     | -42.29      | 44.31          | 68.30          | 23.99       | Vertical |
| 2         | 9530.25         | 47.59          | 37.56     | -39.73      | 45.42          | 68.30          | 22.88       | Vertical |
| 3         | 11396.125       | 39.74          | 38.80     | -37.50      | 41.04          | 54.00          | 12.96       | Vertical |
| 4         | 11397.5625      | 50.56          | 38.80     | -37.50      | 51.86          | 74.00          | 22.14       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 206 of 309

### 802.11c20\_Channel 149

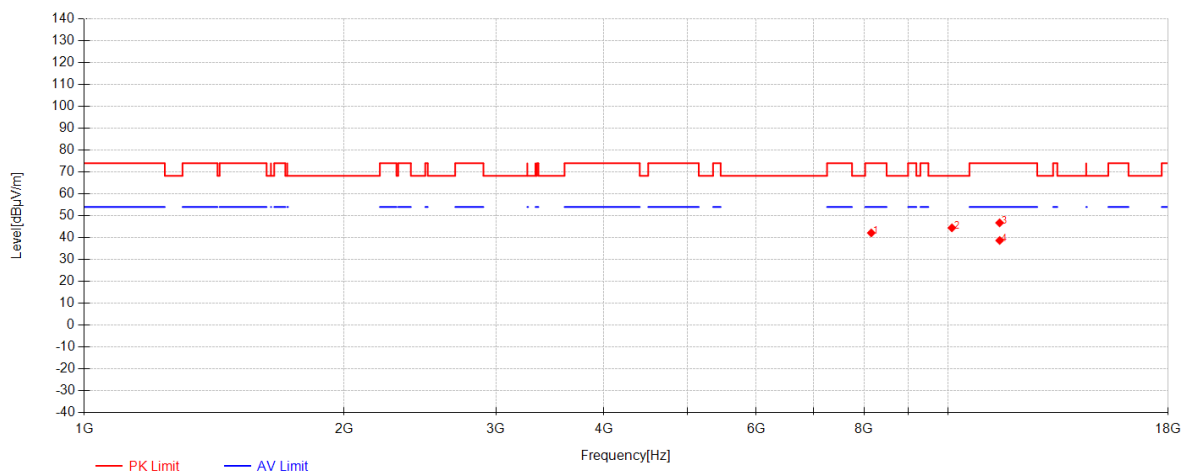

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8157.9167       | 46.95          | 37.01     | -41.81      | 42.15          | 74.00          | 31.85       | Horizontal |
| 2         | 10114.8333      | 44.75          | 38.51     | -38.79      | 44.48          | 68.30          | 23.82       | Horizontal |
| 3         | 11487.1667      | 44.55          | 38.84     | -36.64      | 46.76          | 74.00          | 27.24       | Horizontal |
| 4         | 11490.0417      | 36.46          | 38.85     | -36.61      | 38.70          | 54.00          | 15.30       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 207 of 309

### 802.11c20\_Channel 149

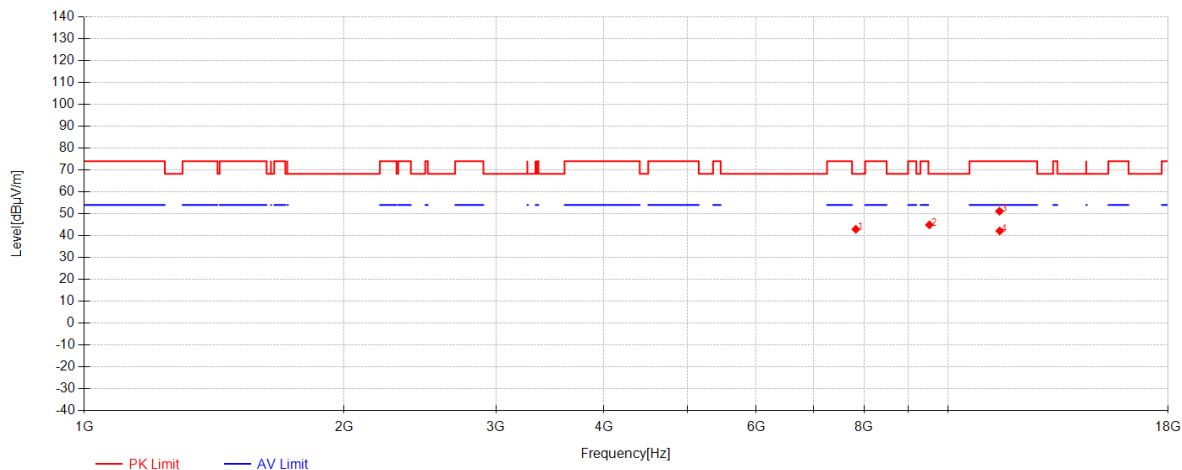

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7829.2083       | 48.67          | 36.86     | -42.63      | 42.90          | 68.30          | 25.40       | Vertical |
| 2         | 9526.4167       | 47.14          | 37.55     | -39.76      | 44.93          | 68.30          | 23.37       | Vertical |
| 3         | 11483.8125      | 49.00          | 38.84     | -36.67      | 51.17          | 74.00          | 22.83       | Vertical |
| 4         | 11491           | 39.90          | 38.85     | -36.60      | 42.15          | 54.00          | 11.85       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 208 of 309

### 802.11c20\_Channel 157

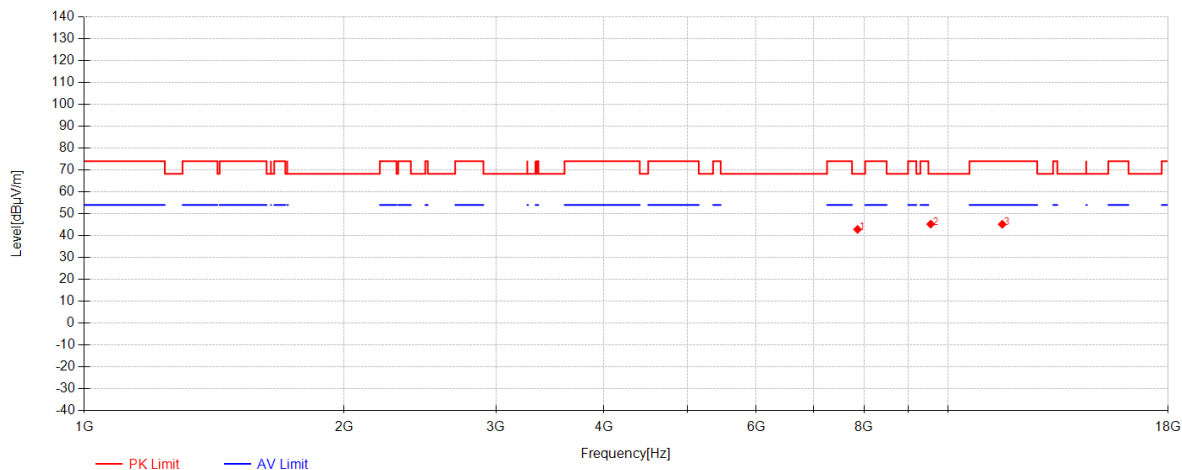

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7864.1875       | 48.62          | 36.91     | -42.68      | 42.85          | 68.30          | 25.45       | Horizontal |
| 2         | 9559            | 47.16          | 37.62     | -39.51      | 45.27          | 68.30          | 23.03       | Horizontal |
| 3         | 11568.625       | 43.13          | 38.88     | -36.83      | 45.18          | 74.00          | 28.82       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 209 of 309

### 802.11c20\_Channel 157

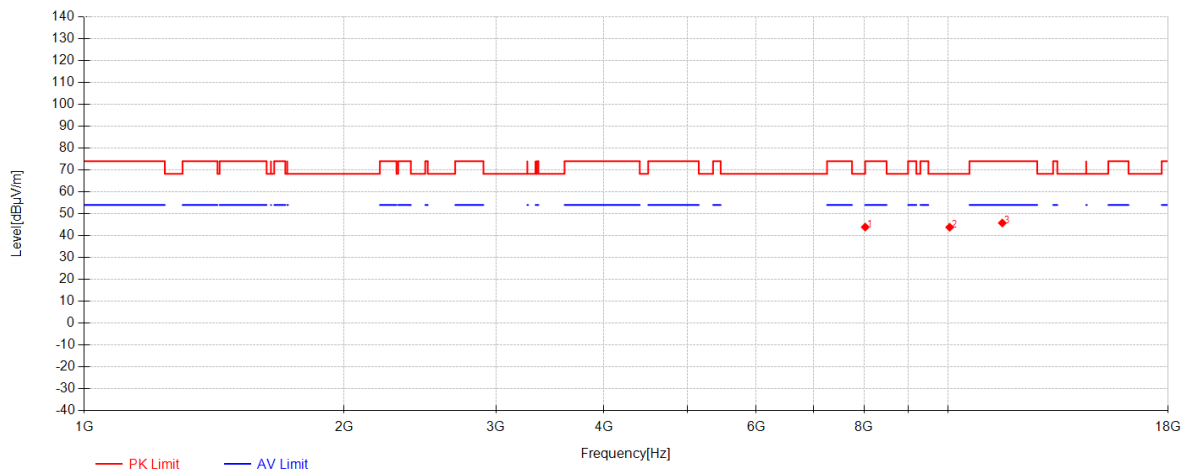

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8027.5833       | 48.73          | 37.08     | -41.91      | 43.90          | 74.00          | 30.10       | Vertical |
| 2         | 10055.4167      | 44.33          | 38.51     | -39.00      | 43.83          | 68.30          | 24.47       | Vertical |
| 3         | 11569.5833      | 43.72          | 38.88     | -36.84      | 45.77          | 74.00          | 28.23       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 210 of 309

### 802.11c20\_Channel 165

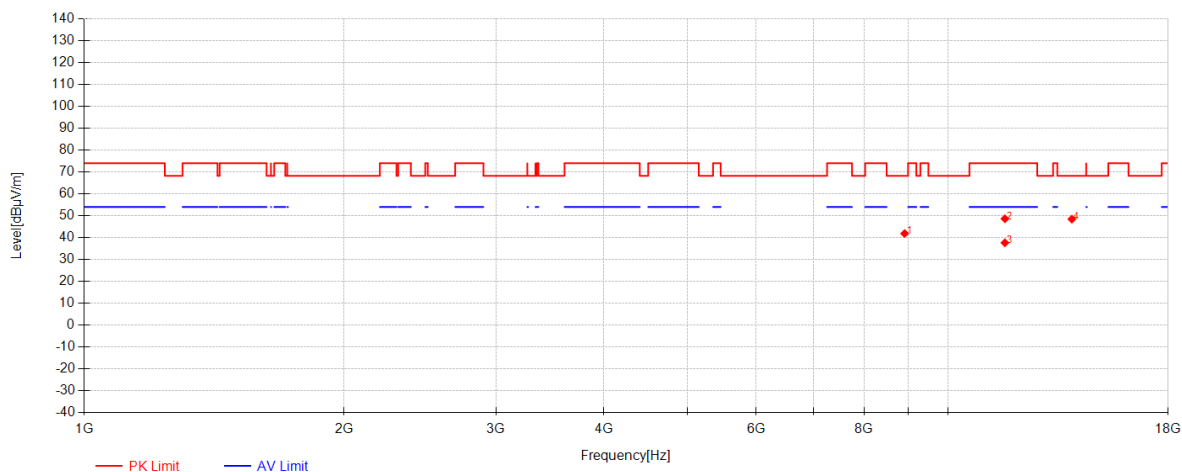

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8916.9167       | 46.23          | 36.55     | -40.90      | 41.88          | 68.30          | 26.42       | Horizontal |
| 2         | 11649.6042      | 46.25          | 38.92     | -36.54      | 48.64          | 74.00          | 25.36       | Horizontal |
| 3         | 11650.5625      | 35.25          | 38.93     | -36.53      | 37.65          | 54.00          | 16.35       | Horizontal |
| 4         | 13927.5625      | 43.09          | 40.70     | -35.35      | 48.44          | 68.30          | 19.86       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 211 of 309

### 802.11c20\_Channel 165

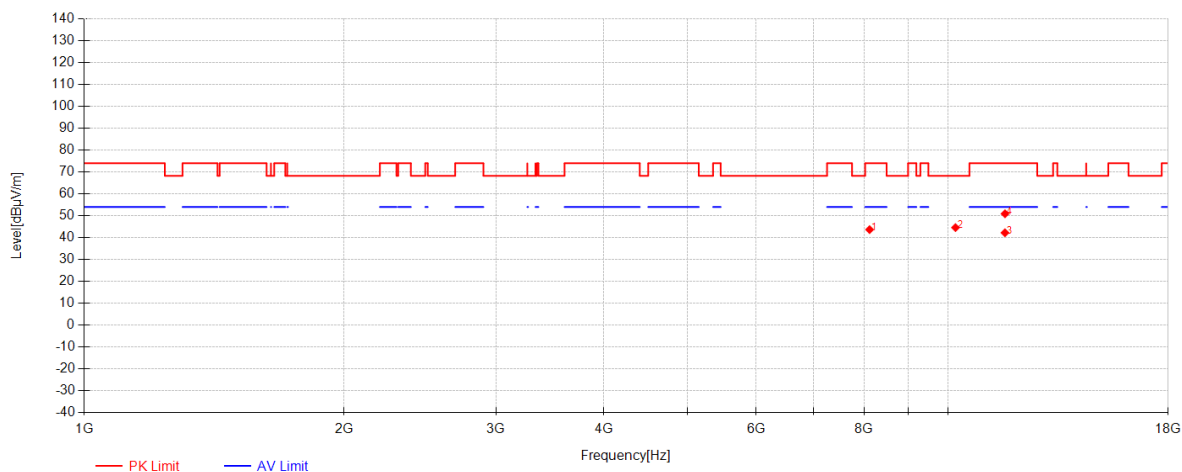

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8121.9792       | 48.16          | 37.03     | -41.52      | 43.67          | 74.00          | 30.33       | Vertical |
| 2         | 10212.5833      | 45.31          | 38.52     | -39.24      | 44.59          | 68.30          | 23.71       | Vertical |
| 3         | 11652           | 39.81          | 38.93     | -36.52      | 42.22          | 54.00          | 11.78       | Vertical |
| 4         | 11653.4375      | 48.49          | 38.93     | -36.50      | 50.91          | 74.00          | 23.09       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 212 of 309

### 802.11ac40\_Channel 38

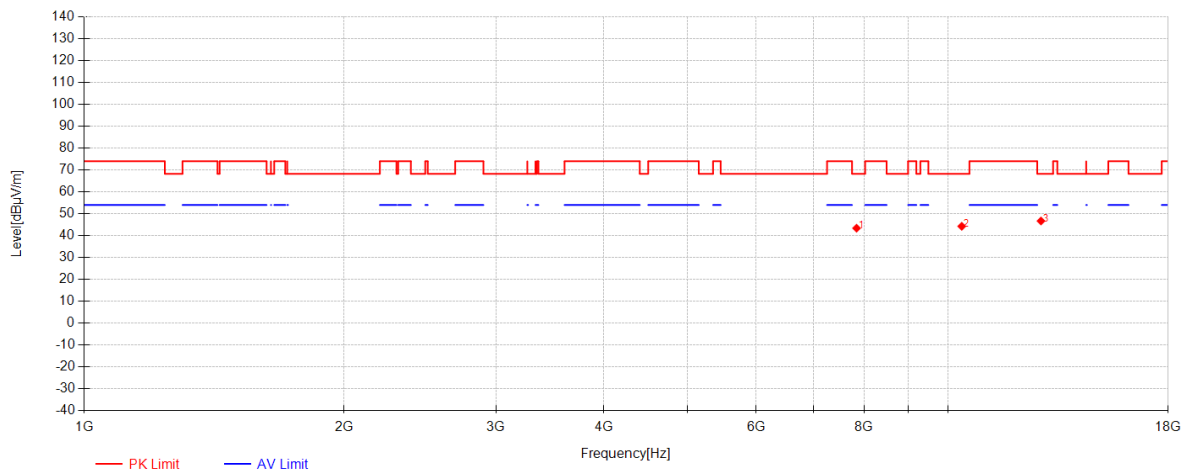

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7844.5417       | 49.17          | 36.88     | -42.65      | 43.40          | 68.30          | 24.90       | Horizontal |
| 2         | 10384.6042      | 44.50          | 38.54     | -38.76      | 44.28          | 68.30          | 24.02       | Horizontal |
| 3         | 12826.9167      | 44.04          | 39.35     | -36.69      | 46.70          | 68.30          | 21.60       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 213 of 309

### 802.11ac40\_Channel 38

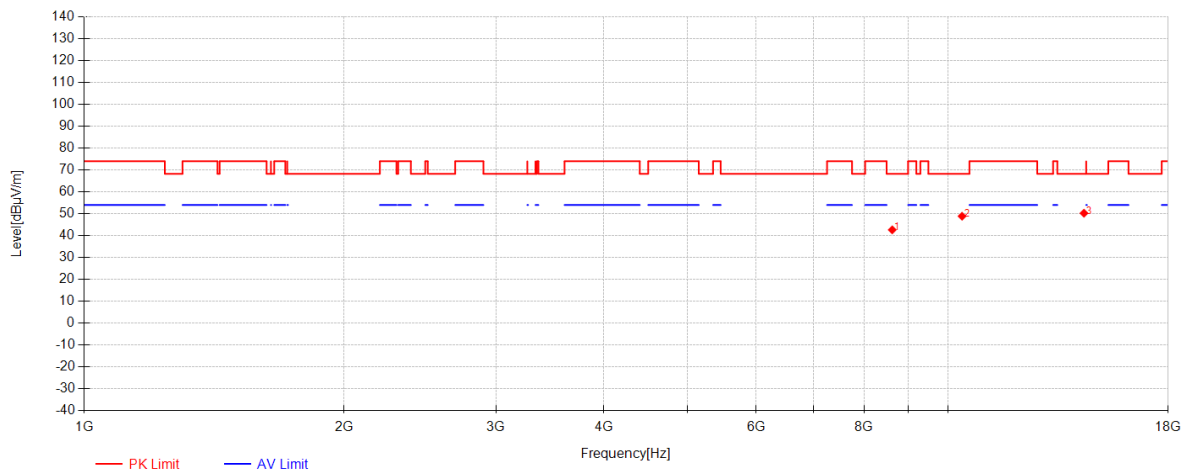

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8627.0208       | 46.93          | 36.72     | -41.01      | 42.64          | 68.30          | 25.66       | Vertical |
| 2         | 10392.2708      | 49.08          | 38.54     | -38.74      | 48.88          | 68.30          | 19.42       | Vertical |
| 3         | 14387.0833      | 44.33          | 41.11     | -35.18      | 50.26          | 68.30          | 18.04       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 214 of 309

### 802.11ac40\_Channel 46

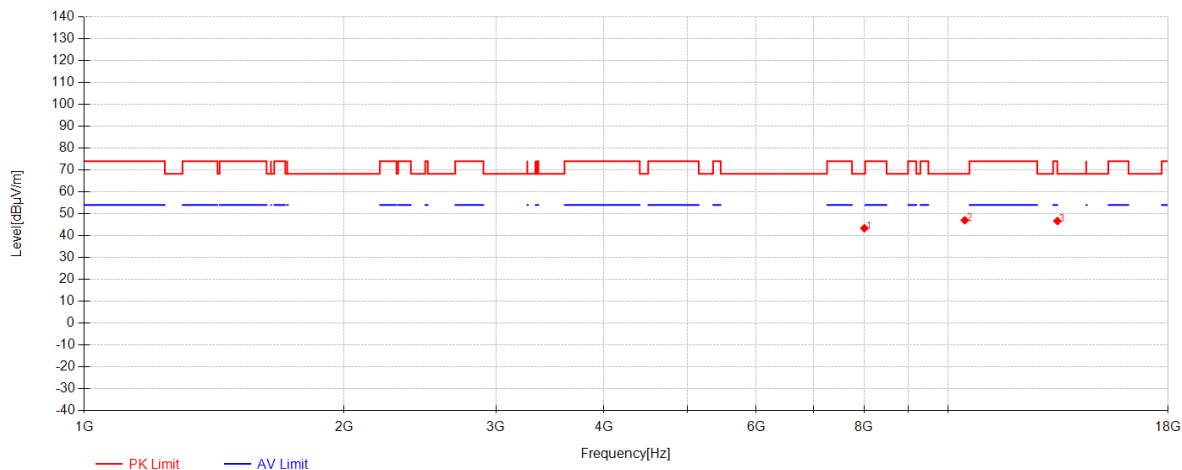

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8008.8958       | 48.34          | 37.09     | -42.06      | 43.37          | 68.30          | 24.93       | Horizontal |
| 2         | 10467.5         | 47.22          | 38.55     | -38.75      | 47.02          | 68.30          | 21.28       | Horizontal |
| 3         | 13401.9167      | 42.80          | 39.96     | -36.08      | 46.68          | 68.30          | 21.62       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 215 of 309

### 802.11ac40\_Channel 46

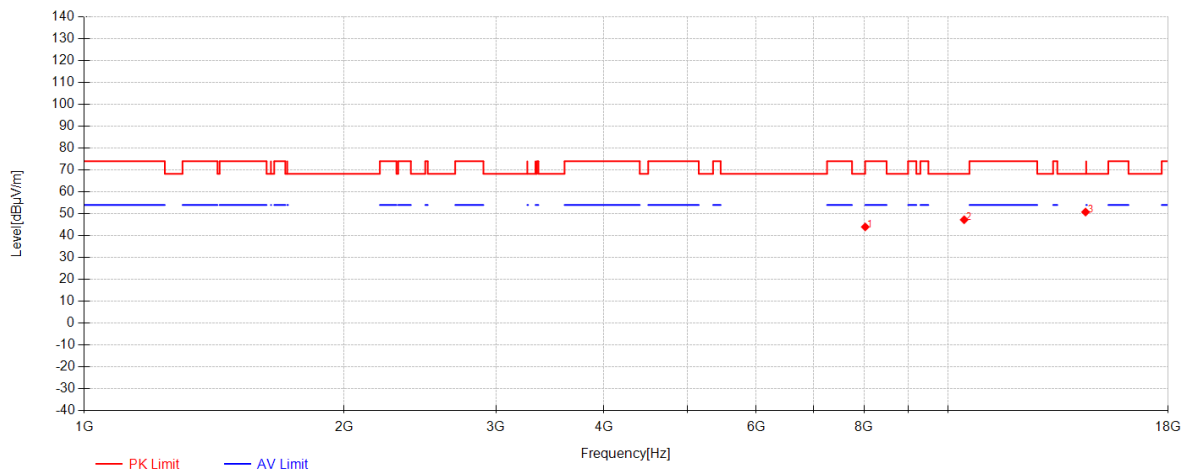

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8028.0625       | 48.80          | 37.08     | -41.91      | 43.97          | 74.00          | 30.03       | Vertical |
| 2         | 10451.2083      | 47.46          | 38.55     | -38.74      | 47.26          | 68.30          | 21.04       | Vertical |
| 3         | 14445.0625      | 44.33          | 41.16     | -34.70      | 50.79          | 68.30          | 17.51       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 216 of 309

### 802.11ac40\_Channel 54

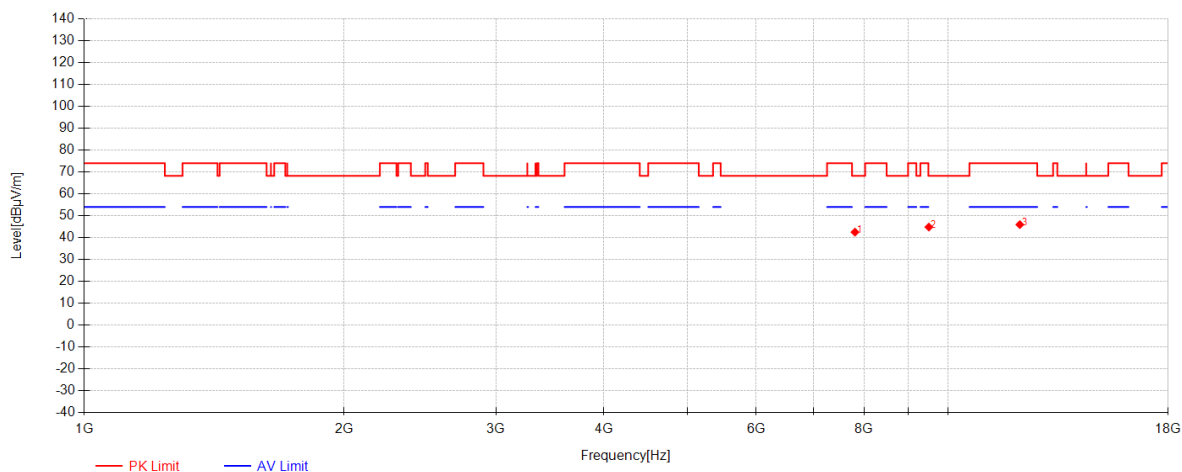

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7811            | 48.27          | 36.84     | -42.60      | 42.51          | 68.30          | 25.79       | Horizontal |
| 2         | 9511.5625       | 47.18          | 37.52     | -39.87      | 44.83          | 68.30          | 23.47       | Horizontal |
| 3         | 12123.5         | 43.99          | 39.14     | -37.17      | 45.96          | 74.00          | 28.04       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 217 of 309

### 802.11ac40\_Channel 54

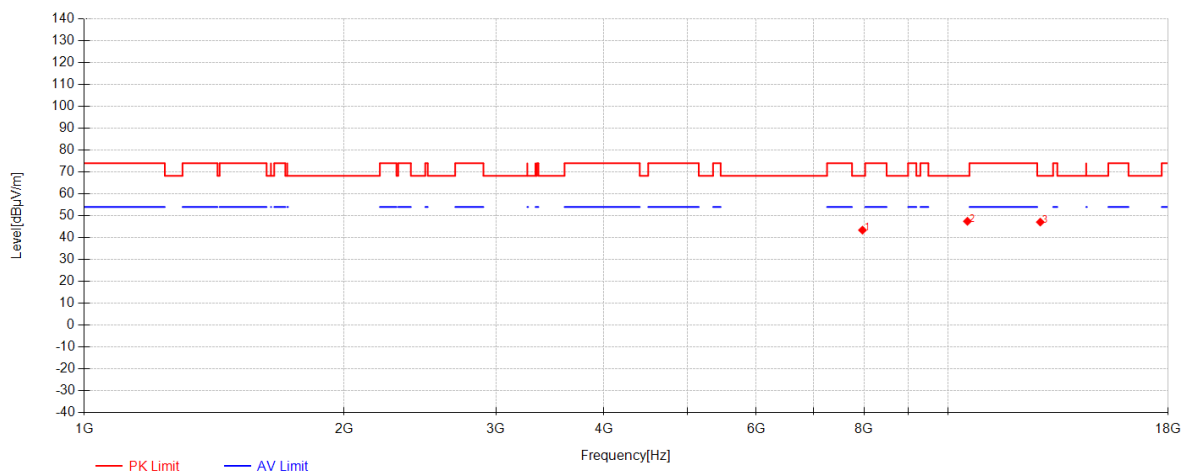

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7969.125        | 48.68          | 37.06     | -42.32      | 43.42          | 68.30          | 24.88       | Vertical |
| 2         | 10541.2917      | 47.37          | 38.55     | -38.45      | 47.47          | 68.30          | 20.83       | Vertical |
| 3         | 12803.9167      | 44.39          | 39.34     | -36.63      | 47.10          | 68.30          | 21.20       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 218 of 309

### 802.11ac40\_Channel 62

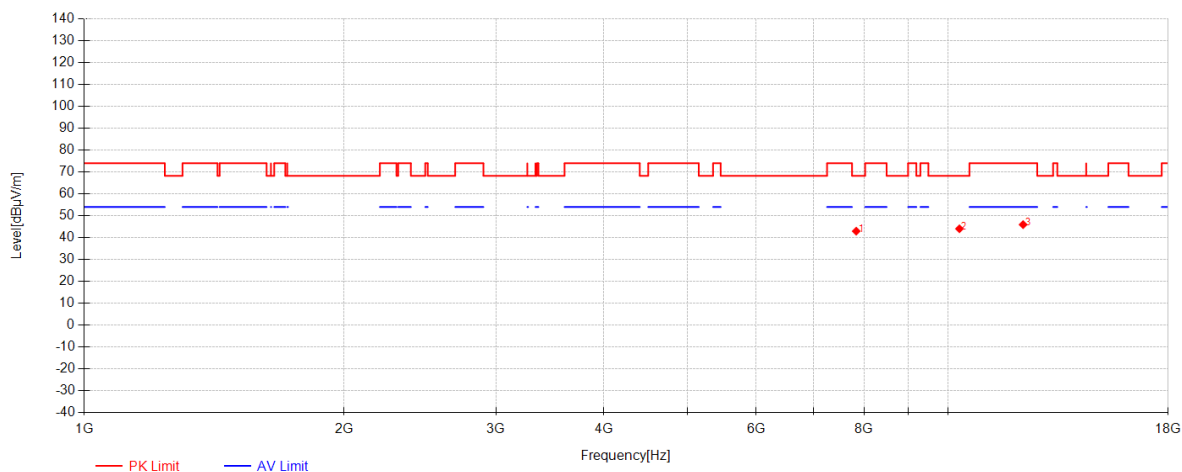

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7836.875        | 48.72          | 36.87     | -42.64      | 42.95          | 68.30          | 25.35       | Horizontal |
| 2         | 10319.9167      | 44.44          | 38.53     | -38.92      | 44.05          | 68.30          | 24.25       | Horizontal |
| 3         | 12229.875       | 43.76          | 39.17     | -36.97      | 45.96          | 74.00          | 28.04       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 219 of 309

### 802.11ac40\_Channel 62

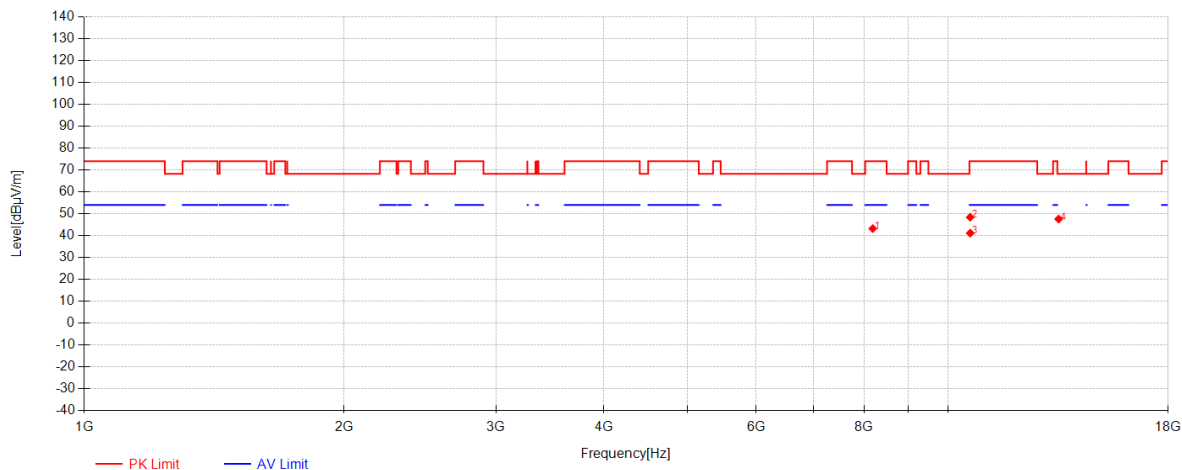

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8190.9792       | 48.32          | 36.99     | -42.08      | 43.23          | 74.00          | 30.77       | Vertical |
| 2         | 10619.875       | 47.74          | 38.56     | -37.91      | 48.40          | 74.00          | 25.60       | Vertical |
| 3         | 10621.3125      | 40.47          | 38.56     | -37.90      | 41.13          | 54.00          | 12.87       | Vertical |
| 4         | 13446.9583      | 43.91          | 40.03     | -36.34      | 47.59          | 68.30          | 20.71       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 220 of 309

### 802.11ac40\_Channel 102

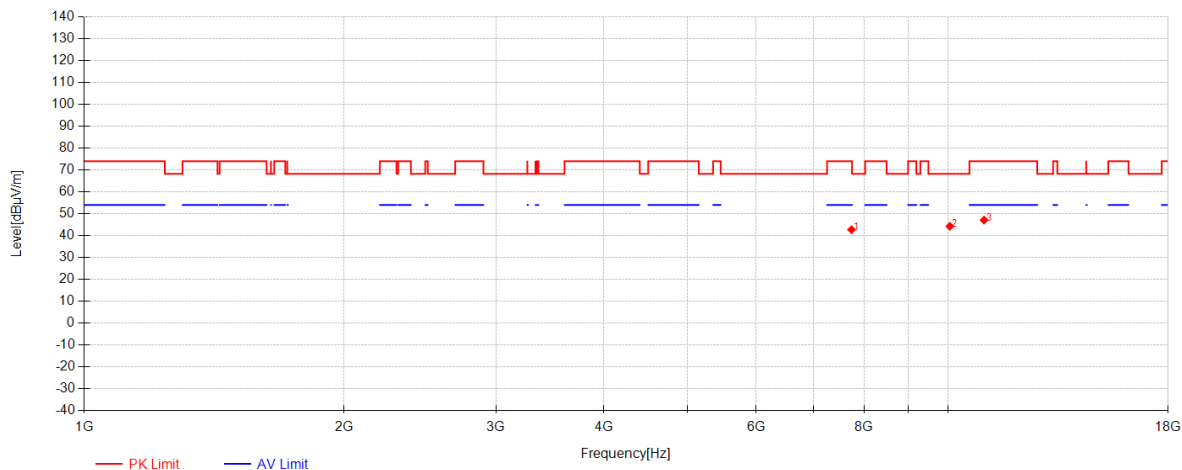

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7739.6042       | 48.80          | 36.74     | -42.80      | 42.73          | 74.00          | 31.27       | Horizontal |
| 2         | 10061.1667      | 44.74          | 38.51     | -38.96      | 44.28          | 68.30          | 24.02       | Horizontal |
| 3         | 11020.9375      | 46.12          | 38.61     | -37.62      | 47.11          | 74.00          | 26.89       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 221 of 309

### 802.11ac40\_Channel 102

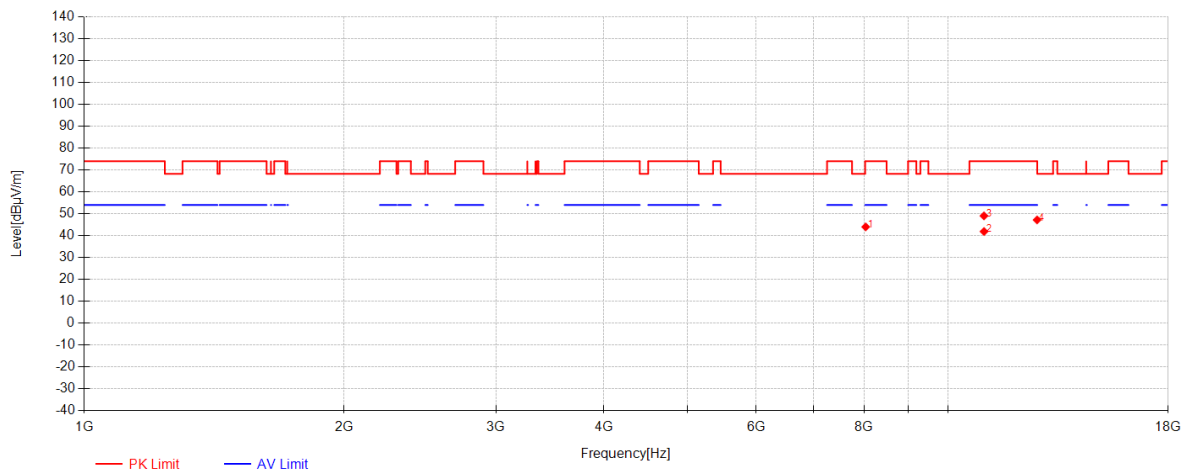

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8037.6458       | 48.76          | 37.08     | -41.83      | 44.00          | 74.00          | 30.00       | Vertical |
| 2         | 11019.0208      | 40.89          | 38.61     | -37.62      | 41.88          | 54.00          | 12.12       | Vertical |
| 3         | 11019.0208      | 48.04          | 38.61     | -37.62      | 49.03          | 74.00          | 24.97       | Vertical |
| 4         | 12695.1458      | 44.74          | 39.31     | -36.85      | 47.20          | 74.00          | 26.80       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 222 of 309

### 802.11ac40\_Channel 110

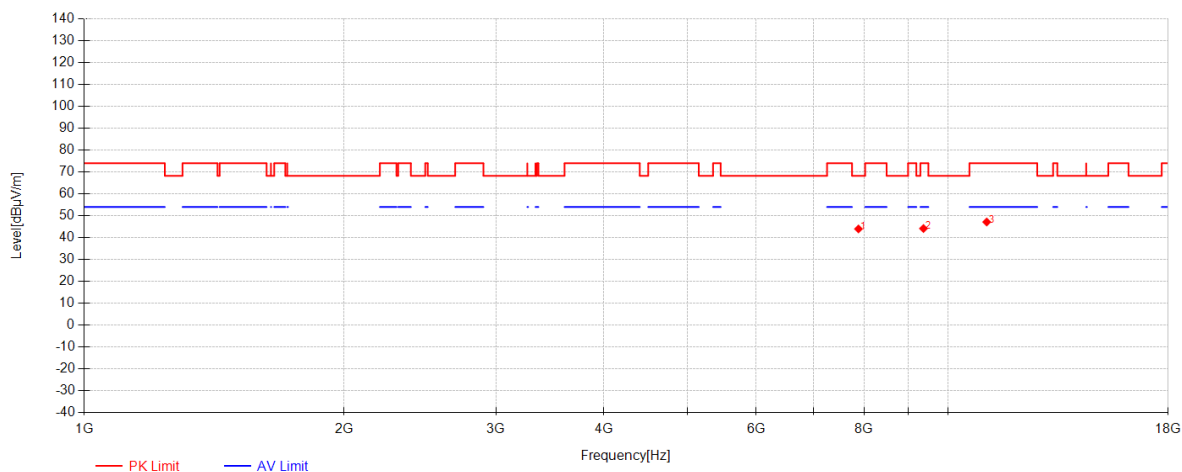

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7884.3125       | 49.77          | 36.94     | -42.71      | 43.99          | 68.30          | 24.31       | Horizontal |
| 2         | 9376.9167       | 46.87          | 37.25     | -39.95      | 44.17          | 74.00          | 29.83       | Horizontal |
| 3         | 11099.0417      | 46.26          | 38.65     | -37.75      | 47.16          | 74.00          | 26.84       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 223 of 309

### 802.11ac40\_Channel 110

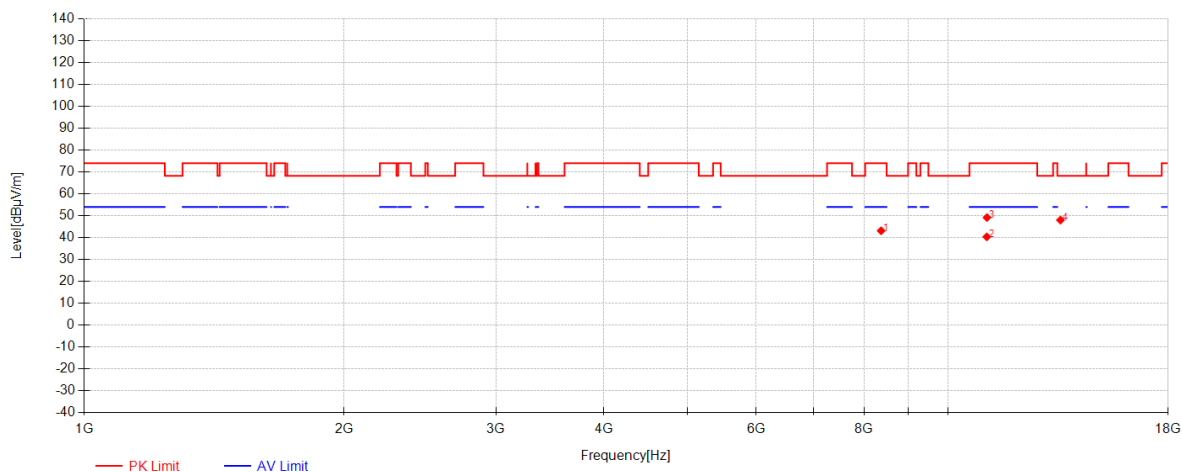

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8374.5          | 47.77          | 36.88     | -41.50      | 43.15          | 74.00          | 30.85       | Vertical |
| 2         | 11100.4792      | 39.43          | 38.65     | -37.74      | 40.34          | 54.00          | 13.66       | Vertical |
| 3         | 11105.75        | 48.23          | 38.65     | -37.68      | 49.20          | 74.00          | 24.80       | Vertical |
| 4         | 13510.2083      | 44.49          | 40.11     | -36.59      | 48.02          | 68.30          | 20.28       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 224 of 309

### 802.11ac40\_Channel 134

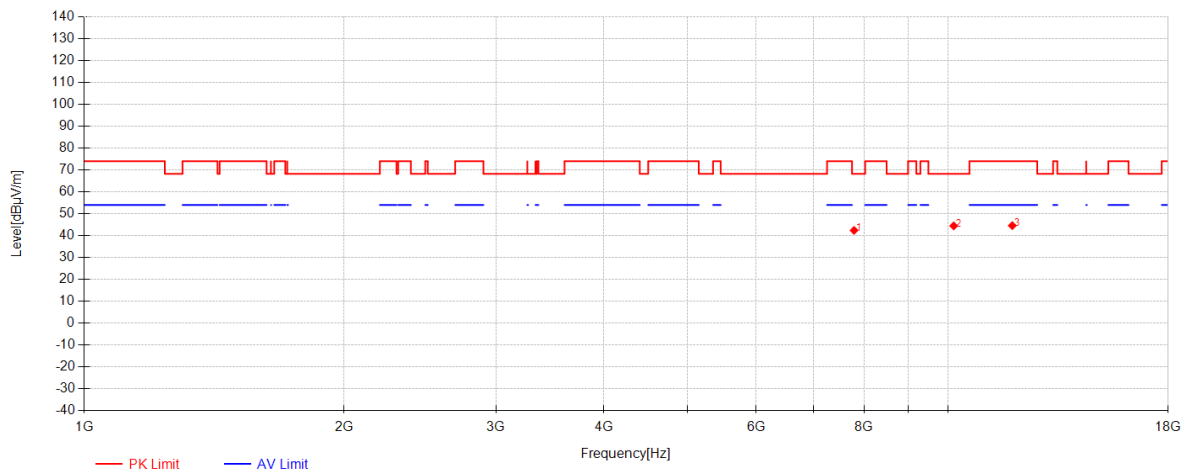

#### Data List

| NO. | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
|-----|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| 1   | 7792.3125       | 48.21          | 36.81     | -42.61      | 42.41          | 68.30          | 25.89       | Horizontal |
| 2   | 10165.1458      | 45.02          | 38.52     | -39.08      | 44.46          | 68.30          | 23.84       | Horizontal |
| 3   | 11881.0417      | 42.87          | 39.04     | -37.32      | 44.59          | 74.00          | 29.41       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 225 of 309

### 802.11ac40\_Channel 134

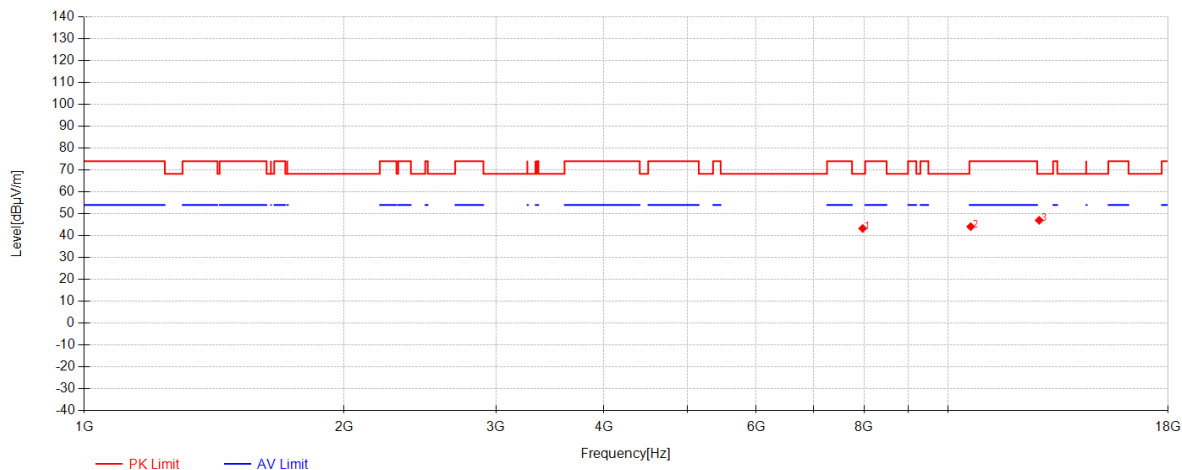

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7974.3958       | 48.50          | 37.06     | -42.29      | 43.28          | 68.30          | 25.02       | Vertical |
| 2         | 10634.25        | 43.38          | 38.56     | -37.83      | 44.11          | 74.00          | 29.89       | Vertical |
| 3         | 12766.0625      | 44.36          | 39.33     | -36.69      | 47.00          | 68.30          | 21.30       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 226 of 309

### 802.11ac40\_Channel 151

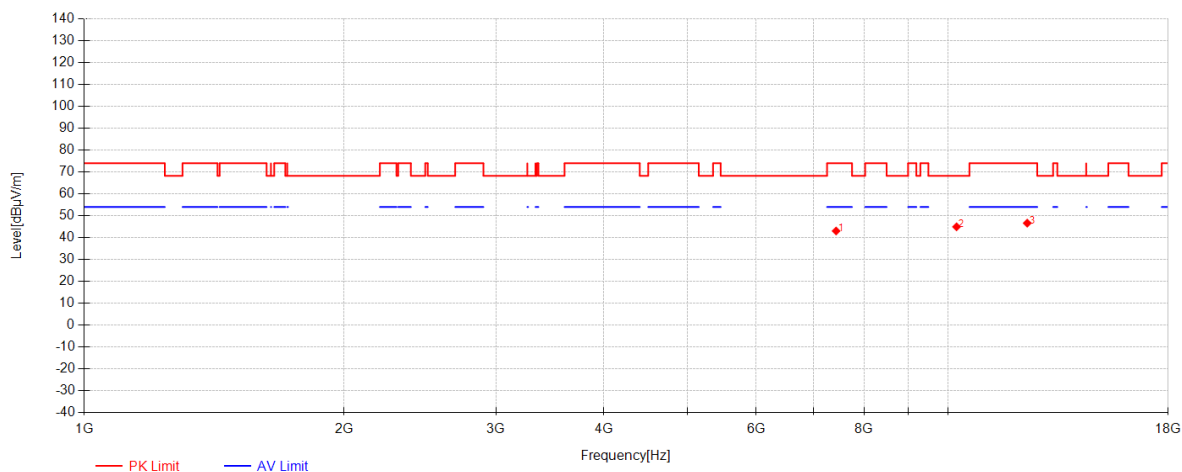

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7427.6667       | 49.75          | 36.20     | -42.90      | 43.05          | 74.00          | 30.95       | Horizontal |
| 2         | 10241.3333      | 45.59          | 38.52     | -39.15      | 44.96          | 68.30          | 23.34       | Horizontal |
| 3         | 12365.4792      | 44.29          | 39.21     | -36.87      | 46.63          | 74.00          | 27.37       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 227 of 309

### 802.11ac40\_Channel 151

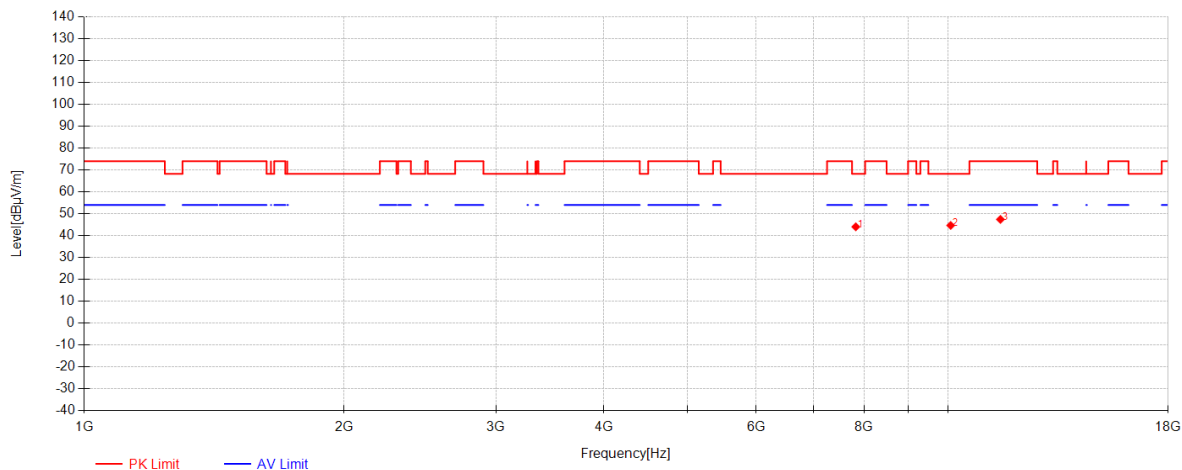

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7828.25         | 49.80          | 36.86     | -42.63      | 44.03          | 68.30          | 24.27       | Vertical |
| 2         | 10081.7708      | 44.99          | 38.51     | -38.82      | 44.67          | 68.30          | 23.63       | Vertical |
| 3         | 11512.0833      | 45.13          | 38.86     | -36.57      | 47.42          | 74.00          | 26.58       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 228 of 309

### 802.11ac40\_Channel 159

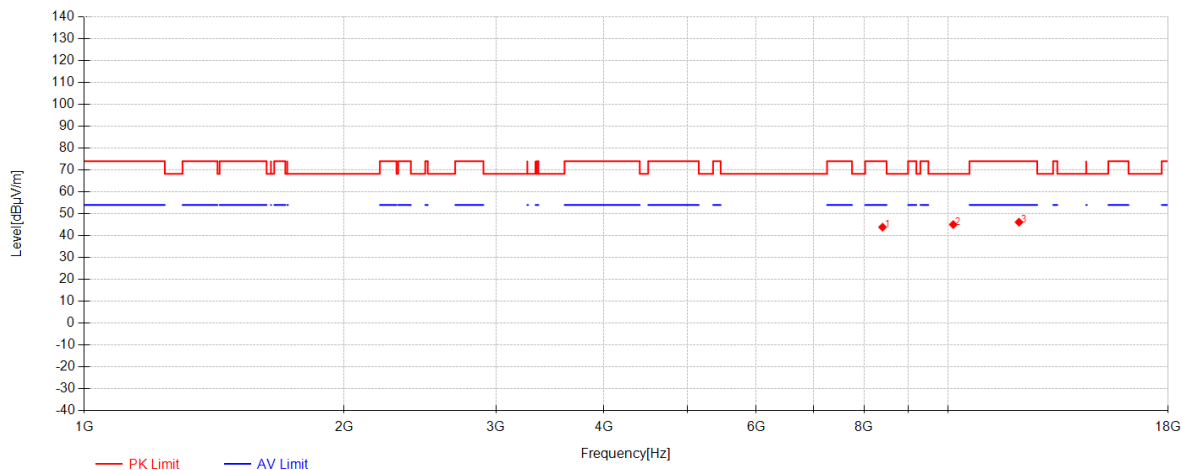


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8407.0833       | 48.41          | 36.86     | -41.40      | 43.87          | 74.00          | 30.13       | Horizontal |
| 2         | 10150.2917      | 45.54          | 38.52     | -38.99      | 45.06          | 68.30          | 23.24       | Horizontal |
| 3         | 12096.6667      | 44.21          | 39.13     | -37.19      | 46.15          | 74.00          | 27.85       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 229 of 309

802.11ac40\_Channel 159

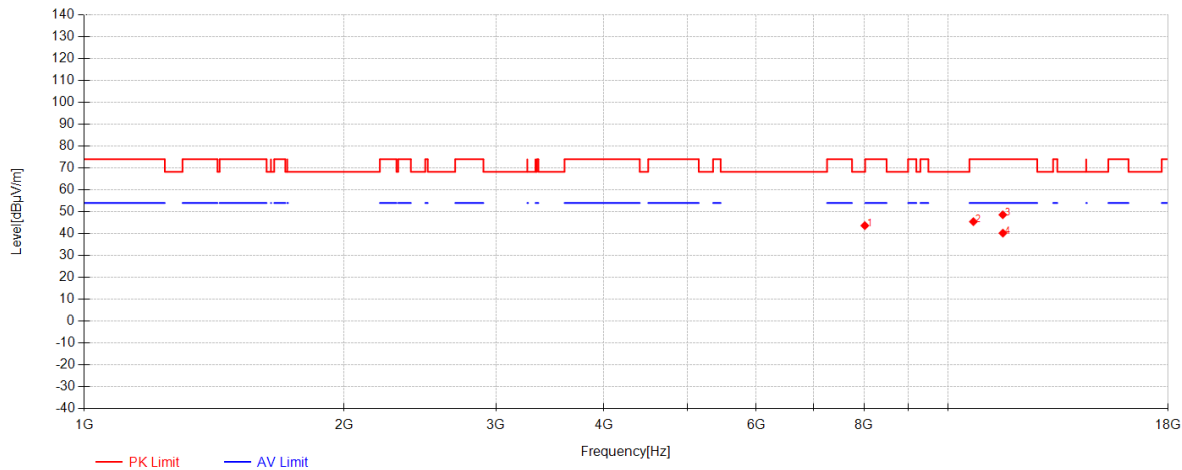

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8018            | 48.57          | 37.09     | -41.99      | 43.67          | 68.30          | 24.63       | Vertical |
| 2         | 10712.8333      | 44.51          | 38.57     | -37.62      | 45.47          | 74.00          | 28.53       | Vertical |
| 3         | 11585.3958      | 46.65          | 38.89     | -36.91      | 48.63          | 74.00          | 25.37       | Vertical |
| 4         | 11589.7083      | 38.27          | 38.89     | -36.93      | 40.23          | 54.00          | 13.77       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 230 of 309

### 802.11ac80\_Channel 42

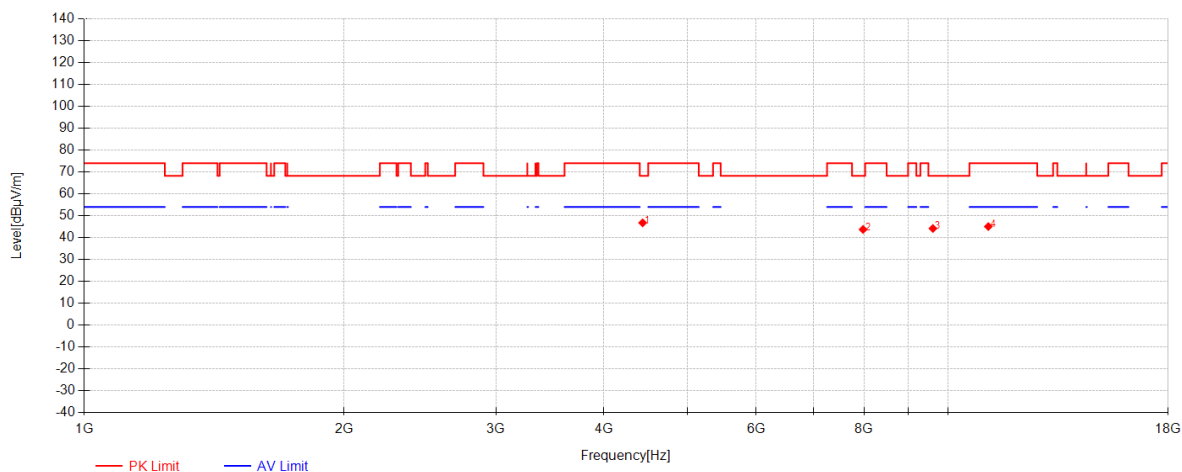

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4434.1154       | 36.93          | 30.44     | -20.59      | 46.78          | 68.30          | 21.52       | Horizontal |
| 2         | 7981.5833       | 48.91          | 37.07     | -42.24      | 43.74          | 68.30          | 24.56       | Horizontal |
| 3         | 9615.0625       | 45.70          | 37.73     | -39.24      | 44.19          | 68.30          | 24.11       | Horizontal |
| 4         | 11146.4792      | 43.61          | 38.67     | -37.22      | 45.07          | 74.00          | 28.93       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 231 of 309

### 802.11ac80\_Channel 42

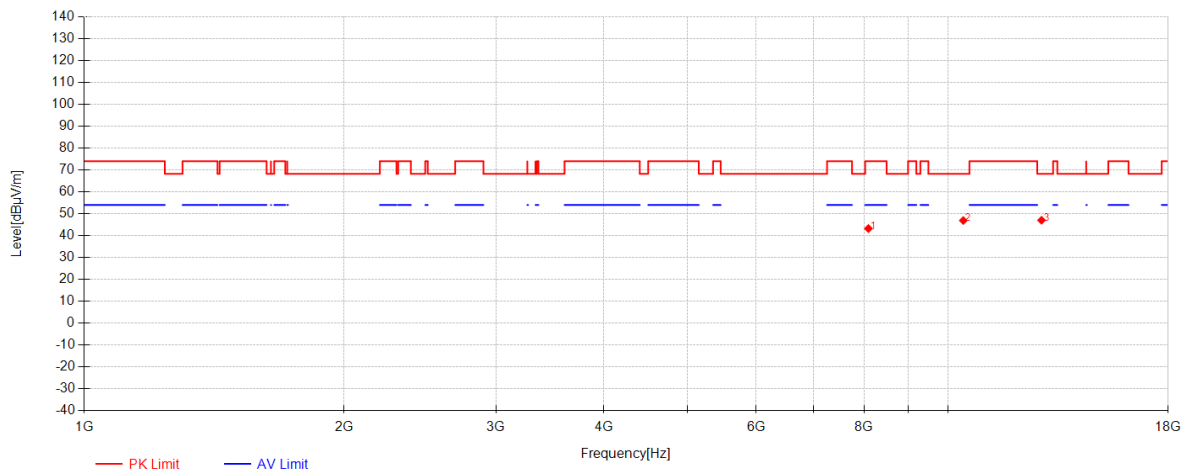

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 8096.1042       | 47.57          | 37.04     | -41.37      | 43.24          | 74.00          | 30.76       | Vertical |
| 2         | 10426.7708      | 47.10          | 38.54     | -38.73      | 46.91          | 68.30          | 21.39       | Vertical |
| 3         | 12845.6042      | 44.41          | 39.35     | -36.73      | 47.03          | 68.30          | 21.27       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 232 of 309

### 802.11ac80\_Channel 58

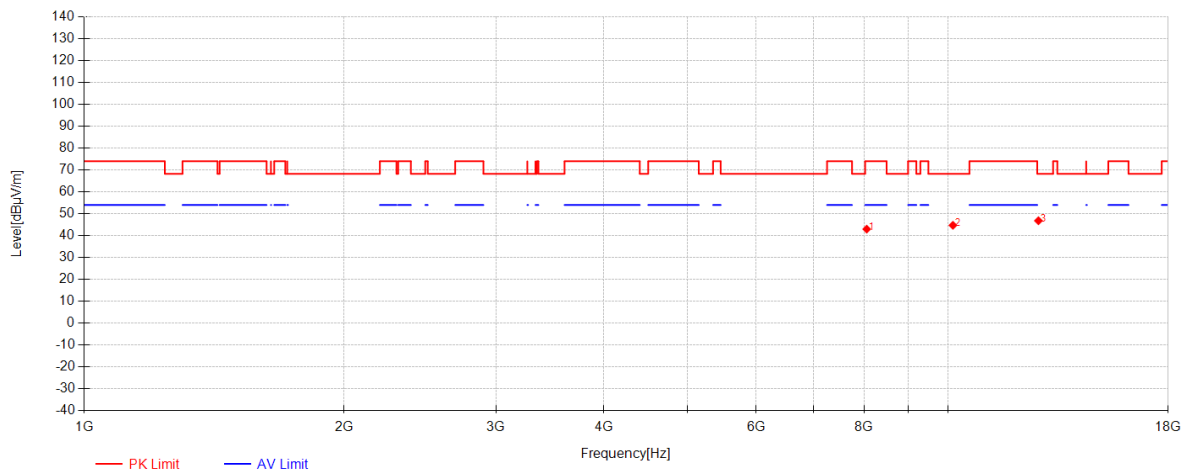

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8059.6875       | 47.57          | 37.06     | -41.66      | 42.98          | 74.00          | 31.02       | Horizontal |
| 2         | 10142.1458      | 45.15          | 38.51     | -38.94      | 44.72          | 68.30          | 23.58       | Horizontal |
| 3         | 12740.1875      | 44.25          | 39.32     | -36.75      | 46.83          | 68.30          | 21.47       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 233 of 309

### 802.11ac80\_Channel 58

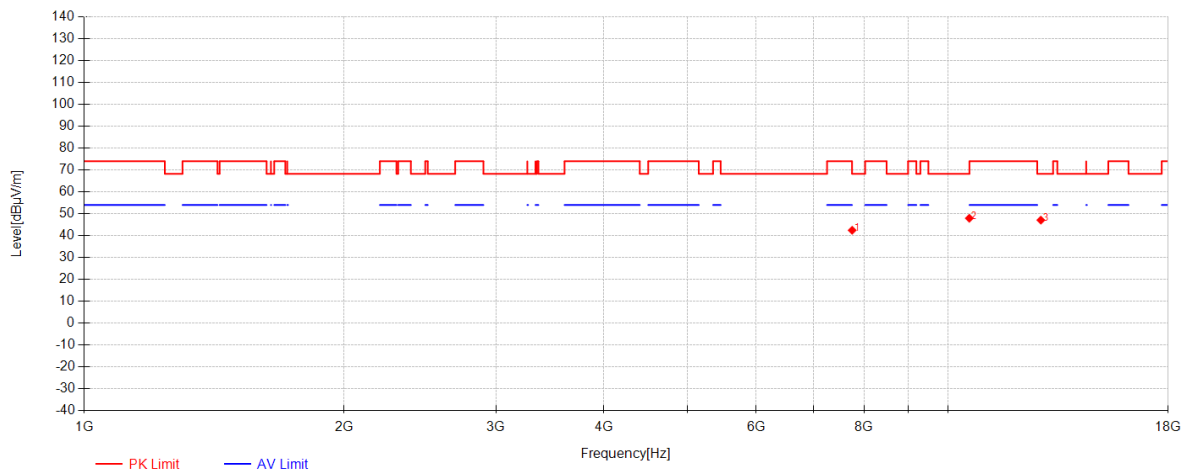


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7752.5417       | 48.46          | 36.75     | -42.76      | 42.46          | 68.30          | 25.84       | Vertical |
| 2         | 10596.875       | 47.42          | 38.56     | -38.03      | 47.95          | 68.30          | 20.35       | Vertical |
| 3         | 12822.6042      | 44.43          | 39.35     | -36.68      | 47.10          | 68.30          | 21.20       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 234 of 309

802.11ac80\_Channel 106

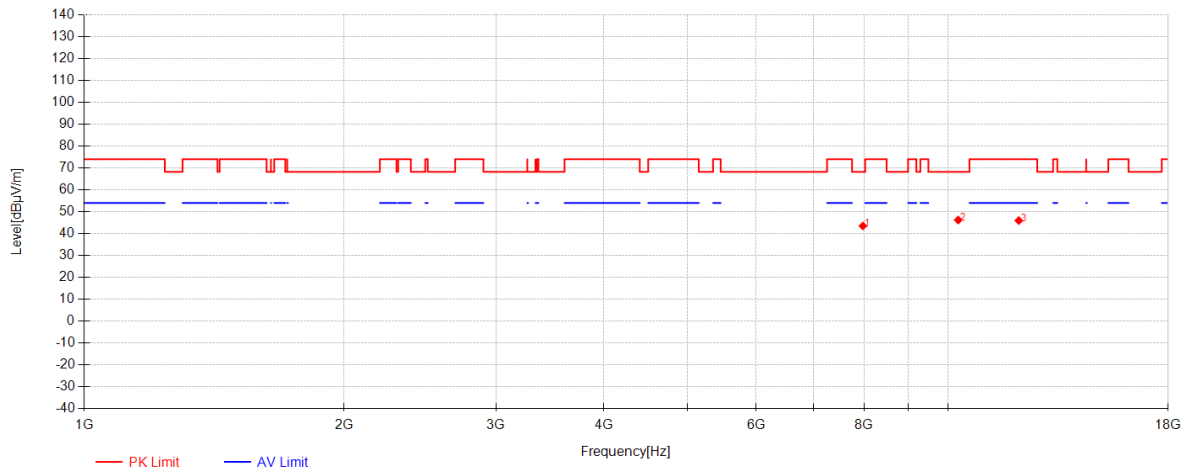

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 7978.2292       | 48.69          | 37.07     | -42.26      | 43.50          | 68.30          | 24.80       | Horizontal |
| 2         | 10285.8958      | 46.71          | 38.53     | -39.01      | 46.22          | 68.30          | 22.08       | Horizontal |
| 3         | 12091.3958      | 44.03          | 39.13     | -37.19      | 45.97          | 74.00          | 28.03       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 235 of 309

### 802.11ac80\_Channel 106

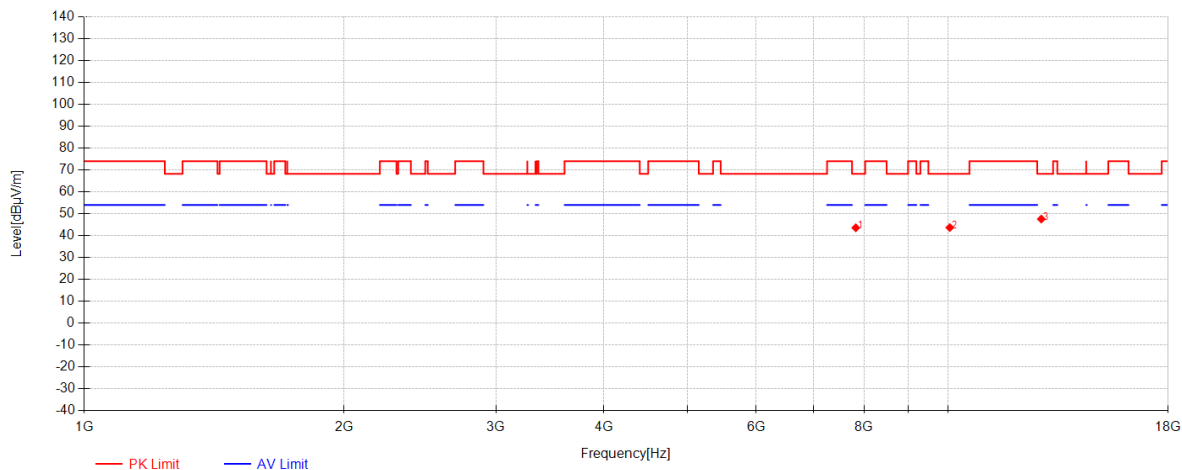


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7827.7708       | 49.37          | 36.86     | -42.62      | 43.60          | 68.30          | 24.70       | Vertical |
| 2         | 10058.7708      | 44.17          | 38.51     | -38.98      | 43.70          | 68.30          | 24.60       | Vertical |
| 3         | 12836.9792      | 44.95          | 39.35     | -36.71      | 47.59          | 68.30          | 20.71       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 236 of 309

802.11ac80\_Channel 155

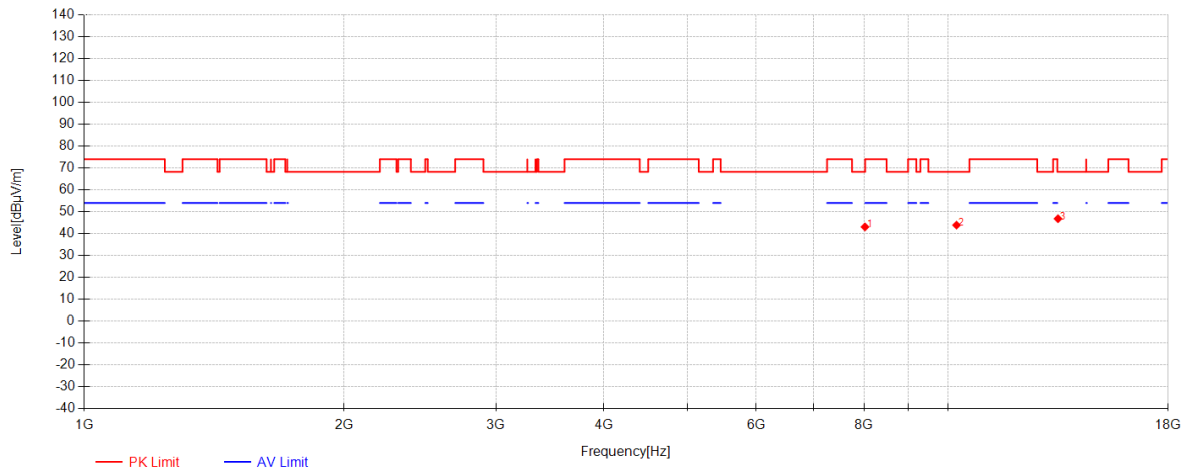

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 8021.8333       | 47.93          | 37.09     | -41.96      | 43.06          | 68.30          | 25.24       | Horizontal |
| 2         | 10240.375       | 44.51          | 38.52     | -39.15      | 43.88          | 68.30          | 24.42       | Horizontal |
| 3         | 13422.5208      | 43.04          | 39.99     | -36.20      | 46.83          | 68.30          | 21.47       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 237 of 309

### 802.11ac80\_Channel 155

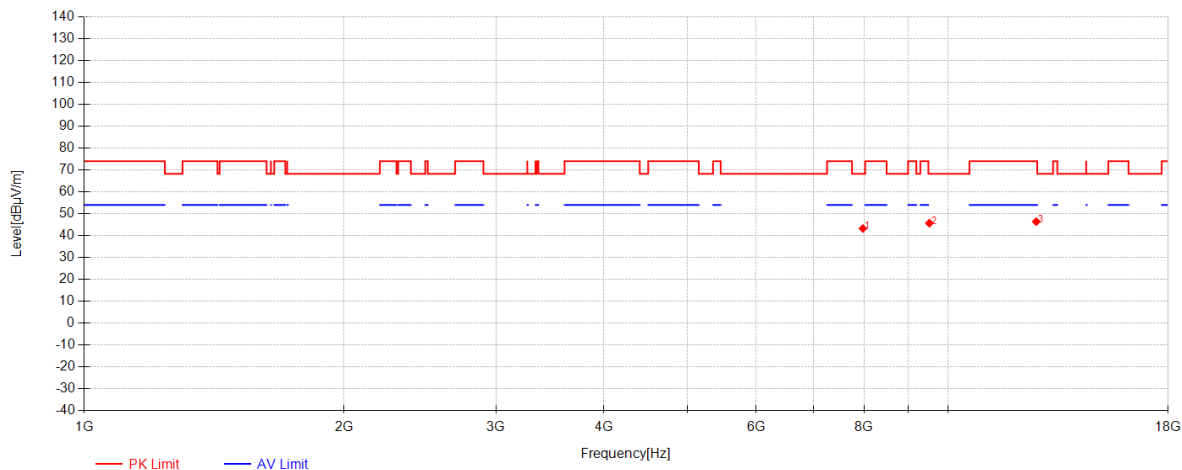

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 7978.2292       | 48.45          | 37.07     | -42.26      | 43.26          | 68.30          | 25.04       | Vertical |
| 2         | 9524.0208       | 47.91          | 37.55     | -39.78      | 45.68          | 68.30          | 22.62       | Vertical |
| 3         | 12667.3542      | 44.07          | 39.30     | -36.95      | 46.42          | 74.00          | 27.58       | Vertical |

#### Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:  
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):  
AF = Antenna Factor(dB/m)  
Factor = Cable Factor(dB) - Preamplifier gain(dB)  
Margin = Limit(dBμV/m) – Level(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.
- Both peak and average measured complies with the limit line, so test result is "PASS"



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032008

Rev.: 01

Page: 238 of 309

### Restricted bands around fundamental frequency

#### 802.11a\_Channel 36

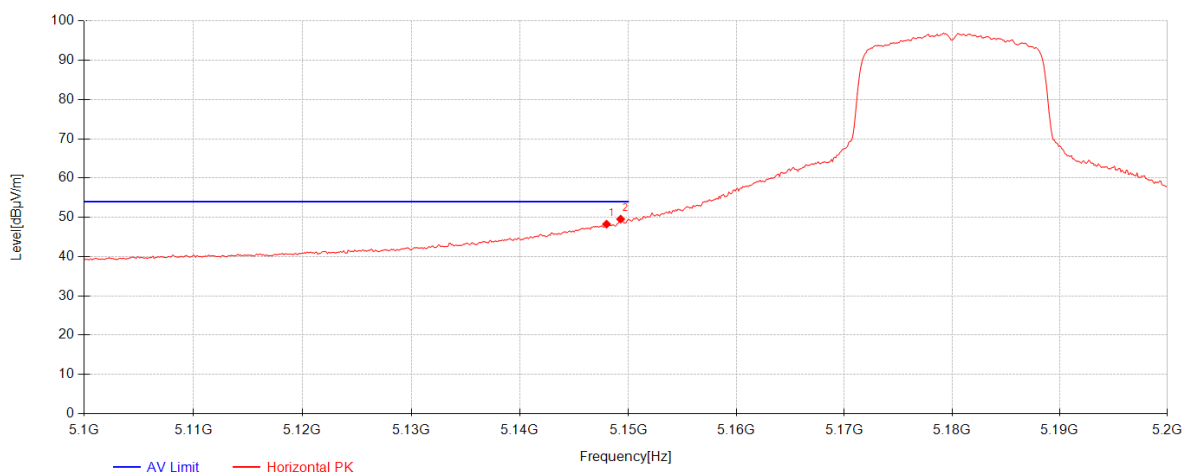


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5148            | 35.74          | 31.67     | -19.14      | 48.26          | 54.00          | 5.74        | Horizontal |
| 2         | 5149.3          | 37.02          | 31.67     | -19.14      | 49.55          | 54.00          | 4.45        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 239 of 309

802.11a\_Channel 36

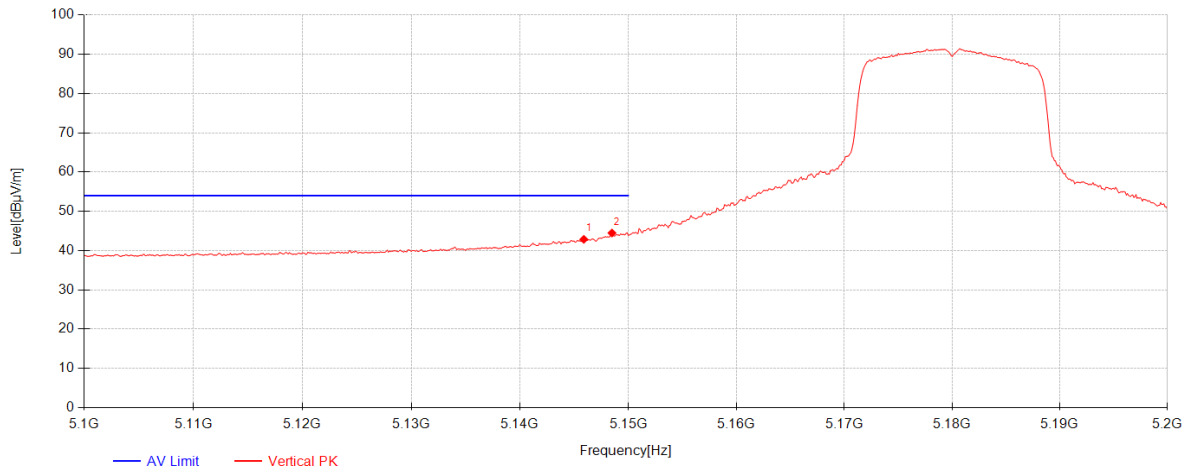


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5145.9          | 30.36          | 31.66     | -19.15      | 42.87          | 54.00          | 11.13       | Vertical |
| 2         | 5148.5          | 31.96          | 31.67     | -19.14      | 44.48          | 54.00          | 9.52        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 240 of 309

802.11a\_Channel 36

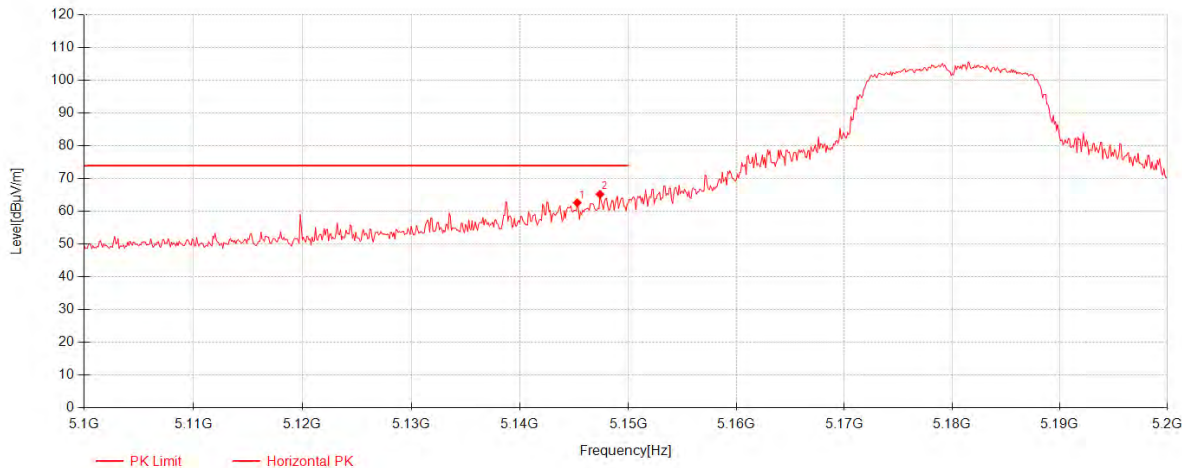


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5145.3          | 50.11          | 31.66     | -19.15      | 62.62          | 74.00          | 11.38       | Horizontal |
| 2         | 5147.4          | 52.71          | 31.67     | -19.15      | 65.23          | 74.00          | 8.77        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 241 of 309

802.11a\_Channel 36

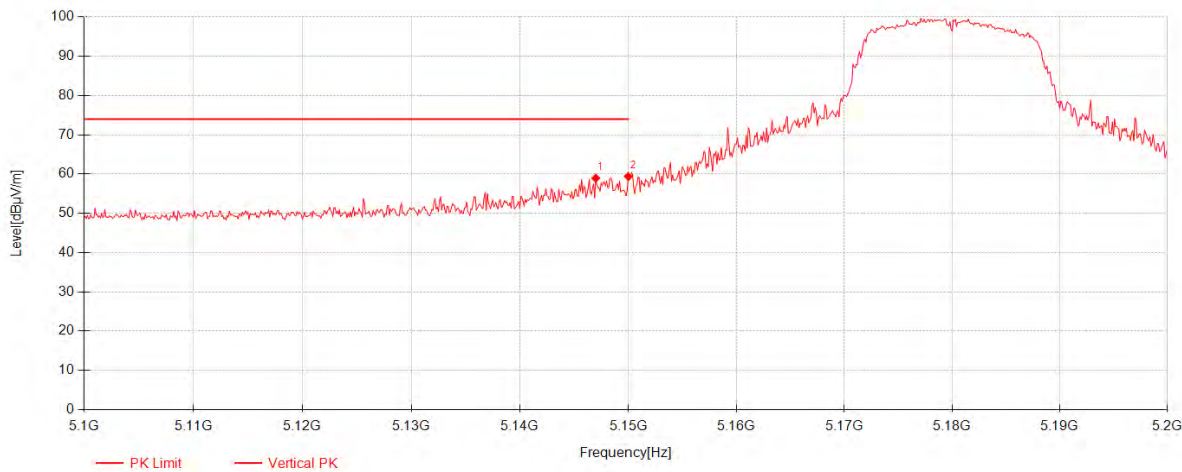


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5147            | 46.43          | 31.66     | -19.15      | 58.95          | 74.00          | 15.05       | Vertical |
| 2         | 5150            | 46.87          | 31.67     | -19.14      | 59.40          | 74.00          | 14.60       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 242 of 309

802.11a\_Channel 64

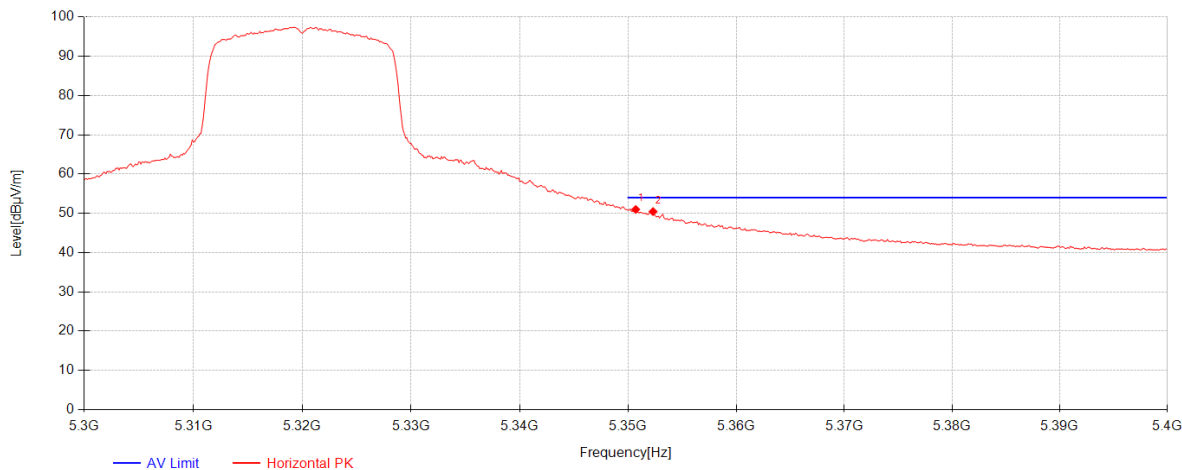


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5350.7          | 37.86          | 32.03     | -18.90      | 50.99          | 54.00          | 3.01        | Horizontal |
| 2         | 5352.3          | 37.32          | 32.03     | -18.91      | 50.45          | 54.00          | 3.55        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 243 of 309

802.11a\_Channel 64

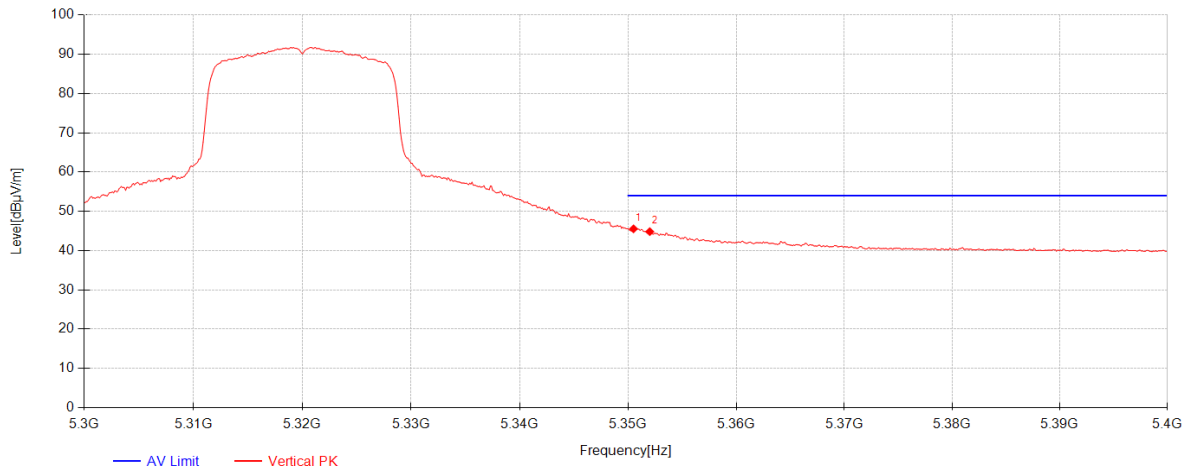


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5350.5          | 32.41          | 32.03     | -18.90      | 45.54          | 54.00          | 8.46        | Vertical |
| 2         | 5352            | 31.70          | 32.03     | -18.90      | 44.83          | 54.00          | 9.17        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 244 of 309

802.11a\_Channel 64

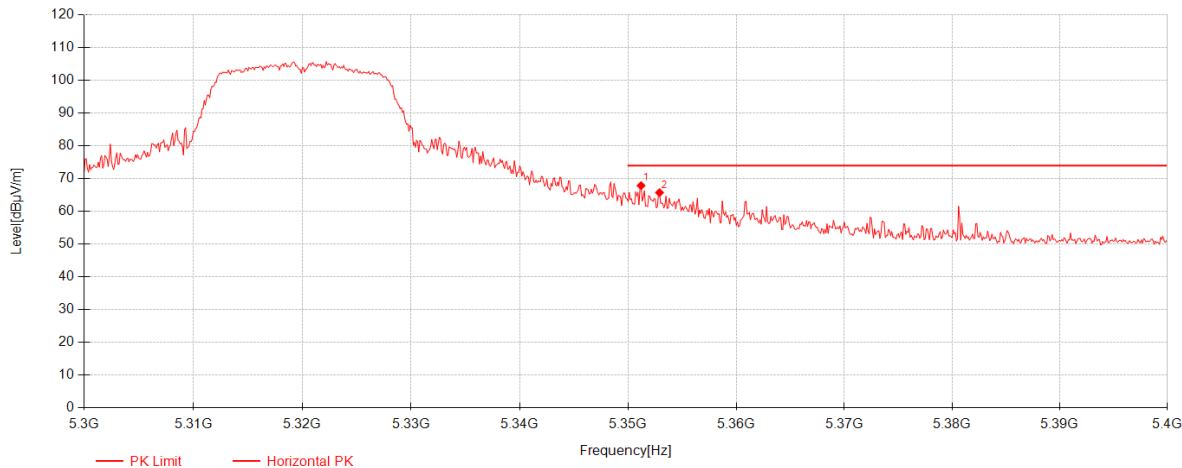


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5351.2          | 54.74          | 32.03     | -18.90      | 67.87          | 74.00          | 6.13        | Horizontal |
| 2         | 5352.9          | 52.59          | 32.04     | -18.91      | 65.72          | 74.00          | 8.28        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 245 of 309

802.11a\_Channel 64

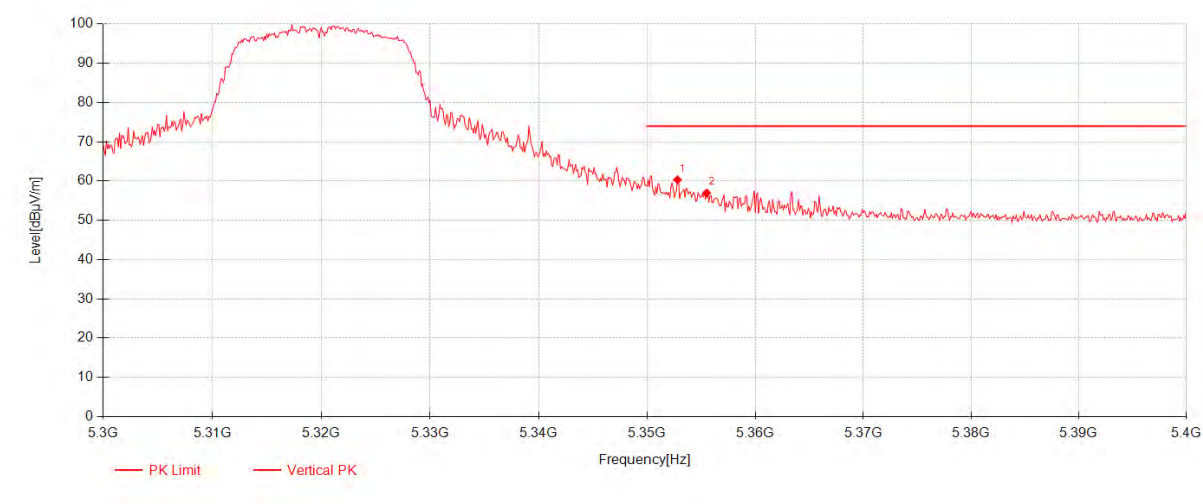


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5352.8          | 47.20          | 32.04     | -18.91      | 60.33          | 74.00          | 13.67       | Vertical |
| 2         | 5355.5          | 43.85          | 32.04     | -18.91      | 56.98          | 74.00          | 17.02       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 246 of 309

802.11a\_Channel 100

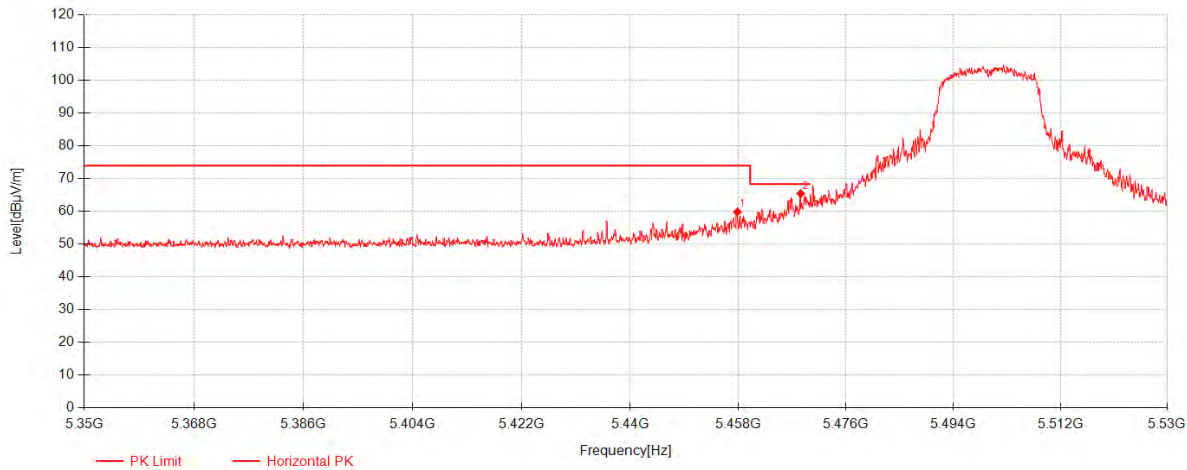


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5457.88         | 46.72          | 32.22     | -19.11      | 59.83          | 74.00          | 14.17       | Horizontal |
| 2         | 5468.44         | 52.33          | 32.24     | -19.13      | 65.44          | 68.30          | 2.86        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 247 of 309

802.11a\_Channel 100

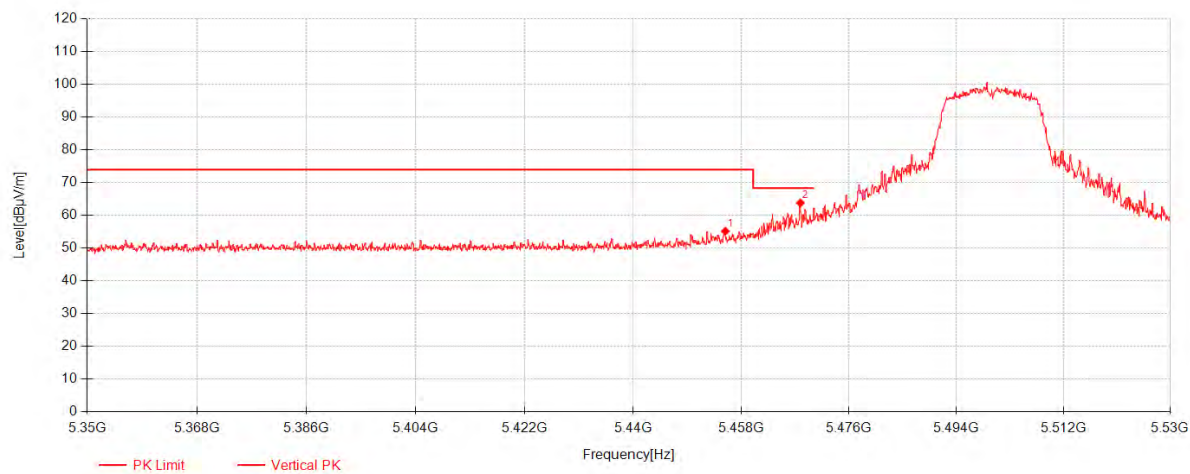


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5455.36         | 42.03          | 32.22     | -19.11      | 55.14          | 74.00          | 18.86       | Vertical |
| 2         | 5467.9          | 50.70          | 32.24     | -19.13      | 63.81          | 68.30          | 4.49        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 248 of 309

802.11a\_Channel 100

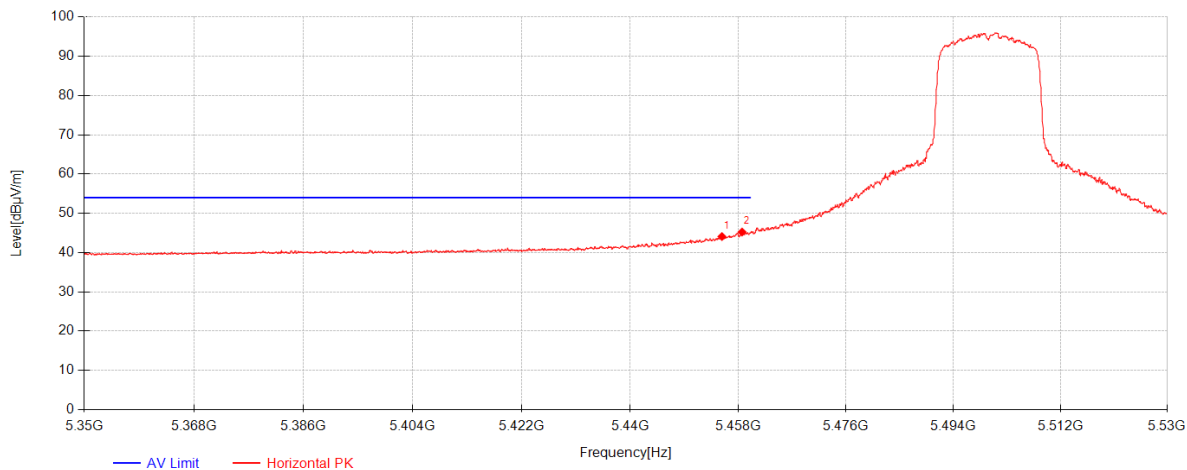


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5455.3          | 30.98          | 32.22     | -19.11      | 44.09          | 54.00          | 9.91        | Horizontal |
| 2         | 5458.66         | 32.13          | 32.23     | -19.11      | 45.24          | 54.00          | 8.76        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 249 of 309

802.11a\_Channel 100

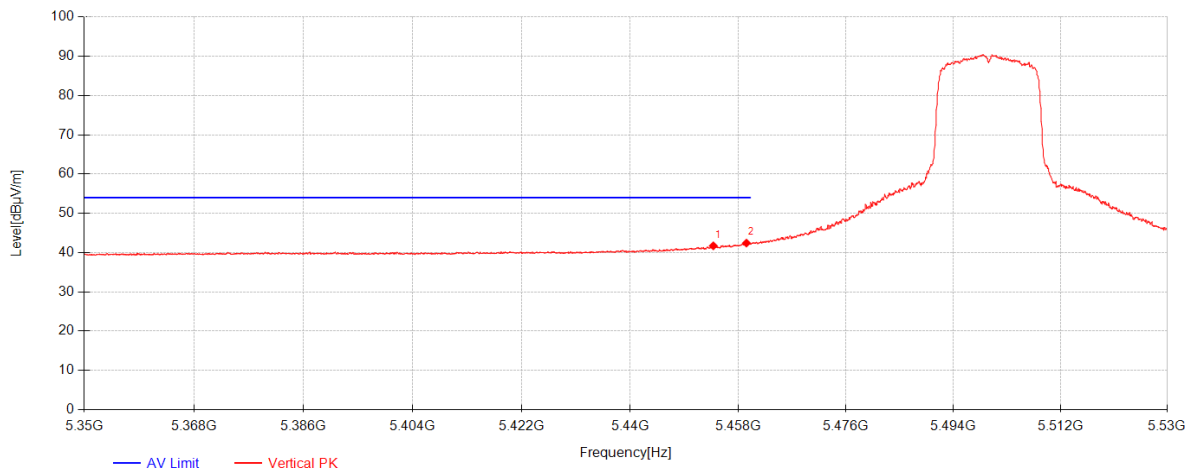


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5453.86         | 28.62          | 32.22     | -19.11      | 41.73          | 54.00          | 12.27       | Vertical |
| 2         | 5459.38         | 29.32          | 32.23     | -19.12      | 42.43          | 54.00          | 11.57       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 250 of 309

802.11a\_Channel 140

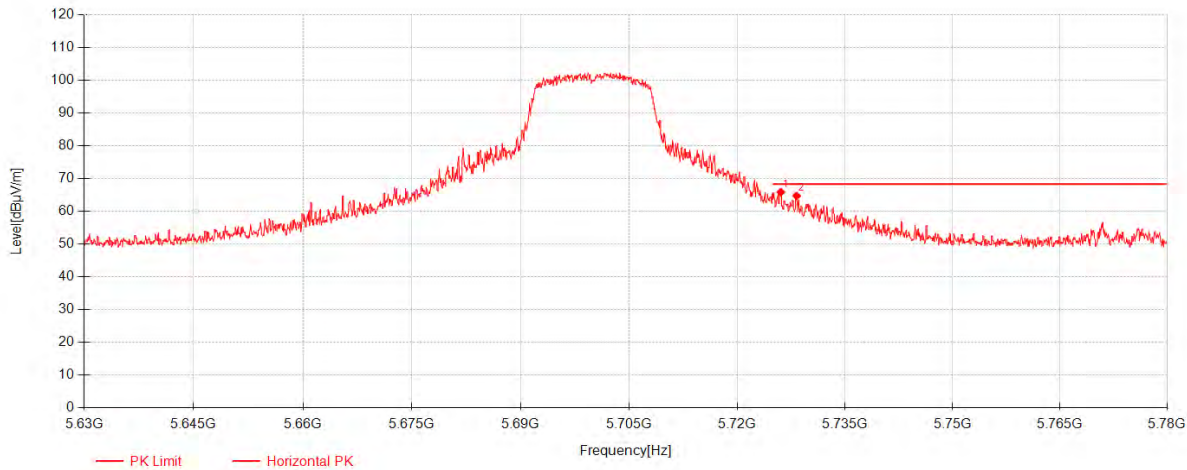


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5726.05         | 52.33          | 32.35     | -18.81      | 65.87          | 68.30          | 2.43        | Horizontal |
| 2         | 5728.25         | 51.20          | 32.35     | -18.81      | 64.73          | 68.30          | 3.57        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 251 of 309

802.11a\_Channel 140

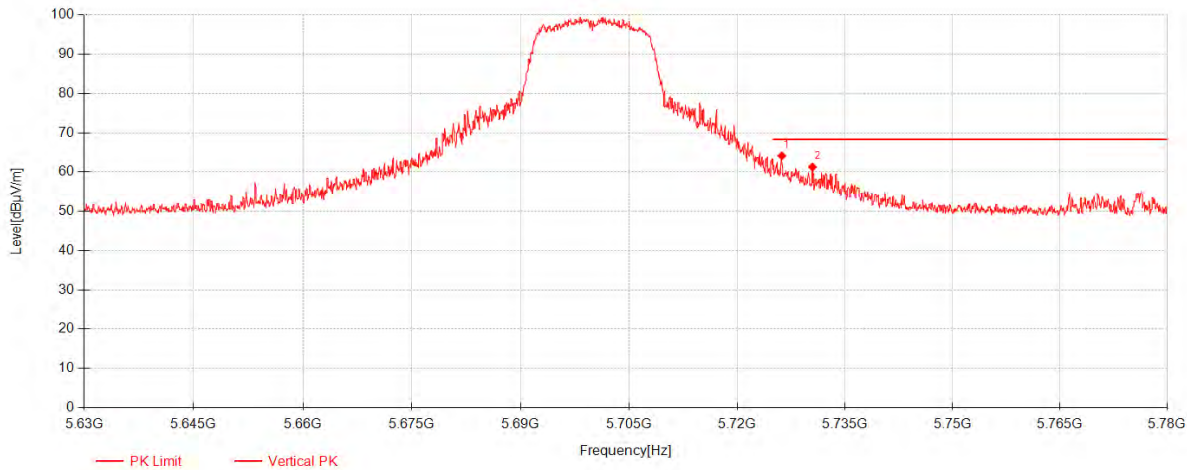


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5726.2          | 50.58          | 32.35     | -18.81      | 64.12          | 68.30          | 4.18        | Vertical |
| 2         | 5730.45         | 47.77          | 32.35     | -18.82      | 61.29          | 68.30          | 7.01        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 252 of 309

802.11a\_Channel 140

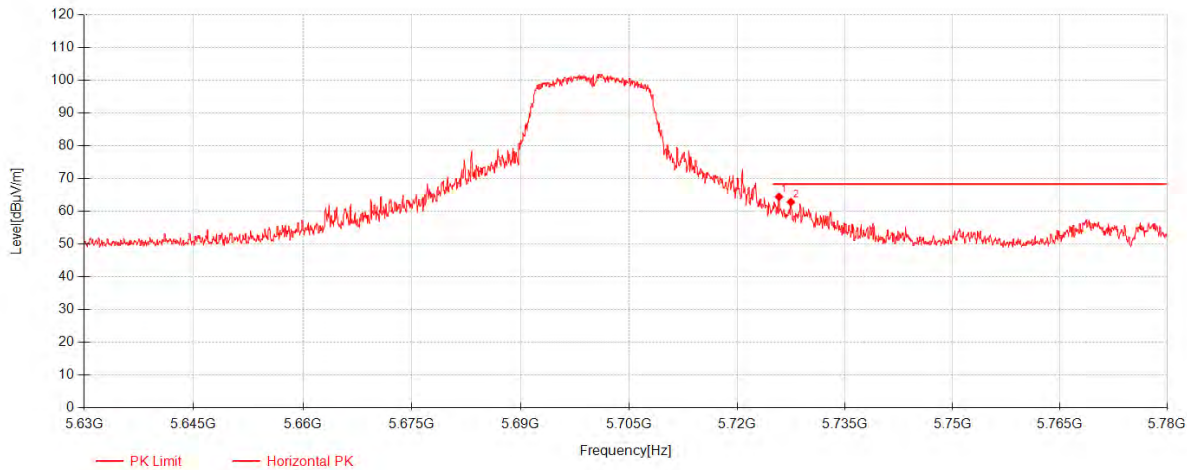


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5725.8          | 50.87          | 32.35     | -18.81      | 64.41          | 68.30          | 3.89        | Horizontal |
| 2         | 5727.45         | 49.29          | 32.35     | -18.81      | 62.82          | 68.30          | 5.48        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 253 of 309

802.11a\_Channel 140

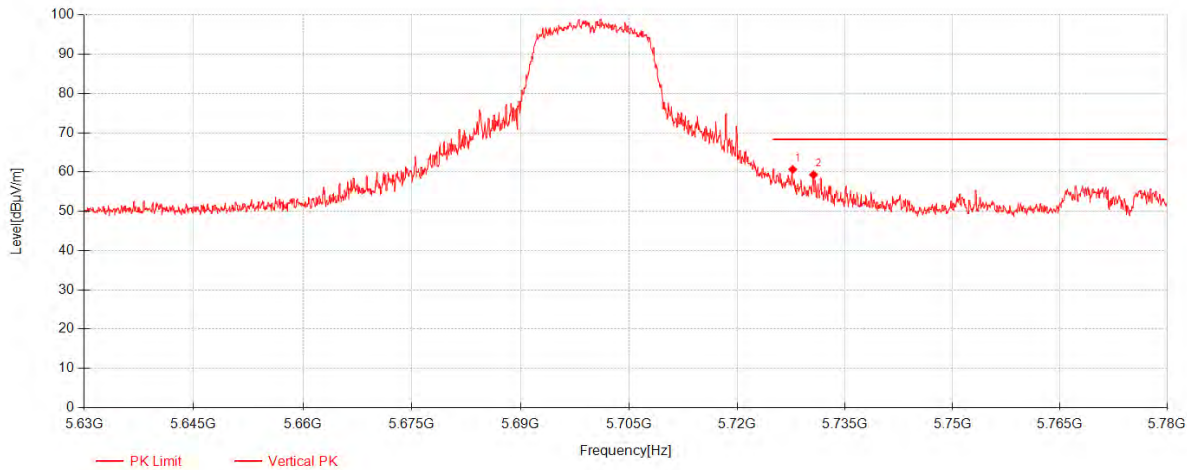

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5727.7          | 47.14          | 32.35     | -18.81      | 60.67          | 68.30          | 7.63        | Vertical |
| 2         | 5730.6          | 45.79          | 32.35     | -18.82      | 59.31          | 68.30          | 8.99        | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 254 of 309

### 802.11a\_Channel 149

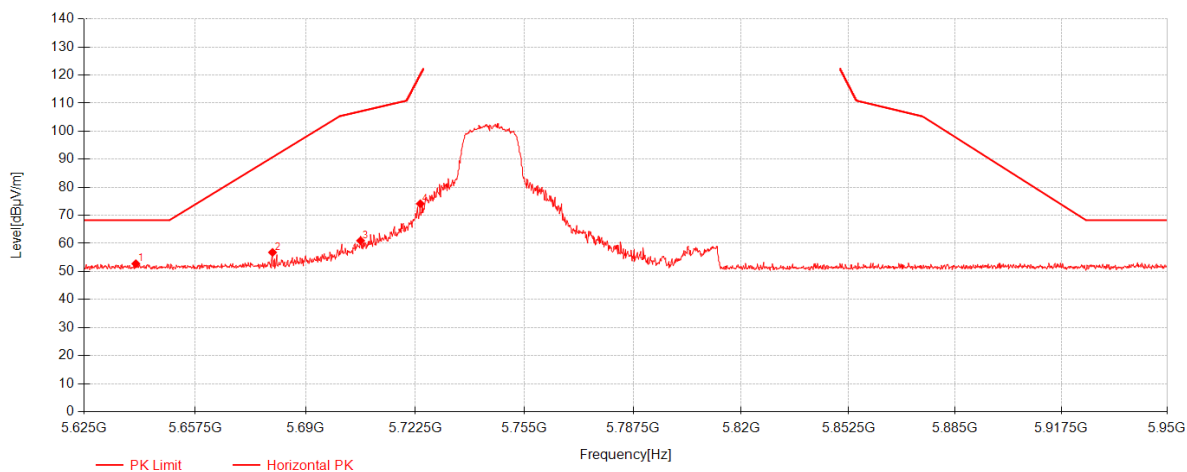


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5640.1125       | 39.16          | 32.33     | -18.72      | 52.76          | 68.30          | 15.54       | Horizontal |
| 2         | 5680.25         | 43.17          | 32.34     | -18.73      | 56.78          | 90.72          | 33.94       | Horizontal |
| 3         | 5706.25         | 47.37          | 32.34     | -18.75      | 60.96          | 107.05         | 46.09       | Horizontal |
| 4         | 5723.9625       | 60.59          | 32.34     | -18.80      | 74.13          | 119.94         | 45.81       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 255 of 309

802.11a\_Channel 149

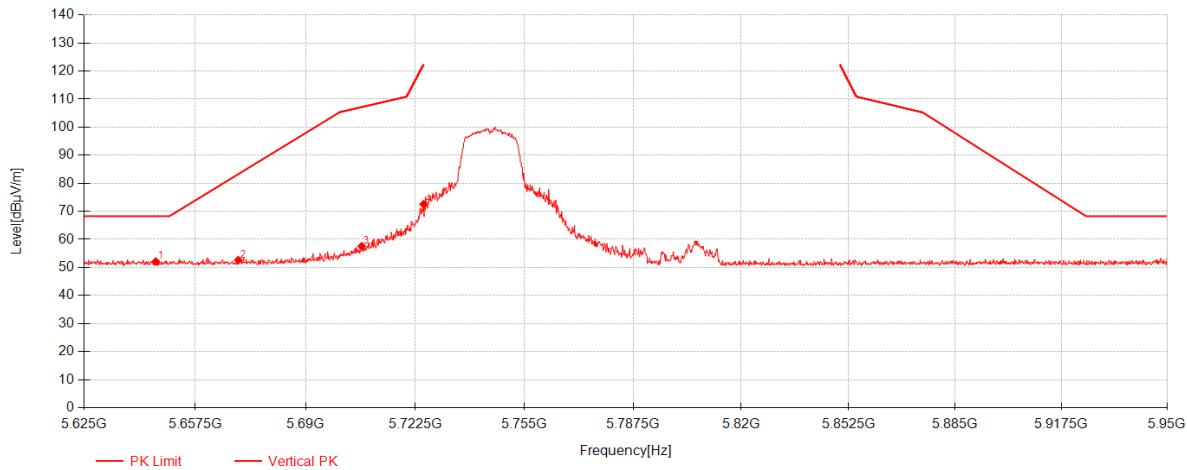

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5645.9625       | 38.49          | 32.33     | -18.72      | 52.09          | 68.30          | 16.21       | Vertical |
| 2         | 5670.175        | 39.00          | 32.33     | -18.73      | 52.61          | 83.27          | 30.66       | Vertical |
| 3         | 5706.575        | 43.98          | 32.34     | -18.75      | 57.57          | 107.14         | 49.57       | Vertical |
| 4         | 5724.9375       | 59.01          | 32.34     | -18.80      | 72.55          | 122.16         | 49.61       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 256 of 309

### 802.11a\_Channel 165

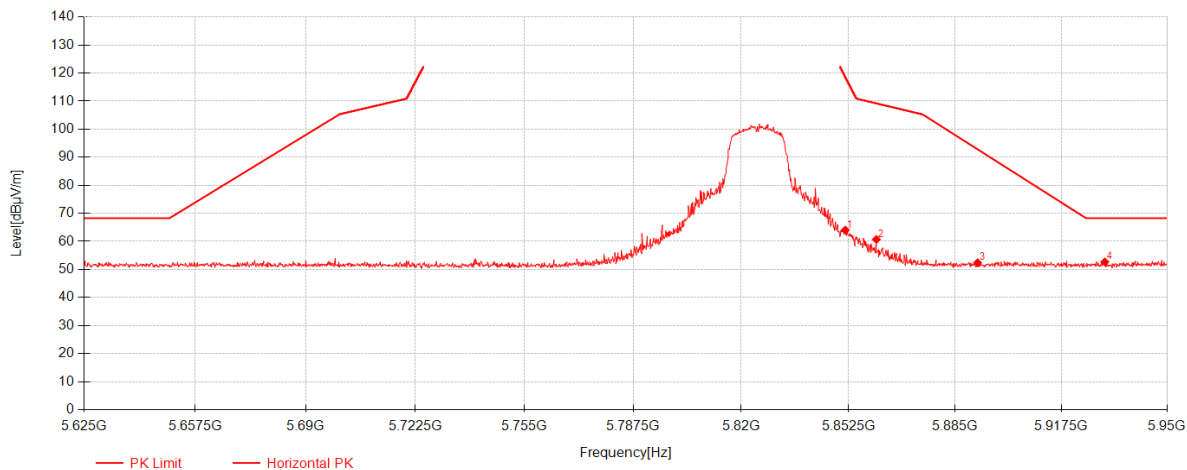


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5851.525        | 50.55          | 32.37     | -18.88      | 64.04          | 118.82         | 54.78       | Horizontal |
| 2         | 5860.95         | 47.17          | 32.37     | -18.85      | 60.69          | 109.23         | 48.54       | Horizontal |
| 3         | 5891.825        | 38.79          | 32.38     | -18.76      | 52.40          | 92.81          | 40.41       | Horizontal |
| 4         | 5930.825        | 39.10          | 32.39     | -18.80      | 52.68          | 68.30          | 15.62       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 257 of 309

802.11a\_Channel 165

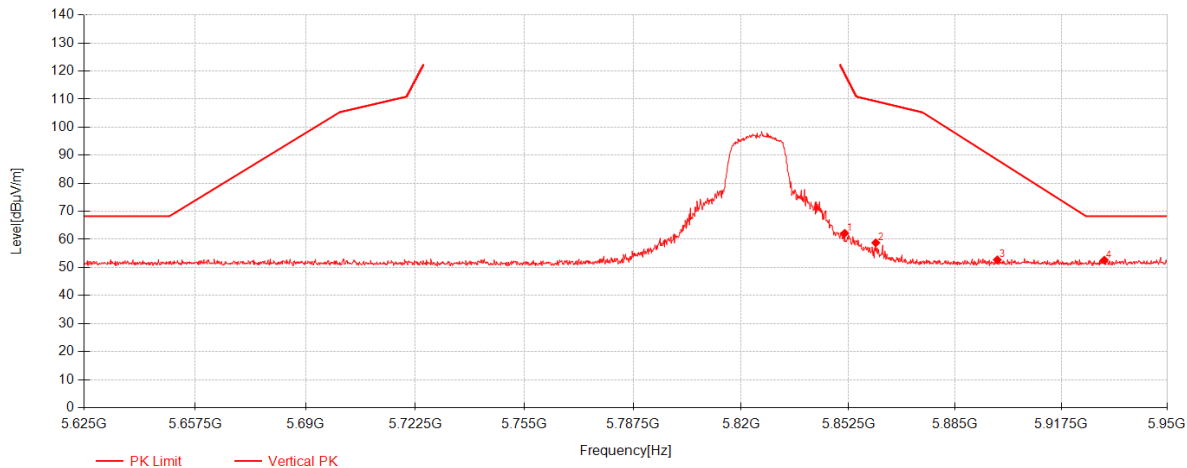


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5851.3625       | 48.71          | 32.37     | -18.88      | 62.20          | 119.19         | 56.99       | Vertical |
| 2         | 5860.7875       | 45.26          | 32.37     | -18.85      | 58.78          | 109.28         | 50.50       | Vertical |
| 3         | 5897.8375       | 39.08          | 32.38     | -18.75      | 52.71          | 88.36          | 35.65       | Vertical |
| 4         | 5930.6625       | 39.05          | 32.39     | -18.80      | 52.63          | 68.30          | 15.67       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 258 of 309

802.11c20\_Channel 36

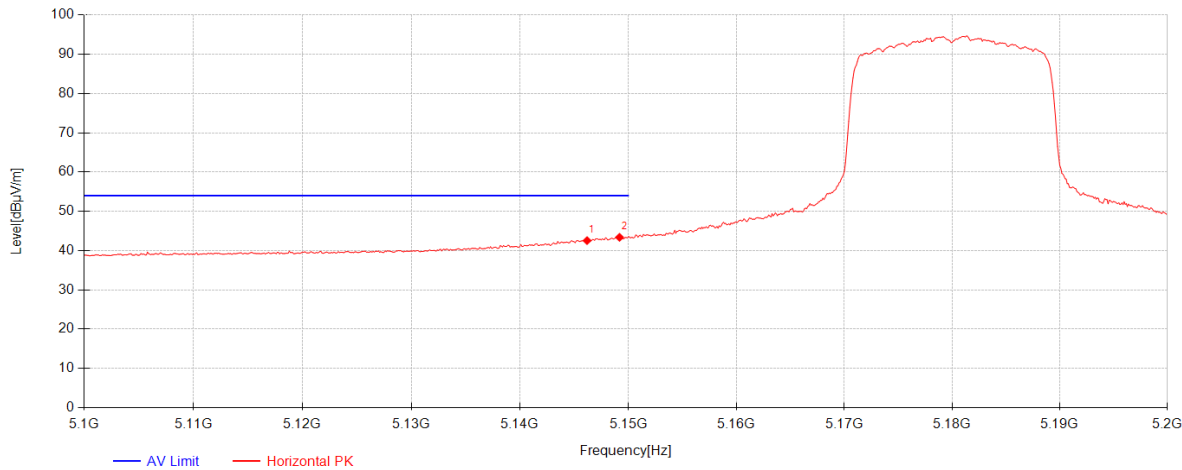


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5146.2          | 30.04          | 31.66     | -19.15      | 42.55          | 54.00          | 11.45       | Horizontal |
| 2         | 5149.2          | 30.85          | 31.67     | -19.14      | 43.38          | 54.00          | 10.62       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 259 of 309

802.11c20\_Channel 36

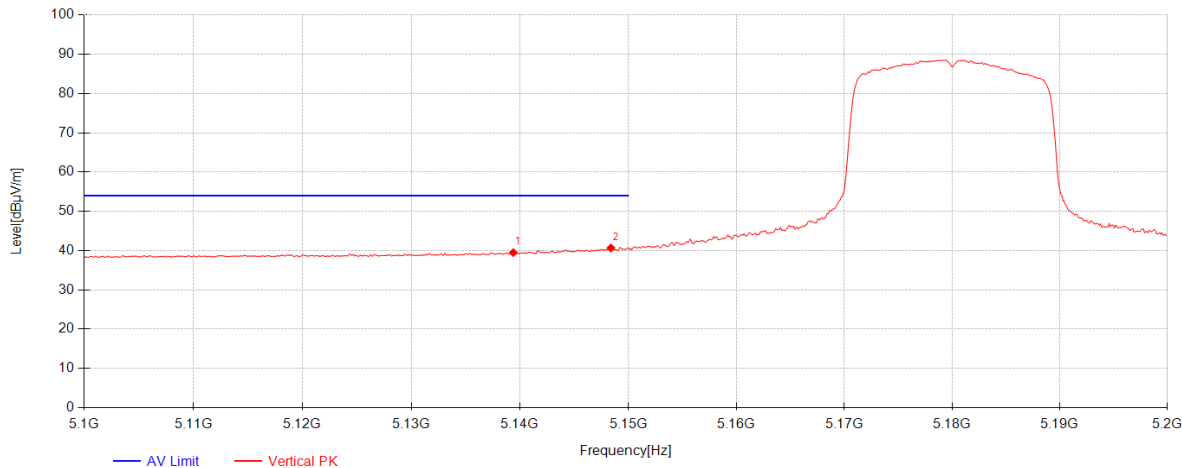


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5139.4          | 27.00          | 31.65     | -19.17      | 39.49          | 54.00          | 14.51       | Vertical |
| 2         | 5148.4          | 28.15          | 31.67     | -19.14      | 40.67          | 54.00          | 13.33       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 260 of 309

802.11c20\_Channel 36

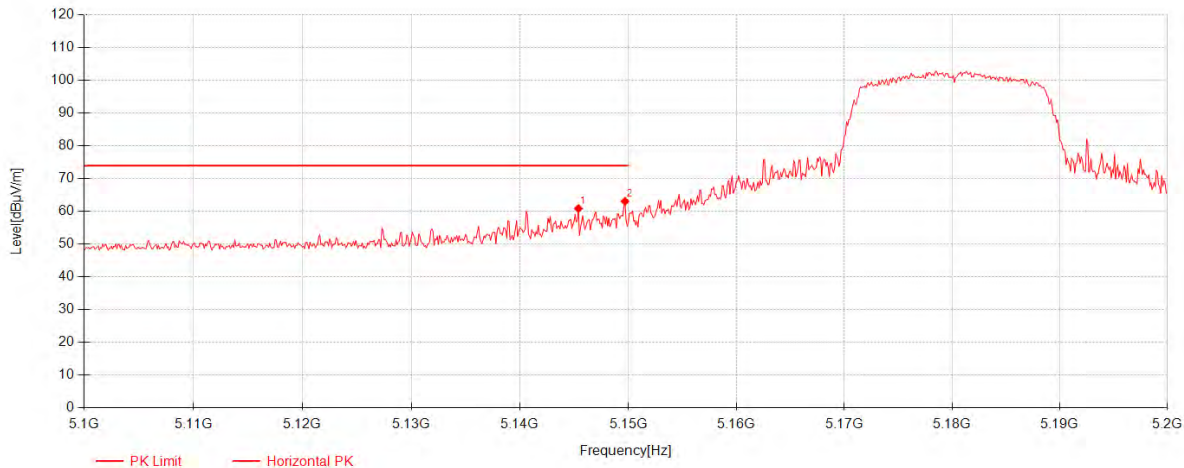


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5145.4          | 48.33          | 31.66     | -19.15      | 60.84          | 74.00          | 13.16       | Horizontal |
| 2         | 5149.7          | 50.55          | 31.67     | -19.14      | 63.08          | 74.00          | 10.92       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 261 of 309

802.11c20\_Channel 36

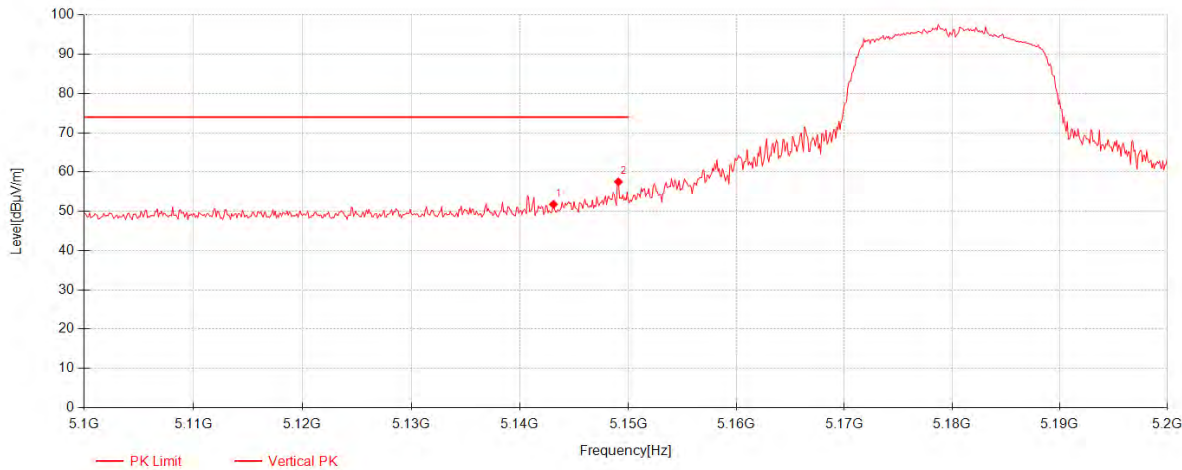

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5143.1          | 39.27          | 31.66     | -19.16      | 51.77          | 74.00          | 22.23       | Vertical |
| 2         | 5149.1          | 45.00          | 31.67     | -19.14      | 57.53          | 74.00          | 16.47       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 262 of 309

### 802.11c20\_Channel 64

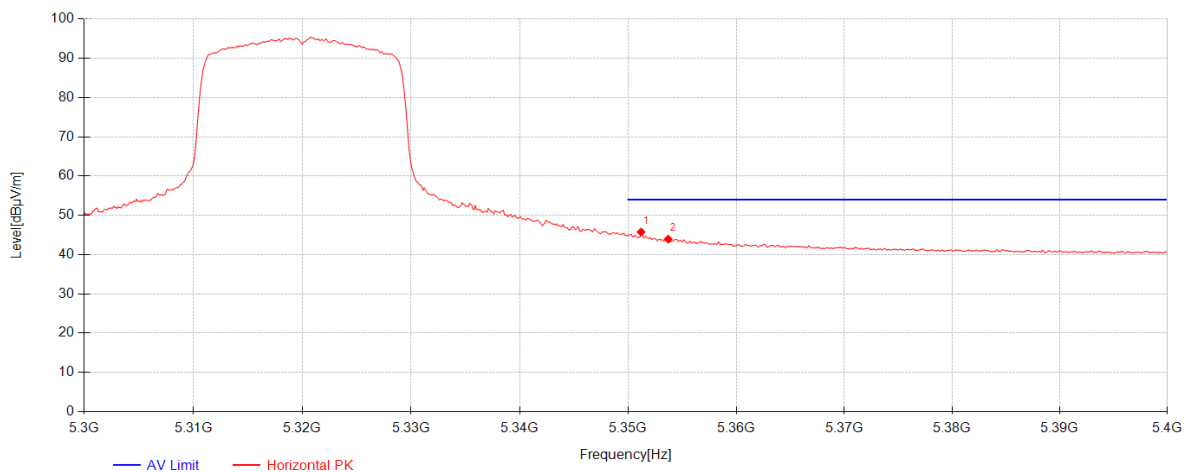


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5351.2          | 32.62          | 32.03     | -18.90      | 45.75          | 54.00          | 8.25        | Horizontal |
| 2         | 5353.7          | 30.81          | 32.04     | -18.91      | 43.94          | 54.00          | 10.06       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 263 of 309

802.11c20\_Channel 64

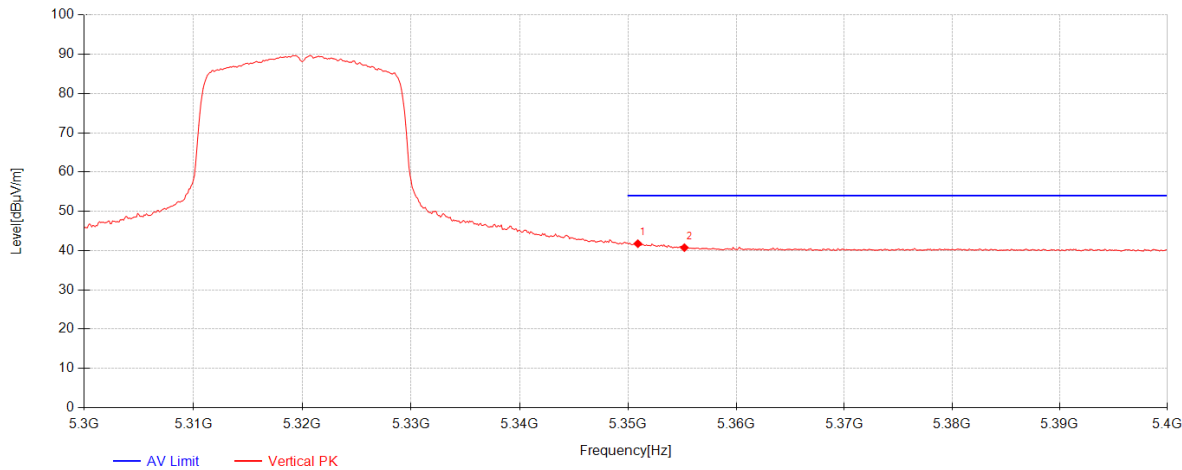


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5350.9          | 28.63          | 32.03     | -18.90      | 41.76          | 54.00          | 12.24       | Vertical |
| 2         | 5355.2          | 27.62          | 32.04     | -18.91      | 40.75          | 54.00          | 13.25       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 264 of 309

802.11c20\_Channel 64

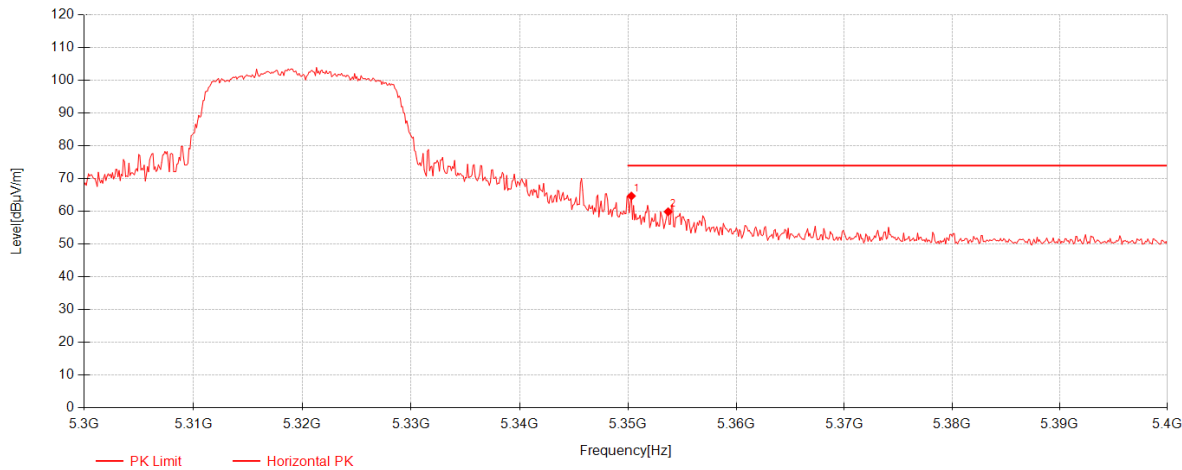


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5350.3          | 51.55          | 32.03     | -18.90      | 64.68          | 74.00          | 9.32        | Horizontal |
| 2         | 5353.7          | 46.75          | 32.04     | -18.91      | 59.88          | 74.00          | 14.12       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 265 of 309

802.11c20\_Channel 64

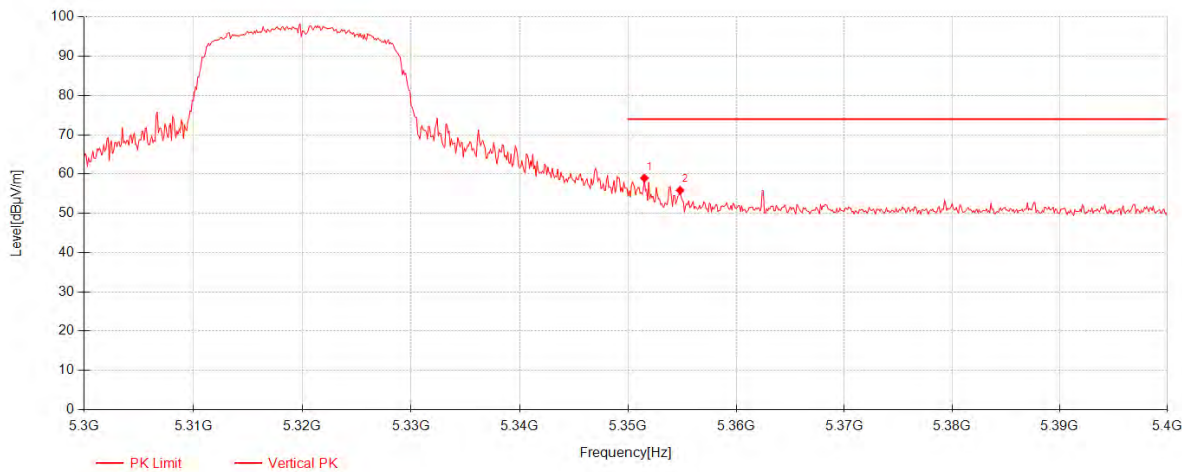


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5351.5          | 45.84          | 32.03     | -18.90      | 58.97          | 74.00          | 15.03       | Vertical |
| 2         | 5354.8          | 42.75          | 32.04     | -18.91      | 55.88          | 74.00          | 18.12       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 266 of 309

802.11c20\_Channel 100

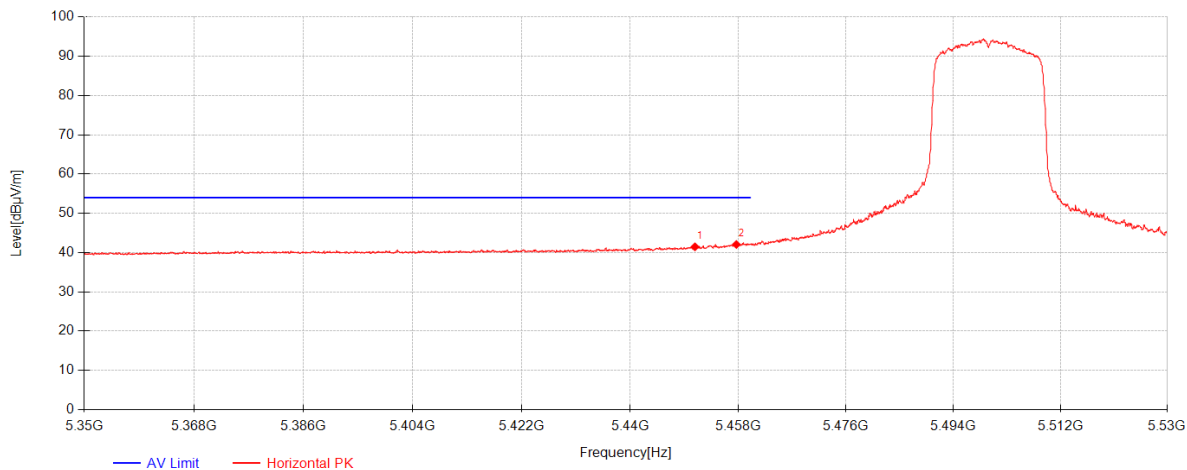


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5450.8          | 28.36          | 32.21     | -19.10      | 41.47          | 54.00          | 12.53       | Horizontal |
| 2         | 5457.7          | 28.96          | 32.22     | -19.11      | 42.07          | 54.00          | 11.93       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 267 of 309

802.11c20\_Channel 100

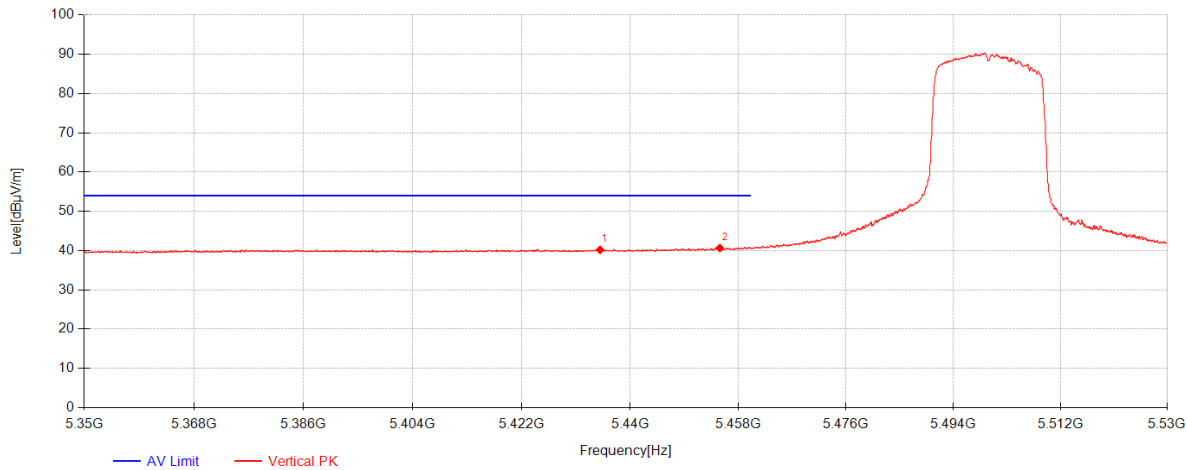


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5435.02         | 27.08          | 32.18     | -19.08      | 40.19          | 54.00          | 13.81       | Vertical |
| 2         | 5454.94         | 27.54          | 32.22     | -19.11      | 40.65          | 54.00          | 13.35       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 268 of 309

802.11c20\_Channel 100

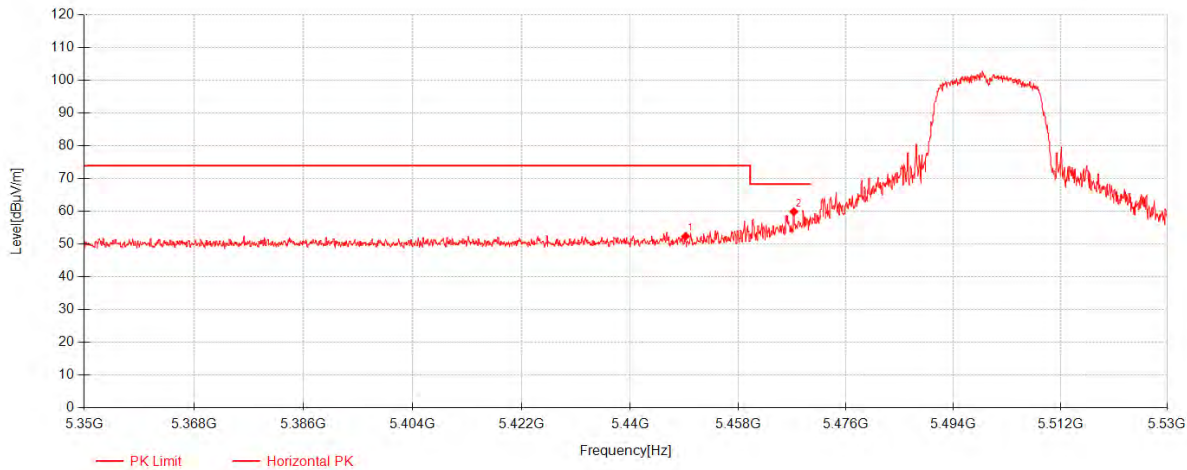


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5449.24         | 39.29          | 32.21     | -19.10      | 52.40          | 74.00          | 21.60       | Horizontal |
| 2         | 5467.3          | 46.79          | 32.24     | -19.13      | 59.90          | 68.30          | 8.40        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 269 of 309

802.11c20\_Channel 100

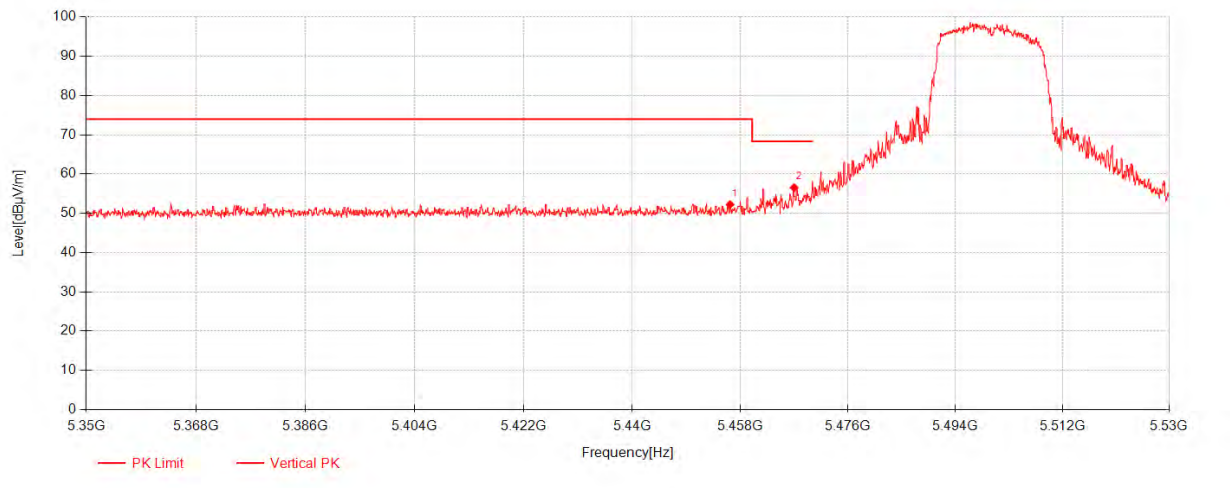


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5456.32         | 39.12          | 32.22     | -19.11      | 52.23          | 74.00          | 21.77       | Vertical |
| 2         | 5467            | 43.44          | 32.24     | -19.13      | 56.55          | 68.30          | 11.75       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 270 of 309

802.11c20\_Channel 140

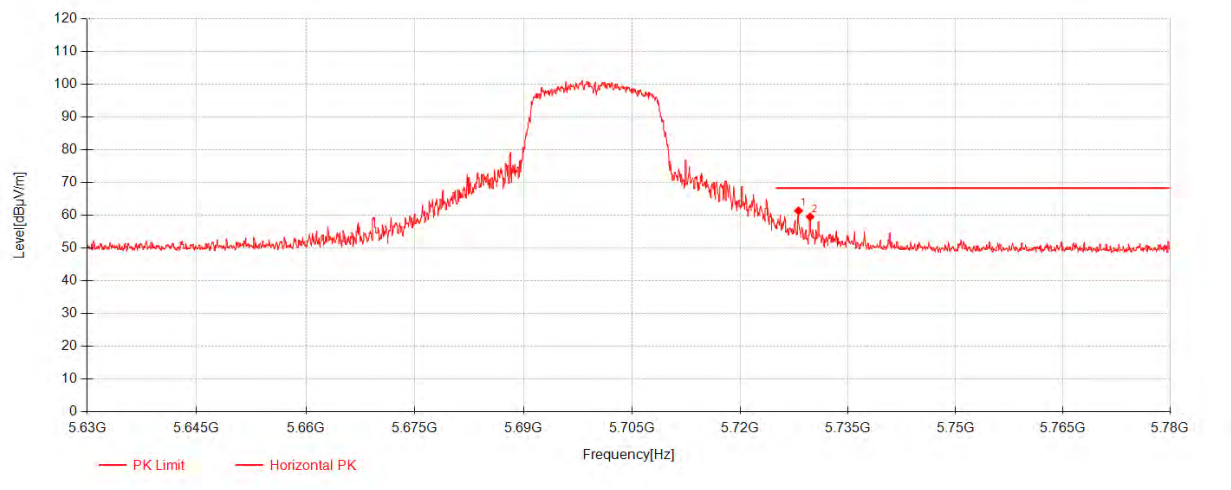


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5728.1          | 47.86          | 32.35     | -18.81      | 61.39          | 68.30          | 6.91        | Horizontal |
| 2         | 5729.7          | 46.03          | 32.35     | -18.82      | 59.56          | 68.30          | 8.74        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 271 of 309

802.11c20\_Channel 140

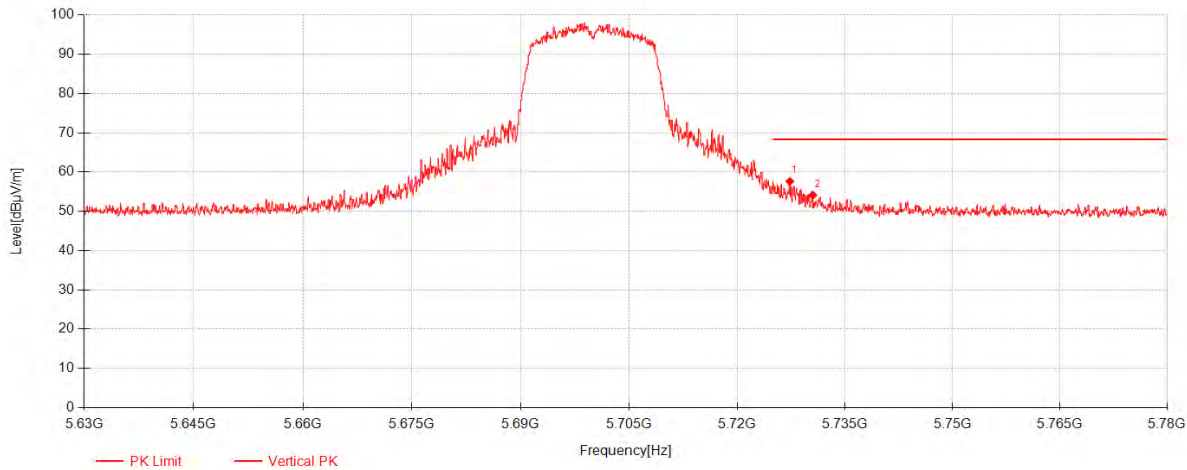

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5727.3          | 44.09          | 32.35     | -18.81      | 57.62          | 68.30          | 10.68       | Vertical |
| 2         | 5730.5          | 40.63          | 32.35     | -18.82      | 54.15          | 68.30          | 14.15       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 272 of 309

### 802.11c20\_Channel 149

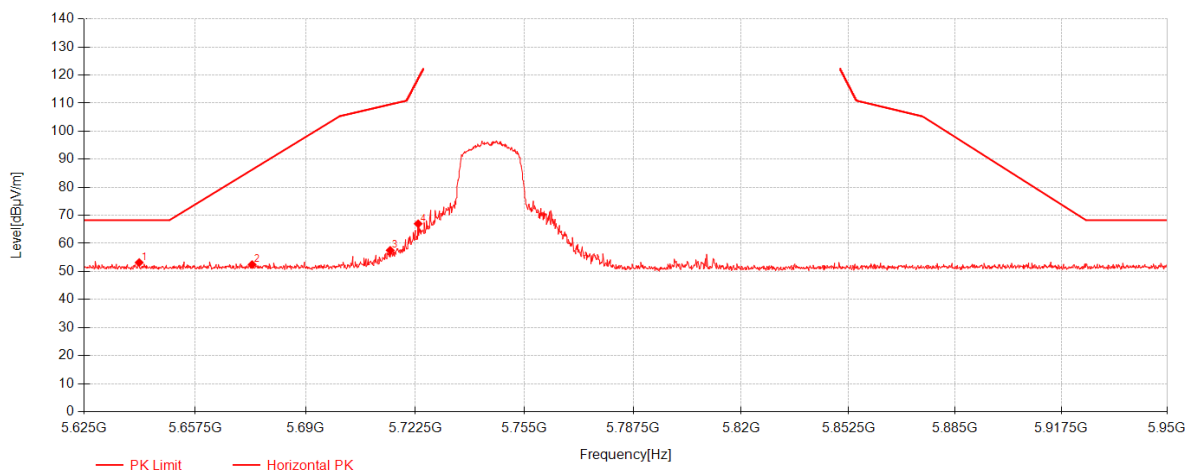

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5641.0875       | 39.56          | 32.33     | -18.72      | 53.16          | 68.30          | 15.14       | Horizontal |
| 2         | 5674.2375       | 38.83          | 32.33     | -18.73      | 52.44          | 86.28          | 33.84       | Horizontal |
| 3         | 5715.025        | 43.96          | 32.34     | -18.78      | 57.53          | 109.51         | 51.98       | Horizontal |
| 4         | 5723.3125       | 53.47          | 32.34     | -18.80      | 67.01          | 118.45         | 51.44       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 273 of 309

### 802.11c20\_Channel 149

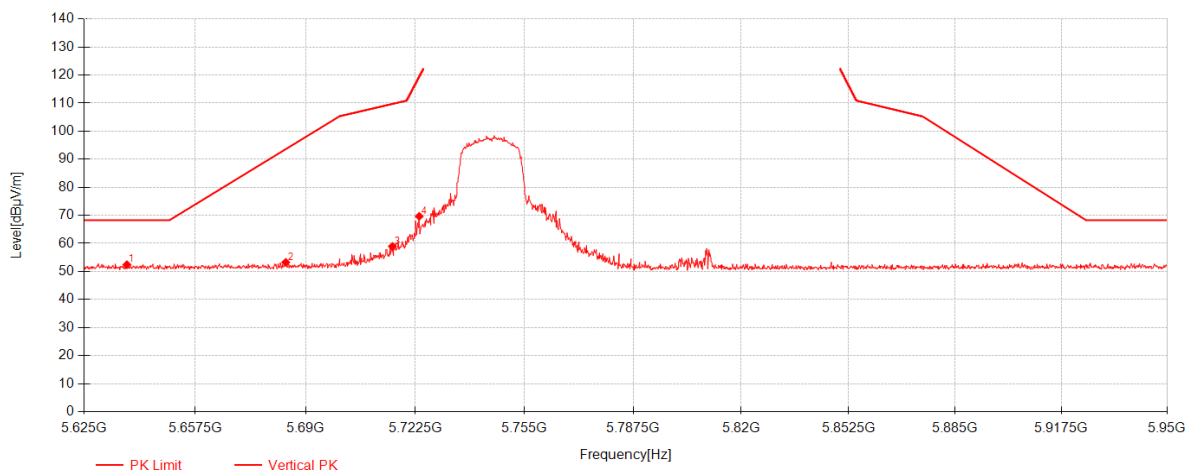


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5637.5125       | 38.79          | 32.33     | -18.72      | 52.39          | 68.30          | 15.91       | Vertical |
| 2         | 5684.15         | 39.62          | 32.34     | -18.73      | 53.23          | 93.61          | 40.38       | Vertical |
| 3         | 5715.675        | 45.36          | 32.34     | -18.78      | 58.93          | 109.69         | 50.76       | Vertical |
| 4         | 5723.6375       | 56.12          | 32.34     | -18.80      | 69.66          | 119.19         | 49.53       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 274 of 309

802.11c20\_Channel 165

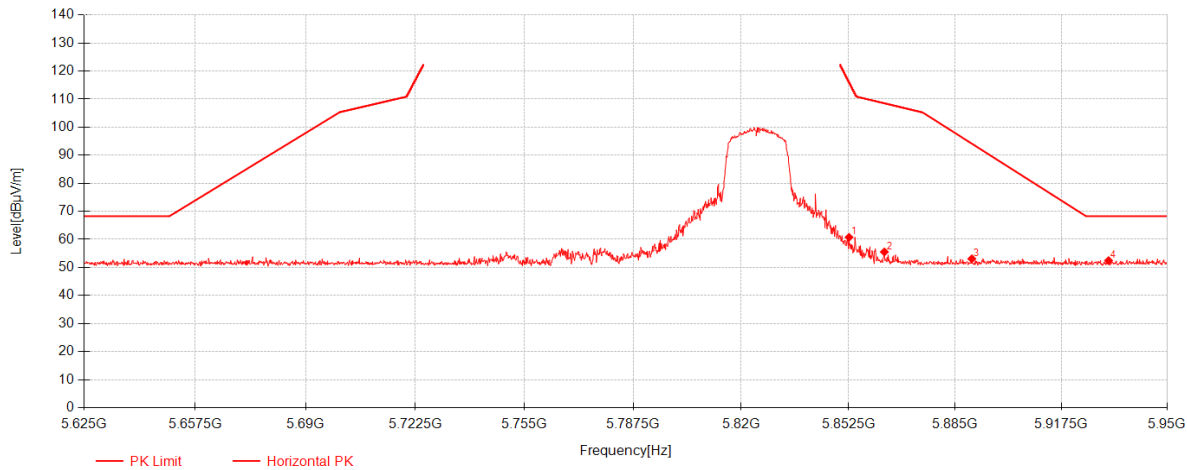


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5852.6625       | 47.27          | 32.37     | -18.88      | 60.76          | 116.23         | 55.47       | Horizontal |
| 2         | 5863.3875       | 42.01          | 32.37     | -18.85      | 55.54          | 108.55         | 53.01       | Horizontal |
| 3         | 5890.0375       | 39.48          | 32.38     | -18.77      | 53.09          | 94.14          | 41.05       | Horizontal |
| 4         | 5931.9625       | 38.85          | 32.39     | -18.81      | 52.43          | 68.30          | 15.87       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 275 of 309

802.11c20\_Channel 165

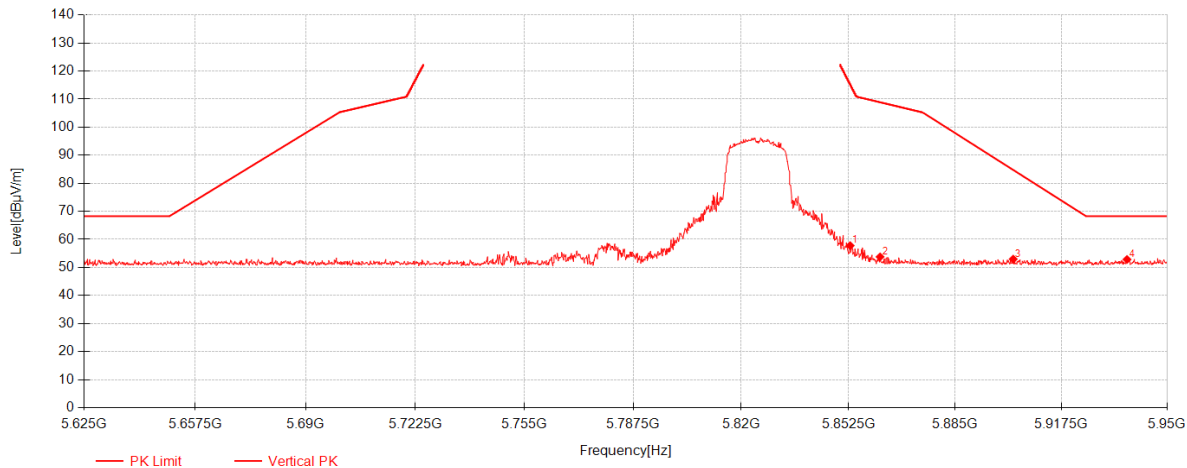


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5852.9875       | 44.29          | 32.37     | -18.88      | 57.78          | 115.49         | 57.71       | Vertical |
| 2         | 5862.0875       | 40.26          | 32.37     | -18.85      | 53.78          | 108.91         | 55.13       | Vertical |
| 3         | 5902.7125       | 39.34          | 32.38     | -18.75      | 52.97          | 84.75          | 31.78       | Vertical |
| 4         | 5937.65         | 39.28          | 32.39     | -18.82      | 52.85          | 68.30          | 15.45       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 276 of 309

802.11ac40\_Channel 38

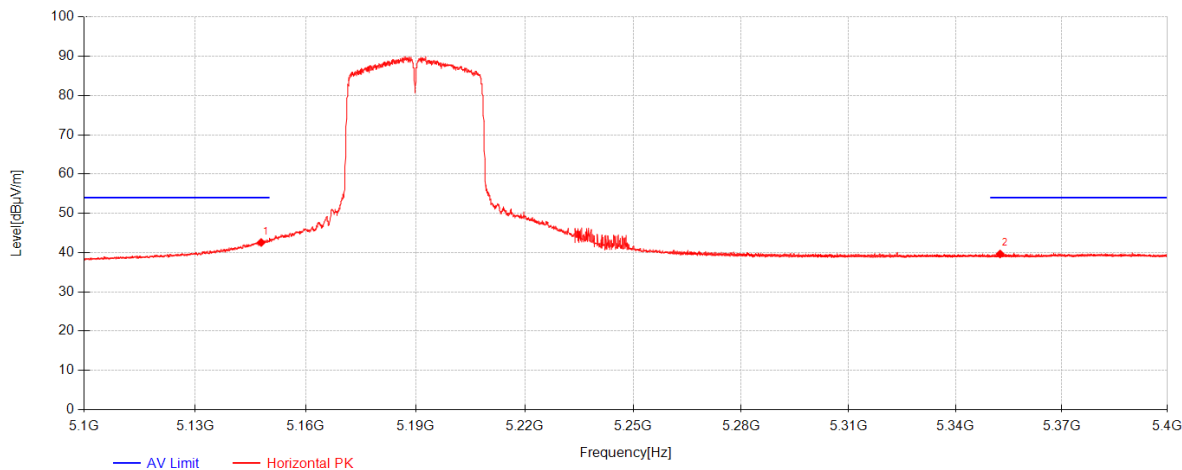


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5147.8933       | 30.05          | 31.67     | -19.15      | 42.57          | 54.00          | 11.43       | Horizontal |
| 2         | 5352.6275       | 26.52          | 32.03     | -18.91      | 39.65          | 54.00          | 14.35       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 277 of 309

802.11ac40\_Channel 38

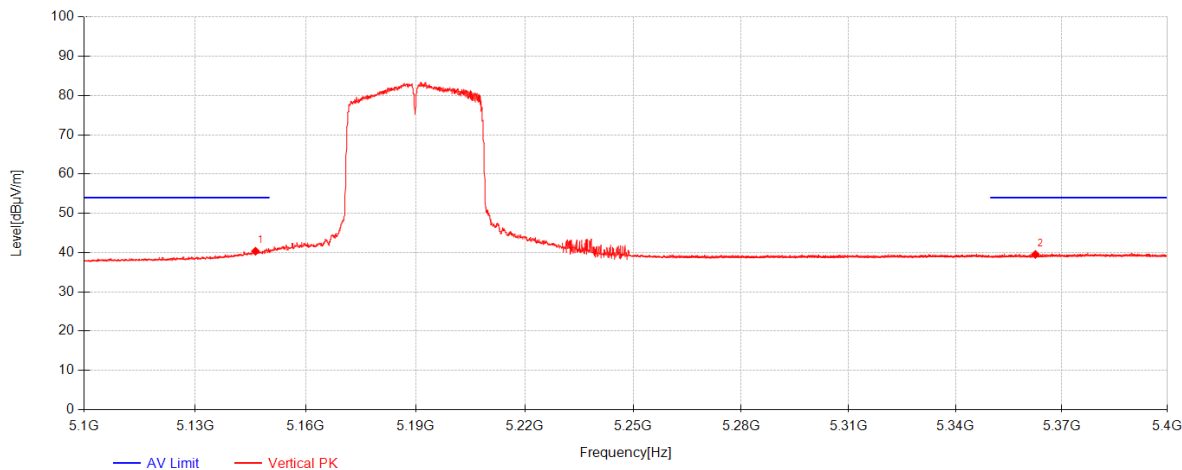


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5146.3467       | 27.84          | 31.66     | -19.15      | 40.35          | 54.00          | 13.65       | Vertical |
| 2         | 5362.6025       | 26.41          | 32.05     | -18.93      | 39.53          | 54.00          | 14.47       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 278 of 309

802.11ac40\_Channel 38

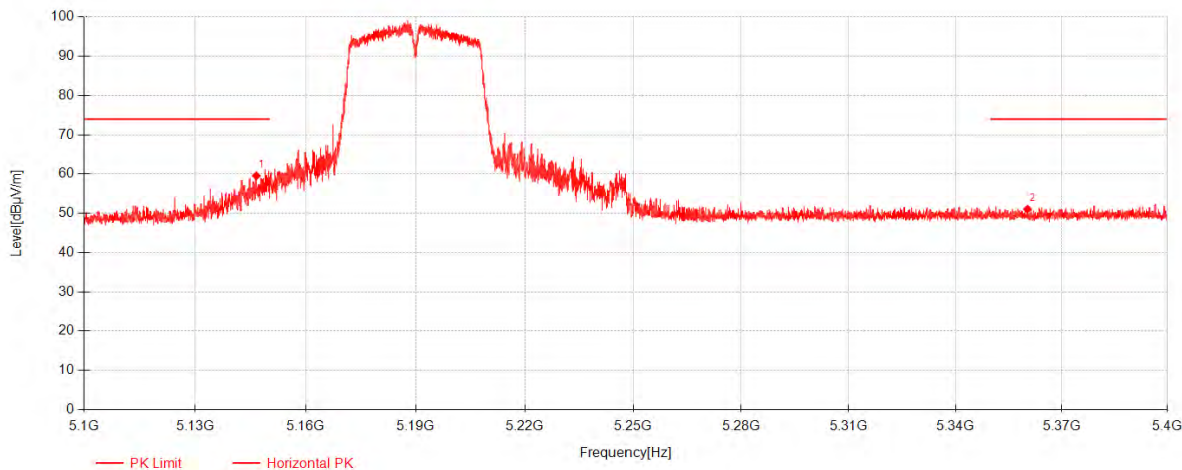


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5146.58         | 47.03          | 31.66     | -19.15      | 59.55          | 74.00          | 14.45       | Horizontal |
| 2         | 5360.3625       | 37.94          | 32.05     | -18.92      | 51.06          | 74.00          | 22.94       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 279 of 309

802.11ac40\_Channel 38

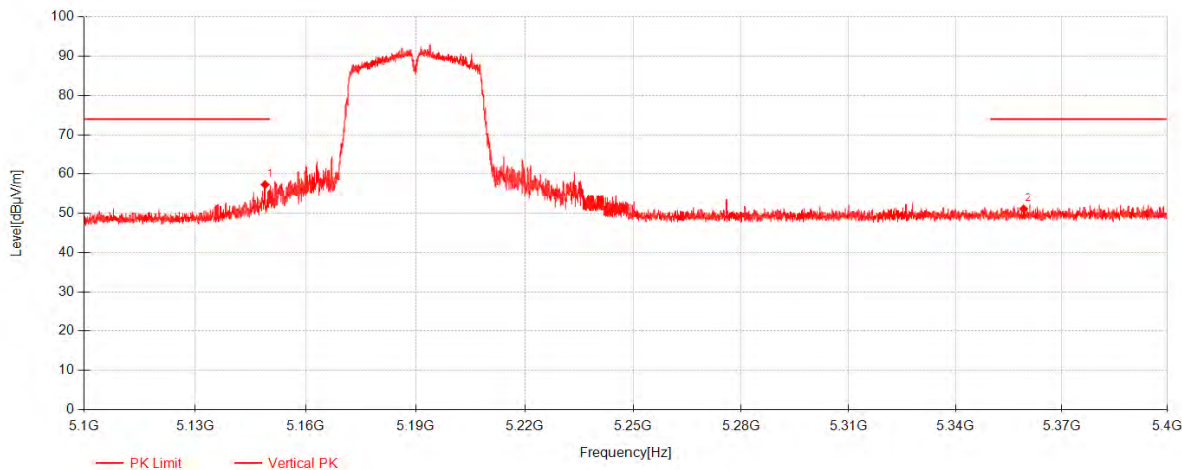


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5148.94         | 44.79          | 31.67     | -19.14      | 57.32          | 74.00          | 16.68       | Vertical |
| 2         | 5359.26         | 38.03          | 32.05     | -18.92      | 51.15          | 74.00          | 22.85       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 280 of 309

802.11ac40\_Channel 62

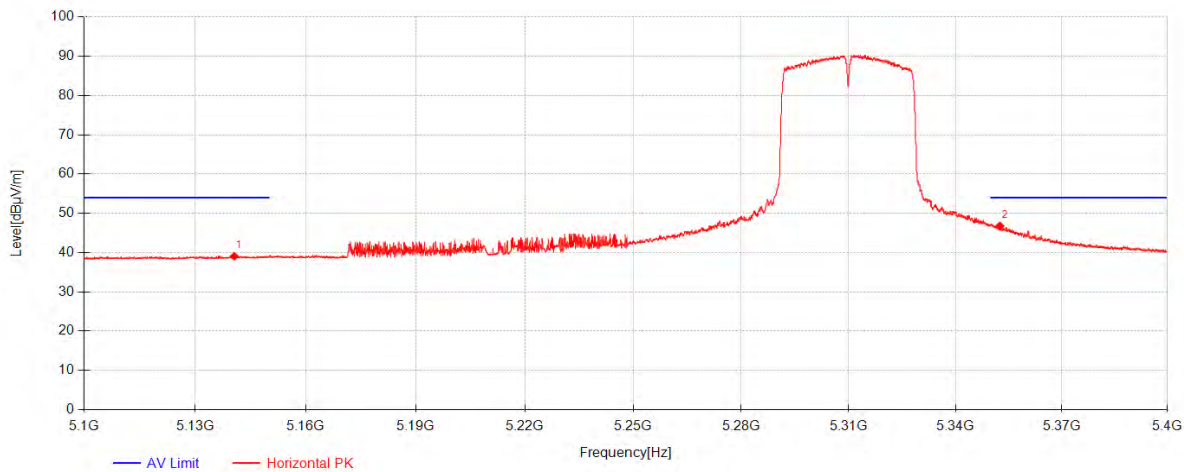


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5140.6          | 26.58          | 31.65     | -19.16      | 39.07          | 54.00          | 14.93       | Horizontal |
| 2         | 5352.55         | 33.66          | 32.03     | -18.91      | 46.79          | 54.00          | 7.21        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 281 of 309

802.11ac40\_Channel 62

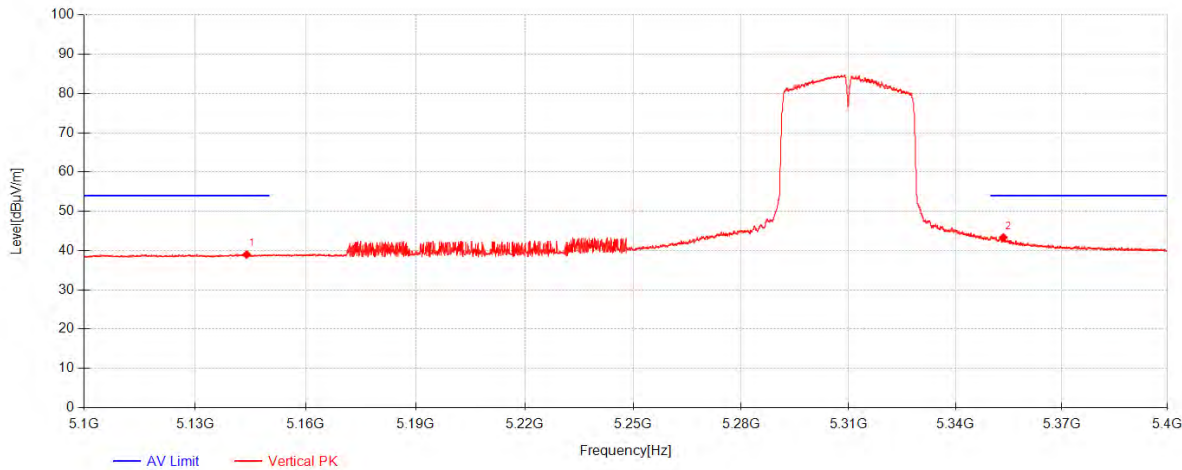


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5143.95         | 26.48          | 31.66     | -19.15      | 38.98          | 54.00          | 15.02       | Vertical |
| 2         | 5353.55         | 30.21          | 32.04     | -18.91      | 43.34          | 54.00          | 10.66       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 282 of 309

802.11ac40\_Channel 62

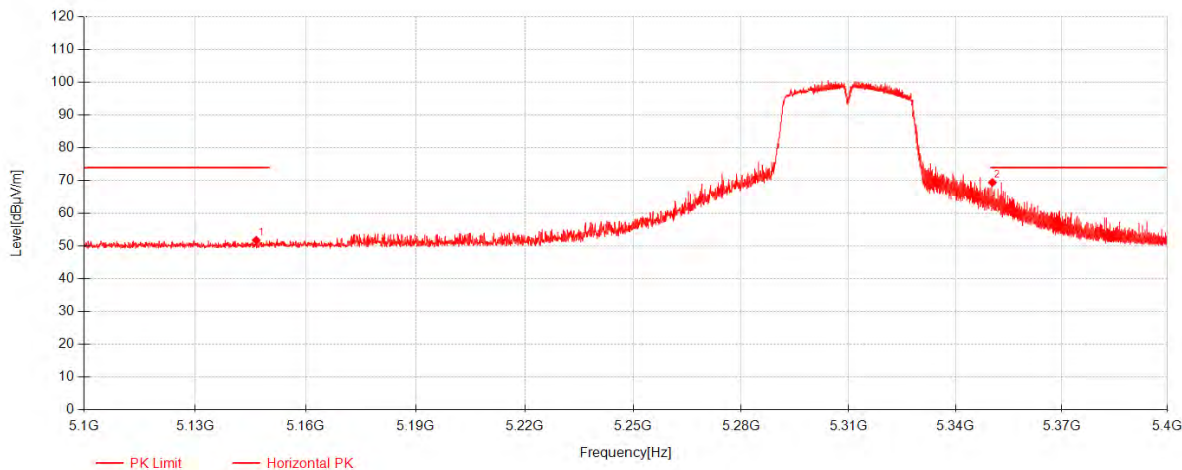


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5146.5333       | 39.28          | 31.66     | -19.15      | 51.80          | 74.00          | 22.20       | Horizontal |
| 2         | 5350.45         | 56.30          | 32.03     | -18.90      | 69.43          | 74.00          | 4.57        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 283 of 309

802.11ac40\_Channel 62

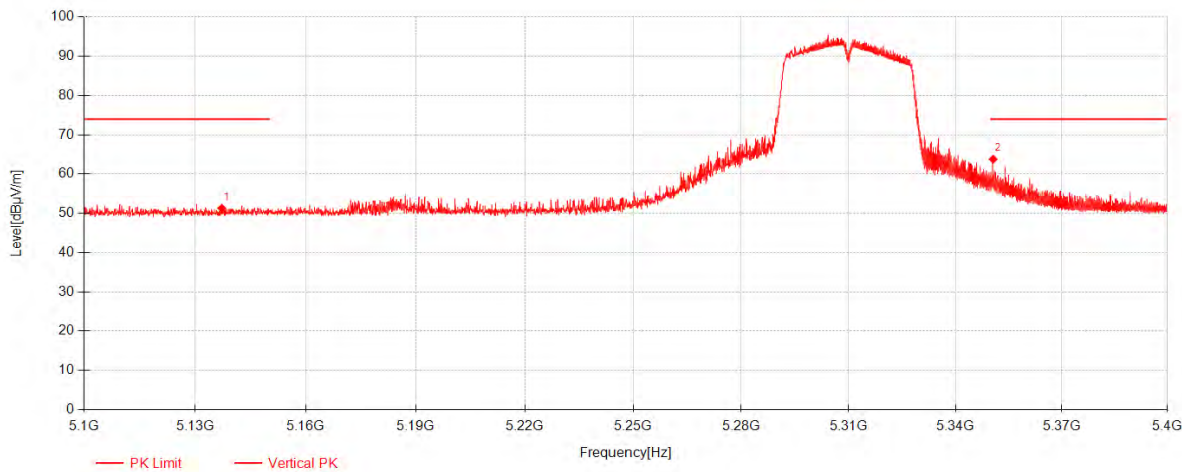


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5137.2          | 38.83          | 31.65     | -19.17      | 51.31          | 74.00          | 22.69       | Vertical |
| 2         | 5350.6625       | 50.66          | 32.03     | -18.90      | 63.79          | 74.00          | 10.21       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 284 of 309

802.11ac40\_Channel 102

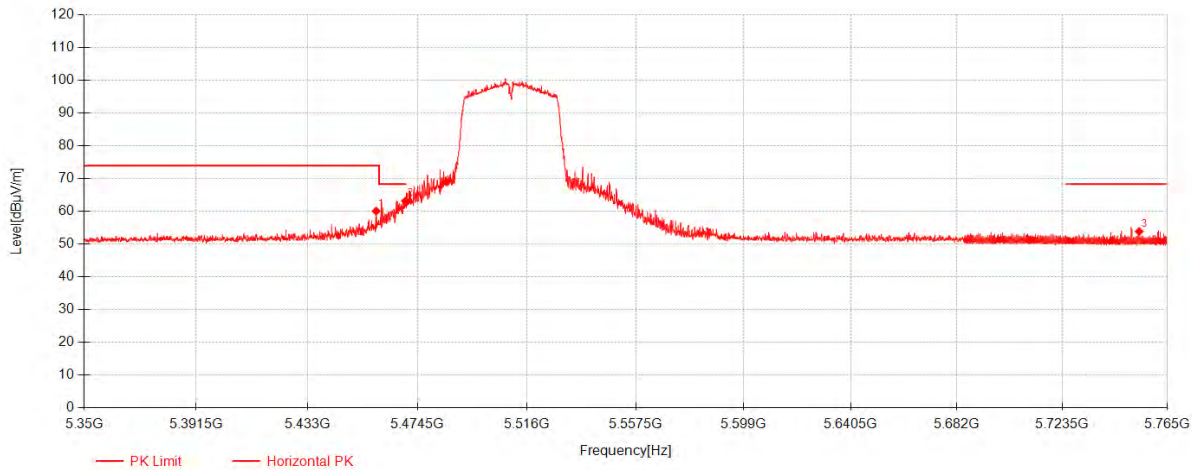


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5458.875        | 46.97          | 32.23     | -19.11      | 60.08          | 74.00          | 13.92       | Horizontal |
| 2         | 5469.93         | 50.08          | 32.25     | -19.13      | 63.19          | 68.30          | 5.11        | Horizontal |
| 3         | 5753.94         | 40.37          | 32.35     | -18.89      | 53.83          | 68.30          | 14.47       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 285 of 309

802.11ac40\_Channel 102

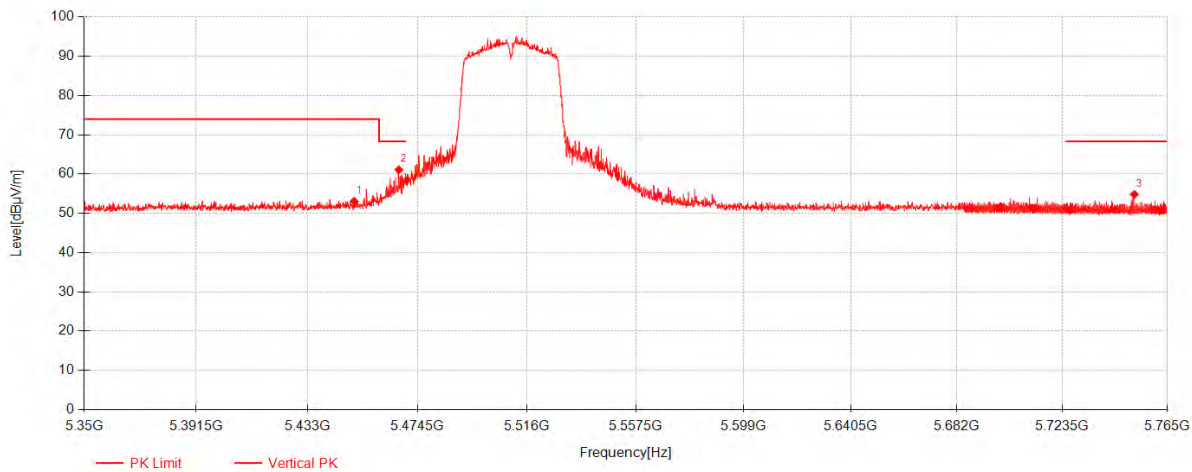


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5450.6117       | 39.96          | 32.21     | -19.10      | 53.07          | 74.00          | 20.93       | Vertical |
| 2         | 5467.4733       | 47.98          | 32.24     | -19.13      | 61.09          | 68.30          | 7.21        | Vertical |
| 3         | 5752.04         | 41.33          | 32.35     | -18.89      | 54.79          | 68.30          | 13.51       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 286 of 309

802.11ac40\_Channel 102

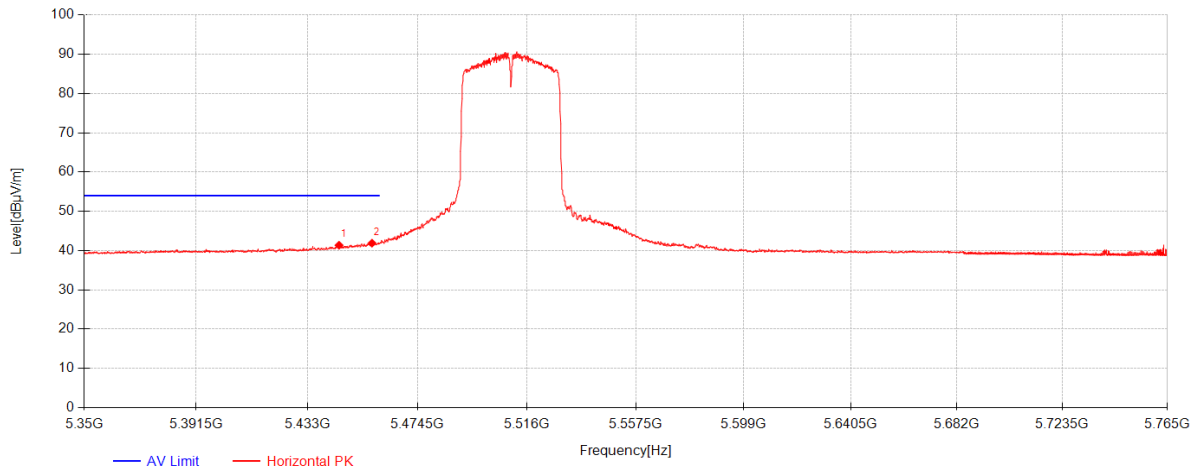


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5444.9167       | 28.25          | 32.20     | -19.09      | 41.36          | 54.00          | 12.64       | Horizontal |
| 2         | 5457.3117       | 28.78          | 32.22     | -19.11      | 41.89          | 54.00          | 12.11       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 287 of 309

802.11ac40\_Channel 102

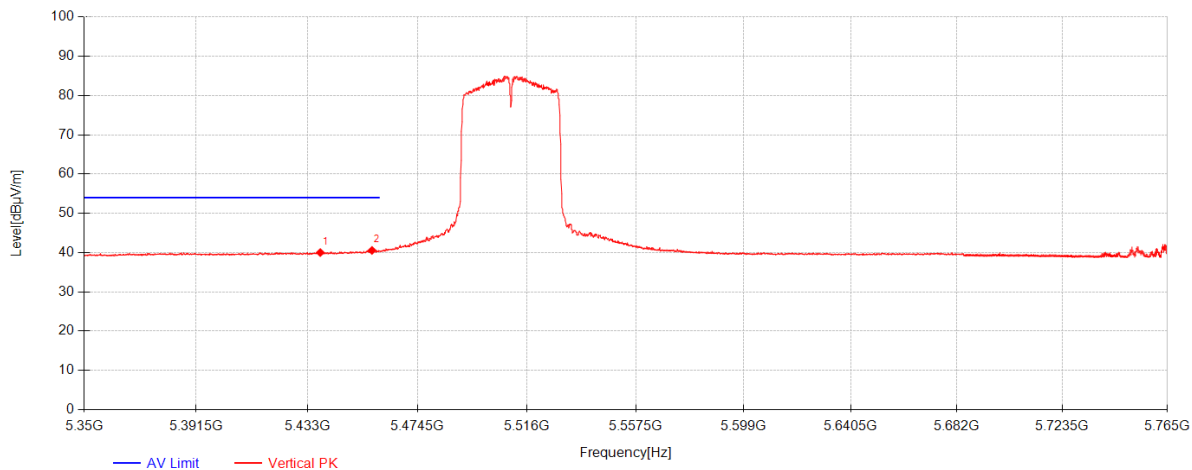


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5437.8817       | 26.90          | 32.19     | -19.08      | 40.01          | 54.00          | 13.99       | Vertical |
| 2         | 5457.3117       | 27.45          | 32.22     | -19.11      | 40.56          | 54.00          | 13.44       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 288 of 309

802.11ac40\_Channel 134

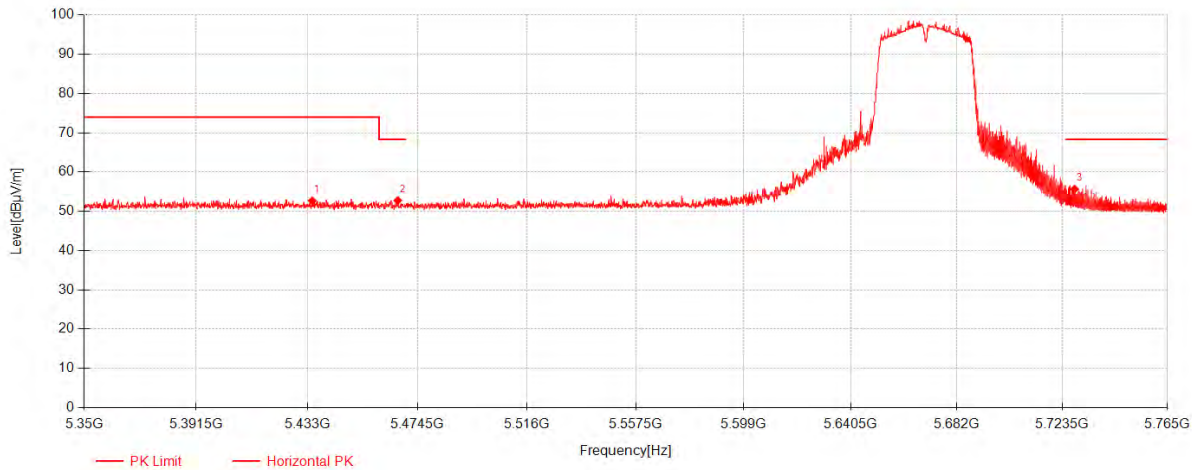


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5434.8667       | 39.59          | 32.18     | -19.08      | 52.70          | 74.00          | 21.30       | Horizontal |
| 2         | 5467.0267       | 39.66          | 32.24     | -19.13      | 52.77          | 68.30          | 15.53       | Horizontal |
| 3         | 5728.37         | 42.15          | 32.35     | -18.82      | 55.68          | 68.30          | 12.62       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 289 of 309

802.11ac40\_Channel 134

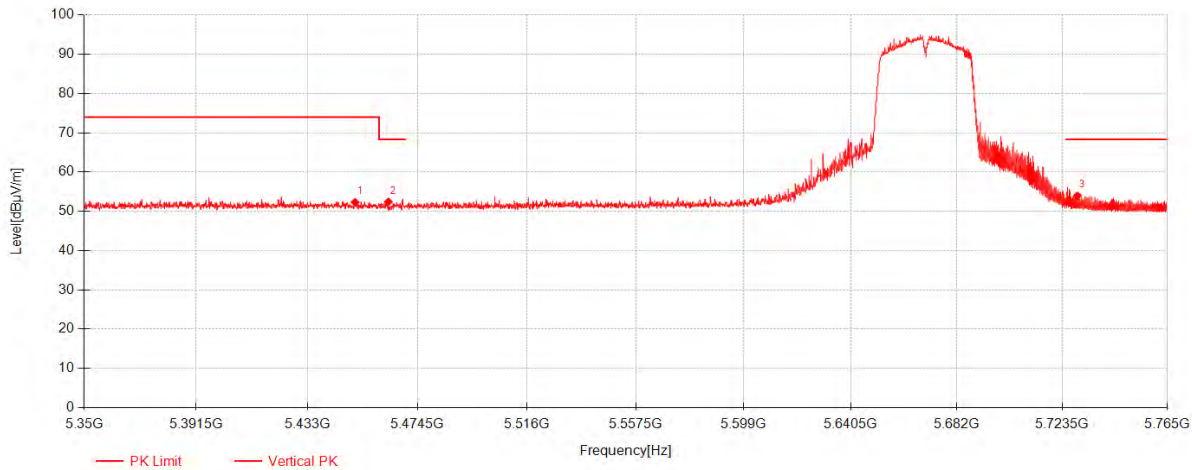


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5450.9467       | 39.21          | 32.21     | -19.10      | 52.32          | 74.00          | 21.68       | Vertical |
| 2         | 5463.4533       | 39.30          | 32.23     | -19.12      | 52.41          | 68.30          | 15.89       | Vertical |
| 3         | 5729.47         | 40.44          | 32.35     | -18.82      | 53.97          | 68.30          | 14.33       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 290 of 309

802.11ac40\_Channel 134

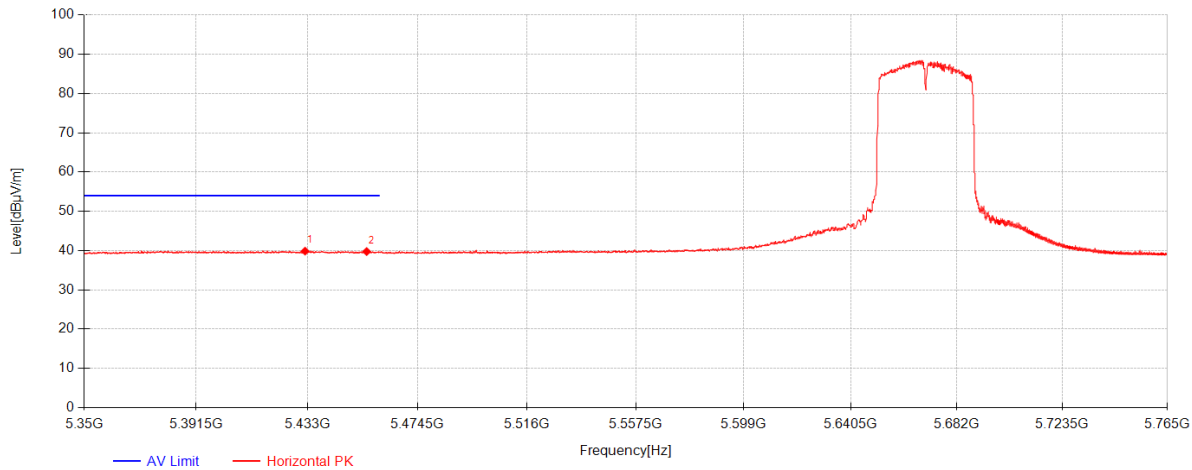


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5432.1867       | 26.76          | 32.18     | -19.07      | 39.87          | 54.00          | 14.13       | Horizontal |
| 2         | 5455.3017       | 26.65          | 32.22     | -19.11      | 39.76          | 54.00          | 14.24       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 291 of 309

802.11ac40\_Channel 134

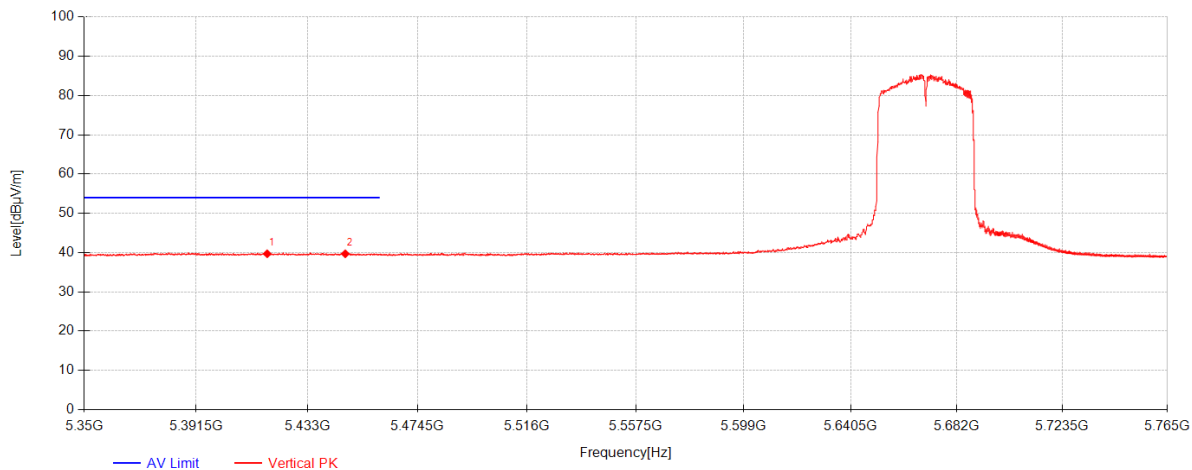

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5418.005        | 26.60          | 32.15     | -19.05      | 39.70          | 54.00          | 14.30       | Vertical |
| 2         | 5447.2617       | 26.59          | 32.21     | -19.10      | 39.70          | 54.00          | 14.30       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 292 of 309

### 802.11ac40\_Channel 151

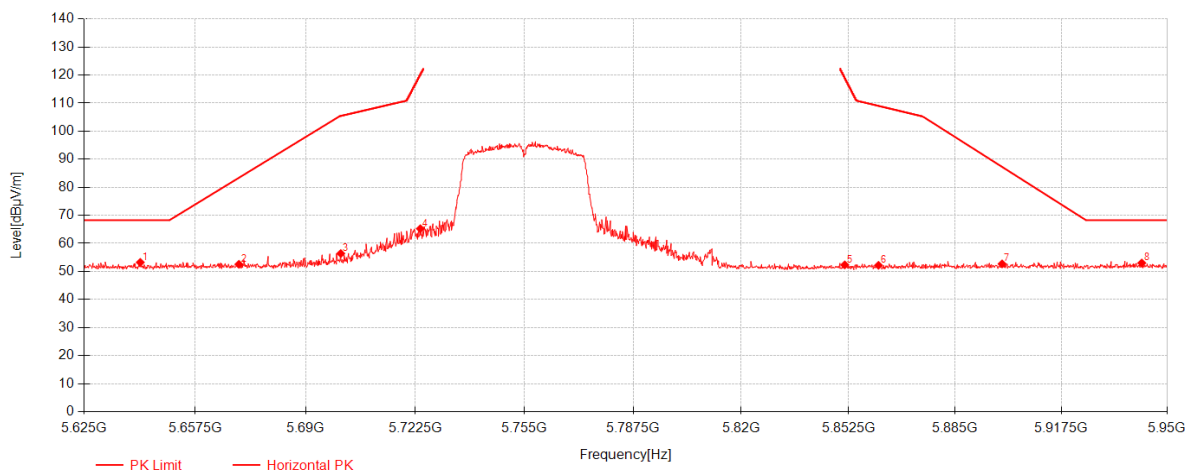

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5641.4125       | 39.63          | 32.33     | -18.72      | 53.23          | 68.30          | 15.07       | Horizontal |
| 2         | 5670.3375       | 38.94          | 32.33     | -18.73      | 52.55          | 83.39          | 30.84       | Horizontal |
| 3         | 5700.4          | 42.77          | 32.34     | -18.73      | 56.38          | 105.41         | 49.03       | Horizontal |
| 4         | 5723.9625       | 51.69          | 32.34     | -18.80      | 65.23          | 119.94         | 54.71       | Horizontal |
| 5         | 5851.3625       | 38.84          | 32.37     | -18.88      | 52.33          | 119.19         | 66.86       | Horizontal |
| 6         | 5861.6          | 38.66          | 32.37     | -18.85      | 52.18          | 109.05         | 56.87       | Horizontal |
| 7         | 5899.3          | 39.05          | 32.38     | -18.74      | 52.69          | 87.28          | 34.59       | Horizontal |
| 8         | 5942.2          | 39.44          | 32.39     | -18.83      | 53.00          | 68.30          | 15.30       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 293 of 309

### 802.11ac40\_Channel 151

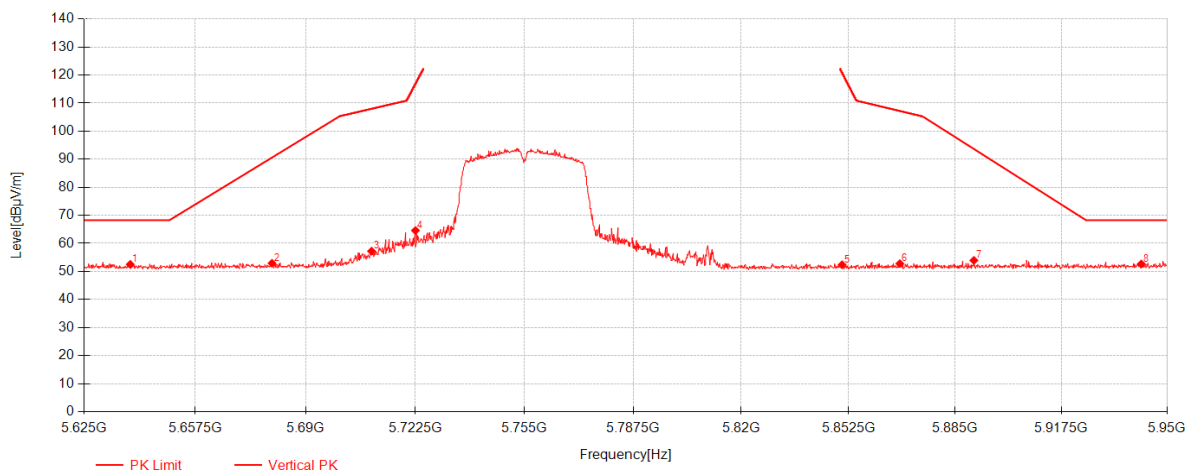

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5638.4875       | 38.90          | 32.33     | -18.72      | 52.50          | 68.30          | 15.80       | Vertical |
| 2         | 5680.0875       | 39.31          | 32.34     | -18.73      | 52.92          | 90.60          | 37.68       | Vertical |
| 3         | 5709.5          | 43.65          | 32.34     | -18.76      | 57.23          | 107.96         | 50.73       | Vertical |
| 4         | 5722.5          | 51.05          | 32.34     | -18.80      | 64.60          | 116.60         | 52.00       | Vertical |
| 5         | 5850.55         | 38.88          | 32.37     | -18.88      | 52.37          | 121.05         | 68.68       | Vertical |
| 6         | 5868.1          | 39.25          | 32.37     | -18.83      | 52.79          | 107.23         | 54.44       | Vertical |
| 7         | 5890.6875       | 40.33          | 32.38     | -18.77      | 53.94          | 93.66          | 39.72       | Vertical |
| 8         | 5942.0375       | 39.09          | 32.39     | -18.83      | 52.65          | 68.30          | 15.65       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 294 of 309

### 802.11ac40\_Channel 159

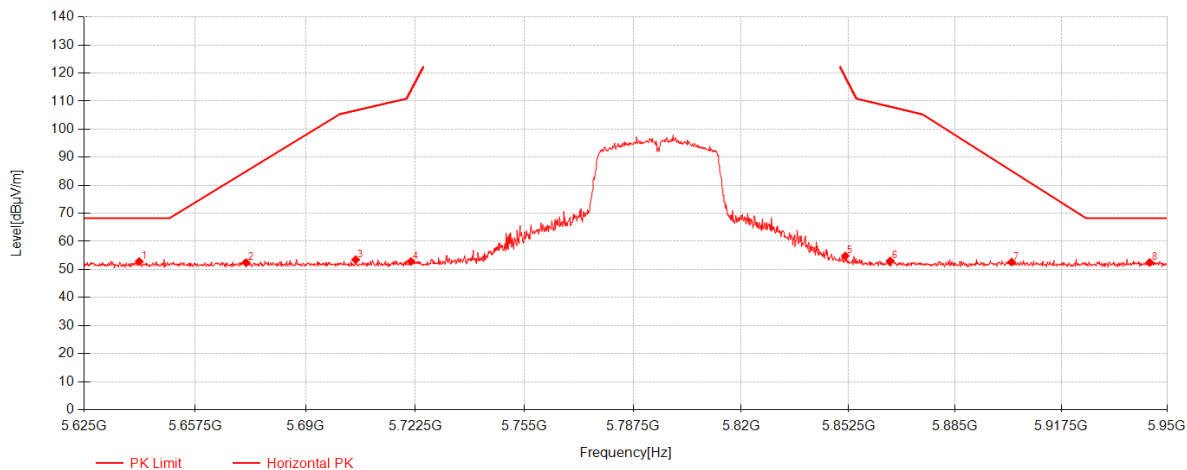

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5641.0875       | 39.20          | 32.33     | -18.72      | 52.80          | 68.30          | 15.50       | Horizontal |
| 2         | 5672.45         | 38.81          | 32.33     | -18.73      | 52.42          | 84.95          | 32.53       | Horizontal |
| 3         | 5704.7875       | 39.86          | 32.34     | -18.74      | 53.46          | 106.64         | 53.18       | Horizontal |
| 4         | 5721.2          | 39.30          | 32.34     | -18.79      | 52.85          | 113.64         | 60.79       | Horizontal |
| 5         | 5851.525        | 41.34          | 32.37     | -18.88      | 54.83          | 118.82         | 63.99       | Horizontal |
| 6         | 5865.175        | 39.50          | 32.37     | -18.84      | 53.03          | 108.05         | 55.02       | Horizontal |
| 7         | 5902.225        | 39.00          | 32.38     | -18.74      | 52.64          | 85.11          | 32.47       | Horizontal |
| 8         | 5944.6375       | 38.92          | 32.39     | -18.83      | 52.48          | 68.30          | 15.82       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 295 of 309

### 802.11ac40\_Channel 159

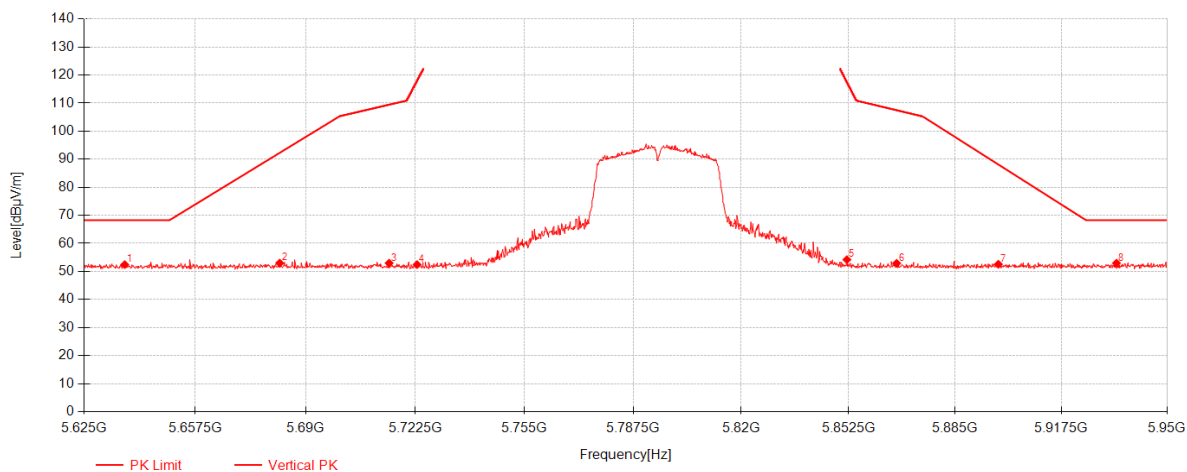


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5636.8625       | 38.84          | 32.33     | -18.72      | 52.44          | 68.30          | 15.86       | Vertical |
| 2         | 5682.3625       | 39.37          | 32.34     | -18.73      | 52.98          | 92.29          | 39.31       | Vertical |
| 3         | 5714.7          | 39.38          | 32.34     | -18.77      | 52.95          | 109.42         | 56.47       | Vertical |
| 4         | 5722.9875       | 38.89          | 32.34     | -18.80      | 52.44          | 117.71         | 65.27       | Vertical |
| 5         | 5852.0125       | 40.71          | 32.37     | -18.88      | 54.20          | 117.71         | 63.51       | Vertical |
| 6         | 5867.125        | 39.37          | 32.37     | -18.84      | 52.91          | 107.50         | 54.59       | Vertical |
| 7         | 5898.1625       | 38.93          | 32.38     | -18.75      | 52.56          | 88.12          | 35.56       | Vertical |
| 8         | 5934.4          | 39.39          | 32.39     | -18.81      | 52.96          | 68.30          | 15.34       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 296 of 309

802.11ac80\_Channel 42

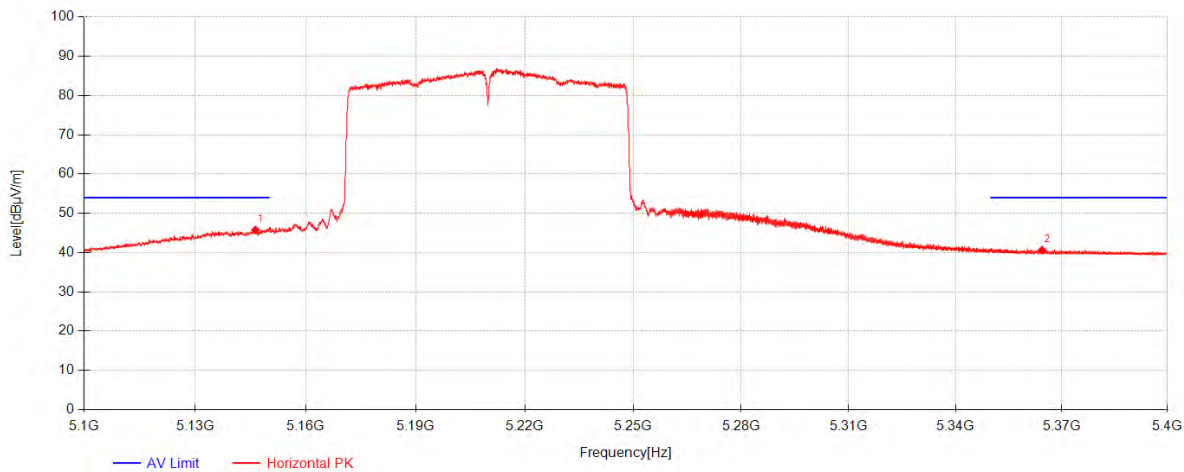


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5146.3467       | 33.24          | 31.66     | -19.15      | 45.75          | 54.00          | 8.25        | Horizontal |
| 2         | 5364.5275       | 27.51          | 32.06     | -18.93      | 40.63          | 54.00          | 13.37       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 297 of 309

802.11ac80\_Channel 42

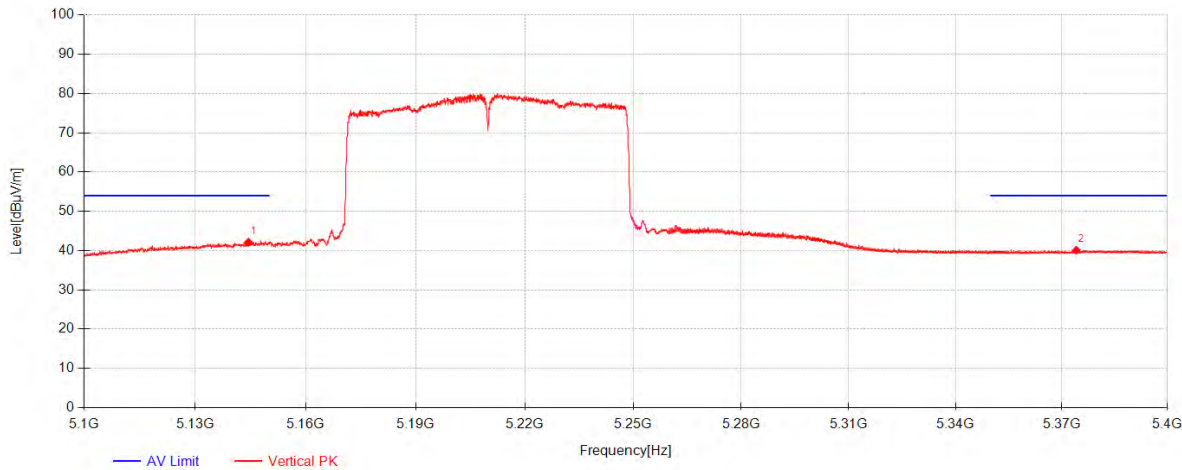


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5144.4267       | 29.61          | 31.66     | -19.15      | 42.12          | 54.00          | 11.88       | Vertical |
| 2         | 5374.205        | 26.96          | 32.07     | -18.96      | 40.08          | 54.00          | 13.92       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 298 of 309

802.11ac80\_Channel 42

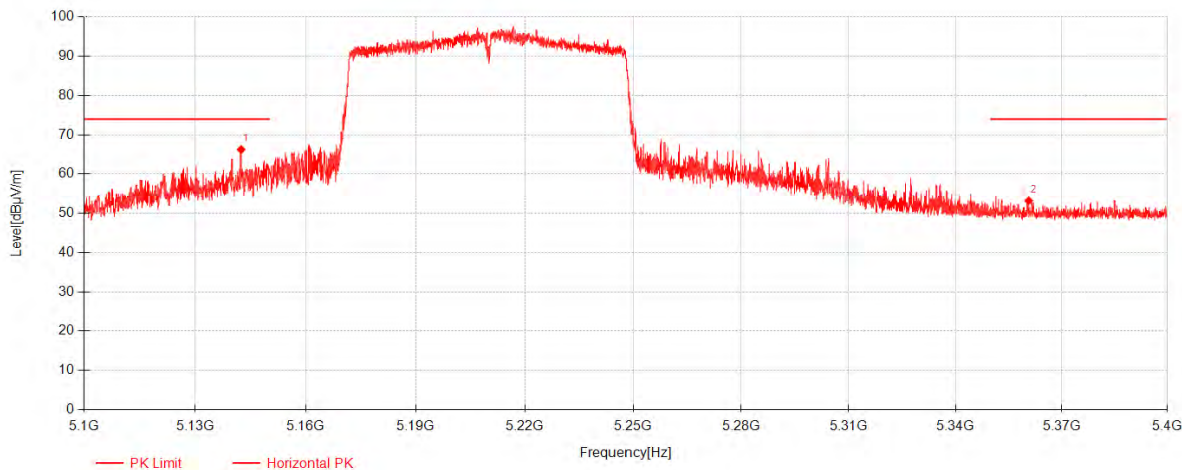


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5142.46         | 53.74          | 31.66     | -19.16      | 66.24          | 74.00          | 7.76        | Horizontal |
| 2         | 5360.7125       | 40.10          | 32.05     | -18.93      | 53.22          | 74.00          | 20.78       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 299 of 309

802.11ac80\_Channel 42

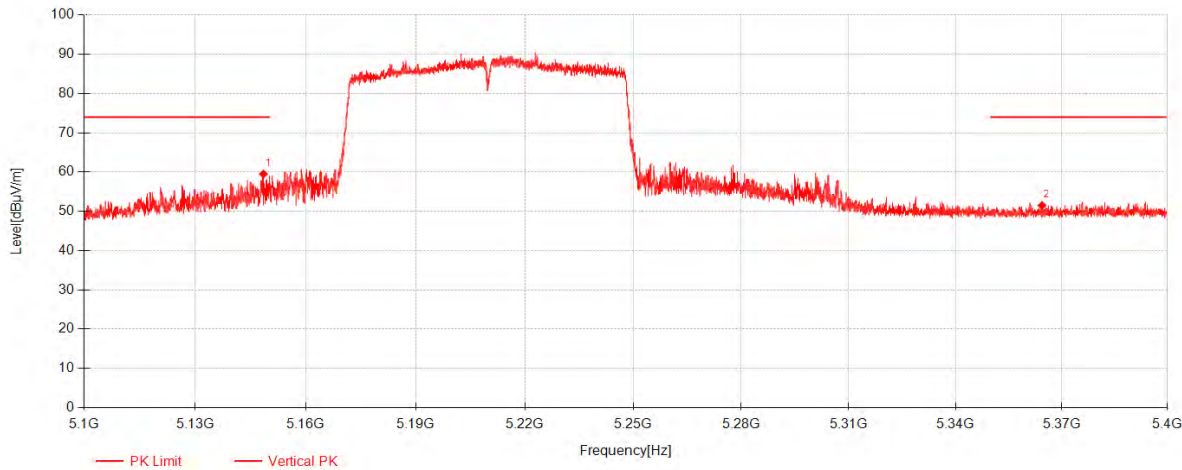


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5148.5          | 46.98          | 31.67     | -19.14      | 59.50          | 74.00          | 14.50       | Vertical |
| 2         | 5364.475        | 38.39          | 32.06     | -18.93      | 51.51          | 74.00          | 22.49       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 300 of 309

802.11ac80\_Channel 58

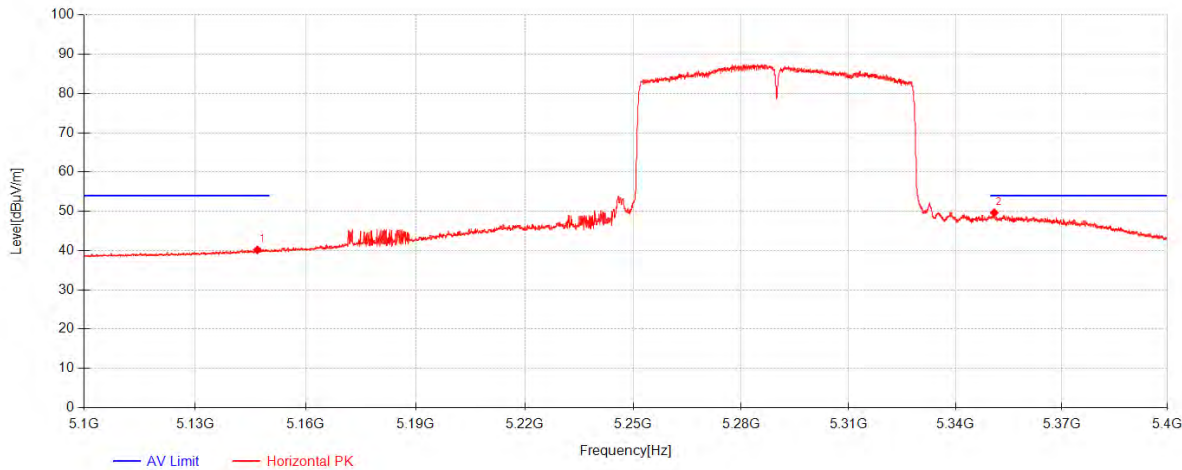


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5146.85         | 27.67          | 31.66     | -19.15      | 40.19          | 54.00          | 13.81       | Horizontal |
| 2         | 5350.975        | 36.53          | 32.03     | -18.90      | 49.66          | 54.00          | 4.34        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 301 of 309

802.11ac80\_Channel 58

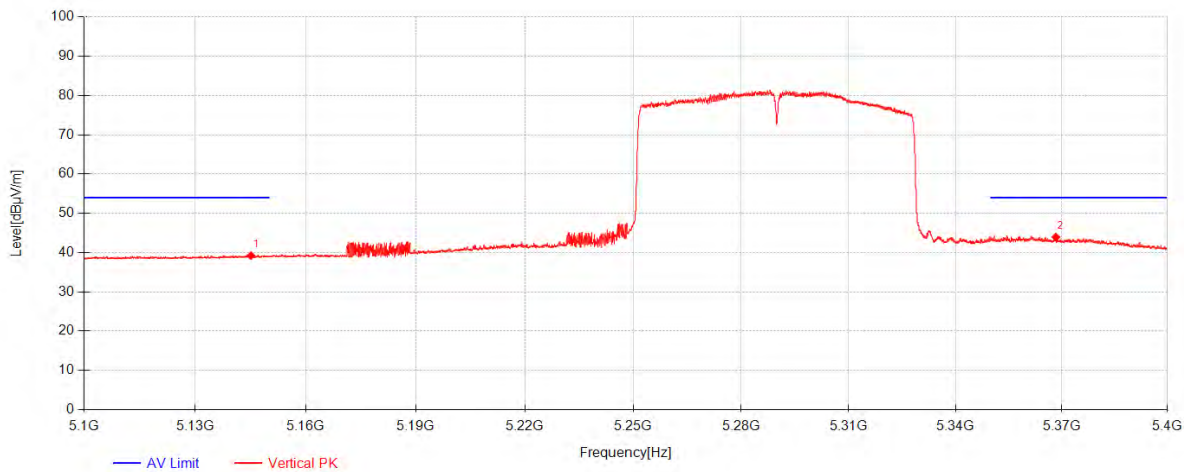


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5145.1          | 26.71          | 31.66     | -19.15      | 39.22          | 54.00          | 14.78       | Vertical |
| 2         | 5368.4          | 30.84          | 32.06     | -18.94      | 43.96          | 54.00          | 10.04       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 302 of 309

802.11ac80\_Channel 58

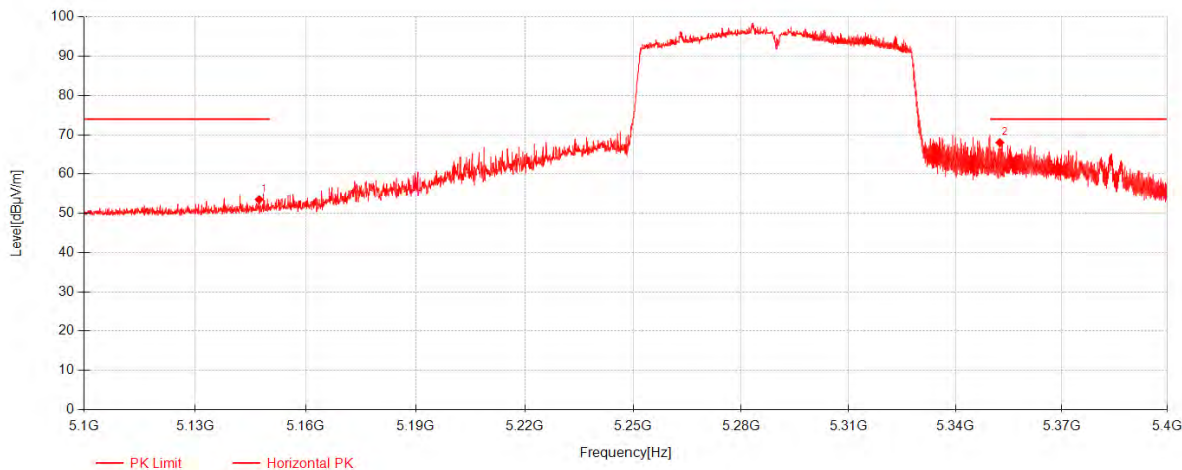


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5147.3333       | 40.99          | 31.67     | -19.15      | 53.51          | 74.00          | 20.49       | Horizontal |
| 2         | 5352.55         | 54.88          | 32.03     | -18.91      | 68.01          | 74.00          | 5.99        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 303 of 309

802.11ac80\_Channel 58

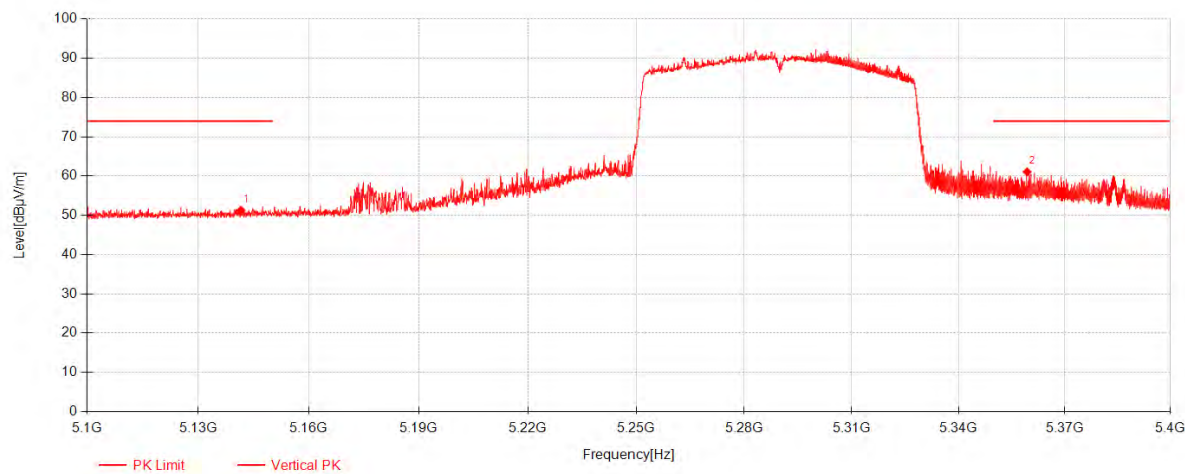


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5141.6          | 38.83          | 31.65     | -19.16      | 51.32          | 74.00          | 22.68       | Vertical |
| 2         | 5359.4          | 47.96          | 32.05     | -18.92      | 61.08          | 74.00          | 12.92       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 304 of 309

802.11ac80\_Channel 106

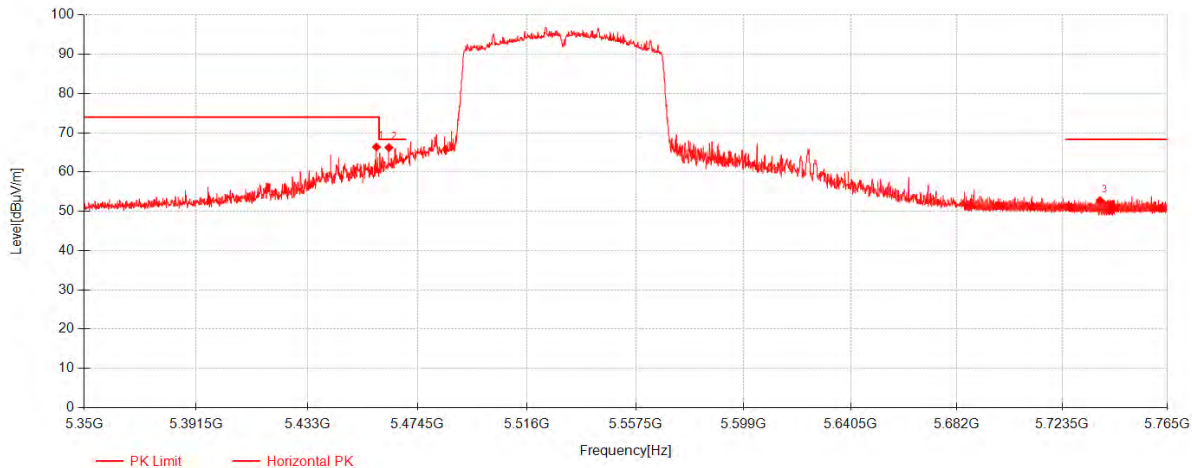


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5458.9867       | 53.28          | 32.23     | -19.11      | 66.39          | 74.00          | 7.61        | Horizontal |
| 2         | 5463.6767       | 53.12          | 32.23     | -19.12      | 66.23          | 68.30          | 2.07        | Horizontal |
| 3         | 5738.38         | 39.27          | 32.35     | -18.85      | 52.77          | 68.30          | 15.53       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 305 of 309

802.11ac80\_Channel 106

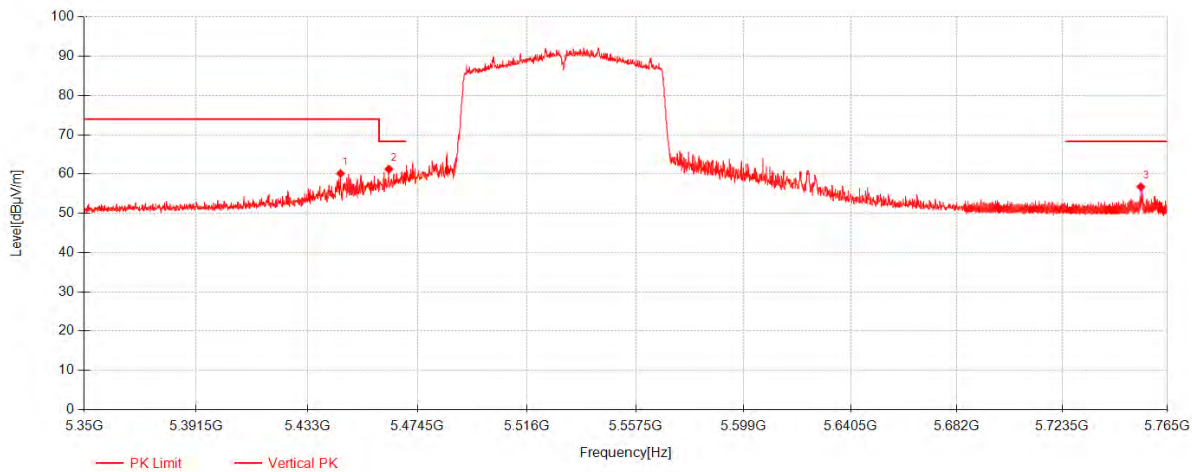


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5445.475        | 47.04          | 32.20     | -19.09      | 60.15          | 74.00          | 13.85       | Vertical |
| 2         | 5463.6767       | 48.14          | 32.23     | -19.12      | 61.25          | 68.30          | 7.05        | Vertical |
| 3         | 5754.59         | 43.29          | 32.35     | -18.89      | 56.75          | 68.30          | 11.55       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 306 of 309

802.11ac80\_Channel 106

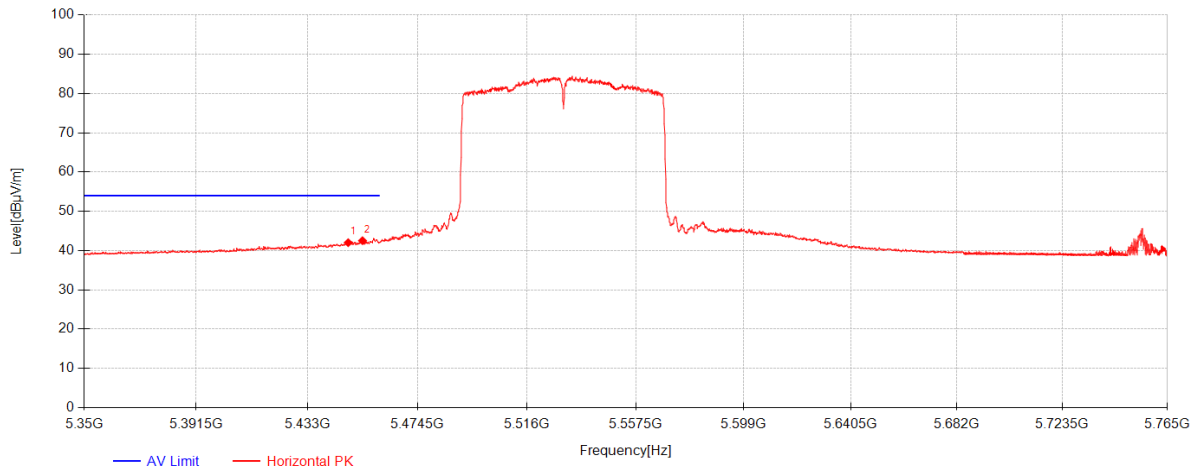


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5448.3783       | 28.91          | 32.21     | -19.10      | 42.02          | 54.00          | 11.98       | Horizontal |
| 2         | 5453.7383       | 29.41          | 32.22     | -19.11      | 42.52          | 54.00          | 11.48       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 307 of 309

802.11ac80\_Channel 106

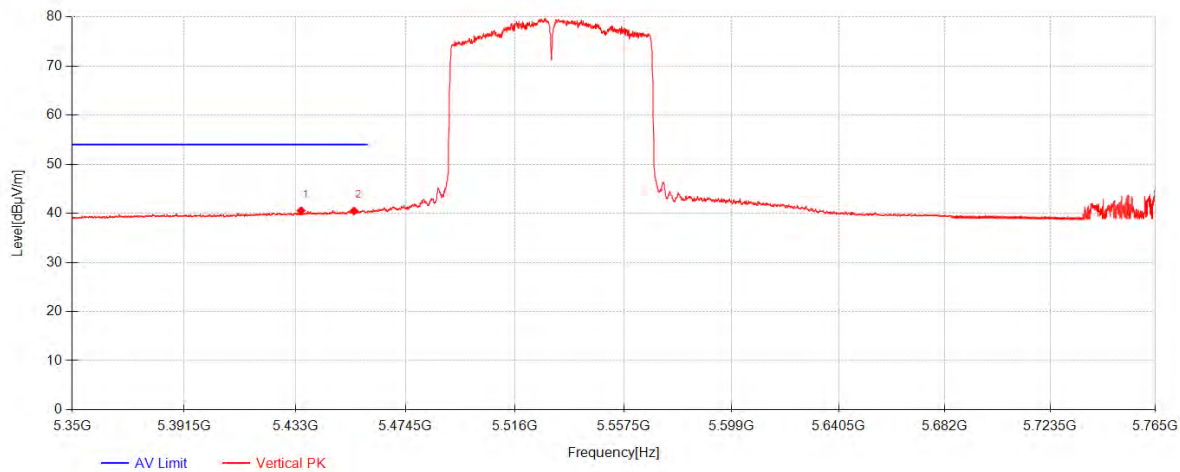


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5435.2017       | 27.43          | 32.18     | -19.08      | 40.54          | 54.00          | 13.46       | Vertical |
| 2         | 5455.0783       | 27.38          | 32.22     | -19.11      | 40.49          | 54.00          | 13.51       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008  
Rev.: 01  
Page: 308 of 309

802.11ac80\_Channel 155

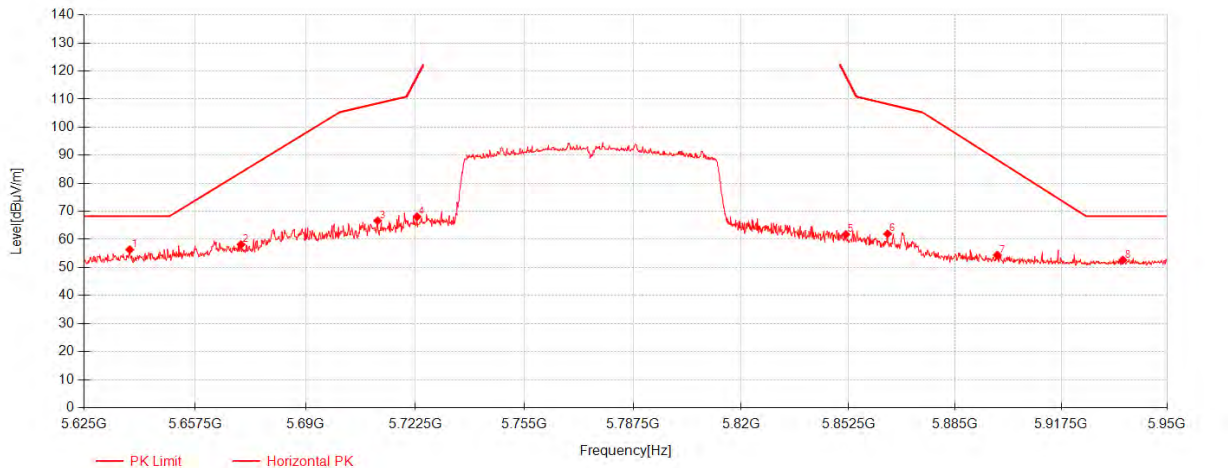

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5638.325        | 42.74          | 32.33     | -18.72      | 56.34          | 68.30          | 11.96       | Horizontal |
| 2         | 5670.9875       | 44.58          | 32.33     | -18.73      | 58.19          | 83.87          | 25.68       | Horizontal |
| 3         | 5711.2875       | 53.07          | 32.34     | -18.76      | 66.65          | 108.46         | 41.81       | Horizontal |
| 4         | 5722.9875       | 54.54          | 32.34     | -18.80      | 68.09          | 117.71         | 49.62       | Horizontal |
| 5         | 5851.6875       | 48.28          | 32.37     | -18.88      | 61.77          | 118.45         | 56.68       | Horizontal |
| 6         | 5864.3625       | 48.43          | 32.37     | -18.84      | 61.96          | 108.28         | 46.32       | Horizontal |
| 7         | 5897.8375       | 40.78          | 32.38     | -18.75      | 54.41          | 88.36          | 33.95       | Horizontal |
| 8         | 5936.35         | 39.07          | 32.39     | -18.82      | 52.64          | 68.30          | 15.66       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032008

Rev.: 01

Page: 309 of 309

### 802.11ac80\_Channel 155

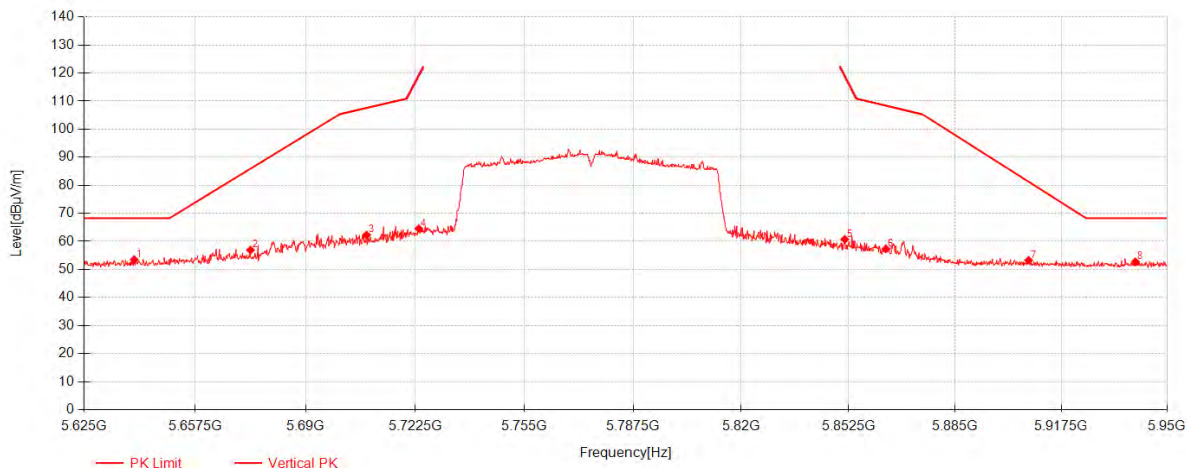

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 5639.625        | 39.90          | 32.33     | -18.72      | 53.50          | 68.30          | 14.80       | Vertical |
| 2         | 5673.75         | 43.28          | 32.33     | -18.73      | 56.89          | 85.92          | 29.03       | Vertical |
| 3         | 5708.0375       | 48.68          | 32.34     | -18.75      | 62.27          | 107.55         | 45.28       | Vertical |
| 4         | 5723.475        | 51.00          | 32.34     | -18.80      | 64.54          | 118.82         | 54.28       | Vertical |
| 5         | 5851.3625       | 47.25          | 32.37     | -18.88      | 60.74          | 119.19         | 58.45       | Vertical |
| 6         | 5863.875        | 43.83          | 32.37     | -18.84      | 57.36          | 108.41         | 51.05       | Vertical |
| 7         | 5907.425        | 39.61          | 32.38     | -18.76      | 53.24          | 81.27          | 28.03       | Vertical |
| 8         | 5940.25         | 39.17          | 32.39     | -18.82      | 52.73          | 68.30          | 15.57       | Vertical |

#### Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:  
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):  
AF = Antenna Factor(dB/m)  
Factor = Cable Factor(dB) - Preamplifier gain(dB)  
Margin = Limit(dBμV/m) – Level(dBμV/m)
- Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---