



User manual

Wireless Router — HNK RAX1500



17.P6.XXXXXXXXXX

Contents

1 Appearance		
2 Packing List	1	
3 Connect the Router	1	
4 WIZARD PAGE	1	
4.1 Wizard Page	2	
4.2 WAN Connection Settings	2	
4.2.1 DHCP Settings		
4.2.2 PPPoE Settings		
4.2.3 Static IP Settings		
4.3 Wireless SSID and Password Settings	3	
4.4 Admin Password Settings	3	
5 Web Management Landing Page	5	
5.1 Management Page Login	5	
6 Home Page	4	
6.1 Internet Information Display Page	4	
6.2 WiFi Information Display Page	5	
6.2.1 Router Mode		
6.2.2 Repeater Mode		
6.3 Connected Clients Information Display Page	5	
7 Function Configuration	6	
7.1 WIFI Setting	6	
7.1.1 WIFI 2.4G Setting and 5G Setting		
7.1.2 Smart Connect		
7.1.3 Guest Zone		
7.2 Internet Function Configuration	7	
7.2.1 IPV4 Settings		
7.2.2 IPV6 Settings		
7.2.3 Host Name		
7.3 Network Function Configuration	9	
7.3.1 Network Settings		
7.3.2 DHCP Server		
7.3.3 Network Advanced Settings		
7.4 Mode Set Configuration	9	
8 Features Setting	10	
8.1 QOS	10	
8.2 Firewall Settings	11	
8.2.1 Website Filter		
8.2.2 IPv4 Rules		
8.2.3 IPv6 Rules		
8.2.4 Remote Management		
8.2.5 WAN PING		
8.3 Port Mapping	12	
8.3.1 Port Forwarding		
8.3.2 DMZ		
8.3.3 Virtual Server		
8.4 DDNS	14	
9 Management Page	14	
9.1 Time and Schedule	14	
9.1.1 Time		
9.1.2 Schedule		
9.1.3 Led Time		
9.2 System Log	15	
9.3 Admin Page Settings	15	
9.4 System Page Setup	16	
9.4.1 Save Settings to Local Hard Drive		
9.4.2 Load Settings from Local Hard Drive		
9.4.3 Restore to Factory Default Settings		
9.4.4 Reboot the Device		
9.5 Upgrade Page Settings	17	
9.5.1 Firmware Information Display		
9.5.2 Online Firmware Upgrade Settings		
9.5.3 Local Firmware Upgrade Settings		
9.6 Statistics Page	18	
10 Hardware	18	
10.1 LED Indicator	18	
10.2 WPS Button	18	
10.3 RESET Pinhole	18	
11 Contact Us	19	

1.Appearance

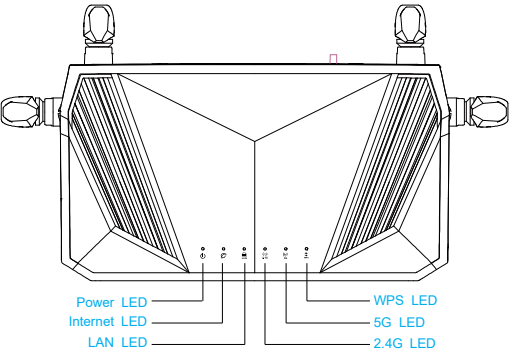


Figure 1-1

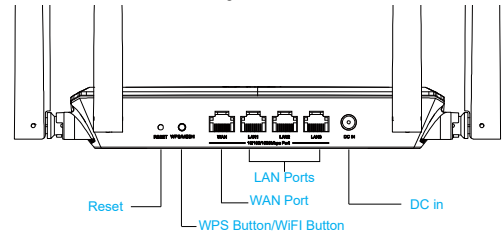


Figure 1-2

2.Packing List

HNK wifi router	× 1
Power adapter	× 1
Ethernet cable	× 1
Quick Installation Guide	× 1
User manual	× 1

3.Connect the Router

1. Before you start, please turn off your modem if any, and remove the backup battery if it has one.
2. Connect the modem to the router's WAN port with an Ethernet cable.
3. Turn on the modem, and then wait about 2 minutes for it to restart.
4. Connect the power adapter to the router.
5. Verify the power LED on the top panel is solid on (green) .
6. Connect your computer or smartphone to the wifi named HNK-RAX1500 or HNK-RAX1500-5Ghz.

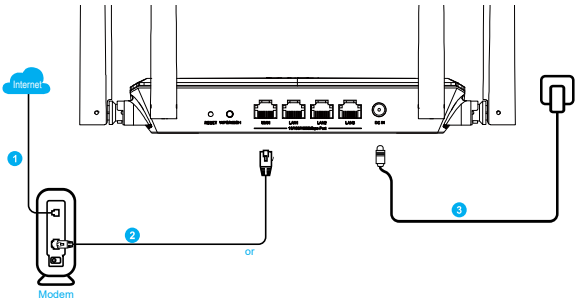


Figure 3-1

Note: If your internet connection is through an Ethernet cable directly from the wall instead of through a DSL / Cable /Satellite modem, connect the Ethernet cable to the router's WAN port, and then connect the power adapter to the router and turn on the router.

4. Wizard Page

4.1 Wizard Page

Browser Type 192.168.0.1 , automatically jump to the configuration wizard page (NO password in default)

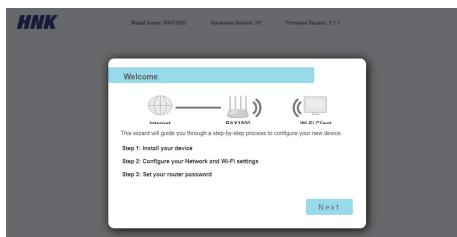


Figure 4-1

4.2 WAN Connection Settings

There are several connection types to choose: Static IP, DHCP and PPPoE. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

4.2.1 DHCP Settings

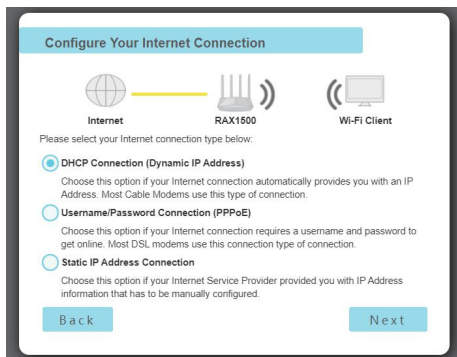


Figure 4-2

4.2.2 PPPoE Settings

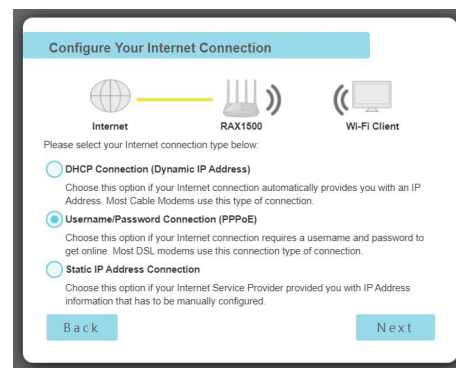


Figure 4-3

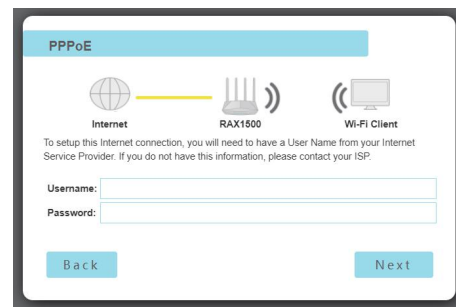


Figure 4-4

4.2.3 Static IP Settings

Configure Your Internet Connection

Internet RAX1500 Wi-Fi Client

Please select your Internet connection type below:

- ☐ DHCP Connection (Dynamic IP Address)
Choose this option if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.
- ☐ Username/Password Connection (PPPoE)
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this connection type of connection.
- ☒ Static IP Address Connection
Choose this option if your Internet Service Provider provided you with IP Address information that has to be manually configured.

Back Next

Figure 4-5

Static IP

Internet RAX1500 Wi-Fi Client

To set up this connection you will need to have a complete list of IP information by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP.

IP Address:

Subnet Mask:

Gateway Address:

Primary DNS Address:

Secondary DNS Address:

Back Next

Figure 4-6

4.3 Wireless SSID and Password Settings

After configuring the static IP access method, please click “Next” to complete the wireless SSID configuration and wireless password settings.

Wi-Fi Settings

Internet RAX1500 Wi-Fi Client

To setup a Wi-Fi network you will need to give your Wi-Fi network a name(SSID) and password.

Wi-Fi Network Name:

Wi-Fi Password:

Back Next

Figure 4-7

4.4 Admin Password Settings

After configuring the wifi, click “Next” to set the user (Admin) password, and then click “Next” to save the configuration.

Device Admin Password

Internet RAX1500 Wi-Fi Client

By default, your new device does not have a password configured for administrator access to the Web-based configuration utility. To secure your new device, please create a password below.

Device Admin Password:

Confirm Device Admin Password:

Password Strength: Low

Back Next

Figure 4-8

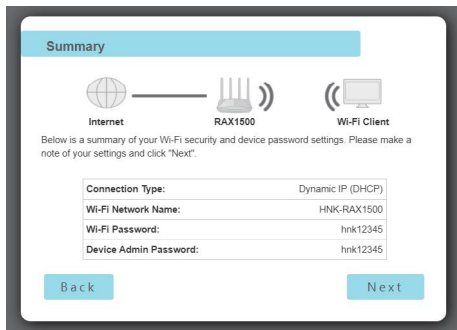


Figure 4-9

5.Web Management Landing Page

5.1 Management Page Login

After completing the configuration wizard, please enter 192.168.0.1 in the browser to log in to the router management page.

Admin Password: The Device admin Password you set on Wizard Page.

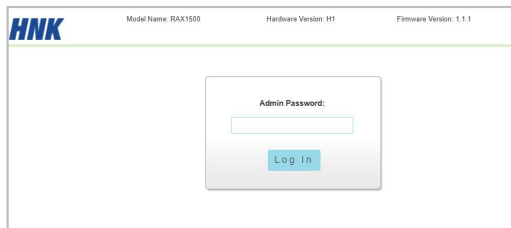


Figure 5-1

6.Home Page

Home page information is displayed.

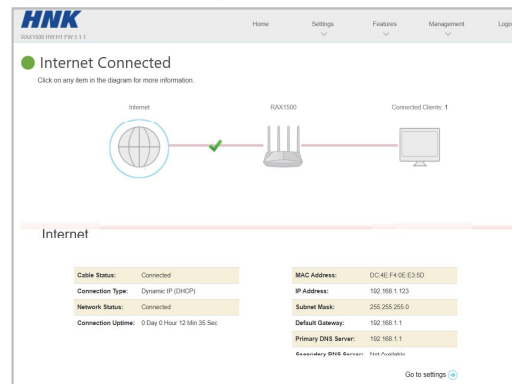


Figure 6-0

6.1 Internet Information Display Page

Internet connection status and connection information.

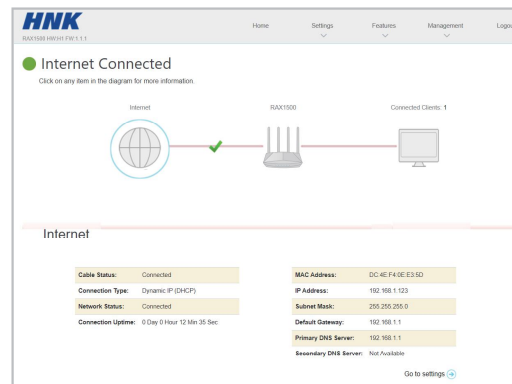


Figure 6-1

6.2 WiFi Information Display Page

6.2.1 Router Mode

Home>>RAX1500

Display Extender IPv4 mac address and wireless SSID.

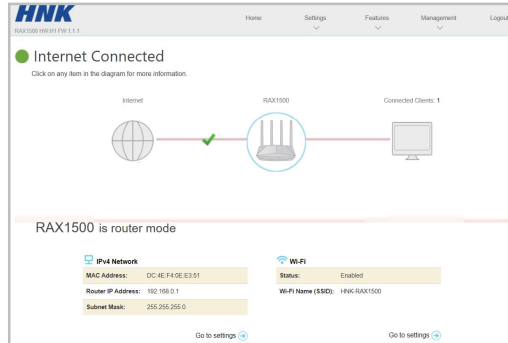


Figure 6-2

6.2.2 Repeater Mode

Display the Extender IPv4 mac address and the uplink router' s wireless SSID.

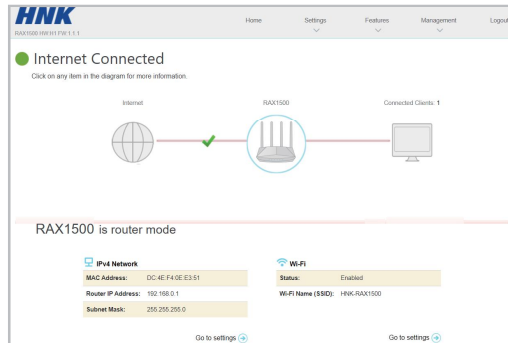


Figure 6-3

6.3 Connected Clients Information Display Page

Connected Clients information display page: It shows Connected Clients information.

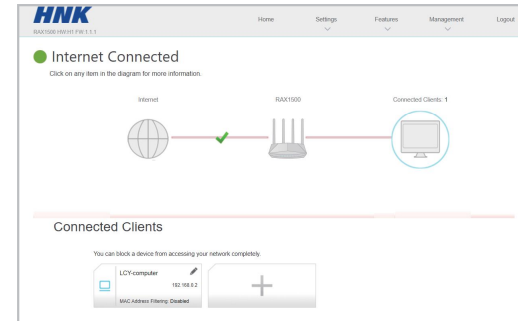


Figure 6-4

7.Function Configuration

7.1 WIFI Setting

Use this section to configure the wireless settings for your Router. Please note that settings made in this section may also need to be synchronized on your Wireless Client.

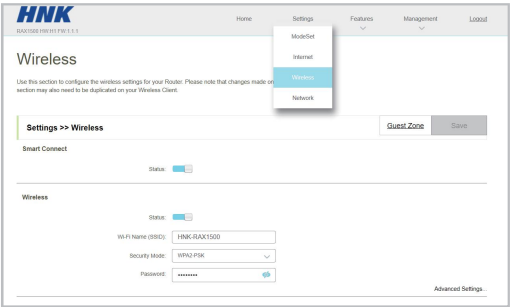


Figure 7-1

7.1.1 WIFI 2.4G Setting and 5G Setting
Configure the router 2.4G or 5G WIFI SSID and password.

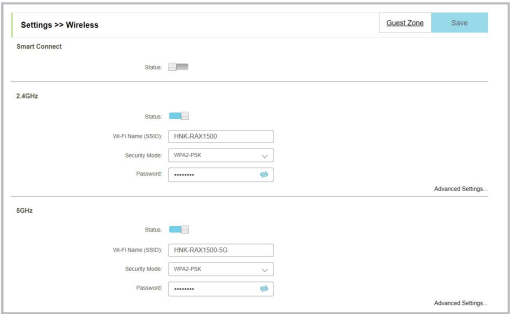


Figure 7-2

Click on Settings >> Wireless. Turn off the status button of Smart Connect. Then you can configure the router 2.4G or 5G WIFI SSID and password. Click on Settings >> Wireless. Turn off the status button of Smart Connect. Then you can configure the router 2.4G or 5G WIFI SSID and password.

Complete 2.4G advanced configuration, such as channel, security mode, 802.11 mode.

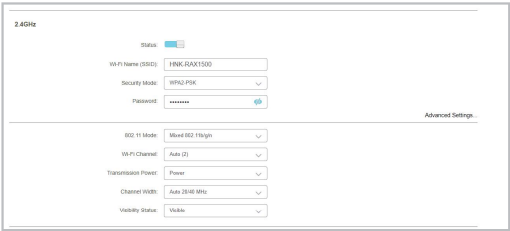


Figure 7-3

Complete 5G advanced configuration, such as channel, security mode, 802.11 mode.

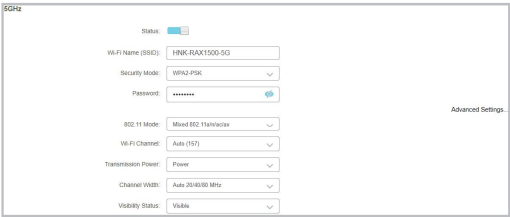


Figure 7-4

7.1.2 Smart Connect

After the smart connection is closed, the extender 2.4G WIFI and the 5G WIFI can be searched on the terminal wireless device respectively, and there are two wireless bands to be displayed on the page.

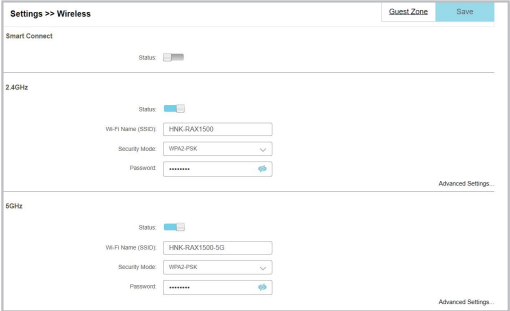


Figure 7-5

When Smart Connect feature is on, your wireless device can find one wireless SSID, and it will automatically match the 2.4G or 5G band WIFI according to the connection signal strength.

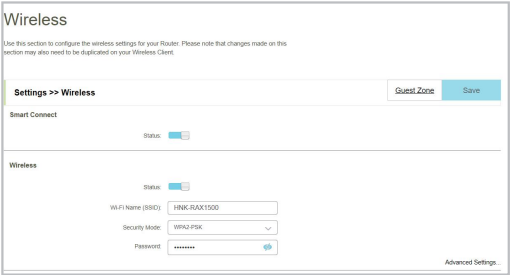


Figure 7-6

7.1.3 Guest Zone

This feature lets you enable and configure a Wi-Fi Guest Zone. It allows you to create a separate network for your guests to secure the main network.

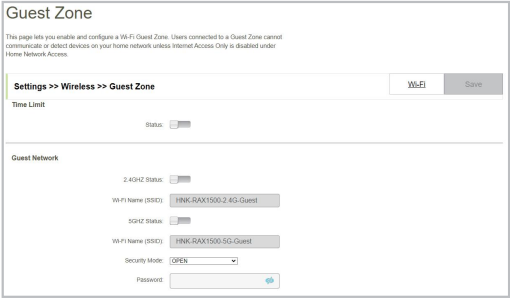


Figure 7-7

7.2 Internet Function Configuration

Use this section to configure your Internet Connection type. There are several connection types to choose: Static IP, DHCP and PPPoE. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

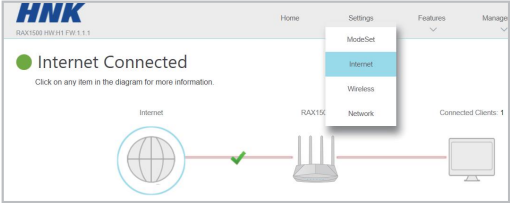


Figure 7-8

7.2.1 IPV4 Settings

Use this section to configure your Internet Connection type. There are several connection types to choose: Static IP, DHCP, PPPoE. If you are unsure of your connection method, please contact your Internet service provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

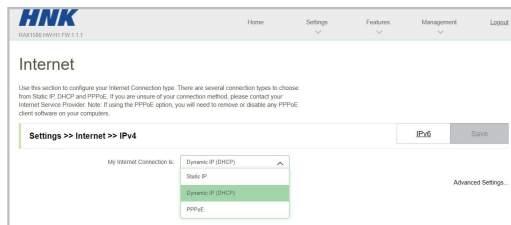


Figure 7-9

7.2.2 IPV6 Settings

All of your IPv6 Internet and network connection details are displayed on this page.

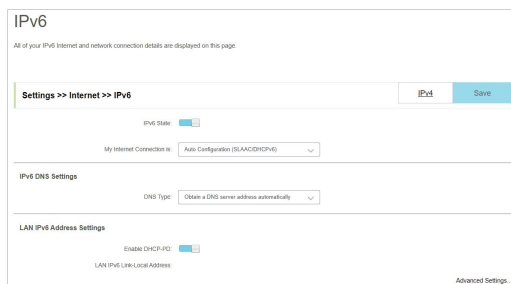


Figure 7-10

7.2.3 Host Name

Set Internet connection type as dhcp.

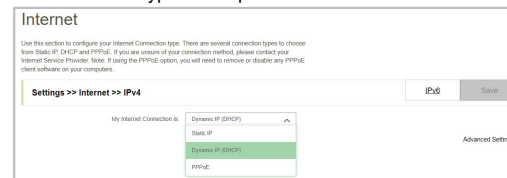


Figure 7-11

Advanced settings.

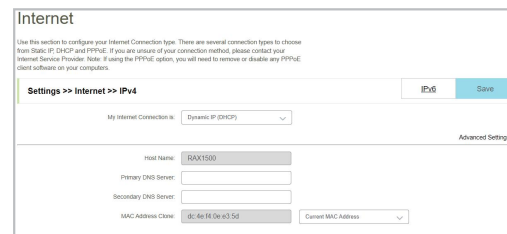


Figure 7-12

Browser Type <http://rax1500/>
Login to the router administration page.

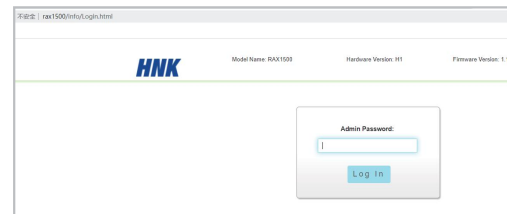


Figure 7-13

7.3 Network Function Configuration

Use this section to configure the network settings for your devices. You can enter a name for your device in the management link field and use the link to access web UI in a web browser. Recommend changing the management link if there are more than one device within the network.

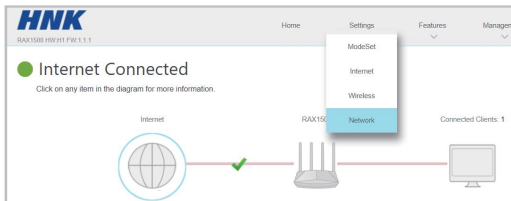


Figure 7-14

7.3.1 Network Settings

Set LAN IP Address, Subnet Mask, Enable DNS Relay.

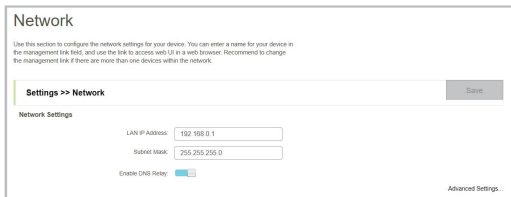


Figure 7-15

7.3.2 DHCP Server

Settings>>Network>>Advanced Settings>>DHCP Server

Set DHCP Server IP address range, lease duration.

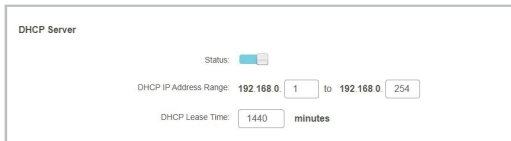


Figure 7-16

7.3.3 Network Advanced Settings

Set LAN advanced settings, UPnP function.



Figure 7-17

7.4 ModeSet Configuration

Settings>>ModeSet

You can set it to be a router or a repeater mode.

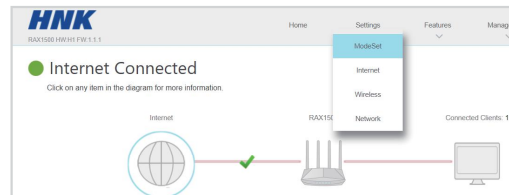


Figure 7-18

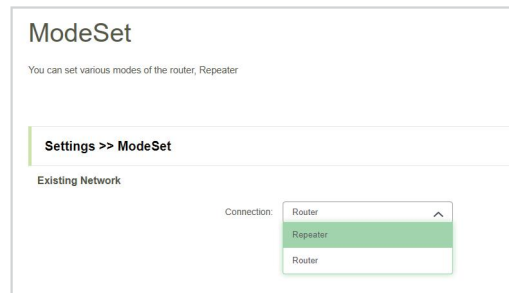


Figure 7-19

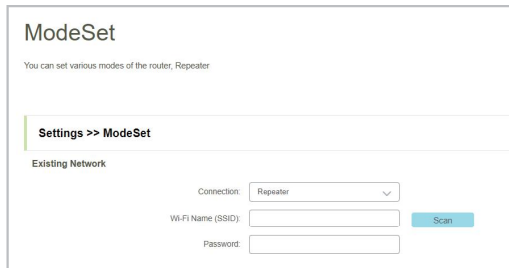


Figure 7-20

Click the scan function after entering the page to scan the uplink router wireless.

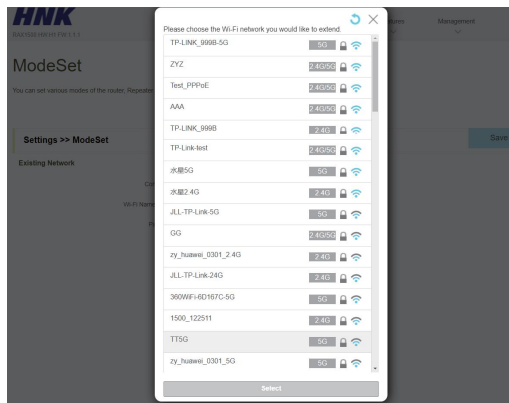


Figure 7-21

Select the router 2.4G or 5G WIFI SSID and enter the signal extension password.

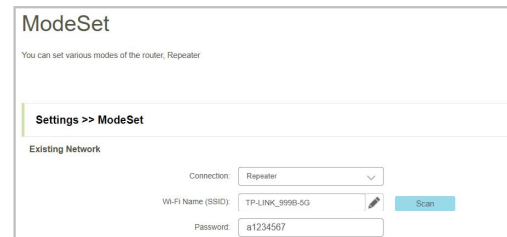


Figure 7-22

8.Features Setting

8.1 QOS

Connected clients can be assigned Internet access priority. Click and drag the client cards into slots.

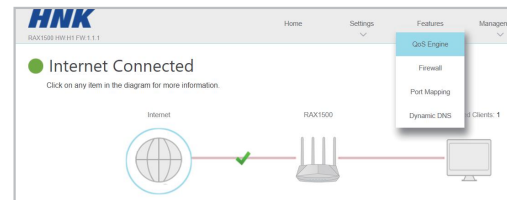


Figure 8-1

Home>>Connected Clients

Create a new QOS rule in connected clients list.

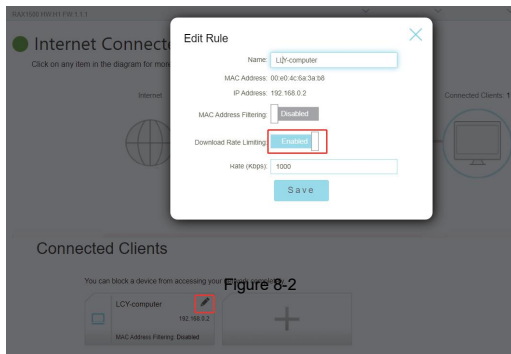


Figure 8-2

You can see the connected clients in the QoS rules list.

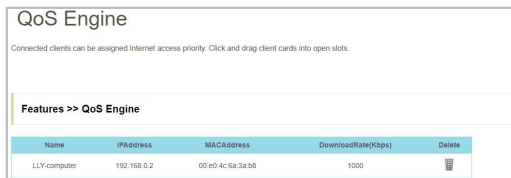


Figure 8-3

8.2 Firewall Settings

In this page, you can set the firewall status, remote management, WAN Ping, website filter, IPv4 Rules and IPv6 Rules.

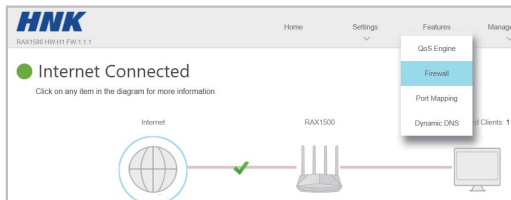


Figure 8-4

8.2.1 Website Filter

The website filter feature allows you to set rules that you can restrict access to a specified web address (URL) or block specified keywords in the URL. You can use Website Filter to restrict access to potentially harmful and inappropriate websites.

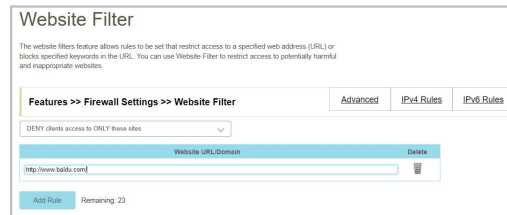


Figure 8-5

8.2.2 IPv4 Rules

The IPv4 rule section is an advanced feature used to deny or allow traffic from passing through the device.

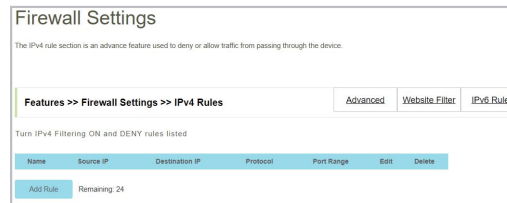


Figure 8-6

Create a new rule.
Open Firewall Status>>Save>>IPv4 Rules>> Add Rule

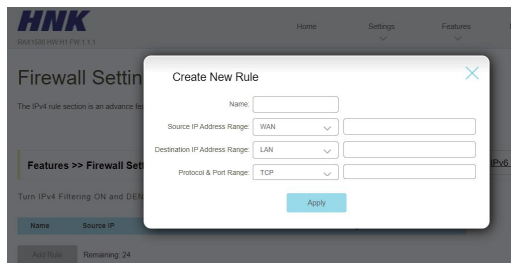


Figure 8-7

8.2.3 IPv6 Rules

The IPv6 will also be supported by your router's built-in firewall. Some applications or clients may require special adjustments for better performance or extra protection.

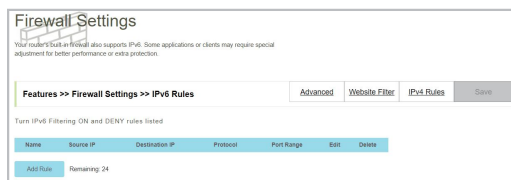


Figure 8-8

Create a new rule.
Open Firewall Status>>Save>>IPv6 Rules>> Add Rule

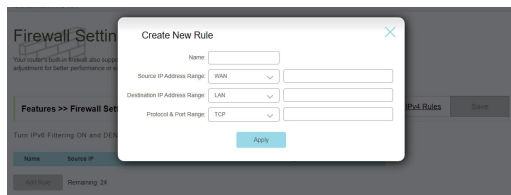


Figure 8-9

8.2.4 Remote Management HTTP Remote Management

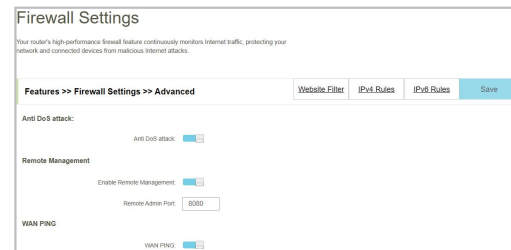


Figure 8-10

8.2.5 WAN Ping

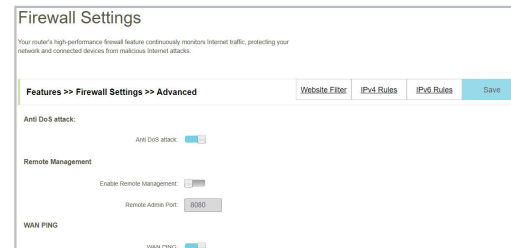


Figure 8-11

8.3 Port Mapping

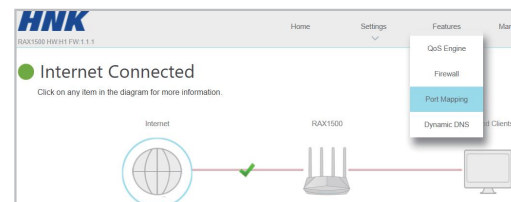


Figure 8-12

8.3.1 Port Forwarding

Your router helps to share a single IP address assigned by your ISP among several clients in your home. Port forwarding allows traffic requests from a specified application to be directed to a specified client inside.

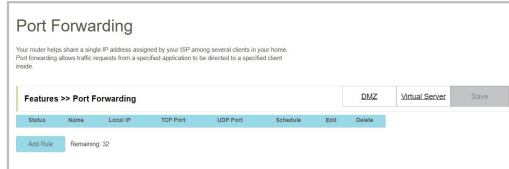


Figure 8-13

Create a new port forwarding rule.

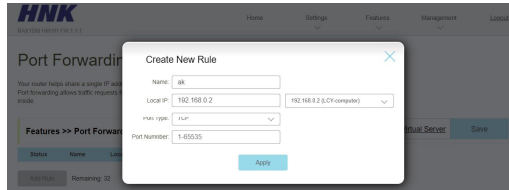


Figure 8-14

8.3.2 DMZ

Your router's high-performance firewall feature continuously monitors Internet traffic, protecting your network and connected devices from malicious Internet attacks.



Figure 8-15

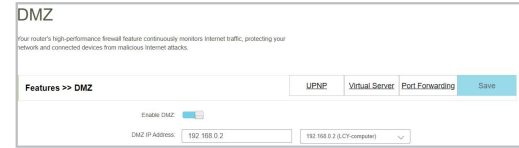


Figure 8-16

8.3.3 Virtual Server

Your router helps to share a single IP address assigned by your Internet service provider among several clients in your home. Virtual servers are preset port mappings for popular services, like a web or e-mail server, that route traffic to a specified client inside.

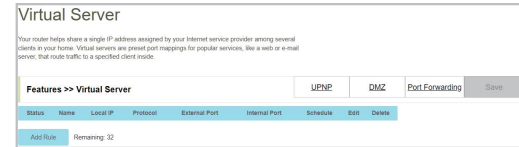


Figure 8-17

Create a new virtual server rule.

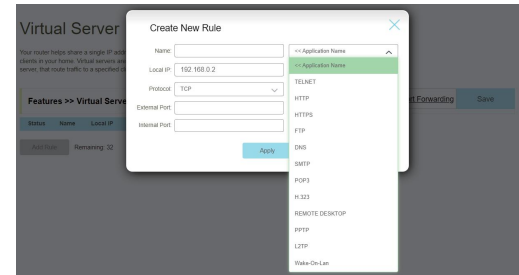


Figure 8-18

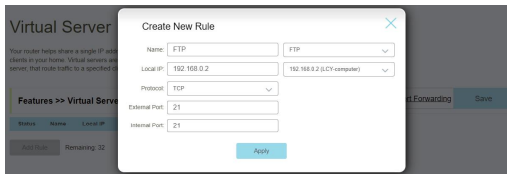


Figure 8-19

8.4 DDNS

Dynamic Domain Name Service (DDNS) allows your router to associate an easy-to-remember domain name such as [YourDomainName].com with the regularly changing IP address assigned by your Internet Service provider. This feature is helpful when running a virtual server.

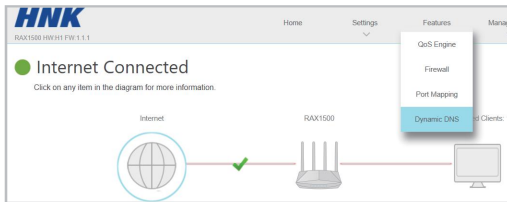


Figure 8-20

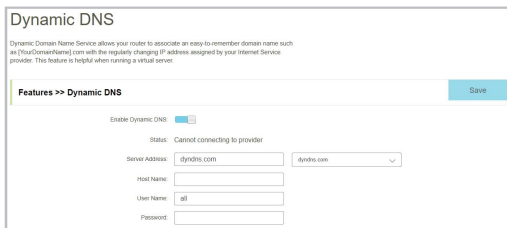


Figure 8-21

9. Management Page

9.1 Time and Schedule

9.1.1 Time

Your router's internal clock is used for data logging and schedules for features. The date and time can be synchronized with a public time server on the Internet, or set manually.

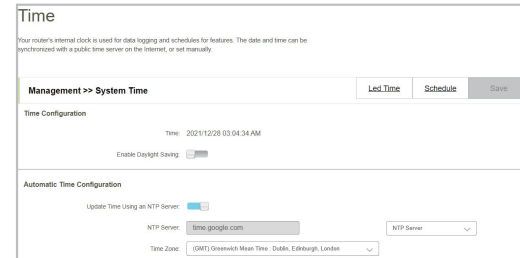


Figure 9-1

9.1.2 Schedule

Some features, such as the firewall and website filters, can be turned on or off based on a schedule. One common use of schedules is to control access to the Internet by a specified device during specified time periods.

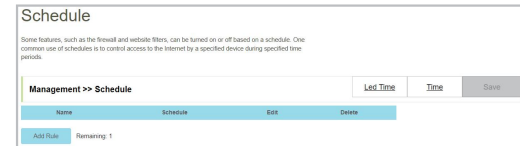


Figure 9-2

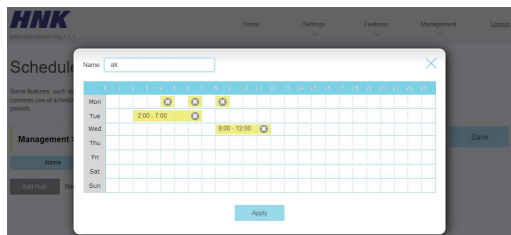


Figure 9-3

9.1.3 Led Time

Your router's internal clock is used for data logging and schedules for features. The date and time can be synchronized with a public time server on the Internet, or set manually.

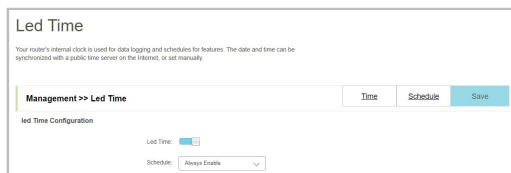


Figure 9-4

9.2 System Log

On-board diagnostics run continually in the background to monitor the health of your router. The results are recorded in the system log if it is enabled. This info can be used to diagnose common problems or help Customer Support resolve issues more quickly.

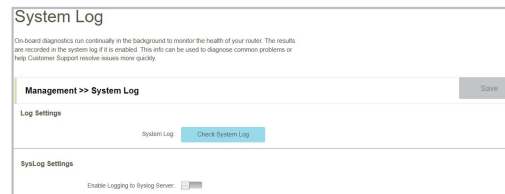


Figure 9-5

9.3 Admin Page Settings

To set the administrator password, you need to enter the original password for verification; then enter a new administrator password and verify it again.

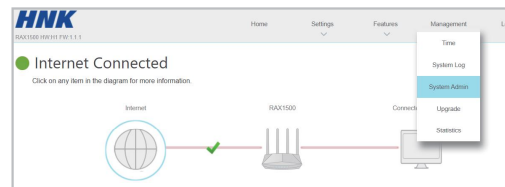


Figure 9-6

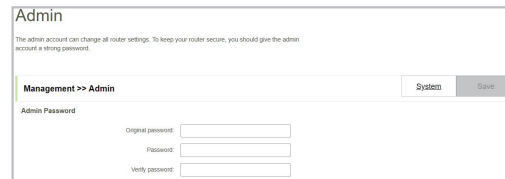


Figure 9-7

After modifying the administrator password, the browser will jump to the login page.
Enter the administrator password to login

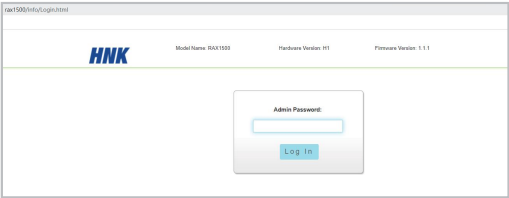


Figure 9-8

9.4 System Page Setup

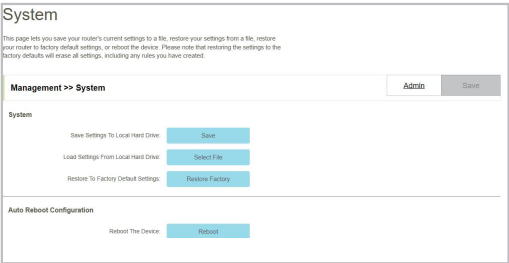


Figure 9-9

9.4.1 Save Settings to Local Hard Drive
Export the configuration file to the local PC for saving, so that you can quickly restore the configuration information.

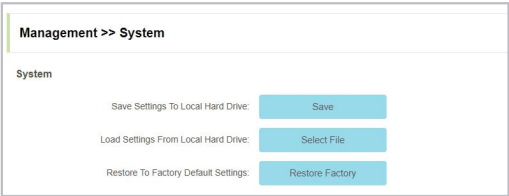


Figure 9-10

9.4.2 Load Settings from Local Hard Drive
Import the configuration file to the Router to quickly configure the router or restore configuration information.

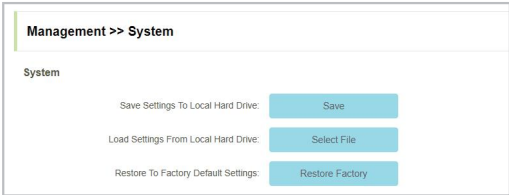


Figure 9-11

9.4.3 Restore to Factory Default Settings
Clear all router configuration and restore the router settings to factory default.

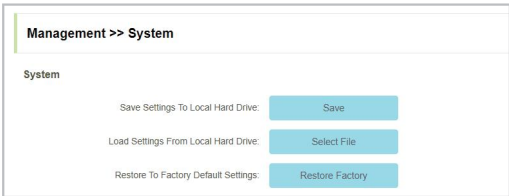


Figure 9-12

9.4.4 Reboot the Device
Reboot the Router.



Figure 9-13

9.5 Upgrade Page Settings

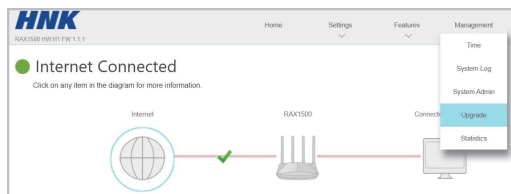


Figure 9-14

9.5.1 Firmware Information Display

Display current firmware version information.

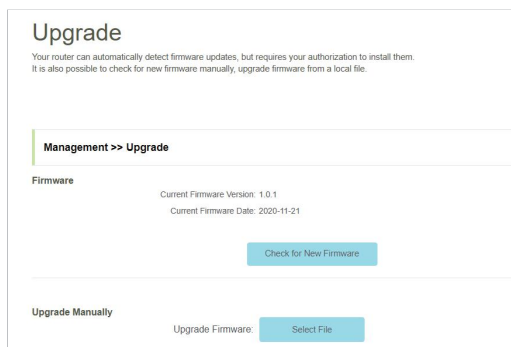


Figure 9-15

9.5.2 Online Firmware Upgrade Settings

This page will display your current firmware version. Click on the 'Check for New Firmware' button for detecting the latest firmware version. If have, you can upgrade your firmware to the latest version. Otherwise the page will prompt that the firmware is the latest version.



Figure 9-16

9.5.3 Local Firmware Upgrade Settings

Select the Router's local firmware configure file to upgrade.



Figure 9-17

9.6 Statistics Page

This page gives you various router statistics about data sent and received through the Internet, wired network (LAN), and wireless networks.

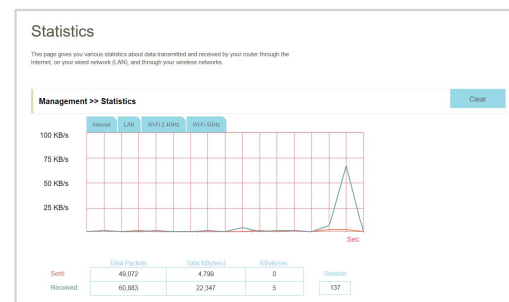


Figure 9-18

10. Hardware

10.1 LED Indicator

- The power light is steady green: The device is on.
- The 2.4G light is steady green: 2.4G Wi-Fi band available.
- The 5G light is steady green: 5G Wi-Fi band available.
- The USB light is steady green: U disk has been inserted.
- The Internet light is steady green: WAN port has been connected with network cable.
- The Internet light blinks green: WAN port has data transmission.

10.2 WPS Button

1. Press the "WPS" button on the panel to start WPS (limited time is 120 seconds), then press the router wps function.

2. Open the WPS function on your mobile phone, Wait for the connection between mobile phone and router.

10.3 RESET Pinhole

When the power is on, sting the router's "Reset" pinhole for 10 seconds to restore the factory settings.

10.4 SAMBA functions

Locally verified are Kingston (DTSE9 G2) USB drives and SEAGATE hard drives

1. Insert the USB disk into the USB port of the AX1500, Wait for the USB indicator light to turn green.

2. Press WIN+R on the keyboard to pop up the Quick Run input box, type \\192.168.0.1, where the IP address is the router address (default route IP: 192.168.0.1), and click OK.

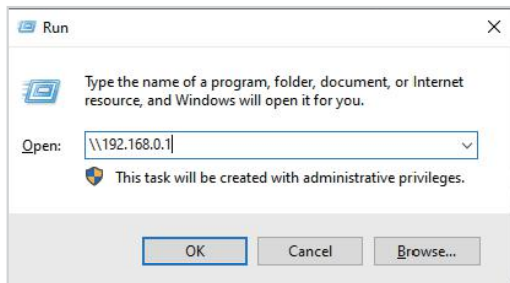


Figure 10-1

3. If the following error message is displayed (if no error message is displayed, go to Step 4), open task Manager, click Programs and Functions, and then click Enable/disable firewall function, select SMB1.0/CIFS File Sharing support, and click OK. After the application succeeds, restart the PC.



Figure 10-2

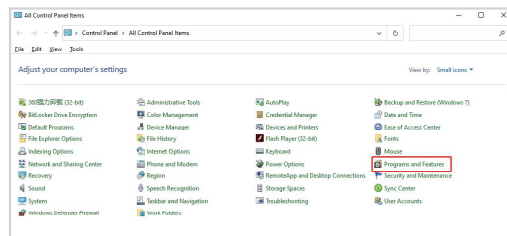


Figure 10-3

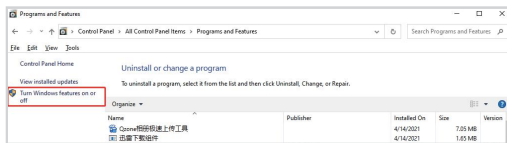


Figure 10-4

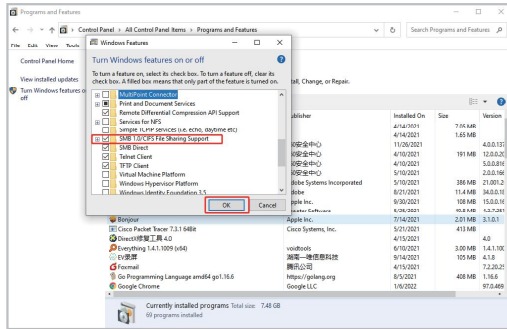


Figure 10-5

4. Enter \\192.168.0.1, click OK, and double-click the folder in the picture below. The input box for account and password will pop up.

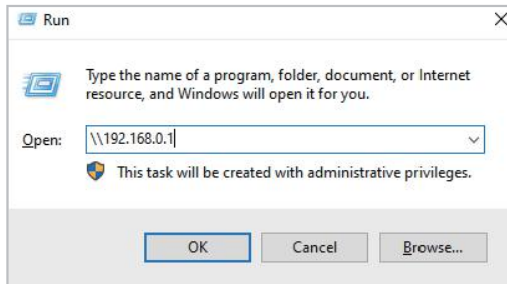


Figure 10-6

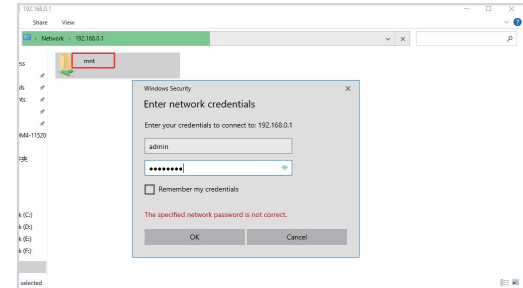


Figure 10-7

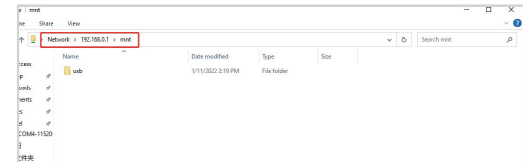


Figure 10-8

Frequently Asked Questions:

Unable to open the router's administrative interface:

- Make sure the computer is "Obtain an IP address automatically".
- Make sure the computer is connected when the router is wireless.
- Please turn off and reopen the browser, or try a different browsers (such as Firefox or Google).
- Please try another computer.
- If operations above still can not solve the problem, please restore the factory settings and re-operation.

How to restore the router to factory settings:

- When the power is on, sting the router's "Reset" pinhole for 10 seconds to restore the factory settings.

11. Contact Us

Method 1: Log in to the App Store or Google Store, search for "HNK Router", download and install the APP.

Method 2: Scan the QR code below to download and install the APP.



24hour Online After-Sales Service

Scan QR Code To Visit

<https://hnk.afterservice.vip>



24hour Online After-Sales Service

Scan QR Code To Visit
<https://hmk.afterservice.vip>

HUIZHOU MTN WEIYE TECHNOLOGY DEVELOPMENT CO.,LTD.
Address: NO.2 Huitai Road,Huinan High-tech Industrial Park,Huiao
Avenue,Huizhou City,Guangdong Province,China

[Tech Support :Support@hmknet.com](mailto:Support@hmknet.com)

Copyright©2021SHENZHEN ZK TECHNOLOGY CO., LTD.
ALL right reserved.
The content of this document maybe updated from time to time
due to product version upgrades or other reasons.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.