



The M210 AP is a Wi-Fi Alliance authorized Wi-Fi CERTIFIED 802.11a/b/g and 802.11n product. The Wi-Fi CERTIFIED Logo is a certification mark of the Wi-Fi Alliance.





M210 Access Point Quickstart

This Quickstart shows you how to get started using the M210 Access Point (US J9467A, WW J9468A).

After reading this Quickstart, you can visit www.hp.com/go/procurve/manuals and download the *M210 Access Point Management and Configuration Guide* and other documentation.

Hardware overview

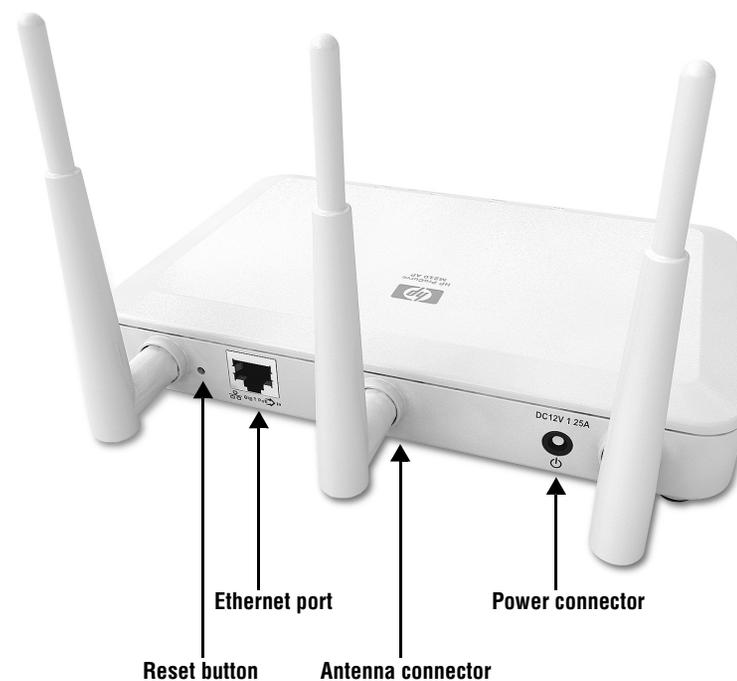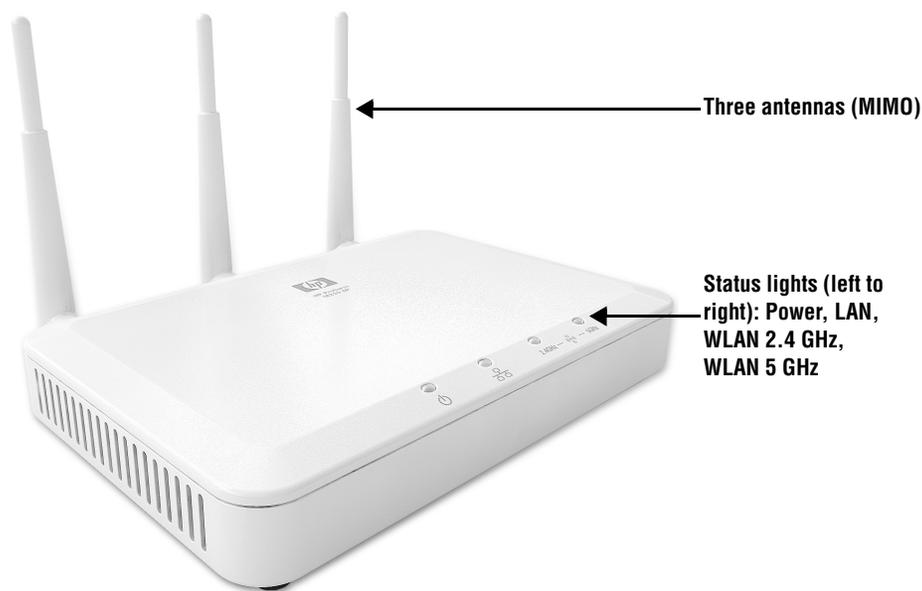

Package contents

M210, documentation, three antennas, and power supply.

Ethernet port

The M210 is equipped with an auto-sensing 10/100/1000 BaseT Ethernet port with RJ-45 connector. The port supports Power over Ethernet (PoE) 802.3af.

Radio and antennas

The M210 contains an 802.11a/b/g/n-compliant radio with three external dual-band antennas (MIMO).

Reset button

Press and quickly release the button to reset the M210. To reset the M210 to factory defaults, press the button until the status lights blink three times, then release.

Status lights

The status lights provide the following information:

Light	State	Description
Power	Off	The M210 has no power.
	Blinking	The M210 is starting up. If the Power light continues to blink after several minutes, it indicates that the software failed to load. Reset or power cycle the M210. If this condition persists, contact HP ProCurve Customer Care.
	On	The M210 is fully operational.
Ethernet	Off	The port is not connected or there is no activity.
	Blinking	The port is transmitting or receiving data.
WLAN 2.4 GHz	Blinking	Radio is transmitting or receiving data in b/g/n mode.
WLAN 5.4 GHz	Blinking	Radio is transmitting or receiving data in a/n mode.

Important information to read before installing

Prior to installing or using the M210, make sure that RF and other regulations, such as building and wiring codes, safety, channel, indoor/outdoor restrictions, and license requirements for the intended country are complied with. It is the responsibility of the end user to ensure that installation and use comply with local safety and radio regulations.

Surge protection and grounding: If you plan on connecting an outdoor antenna to the M210, make sure that proper lightning surge protection and grounding precautions are taken according to local electrical code. Failure to do so may result in personal injury, fire, equipment damage, or a voided warranty. The HP ProCurve hardware warranty provides no protection against damage caused by static discharge or a lightning strike.

Cabling: You must use the appropriate cables, and where applicable, surge protection, for your given region. For compliance with EN55022 Class-B emissions requirements use shielded Ethernet cables. At least Cat 5e cabling is required.

Country of use: In some regions, you are prompted to select the country of use during setup. Once the country has been set, the M210 will automatically limit the available wireless channels, ensuring compliant operation in the selected country. Entering the incorrect country may result in illegal operation and may cause harmful interference to other systems.

Safety: Take note of the following safety information during installation.

- If your network covers an area served by more than one power distribution system, be sure all safety grounds are securely interconnected.
- Network cables may occasionally be subject to hazardous transient voltages (caused by lightning or disturbances in the electrical power grid).
- Handle exposed metal components of the network with caution.

- The M210 is powered-on when the Ethernet port is plugged into a PoE power source or when an external power supply is connected.
- The M210 and all interconnected equipment must be installed indoors within the same building, including all PoE-powered network connections as described by Environment A of the IEEE 802.3af standard.

Powering the M210

The M210 can be powered by:

- The provided 48 Volt power supply.
- A 10/100 or 10/100/1000 PoE-enabled switch. Various PoE-enabled switches are available from HP ProCurve.
- An HP ProCurve PoE Power Injector (J9407A).

Caution: If the M210 will be powered by a user-supplied PoE power injector, use only a gigabit-compatible power injector. PoE injectors designed for 10/100 networks only are NOT compatible with the M210.

Installation

You can mount the M210 horizontally or vertically as shown here:



Horizontal mount with antennas at top



Vertical mount with antennas at left (or right)

Select mounting screws with a non-counter-sunk screw head approximately .25 inches (6.35 mm) in diameter so that the screw head fits into the mounting holes on the back of the M210. The screws should have an approximate length of 1 to 1.25 inches (25 mm to 30 mm) and a diameter of .14 inches (3.5 mm).

For drywall, it is recommended that wall anchors be used with the screws. In North America, a #6 screw with matching wall anchor works well.


1. Drill two holes of appropriate diameter for the screws or wall anchors. The holes must be precisely 3.25 inches (82.55 mm) apart, and positioned for horizontal or vertical mounting.
2. If using wall anchors, insert them into the holes. Drive the screws into the holes. Leave the screws protruding approximately .20 inches (6.35 mm) out of the wall.
3. Position the two mounting holes on the back of the M210 against the two screws.
4. Gently push the M210 against the two screws so that they fit into the mounting holes, and then slide the M210 slightly down until it is sufficiently anchored.

Configure a simple wireless network

This procedure describes how to configure a simple wireless network that enables you to establish a wireless connection to the Internet through the M210.

Other wireless network configurations are possible. See the *M210 Access Point Management and Configuration Guide*.

The topology of this simple wireless network is illustrated as follows:

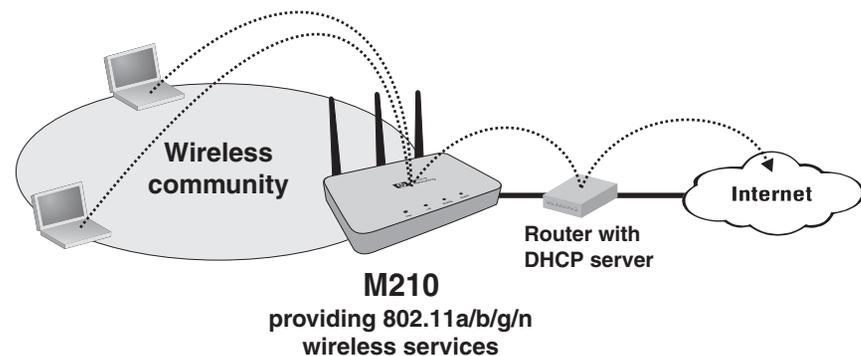

A. Configure your computer

1. Disconnect your computer LAN port and configure it to use a static IP address in the range **192.168.1.2** to **192.168.1.254**, and a subnet mask of **255.255.255.0**. Set the default gateway to **192.168.1.1**, and DNS server to **192.168.1.1**. For example to do this in Windows Vista, use **Control Panel > Network and Sharing Center > Manage Network Connections > Local Area Connection**, right-click **Properties** then select **Internet Protocol Version 4 (TCP/IPv4) > Properties**.
2. Disable any wireless connection on your computer.

B. Connect the cables and power on the M210

1. Connect the cables:

- If you are using a power supply, use an Ethernet cable to connect your computer to the M210 Ethernet port.
- If using a PoE switch, use Ethernet cables to connect your computer and the M210 to an unused factory-default PoE switch.
- If using a PoE injector, use Ethernet cables to connect your computer to the data in port of the PoE injector and the M210 to the data and power out port of the PoE injector.

2. Power on the M210:

- If using a power supply, connect it to the M210 then power on the supply.
- If using a PoE switch or injector, power it on.

Initially, the M210 power light will blink once every two seconds. Wait approximately a minute until it begins blinking once per second before proceeding to the next step.

C. Log in

A factory-default M210 is assumed.

Note: The M210 is managed via its web-based management tool using at least Microsoft Internet Explorer 7/8 or Mozilla Firefox 3.x.

1. In a Web browser, enter the address: **https://192.168.1.1**.
2. At the security certificate prompt, select the option that allows you to continue to the Website.
To eliminate the security warning, you need to replace the default certificate that is installed on the M210. See *About certificate warnings* in the *M210 Access Point Management and Configuration Guide*.
3. On the Login page, specify **admin** for both **Username** and **Password**, and then select **Login**.
4. On the License Agreement page, read the agreement and select **Accept License Agreement**.
5. The registration page appears. It is recommended that you register later by selecting selecting **Maintenance > Registration**.
6. If a **Country** prompt appears, select the country in which the M210 will operate.

Caution: The correct country must be selected. See *Country of use* on page 2.

The management tool is organized with menus and sub-menus. Instructions for making menu selections, such as “select **Wireless > Radio**” instruct you to select the **Wireless** menu and then the **Radio** sub-menu, as follows:



D. Assigning an IP address to the M210

By default the M210 operates as a DHCP client. This means that if the network has a DHCP server, the M210 will automatically receive a new IP address in place of its default IP address (192.168.1.1) upon connecting to the network.

Use one of the following methods to assign an IP address to the M210:

- **Pre-configure the DHCP server** to assign a specific IP address to the M210. To do this you need to specify the M210 Ethernet MAC address and a reserved IP address on the DHCP server. The M210 Ethernet MAC address is printed on the M210 label identified as Ethernet Base MAC, or listed on the management tool Home page as Ethernet base MAC address.
- **Let the DHCP server automatically assign an IP address.** By default, the DHCP server will assign an IP address once the M210 connects to the network. Once the DHCP server has assigned the M210 an IP address, you can then find the IP address of the M210 by looking for its Ethernet base MAC address in the DHCP server log. For example after Step E.4 below, you could go to the DHCP server log to retrieve the IP address assigned to the M210.
- **Assign a static IP address to the M210.** The address must be on the same subnet as the network to which the M210 will connect.
 1. Select **Network > DNS**, and set the DNS server address. Select **Save**.
 2. Select **Network > IP**.
 3. Select **Static** and then **Configure**. Configure settings are as follows:
 - **IP address:** Set an address that is on the same subnet as the network to which the M210 will connect once installed. Respect any DHCP server-mandated static address ranges.
 - **Mask:** Set the corresponding mask for the IP address.
 - **Default gateway:** Set the IP address of the gateway on the network.
 4. Select **Save**. Connection to the management tool is lost.

E. Test the wireless network

For the purpose of this example, the network must have a DHCP server and an Internet connection. Broadband routers typically include a DHCP server.

1. Disconnect your computer from the PoE switch or injector or the M210.
2. Power off the M210:
 - If using a power supply, disconnect it.
 - If using a PoE switch or injector, disconnect the Ethernet cable from the M210.
3. Use an Ethernet cable to connect the switch or the data in port of the injector to the network.

4. Reconnect and power on the M210:

- If using a power supply, use an Ethernet cable to connect the M210 to the network, and reconnect the M210 power supply.
- If using a PoE switch or injector, use an Ethernet cable to reconnect the M210 to the PoE switch or the data and power out port of the injector.

5. Enable the wireless network interface of your computer, and verify that it is set to **Obtain an IP address automatically**.

For example, to do this in Windows Vista, use **Control Panel > Network and Sharing Center > Manage Network Connections > Wireless Network Connection**, right-click **Properties** and select **Internet Protocol Version 4 (TCP/IPv4) > Properties**, and make sure that **Obtain an IP address automatically** and **Obtain a DNS server address automatically** are both enabled.

6. By default, the M210 creates a wireless network named *HP ProCurve*. Connect your computer to this wireless network. For example, in Windows Vista from the **Start** menu, select **Connect to**, and then *HP ProCurve* from the list of available wireless networks. You may have to wait a short time for this wireless network name to appear in the wireless networks list.
7. Confirm that you can browse the Internet using the wireless network.

F. Additional configuration

Configure your computer LAN port and connect it to the same network as the M210. Re-launch the management tool at <https://<IP address>> where *<IP address>* is the M210 IP address from Step D.

Caution: For initial-configuration convenience, a factory-default M210 has all wireless protection options disabled. It is strongly recommended that you enable a wireless protection option to properly safeguard the wireless network from intruders.

Wireless protection is configured by editing a wireless community profile (WCP). See *Wireless protection* in the *M210 Access Point Management and Configuration Guide*.





HP ProCurve M210 Access Point
Safety and Regulatory Information

Preliminary Draft06

© Copyright 2010 Hewlett-Packard Development Company, L.P.

Publication Number

5998-0295
February 2010

Disclaimer

HEWLETT-PACKARD COMPANY MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Hewlett-Packard assumes no responsibility for the use or reliability of its software on equipment that is not furnished by Hewlett-Packard.

Warranty

See the *Software End User License Agreement and Hardware Limited Warranty* booklet included with the product.

A copy of the specific warranty terms applicable to your Hewlett-Packard products and replacement parts can be obtained from your HP Sales and Service Office or authorized dealer.

Safety

Before installing and operating these products, please read:

- “Important information to read before installing” in the *M210 Access Point Quickstart* guide.
 - Safety and regulatory information in the *Management and Configuration Guide* for your access point. For a copy, visit www.hp.com/go/procurve/manuals and browse for your product.
 - This booklet.
-

Hewlett-Packard Company
8000 Foothills Boulevard, m/s 5552
Roseville, California 95747-5552
www.hp.com/go/procurve

HP ProCurve M210 Access Point

Specifications

HP ProCurve M210 Access Point (J9467A NA, J9468A WW)		
Electrical:	For power, requires one of the following: <ul style="list-style-type: none"> • External power adapter module*, or • PoE PD connection to the Ethernet Port. The access point is an IEEE 802.3af Compatible PD (PoE Powered Device) - Class 0.	
	* Use only the external power adapter module supplied with this product. Power adapter module specification are provided below.	
	<table border="0"> <tr> <td> Universal power adapter module (5188-6700): <ul style="list-style-type: none"> - AC Input Voltage: 100-240 V - Maximum AC Input Current: 0.5 A - AC Input Frequency Range: 50/60 Hz - Power Consumption: 15 W - DC Output Voltage: 12 ± 10% V - Maximum DC Output Current: 1.25 A </td> <td> Wall plug-in power adapter module (5184-5863, 5184-5864): <ul style="list-style-type: none"> - AC Input Voltage: 100-240 V - Maximum AC Input Current: 0.4 A - AC Input Frequency Range: 50/60 Hz - Power Consumption: 13 W - DC Output Voltage: 12 ± 10% V - Maximum DC Output Current: 1.085 A </td> </tr> </table>	Universal power adapter module (5188-6700): <ul style="list-style-type: none"> - AC Input Voltage: 100-240 V - Maximum AC Input Current: 0.5 A - AC Input Frequency Range: 50/60 Hz - Power Consumption: 15 W - DC Output Voltage: 12 ± 10% V - Maximum DC Output Current: 1.25 A
Universal power adapter module (5188-6700): <ul style="list-style-type: none"> - AC Input Voltage: 100-240 V - Maximum AC Input Current: 0.5 A - AC Input Frequency Range: 50/60 Hz - Power Consumption: 15 W - DC Output Voltage: 12 ± 10% V - Maximum DC Output Current: 1.25 A 	Wall plug-in power adapter module (5184-5863, 5184-5864): <ul style="list-style-type: none"> - AC Input Voltage: 100-240 V - Maximum AC Input Current: 0.4 A - AC Input Frequency Range: 50/60 Hz - Power Consumption: 13 W - DC Output Voltage: 12 ± 10% V - Maximum DC Output Current: 1.085 A 	
Physical:		
Dimensions:	195 mm (7.6 in) x 128 mm (5.0 in) x 32 mm (1.25 in)	
Environmental:		
Operating Temperature:	0°C to 40°C (32°F to 104°F)	
Relative humidity:	15% to 95% at 40°C (104°F), non-condensing	
Non-Operating Temperature:	-40°C to 70°C (-40°F to 158°F)	
Non-Operating Relative humidity:	15% to 95% at 65°C (149°F), non-condensing	
Maximum Altitude:	4.6 km (15,000 ft)	
Acoustic:	Power: 0 dB (no fan)	
Safety:		
Standards:	EN 60950-1:2006+A11:2009	

Preliminary Draft06

HP ProCurve M210 Access Point External Power Adapters and Power Cords:

HP ProCurve M210 Access Point (J9467A NA, J9468A WW):



WARNING: FOR INDOOR USE ONLY.
The access point, AC power adapter, and all connected cables are not designed for outdoor use.

External Power Adapters and Power Cords:

Universal External AC/DC Power Adapter	AC Power Cords for Universal External AC/DC Power Adapter			
All countries/regions 5188-6700	Australia/New Zealand	8121-0870	South Africa	8120-6317
	Thailand	8121-0664	Taiwan	8121-0963
	China	8120-8373	United Kingdom/Hong Kong/ Singapore/Malaysia	8120-8699
	Continental Europe/Denmark/Switzerland/Israel/Vietnam/Indonesia	8120-6314	United States/Canada/Mexico	8120-6313
	India	8121-0702		

Wall Plug-in External AC/DC Power Adapter (AC Power cords are not used)

United States/Canada	5184-5863
Continental Europe/Denmark/Norway/Sweden/Switzerland	5184-5864

Connectors

- A single RJ-45 network port compatible with the following standards:
 - IEEE 802.3 (10BASE-T)
 - IEEE 802.3u (100BASE-TX)
 - IEEE 802.3ab (1000BASE-T)
 - IEEE 802.3x (full-duplex flow control)
 - IEEE 802.3af (PoE)

Autonegotiation of link speed and duplex mode is provided.

Note

This port supports Auto-MDIX. For PoE support, network cables must use all 4 wire pairs.

- Three RP-SMA connectors for external antennas.

Safety and EMC Regulatory Statements

Safety Information



Documentation reference symbol. If the product is marked with this symbol, refer to the product documentation to get more information about the product.

WARNING

A **WARNING** in the manual denotes a hazard that can cause injury or death.

CAUTION

A **CAUTION** in the manual denotes a hazard that can damage the equipment or create a non-compliant condition.

Do not proceed beyond a **WARNING** or **CAUTION** notice until you have understood the hazardous conditions and have taken appropriate steps.

Grounding

Depending on the product model, your product will be classified either as a safety class I or safety class II compliant device. Class I devices require a connection to earth ground (3-terminal plug), while class II devices incorporate a 2-terminal plug.

Class I: There must be an uninterruptible safety earth ground from the main power source to the product's power cord or supplied power cord set. Whenever it is likely that the protection has been impaired, disconnect the power cord until the ground has been restored.

Class II: Safety class II-compliant devices include supplemental insulation to protect against electric shock, and do not require a connection to earth ground.

For LAN connections:

- If your LAN covers an area served by more than one power distribution system, be sure their safety grounds are securely interconnected.
- LAN cables may occasionally be subject to hazardous transient voltages (such as lightning or disturbances in the electrical utilities power grid). Handle exposed metal components of the network with caution.

Safety and EMC Regulatory Statements

Informations concernant la sécurité

- This product and all interconnected equipment must be installed indoors within the same building, including all associated LAN connections as described by Environment A of the IEEE 802.3af standard.

Servicing

There are no user-serviceable parts inside this product. Any servicing, adjustment, maintenance, or repair must be performed only by service-trained personnel.

This product does not have a power switch; it is powered on when the power cord is plugged in.

Informations concernant la sécurité



Symbole de référence à la documentation. Si le produit est marqué de ce symbole, reportez-vous à la documentation du produit afin d'obtenir des informations plus détaillées.

WARNING

Dans la documentation, un WARNING indique un danger susceptible d'entraîner des dommages corporels ou la mort.

CAUTION

Un texte de mise en garde intitulé CAUTION indique un danger susceptible de causer des dommages à l'équipement.

Ne continuez pas au-delà d'une rubrique WARNING ou CAUTION avant d'avoir bien compris les conditions présentant un danger et pris les mesures appropriées.

Bases

Suivant le modèle, votre produit sera classé comme un équipement conforme à la classe de sécurité I ou II. Les équipements de la classe I doivent être raccordés à la terre (fiche 3 broches), tandis que les équipements de la classe II intègrent une fiche 2 broches.

Classe I : La source d'alimentation principale doit être munie d'une prise de terre de sécurité installée aux bornes du câblage d'entrée, sur le cordon d'alimentation ou le cordon de raccordement fourni avec le produit. Lorsque cette protection semble avoir été endommagée, débranchez le cordon d'alimentation jusqu'à ce que la mise à la terre ait été réparée.

Classe II : Les équipements conformes à la classe II incluent une isolation supplémentaire pour la protection contre les chocs électriques et ne doivent pas forcément être raccordés à la terre.

Pour les connexions LAN :

- Si votre réseau local s'étend sur une zone desservie par plus d'un système de distribution de puissance, assurez-vous que les prises de terre de sécurité sont convenablement interconnectées.
- Les câbles de réseaux locaux peuvent occasionnellement être soumis à des surtensions transitoires dangereuses (telles que la foudre ou des perturbations dans le réseau d'alimentation public). Manipulez les composants métalliques du réseau avec précaution.
- Ce produit et tous les équipements interconnectés doivent être installés à l'intérieur, dans le même bâtiment, y compris toutes les connexions LAN, comme indiqué dans la norme IEEE 802.3af (Environnement A).

Dépannage

Aucune pièce à l'intérieur de ce produit ne peut être réparée par l'utilisateur. Tout dépannage, réglage, entretien ou réparation devra être confié exclusivement à un personnel qualifié.

Cet appareil ne comporte pas de commutateur principal ; la mise sous tension est effectuée par branchement du cordon d'alimentation.

Hinweise zur Sicherheit



Symbol für Dokumentationsverweis. Wenn das Produkt mit diesem Symbol markiert ist, schlagen Sie bitte in der Produktdokumentation nach, um mehr Informationen über das Produkt zu erhalten.

WARNING

Eine WARNING in der Dokumentation symbolisiert eine Gefahr, die Verletzungen oder sogar Todesfälle verursachen kann.

CAUTION

CAUTION in der Dokumentation symbolisiert eine Gefahr, die das Gerät beschädigen kann.

Fahren Sie nach dem Hinweis WARNING oder CAUTION erst fort, nachdem Sie den Gefahrenzustand verstanden und die entsprechenden Maßnahmen ergriffen haben.

Erdung

Je nach Produktmodell wird Ihr Produkt als Gerät nach Sicherheitsklasse I oder Sicherheitsklasse II eingestuft. Für Geräte der Klasse I ist eine Verbindung mit Erdung (3-poliger Stecker) erforderlich, während Geräte der Klasse II einen 2-poligen Stecker enthalten.

Safety and EMC Regulatory Statements

Hinweise zur Sicherheit

Klasse I: Es muss eine ununterbrochene Sicherheitserdung von der Hauptstromquelle bis zum Stromversorgungskabel des Produkts oder dem mitgelieferten Stromversorgungskabel vorhanden sein. Wenn es wahrscheinlich ist, dass der Schutz nicht mehr besteht, trennen Sie das Stromkabel, bis die Erdung wiederhergestellt wurde.

Klasse II: Geräte gemäß Sicherheitsklasse II weisen eine Zusatzisolierung zum Schutz vor Stromschlägen auf und erfordern keine Erdungsverbindung.

Für LAN-Verbindungen:

- Wenn Ihr LAN ein Gebiet umfasst, das von mehr als einem Stromverteilungssystem beliefert wird, müssen Sie sich vergewissern, dass die Sicherheitserdungen fest untereinander verbunden sind.
- LAN-Kabel können gelegentlich gefährlichen Übergangsspannungen ausgesetzt werden (beispielsweise durch Blitz oder Störungen in dem Starkstromnetz des Elektrizitätswerks). Bei der Handhabung exponierter Metallbestandteile des Netzwerkes Vorsicht walten lassen.
- Dieses Produkt und sämtliche angeschlossene Ausrüstung einschließlich aller zugehörigen LAN-Verbindungen müssen in den Innenräumen desselben Gebäudes installiert werden, wie in der Norm IEEE 802.3af für Umgebung A beschrieben.

Wartung

Dieses Gerät enthält innen keine durch den Benutzer zu wartenden Teile. Wartungs-, Anpassungs-, Instandhaltungs- oder Reparaturarbeiten dürfen nur von geschultem Bedienungspersonal durchgeführt werden.

Dieses Gerät hat keinen Netzschalter; es wird beim Anschließen des Netzkabels eingeschaltet.

Considerazioni sulla sicurezza

**WARNING**

Simbolo di riferimento alla documentazione. Se il prodotto è contrassegnato da questo simbolo, fare riferimento alla documentazione sul prodotto per ulteriori informazioni su di esso.

La dicitura **WARNING** denota un pericolo che può causare lesioni o morte.

CAUTION

La dicitura **CAUTION** denota un pericolo che può danneggiare le attrezzature.

Non procedere oltre un avviso di **WARNING** o di **CAUTION** prima di aver compreso le condizioni di rischio e aver provveduto alle misure del caso.

Messa a terra

A seconda del modello, il prodotto sarà classificato come dispositivo di sicurezza conforme alla classe I o alla classe II. I dispositivi di classe I richiedono una connessione alla messa a terra (connettore a 3 terminali), mentre quelli di classe II hanno un connettore a 2 terminali incorporato.

Classe I: deve essere presente una messa a terra di sicurezza di continuità dalla fonte di alimentazione principale al cavo di alimentazione del prodotto o al gruppo dei cavi di alimentazione. Se questa protezione non dovesse più sembrare accoppiata, scollegare il cavo di alimentazione fino a che non viene ripristinata la messa a terra.

Classe II: i dispositivi conformi alla sicurezza di classe II includono un isolamento supplementare per la protezione dalle scosse elettriche e non richiedono una connessione alla messa a terra.

Per le connessioni LAN:

- se la vostra LAN copre un'area servita da più di un sistema di distribuzione elettrica, accertatevi che i collegamenti a terra di sicurezza siano ben collegati fra loro;
- i cavi LAN possono occasionalmente andare soggetti a pericolose tensioni transitorie (ad esempio, provocate da lampi o disturbi nella griglia d'alimentazione della società elettrica); siate cauti nel toccare parti esposte in metallo della rete.
- Questo prodotto e tutti i dispositivi collegati, incluse le connessioni LAN associate, devono essere installati all'interno dello stesso edificio come descritto dallo standard IEEE 802.3af (Environment A).

Safety and EMC Regulatory Statements

Consideraciones sobre seguridad

Manutenzione

Nessun componente di questo prodotto può essere riparato dall'utente. Qualsiasi lavoro di riparazione, messa a punto, manutenzione o assistenza va effettuato esclusivamente da personale specializzato.

Questo apparato non possiede un commutatore principale; si mette scotto tensione all'inserirsi il cavo d'alimentazione.

Consideraciones sobre seguridad



Símbolo de referencia a la documentación. Si el producto va marcado con este símbolo, consultar la documentación del producto a fin de obtener mayor información sobre el producto.

WARNING

Una WARNING en la documentación señala un riesgo que podría resultar en lesiones o la muerte.

CAUTION

Una CAUTION en la documentación señala un riesgo que podría resultar en averías al equipo.

No proseguir después de un símbolo de WARNING o CAUTION hasta no haber entendido las condiciones peligrosas y haber tomado las medidas apropiadas.

Toma de tierra

Dependiendo del modelo del producto, este aparecerá clasificado como dispositivo que cumple los requisitos de la categoría de seguridad I o de la categoría de seguridad II. Los dispositivos de categoría de seguridad I requieren una conexión a tierra (clavija de 3 terminales), mientras que los dispositivos de categoría de seguridad II incorporan una clavija de 2 terminales.

Categoría I: debe haber una puesta a tierra continua desde la fuente principal de energía hasta el cable de la corriente del producto o el grupo de cables proporcionado. Siempre que quepa la posibilidad de que la protección haya sido dañada, desconecte el cable de la corriente hasta que la toma de tierra haya sido restaurada.

Categoría II: los dispositivos de categoría de seguridad II incluyen un aislamiento adicional como protección contra descargas eléctricas y no requieren una conexión a tierra.

Para coneMxiones LAN:

- Si la LAN abarca un área cuyo suministro eléctrico proviene de más de una red de distribución de electricidad, cerciorarse de que las puestas a tierra estén conectadas entre sí de modo seguro.
- Es posible que los cables de la LAN se vean sometidos de vez en cuando a voltajes momentáneos que entrañen peligro (rayos o alteraciones en la red de energía eléctrica). Manejar con precaución los componentes de metal de la LAN que estén al descubierto.
- Este producto y todos los equipos interconectados deben instalarse en interior, dentro del mismo edificio, incluyendo todas las conexiones LAN asociadas como se describe en Environment (entornos) A del estándar IEEE 802.3af.

Servicio

Este aparato no contiene pieza alguna susceptible de reparación por parte del usuario. Todas las reparaciones, ajustes o servicio de mantenimiento debe realizarlos solamente el técnico.

Este producto no tiene interruptor de potencia; se activa cuando se enchufa el cable de alimentación.

Safety Information (Korea)



설명서 참조 기호. 제품에 이 기호가 표시되어 있는 경우 제품 설명서를 참조하여 해당 제품에 대한 자세한 내용을 확인하십시오.

- 경고** 이 설명서에 표시된 경고는 상해 또는 사망을 초래할 위험이 있음을 의미합니다.
- 주의** 이 설명서에 표시된 주의는 장비를 손상하거나 호환되지 않는 상황을 발생시킬 수 있는 위험이 있음을 의미합니다.
- 반드시 경고 또는 주의 정보에서 설명한 위험 상황을 파악하고 적절한 절차를 수행한 후 진행해야 합니다.

접지

제품은 제품 모델에 따라 안전 1등급 또는 안전 2등급 호환 장치로 분류됩니다. 안전 1등급 장치에는 접지된 연결 장치(3터미널 플러그)를 사용해야 합니다. 안전 2등급 장치에는 2터미널 플러그가 포함되어 있습니다.

1등급: 주 전원과 제품 전원 코드 또는 공급된 전원 코드 세트를 연결하기 위한 무정전 안전 접지 장치가 반드시 있어야 합니다. 안전상의 위험이 있는 것으로 판단되는 경우 접지가 복구될 때까지 전원 코드를 분리해 둡니다.

2등급: 안전 2등급 호환 장치에는 감전을 예방하기 위한 추가 절연 장치가 포함되어 있으며 접지 연결 장치가 필요하지 않습니다.

LAN 연결 시:

- LAN이 하나 이상의 전원 분배 시스템에서 전원을 제공하는 영역에 걸쳐 있는 경우 접지가 제대로 연결되어 있는지 확인합니다.
- LAN 케이블에 번개 또는 전력망 장애와 같이 전압이 과도하게 공급되어 위험한 상황이 가끔 발생할 수 있습니다. 네트워크에서 노출된 금속 부품을 취급할 때 주의하십시오.
- 모든 LAN 연결을 포함한 이 제품 및 모든 관련 장비는 IEEE 802.3af 표준의 환경 A 조항에 명시된 대로 동일한 건물 내부에 설치해야 합니다.

서비스

이 제품에 있는 어떠한 부품도 사용자가 직접 다루어서는 안 됩니다. 모든 서비스, 조정, 유지 관리 및 수리는 전문 서비스 담당자가 수행해야 합니다.

이 제품에는 전원 스위치가 없고 전원 코드를 연결하면 전원이 켜집니다.

Safety Information (China)

HP 网络产品使用安全手册

使用须知

欢迎使用惠普网络产品，为了您及仪器的安全，请您务必注意如下事项：

1. 仪器要和地线相接，要使用有正确接地插头的电源线，使用中国国家规定的220V电源。
2. 避免高温和尘土多的地方，否则易引起仪器内部部件的损坏。
3. 避免接近高温，避免接近直接热源，如直射太阳光、暖气等其它发热体。
4. 不要有异物或液体落入机内，以免部件短路。
5. 不要将磁体放置于仪器附近。

警告

为防止火灾或触电事故，请不要将该机放置于淋雨或潮湿处。

安装

安装辅助管理模块，请参看安装指南。

保修及技术支持

如果您按照以上步骤操作时遇到了困难，或想了解其它产品性能，请按以下方式与我们联系。

如是硬件故障：

1. 与售出单位或当地维修机构联系。
2. 中国惠普有限公司维修中心地址：
北京市海淀区知春路49号希格玛大厦
联系电话：010-62623888 转 6101
邮政编码：100080

如是软件问题：


1. 惠普用户响应中心热线电话：010-65645959
2. 传真自动回复系统：010-65645735

Safety and EMC Regulatory Statements
EMC Regulatory Statements

EMC Regulatory Statements

Notice for U.S.A.

Manufacturer's FCC Declaration of Conformity Statement



Product No: J9467A NA, J9468A WW

FCC ID No: B94RSVLC-1001

Regulatory Model No: RSVLC-1001

Manufacturer: Hewlett-Packard Company
3000 Hanover Street
Palo Alto, CA 94304-1185 USA

Phone: 650-857-1501

For questions regarding this declaration, contact the Product Regulations Manager at the above address or phone number.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: The FCC requires the user to be notified that any changes or modifications made to the device that are not expressly approved by the Hewlett-Packard Company may void the user's authority to operate the equipment.

This device is restricted to **indoor** use when using the 5.15-5.25 GHz band (Channels 36, 40, 44 and 48).



Warning: Exposure to Radio Frequency Radiation

The radiated output power of this device is below the FCC radio exposure limits. Nevertheless, the device should be used in such a manner that the potential for human contact during normal operation is minimized. To avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antennas should not be less than 20 cm (8 inches) during normal operation.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country/region-dependent and are firmware programmed at the factory to match the intended destination. The firmware setting is not accessible by the end user.

For additional FCC Statements, see the *Management and Configuration Guide* for this product, available at www.hp.com/go/procurve/manuals.

Regulatory Model Identification Number

For regulatory identification purposes, this product has been assigned a Regulatory Model Number (RMN). The RMN for your product is RSVLC-1001. The RMN should not be confused with the marketing name (HP ProCurve M210 Access Point) or the Product Numbers (J9467A, J9468A).

Safety and EMC Regulatory Statements
EMC Regulatory Statements

Notice for Canada

This device complies with the limits for a Class B digital device and conforms to Industry Canada standard ICES-003. Products that contain a radio transmitter comply with Industry Canada standard RSS210 and are labeled with an IC approval number.

Cet appareil numérique de la classe B est conforme à la norme ICES-003 d'Industry Canada. La radio sans fil de ce dispositif est conforme à la certification RSS 210 d'Industry Canada et est étiquetée avec un numéro d'approbation IC.

This device is restricted to indoor use when using the 5.15-5.25GHz band (Channels 36, 40, 44 and 48) to reduce the potential for harmful interference to co-channel mobile satellite systems.

High-power radars are allocated as primary users (meaning they have priority) of the bands 5250-5350 MHz and 5650-5850 MHz and could cause interference and/or damage to LE-LAN devices.

This device has been designed to operate only with the antennas supplied. Use of accessory antennas not supplied with the product are strictly prohibited for use with this device.

For additional Industry Canada statements, see the *Management and Configuration Guide* for this product, available at www.hp.com/go/procurve/manuals.

Notice for European Community

For additional European Community statements, see the *Management and Configuration Guide* for this product, available at www.hp.com/go/procurve/manuals.



This device complies with the EMC Directive 2004/108/EEC, Low Voltage Directive 2006/95/EC and R&TTE Directive 1999/5/EC. Compliance with these directives implies conformity to harmonized European standards (European Norms) that are listed on the EU Declaration of Conformity that has been issued by HP for this device.

Countries of Operation & Conditions of Use

This device may be used in the following EU and EFTA countries: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Liechtenstein, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom. Restrictions for indoor vs. outdoor operation, licensing and allowed channels of operation apply in some countries as described below.

Note

The user must use the configuration utility provided with this device to ensure the channels of operation are in conformance with the spectrum usage rules for EU and EFTA countries as described below.

2.4 GHz Operation:

- This device may be operated indoors in all EU and EFTA countries using the 2.4GHz band (Channels 1 - 13), except where noted below.
- In Italy, a license is required for outdoor use. Verify with your dealer or directly with the General Direction for Frequency Planning and Management (Direzione Generale Pianificazione e Gestione Frequenze).

E' necessaria una concessione ministeriale anche per l'uso del prodotto. Verifici per favore con il proprio distributore o direttamente presso la Direzione Generale Pianificazione e Gestione Frequenze.

Safety and EMC Regulatory Statements

EMC Regulatory Statements

- Notice for France for use of 2.4 GHz wireless communication:
France:

L'utilisation de cet équipement (2.4GHz Wireless LAN) est soumise a certaines restrictions: Cet équipement peut être utilise a l'interieur d'un bâtiment en utilisant toutes les fréquences de 2400 a 2483.5MHz (Chaîne 1-13). Pour une utilisation en environnement extérieur, vous devez utiliser les fréquences comprises entre 2400-2454 MHz (Chaîne 1-9). Pour les dernieres restrictions, voir <http://www.arcep.fr>.

For 2.4 GHz Wireless LAN operation of this product certain restrictions apply: This product may be used indoor for the entire 2400-2483.5 MHz frequency band (channels 1-13). For outdoor use, only 2400-2454 MHz frequency band (channels 1-9) may be used. For the latest requirements, see <http://www.arcep.fr>.

5 GHz Operation:

- This device will automatically limit the allowable channels determined by the current country of operation. Incorrectly entering the country of operation may result in illegal operation and may cause harmful interference to other systems. The user is obligated to ensure the device is operating according to the channel limitations, indoor/outdoor restrictions and license requirements for each European Community country as described in this document.
- This device is restricted to indoor use when operated in EU and EFTA countries using the 5.15-5.25 GHz band (Channels 36, 40, 44, 48). See the table below for the allowed 5 GHz channels in each band.

Operation Using 5 GHz Channels in the European Community

Frequency Band (MHz)	Allowed Channels	Usage	Maximum EIRP (mW)
5150 - 5250	36, 40, 44, 48	Indoor use only	200

All ProCurve devices are designed to be compliant with the rules and regulations in locations they are sold and will be labeled as required. Any changes or modifications to ProCurve devices, not expressly approved by HP, could void the user's authority to operate this device.

EU Declaration of Conformity

**DECLARATION OF CONFORMITY**

according to ISO/IEC 17050-1 and EN 17050-1

DoC #: RSVLC-1001-01

Supplier's Name: Hewlett-Packard Company
Supplier's Address: 8000 Foothills Blvd., Roseville CA 95747 U.S.A.

declares, that the product
Product Name and Model: ProCurve M210 Access Point, J9467A, J9468A
Regulatory Model Number: ¹⁾ RSVLC-1001
Product Options: AC Adapters: 5188-6700, 5184-5864
 PoE Injector: J9407A

Conforms to the following Product Specifications and Regulations:

EMC: Class B
 EN 55022:2006+A1:2007
 EN 61000-3-2:2006
 EN 61000-3-3:2008
 EN 60601-1-2:2007

Safety:
 EN 60950-1:2006+A11:2009

Telecom:
 EN 300 328 V1.7.1
 EN 301 893 V1.5.1
 EN 301 489-1 V1.8.1
 EN 301 489-17 V2.1.1
 EN 50385:2002

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and (2) this device must accept any interference received,
 including interference that may cause undesired operation.

The product herewith complies with the requirements of the Low Voltage Directive 2006/95/EC, the EMC
 Directive 2004/108/EC, the R&TTE Directive 1999/5/EC and carries the **CE** marking accordingly.

Additional Information:

- 1) This product is assigned a Regulatory Model Number which stays with the regulatory aspects of the
 design. The Regulatory Model Number is the main product identifier in the regulatory documentation and
 test reports. This number should not be confused with the marketing name or the product numbers.

Roseville CA,
 February 9, 2010

Mike Avery, Manager
 ProCurve Networking Business

Local contact for regulatory topics only:

EMEA: Hewlett-Packard GmbH, HQ-TRE, Herrenberger Strasse 140, 71034 Boeblingen, Germany
 U.S.: Hewlett-Packard, 3000 Hanover St., Palo Alto 94304, U.S.A. 650-857-1501

www.hp.com/go/certificates

Safety and EMC Regulatory Statements
EMC Regulatory Statements

Notice for Taiwan

For Taiwan 警語：

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

在5.25-5.35GHz頻帶內操作之無線資訊傳輸設備，限於室內使用。

Notice for Korea

B급 기기 (가정용 방송통신기기)	이 기기는 가정용(B급)으로 전자파적합등록을 한 기기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.
-----------------------	--

Recycle Statements

Waste Electrical and Electronic Equipment (WEEE) Statements



Disposal of Waste Equipment by Users in Private Household in the European Union

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



Likvidace zařízení soukromými domácími uživateli v Evropské unii

Tento symbol na produktu nebo balení označuje výrobek, který nesmí být vyhozen spolu s ostatním domácím odpadem. Povinností uživatele je předat takto označený odpad na předem určené sběrné místo pro recyklaci elektrických a elektronických zařízení. Okamžité třídění a recyklace odpadu pomůže uchovat přírodní prostředí a zajistí takový způsob recyklace, který ochrání zdraví a životní prostředí člověka. Další informace o možnostech odevzdání odpadu k recyklaci získáte na příslušném obecním nebo městském úřadě, od firmy zabývající se sběrem a svozem odpadu nebo v obchodě, kde jste produkt zakoupili.



Bortskaffelse af affald fra husstande i den Europæiske Union

Hvis produktet eller dets emballage er forsynet med dette symbol, angiver det, at produktet ikke må bortskaffes med andet almindeligt husholdningsaffald. I stedet er det dit ansvar at bortskaffe kasseret udstyr ved at aflevere det på den kommunale genbrugsstation, der forestår genvinding af kasseret elektrisk og elektronisk udstyr. Den centrale modtagelse og genvinding af kasseret udstyr i forbindelse med bortskaffelsen bidrager til bevarelse af naturlige ressourcer og sikrer, at udstyret genvindes på en måde, der beskytter både mennesker og miljø. Yderligere oplysninger om, hvor du kan aflevere kasseret udstyr til genvinding, kan du få hos kommunen, den lokale genbrugsstation eller i den butik, hvor du købte produktet.



Seadmete jäätmete kõrvaldamine eramajapidamistes Euroopa Liidus

See tootel või selle pakendil olev sümbol näitab, et kõnealust toodet ei tohi koos teiste majapidamisjäätmetega kõrvaldada. Teie kohus on oma seadmete jäätmed kõrvaldada, viies need elektri- ja elektroonikaseadmete jäätmete ringlussevõtmiseks selleks ettenähtud kogumispunkti. Seadmete jäätmete eraldi kogumine ja ringlussevõtmise kõrvaldamise ajal aitab kaitsta loodusvarasid ning tagada, et ringlussevõtmise toimub viisil, mis kaitseb inimeste tervist ning keskkonda. Lisateabe saamiseks selle kohta, kuhu oma seadmete jäätmed ringlussevõtmiseks viia, võtke palun ühendust oma kohaliku linnakantselei, majapidamisjäätmete kõrvaldamise teenistuse või kauplusega, kust Te toote ostsite.

Recycle Statements**Waste Electrical and Electronic Equipment (WEEE) Statements****Laitteiden hävittäminen kotitalouksissa Euroopan unionin alueella**

Jos tuotteessa tai sen pakkauksessa on tämä merkki, tuotetta ei saa hävittää kotitalousjätteiden mukana. Tällöin hävitettävä laite on toimitettava sähkölaitteiden ja elektronisten laitteiden kierrätyspisteeseen. Hävitettävien laitteiden erillinen käsittely ja kierrätys auttavat säästämään luonnonvaroja ja varmistamaan, että laite kierrätetään tavalla, joka estää terveyshaitat ja suojelee luontoa. Lisätietoja paikoista, joihin hävitettävät laitteet voi toimittaa kierrätettäväksi, saa ottamalla yhteyttä jätehuoltoon tai liikkeeseen, josta tuote on ostettu.

**Élimination des appareils mis au rebut par les ménages dans l'Union européenne**

Le symbole apposé sur ce produit ou sur son emballage indique que ce produit ne doit pas être jeté avec les déchets ménagers ordinaires. Il est de votre responsabilité de mettre au rebut vos appareils en les déposant dans les centres de collecte publique désignés pour le recyclage des équipements électriques et électroniques. La collecte et le recyclage de vos appareils mis au rebut indépendamment du reste des déchets contribue à la préservation des ressources naturelles et garantit que ces appareils seront recyclés dans le respect de la santé humaine et de l'environnement. Pour obtenir plus d'informations sur les centres de collecte et de recyclage des appareils mis au rebut, veuillez contacter les autorités locales de votre région, les services de collecte des ordures ménagères ou le magasin dans lequel vous avez acheté ce produit.

**Entsorgung von Altgeräten aus privaten Haushalten in der EU**

Das Symbol auf dem Produkt oder seiner Verpackung weist darauf hin, dass das Produkt nicht über den normalen Hausmüll entsorgt werden darf. Benutzer sind verpflichtet, die Altgeräte an einer Rücknahmestelle für Elektro- und Elektronik-Altgeräte abzugeben. Die getrennte Sammlung und ordnungsgemäße Entsorgung Ihrer Altgeräte trägt zur Erhaltung der natürlichen Ressourcen bei und garantiert eine Wiederverwertung, die die Gesundheit des Menschen und die Umwelt schützt. Informationen dazu, wo Sie Rücknahmestellen für Ihre Altgeräte finden, erhalten Sie bei Ihrer Stadtverwaltung, den örtlichen Müllentsorgungsbetrieben oder im Geschäft, in dem Sie das Gerät erworben haben.

**Απόρριψη άχρηστου εξοπλισμού από χρήστες σε ιδιωτικά νοικοκυριά στην Ευρωπαϊκή Ένωση**

Το σύμβολο αυτό στο προϊόν ή τη συσκευασία του υποδεικνύει ότι το συγκεκριμένο προϊόν δεν πρέπει να διατίθεται μαζί με τα άλλα οικιακά σας απορρίμματα. Αντίθετα, είναι δική σας ευθύνη να απορρίψετε τον άχρηστο εξοπλισμό σας παραδίδοντάς τον σε καθορισμένο σημείο συλλογής για την ανακύκλωση άχρηστου ηλεκτρικού και ηλεκτρονικού εξοπλισμού. Η ξεχωριστή συλλογή και ανακύκλωση του άχρηστου εξοπλισμού σας κατά την απόρριψη θα συμβάλει στη διατήρηση των φυσικών πόρων και θα διασφαλίσει ότι η ανακύκλωση γίνεται με τρόπο που προστατεύει την ανθρώπινη υγεία και το περιβάλλον. Για περισσότερες πληροφορίες σχετικά με το πού μπορείτε να παραδώσετε τον άχρηστο εξοπλισμό σας για ανακύκλωση, επικοινωνήστε με το αρμόδιο τοπικό γραφείο, την τοπική υπηρεσία διάθεσης οικιακών απορριμμάτων ή το κατάστημα όπου αγοράσατε το προϊόν.

**Készülékek magánháztartásban történő selejtezése az Európai Unió területén**

A készüléken, illetve a készülék csomagolásán látható azonos szimbólum annak jelzésére szolgál, hogy a készülék a selejtezés során az egyéb háztartási hulladéktól eltérő módon kezelendő. A vásárló a hulladékká vált készüléket köteles a kijelölt gyűjtőhelyre szállítani az elektromos és elektronikai készülékek újrahasznosítása céljából. A hulladékká vált készülékek selejtezési begyűjtése és újrahasznosítása hozzájárul a természeti erőforrások megőrzéséhez, valamint biztosítja a selejtezett termékek környezetre és emberi egészségre nézve biztonságos feldolgozását. A begyűjtés pontos helyéről bővebb tájékoztatást a lakhelye szerint illetékes önkormányzattól, az illetékes személtakarító vállaltól, illetve a terméket elárúsító helyen kaphat.

**Smaltimento delle apparecchiature da parte di privati nel territorio dell'Unione Europea**

Questo simbolo presente sul prodotto o sulla sua confezione indica che il prodotto non può essere smaltito insieme ai rifiuti domestici. È responsabilità dell'utente smaltire le apparecchiature consegnandole presso un punto di raccolta designato al riciclo e allo smaltimento di apparecchiature elettriche ed elettroniche. La raccolta differenziata e il corretto riciclo delle apparecchiature da smaltire permette di proteggere la salute degli individui e l'ecosistema. Per ulteriori informazioni relative ai punti di raccolta delle apparecchiature, contattare l'ente locale per lo smaltimento dei rifiuti, oppure il negozio presso il quale è stato acquistato il prodotto.

**Nolietotiekārtu iznīcināšanas noteikumi lietotājiem Eiropas Savienības privātajās mājāsaimniecībās**

Šāds simbols uz izstrādājuma vai uz tā iesaiņojuma norāda, ka šo izstrādājumu nedrīkst izmest kopā ar citiem sadzīves atkritumiem. Jūs atbildat par to, lai nolietotās iekārtas tiktu nodotas speciāli iekārtotos punktos, kas paredzēti izmantoto elektrisko un elektronisko iekārtu savākšanai otrreizējai pārstrādei. Atsevišķa nolietoto iekārtu savākšana un otrreizējā pārstrāde palīdzēs saglabāt dabas resursus un garantēs, ka šīs iekārtas tiks otrreizēji pārstrādātas tādā veidā, lai pasargātu vidi un cilvēku veselību. Lai uzzinātu, kur nolietotās iekārtas var izmest otrreizējai pārstrādei, jāvērsas savas dzīves vietas pašvaldībā, sadzīves atkritumu savākšanas dienestā vai veikalā, kurā izstrādājums tika nopirkts.

**Vartotoju īs privāču namu ūkiu iřangos atlieku řalinimas Europos Sąjungoje**

Šis simbolis ant gaminio arba jo pakuotės rodo, kad šio gaminio šalinti kartu su kitomis namų ūkio atliekoms negalima. Šalintinas įrangos atliekas privalote pristatyti į specialią surinkimo vietą elektros ir elektroninės įrangos atliekoms perdirbti. Atskirai surenkamos ir perdirbamos šalintinos įrangos atliekos padės saugoti gaminius išteklius ir užtikrinti, kad jos bus perdirbtos tokiu būdu, kuris nekenkia žmonių sveikatai ir aplinkai. Jeigu norite sužinoti daugiau apie tai, kur galima pristatyti perdirbtinas įrangos atliekas, kreipkitės į savo seniūniją, namų ūkio atliekų šalinimo tarnybą arba parduotuvę, kurioje įsigijote gaminį.

**Verwijdering van afgedankte apparatuur door privé-gebruikers in de Europese Unie**

Dit symbool op het product of de verpakking geeft aan dat dit product niet mag worden gedeponeerd bij het normale huishoudelijke afval. U bent zelf verantwoordelijk voor het inleveren van uw afgedankte apparatuur bij een inzamelingspunt voor het recyclen van oude elektrische en elektronische apparatuur. Door uw oude apparatuur apart aan te bieden en te recyclen, kunnen natuurlijke bronnen worden behouden en kan het materiaal worden hergebruikt op een manier waarmee de volksgezondheid en het milieu worden beschermd. Neem contact op met uw gemeente, het afvalinzamelingsbedrijf of de winkel waar u het product hebt gekocht voor meer informatie over inzamelingspunten waar u oude apparatuur kunt aanbieden voor recycling.

**Pozbywanie się zużytego sprzętu przez użytkowników w prywatnych gospodarstwach domowych w Unii Europejskiej**

Ten symbol na produkcie lub jego opakowaniu oznacza, że produkt nie wolno wyrzucać do zwykłych pojemników na śmieci. Obowiązkiem użytkownika jest przekazanie zużytego sprzętu do wyznaczonego punktu zbiórki w celu recyklingu odpadów powstałych ze sprzętu elektrycznego i elektronicznego. Osobna zbiórka oraz recykling zużytego sprzętu pomogą w ochronie zasobów naturalnych i zapewnią ponowne wprowadzenie go do obiegu w sposób chroniący zdrowie człowieka i środowisko. Aby uzyskać więcej informacji o tym, gdzie można przekazać zużyty sprzęt do recyklingu, należy się skontaktować z urzędem miasta, zakładem gospodarki odpadami lub sklepem, w którym zakupiono produkt.

Recycle Statements**Waste Electrical and Electronic Equipment (WEEE) Statements****Descarte de Lixo Elétrico na Comunidade Européia**

Este símbolo encontrado no produto ou na embalagem indica que o produto não deve ser descartado no lixo doméstico comum. É responsabilidade do cliente descartar o material usado (lixo elétrico), encaminhando-o para um ponto de coleta para reciclagem. A coleta e a reciclagem seletivas desse tipo de lixo ajudarão a conservar as reservas naturais; sendo assim, a reciclagem será feita de uma forma segura, protegendo o ambiente e a saúde das pessoas. Para obter mais informações sobre locais que reciclam esse tipo de material, entre em contato com o escritório da HP em sua cidade, com o serviço de coleta de lixo ou com a loja em que o produto foi adquirido.

**Likvidácia vyradených zariadení v domácnostiach v Európskej únii**

Symbol na výrobku alebo jeho balení označuje, že daný výrobok sa nesmie likvidovať s domovým odpadom. Povinnosťou spotrebiteľa je odovzdať vyradené zariadenie v zbernom mieste, ktoré je určené na recykláciu vyradených elektrických a elektronických zariadení. Separovaný zber a recyklácia vyradených zariadení prispieva k ochrane prírodných zdrojov a zabezpečuje, že recyklácia sa vykonáva spôsobom chrániacim ľudské zdravie a životné prostredie. Informácie o zberných miestach na recykláciu vyradených zariadení vám poskytne miestne zastupiteľstvo, spoločnosť zabezpečujúca odvoz domového odpadu alebo obchod, v ktorom ste si výrobok zakúpili.

**Odstranjevanje odslužene opreme uporabnikov v zasebnih gospodinjstvih v Evropski uniji**

Ta znak na izdelku ali njegovi embalaži pomeni, da izdelka ne smete odvreči med gospodinjске odpadke. Nasprotno, odsluženo opremo morate predati na zbirališče, pooblaščeno za recikliranje odslužene električne in elektronske opreme. Ločeno zbiranje in recikliranje odslužene opreme prispeva k ohranjanju naravnih virov in zagotavlja recikliranje te opreme na zdravju in okolju neškodljiv način. Za podrobnejše informacije o tem, kam lahko odpeljete odsluženo opremo na recikliranje, se obrnite na pristojni organ, komunalno službo ali trgovino, kjer ste izdelek kupili.

**Eliminación de residuos de equipos eléctricos y electrónicos por parte de usuarios particulares en la Unión Europea**

Este símbolo en el producto o en su envase indica que no debe eliminarse junto con los desperdicios generales de la casa. Es responsabilidad del usuario eliminar los residuos de este tipo depositándolos en un "punto limpio" para el reciclado de residuos eléctricos y electrónicos. La recogida y el reciclado selectivos de los residuos de aparatos eléctricos en el momento de su eliminación contribuirá a conservar los recursos naturales y a garantizar el reciclado de estos residuos de forma que se proteja el medio ambiente y la salud. Para obtener más información sobre los puntos de recogida de residuos eléctricos y electrónicos para reciclado, póngase en contacto con su ayuntamiento, con el servicio de eliminación de residuos domésticos o con el establecimiento en el que adquirió el producto.

**Bortskaffande av avfallsprodukter från användare i privathushåll inom Europeiska Unionen**

Om den här symbolen visas på produkten eller förpackningen betyder det att produkten inte får slängas på samma ställe som hushållssopor. I stället är det ditt ansvar att bortskaffa avfallet genom att överlämna det till ett uppsamlingsställe avsett för återvinning av avfall från elektriska och elektroniska produkter. Separat insamling och återvinning av avfallet hjälper till att spara på våra naturresurser och gör att avfallet återvinns på ett sätt som skyddar människors hälsa och miljön. Kontakta ditt lokala kommunkontor, din närmsta återvinningsstation för hushållsavfall eller affären där du köpte produkten för att få mer information om var du kan lämna ditt avfall för återvinning.

Preliminary Draft06



Technology for better business outcomes

To learn more, visit www.hp.com/go/procurve/

© Copyright 2010 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP will not be liable for technical or editorial errors or omissions contained herein.



Printed in China
February 2010

Manual Part Number
5998-0295

