

C4000BG

USER

GUIDE

Version 1.0



NOTICE

This document contains confidential information, which is proprietary to CenturyLink. No part of its contents can be used, copied, disclosed, or conveyed to any party in any manner whatsoever without prior written permission from CenturyLink.

Copyright © 2020 CenturyLink Inc. All Rights Reserved.

Contents

1	Introduction	4
2	Overview	4
3	Setup	4
4	Internet Connection Setup (CenturyLink Home Router side).....	7
4.1	Automatic Connection	7
4.2	Manual Connection.....	7
5	Setting up a wireless network	9
5.1	Using WPS (Wireless Protected Setup)	9
5.2	Setting up a wireless network manually	9
6	Getting to know the C4000BG	10
7	Technical Specifications:.....	11
7.1	General Specifications.....	11
7.2	Dimensions and weight.....	11
7.3	Environmental Parameters	11
8	FCC:.....	12

1 Introduction

Please read through this user guide prior to using this product and retain the manual for future use. Only operate this device upon the full understanding of the devices basic operation as described in this manual.

Any deviation or alteration of this product, it's appearance or specification are without consent or further notice of the company.

2 Overview

The C4000BG is a high performance 2x2 Wi-Fi 6 router (802.11ax) with a bonded VDSL2 integrated access device (IAD) and a four-port built-in Gigabit Ethernet switch. The C4000BG allows wired and wireless clients to safely access the Internet. Additionally, the C4000BG includes a Gigabit Ethernet LAN port that can also serve as a WAN connection to support a either a WAN or LAN function.

3 Setup

1. Insert the power connector into the C4000BG.



2. Plug the power adapter into a power outlet.



3. Plug phone cable (green) into the C4000BG



4. Plug other end of phone cable into the your home phone line.



5. Continue to the Internet connection Setup.

4 Internet Connection Setup (CenturyLink Home Router side)

Your C4000BG can automatically detect and configure your Internet (section 4.1), or done manually (section 4.2).

4.1 Automatic Connection

1. Open your web browser to a website. Wait while your device tries to detect your DSL connection to your ISP. This may take a few minutes.
2. After it detects the connection, the LED Ring will show green on your C4000BG when the Internet is ready for you to use. If you have a PPPoE connection, you will have to enter the user name and password provided by your ISP.
3. Go to Set Up a Wireless Network if you wish to configure your wireless settings.
4. If the automatic connection is not successful, check your connections and restart the Device. Also, make sure you have entered the user name and password correctly. If you still cannot access the Internet, follow the steps in the next section to manually configure the Internet connection.

4.2 Manual Connection

You can also manually log into the router's Web UI to configure your Internet connection

1. In your browser, if the Device does not automatically re-direct you to the login screen, go to <http://192.168.0.1>
2. Enter the default user name admin and password (see the label on the bottom of the device). Click **Apply**.

1. Enter the administrator username and password below.

Administrator Username:


Administrator Password:

Show Password The default administrator username and password can be found on the sticker located on the modem.

2. Click "Apply" to log in.

If the login screen does not open, make sure you allow web browser pop-up windows, JavaScripts and Java permissions. Your computer should be also set to get an IP address automatically from a DHCP server.

3. The main screen will appear. Click the quick setup icon to configure the device's Internet access

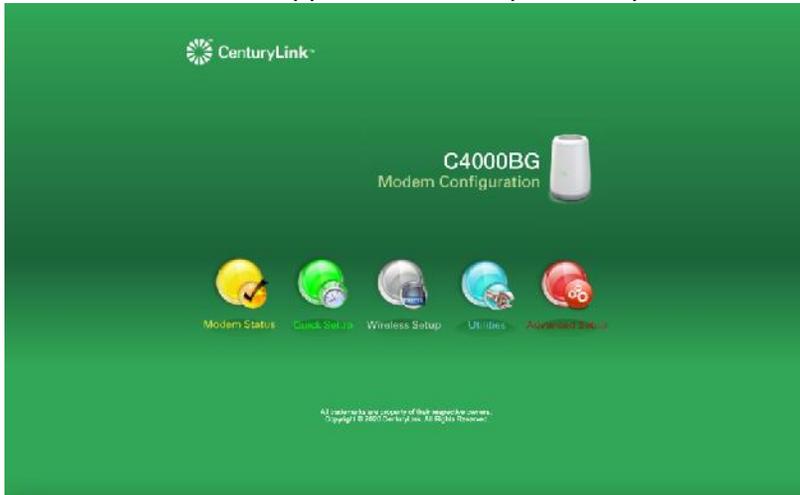

4. Enter the user name and password provided by your ISP. Click Apply to finish the configuration.

1. Enter the PPP username and PPP password.

PPP Username: @centurylink.net

PPP Password:

Confirm Password:

Hide Password

2. Select the time zone.

Time Zone:

3. Set the clock mode below.

Clock Mode: Daylight Saving Time Standard Time

4. Click "Apply" to save your settings.

5. The LED ring in the center of the C4000BG will light up green upon full internet access. If it is Red, please contact CenturyLink support to troubleshoot. Alternatively, you can look at the status within the Web UI to try to determine what the issue might be.

5 Setting up a wireless network

You can setup a wireless network using the following methods using an automatic connection (section 5.1) or manually connecting the device (section 5.2):

5.1 Using WPS (Wireless Protected Setup)

1. Press the WPS button on the C4000BG's front for more than five seconds to turn WPS on.
2. You should see the light blinking White until a pairing sequence has started with the device connecting to the network (at which point it will alternate white and green).
3. Press the WPS button on the device you wish to connect to the network
4. If a successful connection is established, the LED ring will alternate Green, then white, then solid green once normal active operations continue.

5.2 Setting up a wireless network manually


The wireless LAN on your C4000BG is enabled by default. To add a wireless client to the network, use the settings found on the bottom label of your C4000BG. Configure wireless devices that you want to connect to the wireless network to use the same wireless settings as the C4000BG.

6 Getting to know the C4000BG

Front



Back

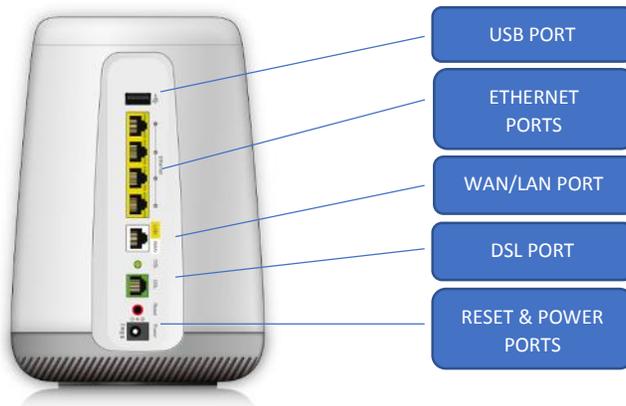

7 Technical Specifications:

7.1 General Specifications

Model Number:	C4000BG
Standards:	802.11n/ac/ax, and backward compatible to 802.11a/b/g
Memory:	512GB DDR3 Memory, 512GB Flash
IP:	IP versions 4 and 6
WAN:	Single line and bonded VDSL2/ADSL/2/2+ support Wired WAN or LAN Ethernet: 10/100/1000 Mbps auto-sensing
Speed:	Wireless LAN PHY Rate: 2.4 GHz: 802.11ax - up to 600Mbps 5 GHz: 802.11ax - up to 2400Mbps
Wired LAN Ethernet:	4x Wired LAN Ethernet: 10/100/1000 Mbps auto-sensing

7.2 Dimensions and weight

Gateway (unit only)

Size: 8.30" (Height) x 5.64" (Bottom) x 4.68" (Top).

Weight: 2.19 lbs / 0.996 kg

7.3 Environmental Parameters

Power: External, 12V DC, 2.5A

Only use power supply adapter or any type of connection accessory supplied with this product.

Certifications: FCC Part 15, UL : E164374

Operating Temperature: 10° C to 40° C (50° F to 104° F)

Storage Temperature: -20° C to 85° C (-4° F to 185° F)

Operating Humidity: 8% to 95% (non-condensing)

Storage Humidity: 5% to 100% (non-condensing)

8 FCC:

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **27**cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/CANADA

Operation of this device is restricted to indoor use only.

FCC Part 68

This equipment complies with Part 68 of the FCC rules. Located on the equipment is a label that contains, among other information, the ACTA registration number and ringer equivalence number (REN.) If requested, this information must be provided to the telephone company.

The REN is used to determine the quantity of devices which may be connected to the telephone line. Excessive REN's on the telephone line may result in the devices not ringing in response to an incoming call. In most, but not all areas, the sum of the REN's should not exceed five (5.0). To be certain of the number of devices that may be connected to the line, as determined by the total REN's contact the telephone company to determine the maximum REN for the calling area.

This equipment cannot be used on the telephone company-provided coin service. Connection to Party Line Service is subject to State Tariffs.

If this equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. If advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations, or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make the necessary modifications in order to maintain uninterrupted service.

If trouble is experienced with this equipment, please contact:

Company Name: CenturyLink Inc.

Address: 100 CenturyLink Dr. Monroe, LA 71203

TEL: 866-642-0444 7 am – 9 pm (ET)

FAX: N/A

If the trouble is causing harm to the telephone network, the telephone company may request you to remove the equipment from the network until the problem is resolved.

This equipment uses the following USOC jacks:

It is recommended that the customer install an AC surge arrester in the AC outlet to which this device is connected. This is to avoid damaging the equipment caused by local lightning strikes and other electrical surges.