
Ultra Mobile PC



User's Guide

Preface

©Copyright 2007

All Rights Reserved.

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Safety Notices

1. Please read these safety instructions carefully.
2. All precautions and warnings on the equipment should be carefully noted.
3. Please disconnect the computer from the AC outlet before cleaning.
4. Never pour any liquids into any openings or directly onto the computer unit. This could result in fire or electrical shock.
5. Ensure the voltage range of the power outlet is between 100V and 240V before connecting the computer unit. Exceeding the maximum rated voltage may cause damage to the AC adapter or to the computer. This could result in fire or electrical shock.
6. Do not leave this equipment in a non-temperature controlled environment; storage temperatures below 4°C (39°F) or above 35°C (95°F) may damage the unit.

! CAUTION *To reduce the risk of an electric shock, which could cause personal injury, please follow all safety notices. The symbols shown are used in your documentation and on your equipment to indicate safety hazards.*

! CAUTION

Lithium batteries can be dangerous. Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

! CAUTION

Under no circumstances should the user attempt to disassemble the power supply. The power supply has no user-replaceable parts. Inside the power supply are hazardous voltages that can cause serious personal injury. A defective power supply must be returned to your dealer.

Safety Notices for the Power Cord

This equipment has a 2 or 3-wire power cord. Replace the power cord if it becomes damaged. Contact your dealer for an exact replacement.

In the U.S.A. and Canada, the power cord must be a UL-listed detachable power cord (in Canada, CSA-certified).

2-wire cord	SPT-2 18AWG
3-wire cord	SVT or SJT, 18 AWG, 3-conductor

Provided with a molded-on cord connector body at the other end. The cord length must not exceed 3 meters.

Outside the U.S.A. and Canada, the plug must be rated for 250 VAC, 2.5 amp minimum, and must display an international agency approval marking. The cord must be suitable for use in the end-user's country. Consult your dealer or the local electrical authorities if you are unsure of the type of power cord to use in your country. Voltage changes occur automatically in the power supply.

Notice of EMC Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced technician for help.

Use only shielded I/O cables to connect I/O devices to this equipment.

You are cautioned the changes or modifications not expressly approved by the party responsible for compliance could void your authority to use the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device will not cause harmful interference, and (2) this device must accept any interference it receive including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Radiation Exposure Statement

This Transmitter has been demonstrated co-location compliance requirements with (Bluetooth/Model No:GUBTCR42M).This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

1. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. To maintain compliance with FCC RF exposure compliance requirements, avoid direct contact to the transmitting antenna during transmitting.

-
2. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

Canadian EMI Compliance Statement

This Class B digital apparatus meets all requirements of the Canadian Interference - Causing Equipment Regulations.

European Union CE Marking Declaration

This product has been tested and found to comply with the EMC requirement subject to the EU directive for CE marking.

CE Declaration of Conformity

For the following equipment: Ultra Mobile PC

CE 0984 

Is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (89/336/EEC), Low-voltage Directive (73/23/EEC) and the Amendment Directive (93/68/EEC), the procedures given in European Council Directive 99/5/EC and 89/336/EEC.

The equipment was passed. The test was performed according to the following European standards:

- EN 300 328 V.1.6.1 (2004)
- EN 301 489-1 V.1.4.1 (2002) / EN 301 489-17 V.1.2.1 (2002)
- EN 50371: 2002
- EN 60950-1: 2001

Regulatory statement (R&TTE / WLAN IEEE 802.11b & 802.11g)

European standards dictate maximum radiated transmit power of 100mW EIRP and frequency range 2.400-2.4835GHz; In France, the equipment must be restricted to the 2.4465-2.4835GHz frequency range and must be restricted to indoor use.

- Inside the buildings with a power (WORSE *) maximum of 100 MW on all the frequency band 2400-2483,5 MHz,

-
- Outside the buildings with a power (WORSE *) maximum of 100 MW on the part 2400-2454MHz and with a power (WORSE *) maximum of 10 MW on the part 2454-2483MHz

Laser Compliance Statement for CD-ROM, DVD-ROM, CD-RW and DVD/CD-RW Combo Drives



The CD-ROM, DVD-ROM, CD-RW and DVD/CD-RW Combo drive for this computer are laser products. The classification label of the drive is located on the bottom of the drive. Below is a sample of the classification label;

CLASS 1 LASER PRODUCT
LASER KLASSE 1
LOUKAN 1 LASERLAITE
APPAREIL A LASER DE CLASSE 1
KLASS 1 LASER APPARAT

The drive is certified in the USA to comply with the requirements of the Department of Health and Human Services 21 Code of Federal Regulations (DHHS 21 CFR) Subchapter J. for Class 1 laser products.

In other countries the drive is certified to comply with the requirements of EN60825.



WARNING:

Do not open the drive. There are no user-serviceable parts or components inside. Use of controls, adjustments and operation of procedures other than those specified, may result in hazardous exposure to radiation. Class I (1) laser products are not considered hazardous. The drive has an internal, Class I (1), 0.5-milliwatt, aluminum gallium-arsenide laser that operates at a wavelength of 760 to 810 nanometers. The design of the laser system and the drive ensures that there is no exposure to laser radiation above a Class I (1) level during normal operation, user maintenance or servicing.

Table of Content

CHAPTER 1:

BEFORE YOU START	1
LET YOUR COMPUTER ACCLIMATIZE ITSELF	1
PLACEMENT OF YOUR COMPUTER	1
SUITABLE PLACE TO WORK	2
INTRODUCTION	3
UNPACKING THE COMPUTER	3
FRONT VIEW	4
LEFT AND RIGHT VIEW	6
TOP AND BOTTOM VIEW	7
REAR VIEW	8
GETTING STARTED	10
INSERTING THE BATTERY PACK	10
REMOVING THE BATTERY PACK	11
OPERATING ON BATTERY POWER	12
CHARGING THE BATTERY PACK	12
USING THE COMPUTER	14
EXTERNAL CRT DISPLAY	14
THE COMPUTER'S HOT KEY CONTROLS	14
THE BATTERY POWER SYSTEM	15
BATTERY STATUS	17
BATTERY LOW WARNING	17
CMOS BATTERY	17
ADJUSTING THE BRIGHTNESS	18
ADJUSTING THE VOLUME	18
BATTERY STATUS	19
AP KEY APPLICATION	20
D-PAD	22
CONTROL KEYS	23
FUNCTION KEY COMBINATION	23
TROUBLESHOOTING	25
A FREEZE ON THE SYSTEM DURING PROGRAM OPERATION	25

SYSTEM NOT RESUMING OPERATION	25
THE LCD SCREEN IS TOO DARK OR TOO BRIGHT	25
BEEPING SOUND.....	25
THE SYSTEM CAN NOT SHUTDOWN PROPERLY	26
WHAT ARE THE MAJOR STEPS TO FOLLOW WHEN THE SYSTEM DOES NOT TURN ON PROPERLY AFTER IT SHUTDOWN.....	26
HOW TO EXTEND BATTERY LIFE	26
WIRELESS LAN CONNECTION IS DISCONNECTED AFTER 2~3 MINUTES, AND THE CONNECTION IS NOT RECOVERED.....	26
THE COMPUTER IS UNABLE TO CONNECT TO THE INTERNET.....	26
THE WIRELESS LAN IS CONNECTED, BUT I CAN NOT CONNECT TO OR TO ANOTHER COMPUTER.....	26
THE SIGNAL STRENGTH IS EXCELLENT BUT CANNOT CONNECT TO THE NETWORK.	28
CONTACTING YOUR DEALER.....	28
WHAT STEPS SHOULD BE TAKEN WHEN WATER ACCIDENTALLY GET INSIDE THE UMPC	28
THE UMPC COULD NOT RESUME AFTER IT ENTER THE STANDBY MODE	29
THE SYSTEM CAN'T RESUME OPERATION.....	29
DISPLAY PROBLEM.....	30
OS CRASH	30
SPECIFICATION	32

Chapter 1

Before You Start

This manual will help you get the most from your computer. If you are a less experienced user, you should read through the manual carefully before using your computer.

What to do Before You Work on your Computer

Let your Computer acclimatize itself

Rapid changes in temperature such as those from the cold outdoors to a warm office would not be suitable for your system.



NOTE: *Do not power up your system immediately if it has been exposed to hot or cold conditions. Instead, allow the system to adjust gradually to room temperature over a three to four hour period.*

Placement of your Computer

Choose a suitable place for your system that's not too hot, too cold, too dark, or too bright. Glare can make it difficult to read the screen.

- Allow sufficient air circulation around the computer when you are working indoors
- Try to keep the system components from being destroyed if it is over heated
- Do not block the ventilation opening
- Do not place your computer in direct sunlight

Suitable place to work

Your computer will run well under most conditions but avoid extreme temperatures and humidity levels.

There are some things you can tolerate that the computer can't – things like static electricity, dust, water, steam and oil.



NOTE:

A lithium-ion battery pack is included for those who are frequent travelers. When you are running your computer on battery power for the first time, remove the battery from the package, install it into the system and recharge the battery to fully prepare for service.

Chapter 2

Introduction

Introducing your Computer

Your computer features the latest advances in portable computing technology. The computer modular design provides maximum expandability without compromising portability.

 ***Please never try to disassemble the UMPC and we will not be responsible for any damage caused by this action.***

Unpacking the Computer

The computer comes securely packaged in a shipping carton. Please contact your dealer if you find that anything is missing or damaged after examining the contents. The shipping carton should contain the following items:

- AC-DC Adapter 19V 65W
- Carry Bag
- 2 Cells Polymer Battery
- Power Cord
- Ear Phone
- Quick Guide
- Touch Pen
- Clean Cloth

Do not throw the packaging materials away. You may need them later if you have to ship the computer.



NOTE: ***Because of customer requirement, some of the features mentioned in this manual might not be included on your computer or may differ slightly.***

Getting to Know Your Computer

Front View



1. CMOS Camera

This is where the built-in camera located where you can use for any video conferencing application.

2. Mouse Left Key

This is equivalent to the left key on an average mouse that you are using.

3. Mouse Right Key

This is equivalent to the right key on an average mouse that you are using.

4. D-Pad

[↑]/[↓] Buttons

Press on the [↑]/[↓] buttons to scroll down on the item vertically that you wish to execute or run.

[●] Button

Press on this button the same way as you use the enter button.

[←] [→] Buttons

Press on the [→] or [←] buttons to scroll down on the item horizontally that you wish to execute or run.


5. LCD Display

This system is equipped with a 4.8" LCD screen display (1024*600)
800*600. The brightness (cd/m²): 280 nits (typ)

6. Stick Point

This is equivalent to the touchpad on an ordinary UMPC.

7. LED Indicator

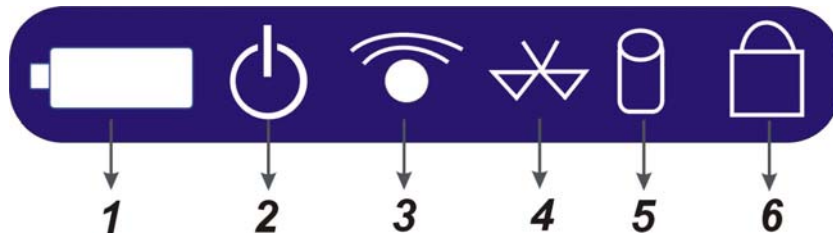

1. Battery Indicator

Charging: Orange, Full W/ DC: Green, Full W/O DC: OFF

2. Power Indicator

ON Mode: Blue, Standby Mode: Blinking

3. Wireless Indicator

WLAN ON: Orange

4. Bluetooth Indicator

Bluetooth ON: Blue

5. HDD Indicator

HDD Accessing (Blinking: Green color)

6. Hold Indicator

Hold Mode: Green color

Left and Right View



1. Earphone Jack

The stereo headphone jack (3.5-mm diameter) is where you connect the headphones or external speakers.

2. Power/Hold Switch

Slide the button up to the ON/OFF position and release the power switch for 1 to 2 seconds will turn on the computer (the LED will lit to indicate its present status). You can also slide this switch to HOLD position to hold the computer as it enter the suspend mode.

3. Bluetooth Button

Press this button to turn on or off the Bluetooth application.

4. Wireless Button

Press this button to turn on or off the wireless application.

5. **USB Port**

Your computer includes two Universal Serial Bus (USB) 2.0 ports. USB2.0 is the latest development in Plug and Play technology.

Top and Bottom View



1. **Knob Hole**

These two holes directly hold the two knob on the docking station.

2. Stand

This stand will serve as supporting stand for this computer.

3. Docking Port

Use this port to connect to the system docking station.

4. Ventilation Opening

Please don't block this opening that serve as cooling purpose for the system.

5. DC IN Jack

Plug the AC adapter into this jack.

6. CF Card Reader

This compartment contains the system CF Card Reader.

Rear View



1. Battery Latch

Use this latch to release the battery from its bay.

 **WARNING:** *We recommend you to be extra careful on not to press when you handle the bottom panel of your computer.*

System Keyboard



44 Keys Universal built-in keyboard with 36 embedded Keys + 8 Keys Function Key.

Chapter 3

Getting Started

Setting Up the Computer

- Remove the computer from its package.
- Insert the battery pack into the computer so the pack can start charging.
- Connect the computer to an external power source. Turn on the computer.

Inserting and Removing the Battery Pack

Inserting the Battery Pack



NOTE:

Before inserting the battery, be sure the front side of the battery is facing the top side of the system as shown in the illustration.

- Turn over the computer and place it on a solid, flat surface.
- Align the battery into the battery compartment.



Removing the Battery Pack

- Insert back the battery into the compartment and push down until the battery latch click sound to indicate it is lock.



Connecting the Computer to an External Power Source

To connect the computer to an external AC power source using the AC adapter:

- Plug the AC adapter cable into the AC power connector on the computer.
- Plug one end of the power cord into an electrical outlet and the other end into the AC adapter.

⚡ WARNING: *To prevent damage to your computer, please do not use inferior extension cords. An AC adapter comes with your computer. Never use a different kind of adapter to power the computer or other electrical devices.*

Whenever possible, keep the AC adapter plugged into the computer and an electrical outlet to recharge the battery.

⚡ WARNING: *Don't try to reset your computer while the hard disk is in use as it may result in the loss or destruction of your data.*

Operating on Battery Power

Your computer comes with a rechargeable battery pack that lets you operate the computer without an external power source.

When the battery pack is fully charged, you can operate the computer for approximately 2.2 hours/26Wh pack under typical condition.

Charging the Battery Pack

The installed battery pack charges automatically whenever the computer is connected to the AC adapter and an external power source.

The first time you use the battery, be sure to fully discharge the battery and recharge it until it is fully charged.

Opening the keyboard



Using the Stand



The stand of your UMPC is too delicate to withstand any force heavier than its actual weight. Be sure not to put any heavy external peripherals over it. Also be extra careful when you are operating the system using both your arm exerting too much force on it might also cause damage to the stand.

Chapter 4

Using the Computer


Adjusting the Screen Display

External CRT Display

You can connect an external monitor through the Docking Station.

The Computer's Hot Key Controls

The computer provides you with special hot keys to execute all the major functions that you like to run on your computer.

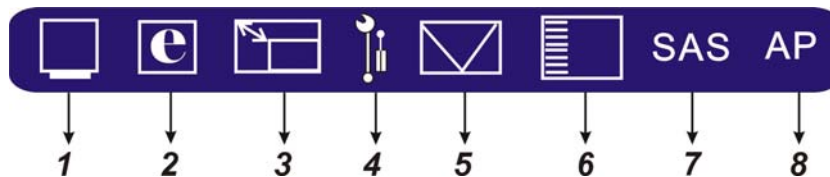

1. **My Computer Button** – Press this button to execute the Control Panel window.
2. **Internet Explorer Button** – Press this button to execute the Internet Explorer application.
3. **Resolution Button** – Press this button to execute the resolution application.
4. **A-Menu Button** - Press this button to use the “A-Menu” function.
5. **Outlook Button** – Press this button to execute the outlook mail application.

-
6. **Media Player Button** – Press this button to execute the Media Player application.
 7. **SAS Button** – A computer without an attached keyboard must support an SAS hardware mechanism to generate the SAS which also known as “CTRL-ALT-DEL” or “CAD”.
 8. **Function Specified Button** – Press this button to execute the application you set using the “Shortcut Setting”.

The Battery Power System

Before using the computer on battery power for the first time, disconnect the power adapter and check the battery status icon on the Windows Toolbar to make sure the battery is fully charged.

Preparing the Battery Pack for Use

Before using the battery pack for the first time, the Smart Battery IC within the battery pack should be calibrated in order to get accurate reporting of the remaining battery life status.

To calibrate the battery pack, follow the instructions below:

- Turn the computer off. Connect the AC adapter and let the battery fully recharge. When the battery charge LED turns from orange to green, the battery is fully charged.
- Turn On the computer and let the battery run down until the battery is low-low and you hear continuous warning beeps. The system will automatically enter the Suspend mode. You can now connect the AC adapter.
- The battery pack is now properly calibrated.

In general, using the battery until the low battery warning indicator appears and fully recharging the battery each time (full discharge/charge cycle) will ensure the accuracy of the battery status gauge.

Automatic Battery Pack Charging Function

You can automatically charge the battery pack by using the AC Adapter.



NOTE:

The charge time is almost two

hours when the computer power is turned off.

Battery Status

Windows Vista has an applet in the Control Panel that will display an icon in the Windows taskbar indicating when the computer is running on battery power or is attached to the AC adapter.

This applet also displays a meter that indicates how much charge is remaining in the battery.

Battery Low Warning

When the battery is in low status, its LED indicator will blink continuously and you will hear beeping sound.

CMOS Battery

There is a small built-in battery pack that supplies power to the system in order to maintain certain system information while the power is off. If the computer is left without a power source for long period of time, this battery will be exhausted and system information will be lost.



NOTE:

To avoid damage, only use replacement batteries recommended by System provider. To prevent the loss of data when the system loses power, do not remove the battery pack while the power is on.

Using the A-Menu

Drag the “A-Menu” located on the right side of the UMPC to display the “A-Menu” window dialog box.



Battery Operated

AC-DC Operated



NOTE: *Some of the most popular functions can be accessed from this menu.*

Adjusting the Brightness

The brightness can be adjusted using the selection provided by the **A-Menu**.

Scroll up to increase and scroll down to decrease the screen brightness of your system.



Adjusting the Volume

You can also adjust the volume of your system using this application. Scroll up to increase and scroll down to decrease the volume of your system.



Battery Status

Press on the battery icon to open up the Power Options Properties.



AP Key Application

Select the “Start” → A-Menu → Shortcut Setting to open up the “Shortcut” Setting mini window.


- Click on the “Browse” button to open up the “Open” Properties window.
- Locate on the program you want to set as the main function using the AP button.
- Click on the “Save Setting” button to save the application
- The application will then be applied to the “AP” button.
- Click on the “Exit” to close this window.




Pen Calibration

If your cursor pointer does not function well, you can select the “**ENE Touch Screen**” function.

To calibrate on the pen, click on the “**ENE**”  icon located at the lower right end of the screen.

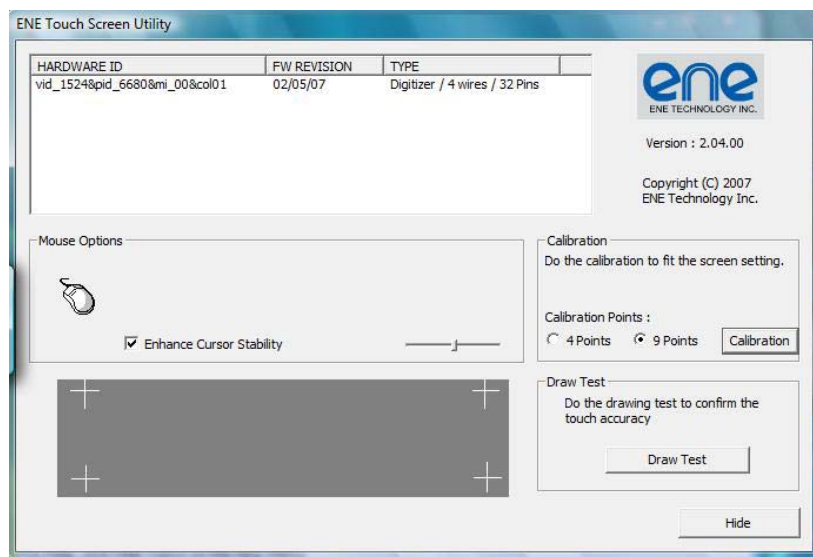

This setting will enable you to adjust the screen orientation.
There are two points for you to adjust: 4 points and 9 points.
Select on either one of the points and click on the “Calibrate”
tab.

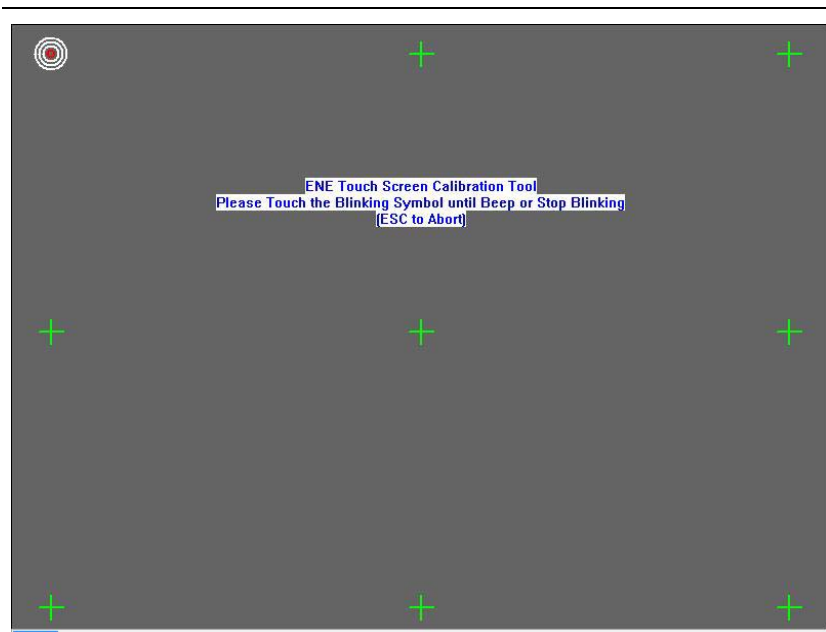

Function Key Operation

D-Pad

Button Press	
	Keyboard "Up Arrow" key
	Keyboard "Down Arrow" key
	Keyboard "Left Arrow" key
	Keyboard "Right Arrow" key
	Keyboard "Enter" key

 **NOTE:** *Equivalent to each individual function mentioned above when executing some function in the BIOS Setup menu.*

Control keys

Button Press	
	My Computer key
	Open the IE key
	Display the resolution function
	Enable the A-Menu application.
	Open the Mail application
	Enable the Media Player application
	Enable the application you set using the "Shortcut Setting"
	Keyboard "Ctrl + Alt + Del" key function

Function Key Combination

Button Press	
	Increase the speaker volume
	Decrease the speaker volume
	Decrease the LCD display brightness

Fun +

Increase the LCD display brightness



NOTE:

There is no function for these key combination in DOS mode or BIOS Setup.

“Num” Key Definition

The “**Num**” key is designated in **black color** to input on the corresponding numeric keys. Press the “**Num**” key with the desired numeric key just the way you are using an ordinary numeric keypad.



NOTE:

*Press once to illustrate the numeric key that you desired to input. After typing the numeric key, it will return to any other corresponding alpha or function key designated on the same key. Again, press the “**Num**” key to type another numeric key using the same procedure.*

*Press and hold the “**Num**” key for 1.5 second to lock or unlock the number key.*

This function also applies when you are in DOS mode.

“Sym” Key Definition

The “**Sym**” key is designated in **red color** to input on the corresponding keyboard symbol. Press the “**Sym**” key with the desired symbol just the way you are using an ordinary keyboard key.



NOTE:

*Press once to illustrate the symbol key that you desired to input. After typing the symbol key, it will return to any other corresponding alpha or function key designated on the same key. Again, press the “**Sym**” key to type another symbol key using the same procedure.*

Troubleshooting

This chapter describes locating and solving problems that you may encounter while using your computer.

General Hardware Problems / Possible Cause and Solution

A few common hardware problems and suggested solutions are presented in the table below:

A freeze on the system during program operation

An error occur during program currently being used. Press the SAS key of your UMPC.

Solution: An error with the Windows OS. Reboot the system using the Power button.

System Not Resuming Operation

If the system will not resume operation after system operation has been suspended, check the following possible causes:

Solution: The battery may either be defective, or discharge to a critically low level. To correct this problem, connect an external power supply such as AC adapter.

The LCD screen is too dark or too bright

Solution: Adjust the LCD brightness. Press the A-Menu button and click on Brightness Up or Brightness Down.

Beeping sound

Solution: Connect the computer to an external power source immediately.

The system can not shutdown properly

Solution: Press and hold the power button for 4~6 seconds until the system shutdown manually.

What are the major steps to follow when the system does not turn on properly after it shutdown

The system will turn after connecting the AC adapter, this indicates the battery is in low status.

Solution:

- Check if the LCD screen is accidentally press or the LCD toggle key.
- Remove the battery and connect the AC adapter to turn on and press on the Reset the button to turn on the system.

How to extend battery life

Solution:

- Adjust the display brightness to minimum level.
- Adjust the volume to minimum level.
- Disconnect all PC card not often used.

Wireless LAN connection is disconnected after 2~3 minutes, and the connection is not recovered.

Solution: The reason may be caused by channel interference, change the channel of the AP and reconnect.

The computer is unable to connect to the Internet.

Solution: Account for Internet service provider (ISP) is not properly configured. Ask for your ISP assistance.

The Wireless LAN is connected, but I can not connect to or to another computer.

Solution:

-
- Check the device driver is properly installed.

-
- Check that the device driver is properly installed. If the driver is not properly installed, you will find a yellow exclamation mark on the network icon by clicking Start > Control Panel > System > Device Manager > Network Adapters.
If there is a yellow exclamation mark, please reinstall the device driver with the system software Media.

The signal strength is excellent but cannot connect to the network.

Solution: Check the TCP/IP properties are configured properly. When you connect to an AP, click the Wireless Network Connection icon on the taskbar and select the Support tab.

Contacting Your Dealer

If you still have a problem after reading the preceding section, the next step is to contact your dealer.

Your dealer can determine if the problem is something that requires the computer to be taken to the shop. Before you call your dealer, however, please have the following information available:

Solution:

- How is your computer configured? Your dealer needs to know what peripheral devices you are using.
- What messages, if any, are on the screen?
- What software were you running at the time?
- What have you done already to try to solve the problem? If you have overlooked a step, your dealer may be able to solve the problem over the phone.

What steps should be taken when water accidentally get inside the UMPC

Solution:

- At this time be sure not to power on the UMPC or else it will cause more serious damage to the computer

-
- Unplug the adapter and take out the battery. Disconnect as well if there are any external devices connected (like CD-ROM or flash drive)
 - Pour out the water that got inside the computer and use a soft cloth to remove the stain to avoid any more damage
 - Use the fan to dry the whole system and any peripheral then send it to the closest service center for experienced personnel to diagnose and repair. This will reduce the damage to the system
 - As a special reminder, be sure not to put the computer inside the carry bag that has stain in sending the computer for repair

The UMPC could not resume after it enter the Standby mode

Solution:

- Standby Mode – allows the computer or program save into the RAM. The system will enter the saving mode. Press any key to resume the system
- Hibernate Mode – allows the computer or program save into the HDD. At this time the power is completely turn off. Press any key to resume the system

The system can't resume operation

Solution:

- Malfunction of external memory or internal memory – an error will occur during saving into the system memory, it will not execute normal operation
- External peripheral connected to the system not compatible – such as external USB devices, compact flash, MMC, Smart Media are complicated devices will easily cause the computer to enter standby mode thus unable to resume operation
- Un-suitable program or driver – any un-suitable driver could cause any extension file like .dll, .sys and .exe would not allow the system to enter standby or hibernate mode

-
- Operating System loses effect – the power saving mode of Microsoft operating system adopt ACPI mode (advanced Configuration and Power Interface), the power scheme will be handle by the OS thus affecting the power saving mode of the system

Display problem

Problem: Display LED too bright or too dark

Solution: Adjust the LED brightness, press the hotkey combination by brightness up or brightness down

Problem: The whole image does not display on the screen

Solution: This symptom will occur if you are executing any program or playing games design to run only on 800x600 resolution. Adjust the display to a higher resolution.

Problem: Can not execute any function

Solution:

- This only happens when the system is in hold status. Slide the power/hold switch to power on, this time the charge LED indicator will lit thus allowing you to restart your computer
- If you are operating the computer using the battery, examine the battery charge status

Problem: The power switch is not operating

Solution: This only happens when the system is in hold status. Slide the power/hold switch to power on, this time the charge LED indicator will lit thus allowing you to restart your computer

OS Crash

Solution: Restart your system, when it enter the DOS mode with the term “Press Hot Key to Restore” appearing on your screen, press the AP key immediately to restore the system OS. After recovering all data, you are now required to calibrate your cursor pointer. You can select the “**ENE Touch Screen**” function. Click on the “**ENE**”  icon located at the lower right

end of the screen to execute this function.

Specification

CPU

- Intel Processor A100 (600 MHz) and A110 (800 MHz)
- 400 MHz FSB, 512K L2 Cache

Chipsets

- Core Logic: 945GU + ICH7-U
- VGA: GMA 950 Integrated
- Audio: High Definition Audio

Memory

- 1x Micro DIMM Slot, Single Channel, DDR2 400 (Factory Option)

Maximum Memory

- 1GB Maximum (512MB Default)

BIOS

- BIOS Includes System & Video
 - Boot from USB
 - Plug & Play
 - APM 1.2
 - ACPI 2.0

HDD

- 40GB 1.8" 5 to 8mm height 4200 RPM FPC , 30G/60G (Option)

Video

- Intel 945GU (Simultaneous and Multi-Monitor)

LCD Display

- 4.8" LCD (1024*600)
- 800*600, 1024*600
- Brightness (cd/m²): 280 nits (type)

CMOS Camera

- 1.3M (Fixed): Rotating

Audio

- Built In Stereo Speaker
- Internal Digital Microphone
- Stereo Head Phone (3.5 mm)

Keyboard

- 44 Keys Universal Key Board Build In. (English Version)
36 Keys + 8 Keys Function Key

Communication

- WLAN 802.11 B/G
- Ethernet 10M/100M/1G on Docking
- Blue Tooth V2.0+EDR

Pointing Device

- Resistive Touch Screen (80g Input Force)
- Stick Cursor

AC/DC Adapter

- AC 100~240Volt

Battery Pack

- 2 cells Standard Battery Pack (26 Whr)
- 4-cells Extended battery pack (52 Whr) (option)

Power Management

- Support For ACPI 2.0

Physical/Mechanical

- 189(W) * 107(H) * 36 (D) mm
- 680g

Accessory Kit

- AC-DC Adapter 19V
- Carry Bag
- Quick Guide
- 2 Cells standard Battery

Options

- 1GB Memory Module (512MB Default)
- 4-Cells Extended Battery Pack
- Docking Station

Regulatory Approval

- | | |
|---------------|--|
| EMC | ➤ CE, FCC, VCCI, BSMI, CCC |
| Safety | ➤ UL, TUV, CB Report, CCC |
| ESD | ➤ Contact Discharge 4KV, Air Discharge 8KV |
| RF | ➤ FCC ID, CE, TELEC, DGT, SRRC |