



QuickStart Guide

FortiGate Rugged 70G-5G

FGR-70G-5G



reddot winner 2025



The Essentials

Register at <https://support.fortinet.com> for the latest threat protection updates

GUI

- 1 Connect Port 1 to an Ethernet port or USB-RJ45 Ethernet adapter on your computer using the provided Ethernet cable
- 2 Open a browser to <https://192.168.1.99>

CLI

- 1 Connect a console cable (not included) to the Console Port
- 2 Open a Terminal app using 9600-8-N-1

Default Login



<https://192.168.1.99>
Username: *admin*
Password: leave blank

Fortinet Documents Library

For getting started documentation, admin guides, up-to-date hardware manuals and reference resources, visit <https://docs.fortinet.com/>

FortiGate Cloud

Experience simplified cloud provisioning, security analytics, remote access, hosted log retention and reporting at <https://fortigate.forticloud.com>


FortiExplorer Go

Rapidly provision, deploy and manage your Fortinet Security Fabric Platform, free on iOS and Android: <https://docs.fortinet.com/product/fortiexplorer-go/>



Package Contents


FortiGate Rugged 70G-5G
FGR-70G-5G



1x FGR-70G-5G




1x QuickStart Guide




1x CAT5e Ethernet Cable



1x DIN Rail Bracket w/Screws
(4x M3×10)



1x Digital I/O Connector



1x DC Power Connector



5x Antennas
(4x WWAN, 1x GPS)




Power Installation

Warnings

- The redundant DC inputs support negative ground (+12V to +125V DC) and positive ground (-12V to -125V DC), 2.5A Max
- With the optional failover redundancy, if the primary DC input fails, the secondary DC input will supply power
- DC1+ and DC2+ are the higher voltage potential pins and DC1- and DC2- are the lower voltage potential pins
- Do not connect the DC+ terminal to a lower voltage potential than the DC- terminal
- The voltage between DC+ and DC- must be +12V to +125V DC
- The DC wire gauge maximum is 12 AWG; the minimum is 22 AWG
- Consult a professional electrician to install the device and determine a suitable wire gauge and length

Connector Pinout


Connect DC1+ or DC2+ on the device terminal block to the DC power source, then connect the negative DC1- or DC2- on the terminal block. Terminal block does not support hot-plugging.

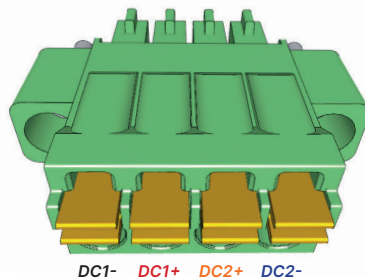

DC Input Power	DC+ Terminal	DC- Terminal
Negative Ground	+12V to +125V DC	Ground
Positive Ground	Ground	-12V to -125V DC



Wiring

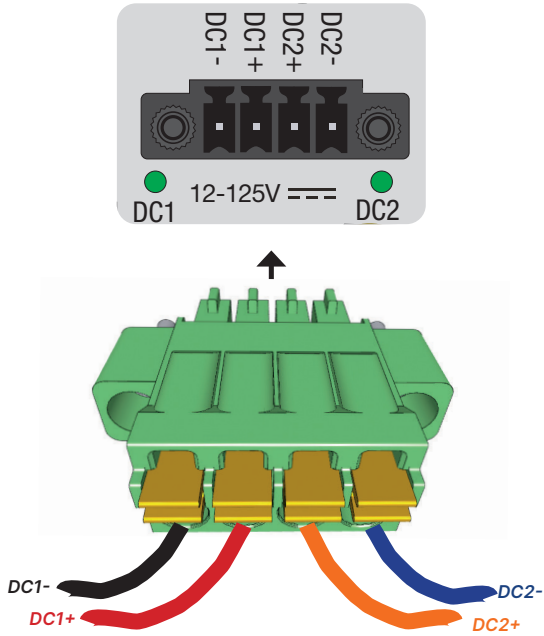


Grounding

Optional but recommended, connect earth ground using the lug plate or grounding screw.





Dimensions

NOTE: Drawings are for dimensional purposes only. Refer to the following pages for connector details.

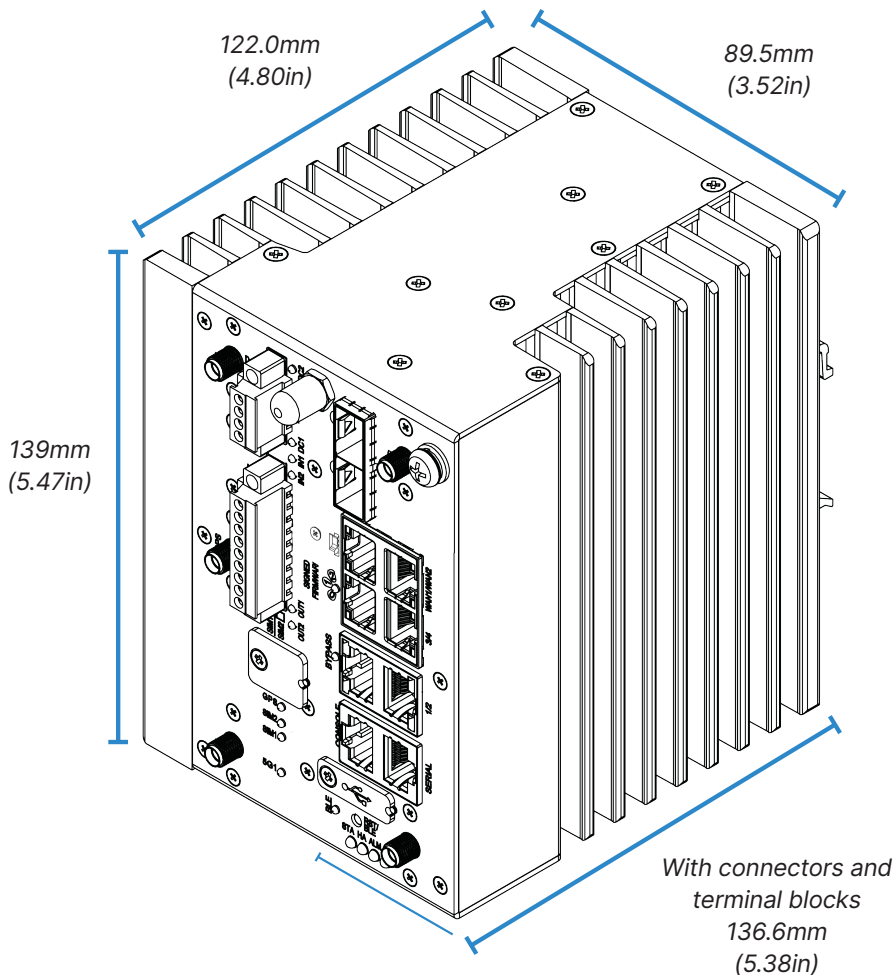




QUICKSTART GUIDE

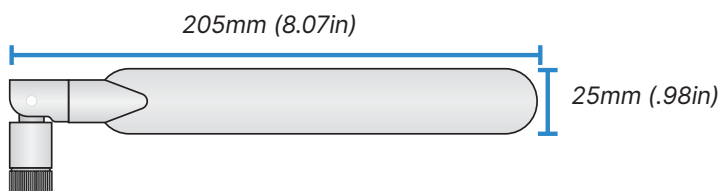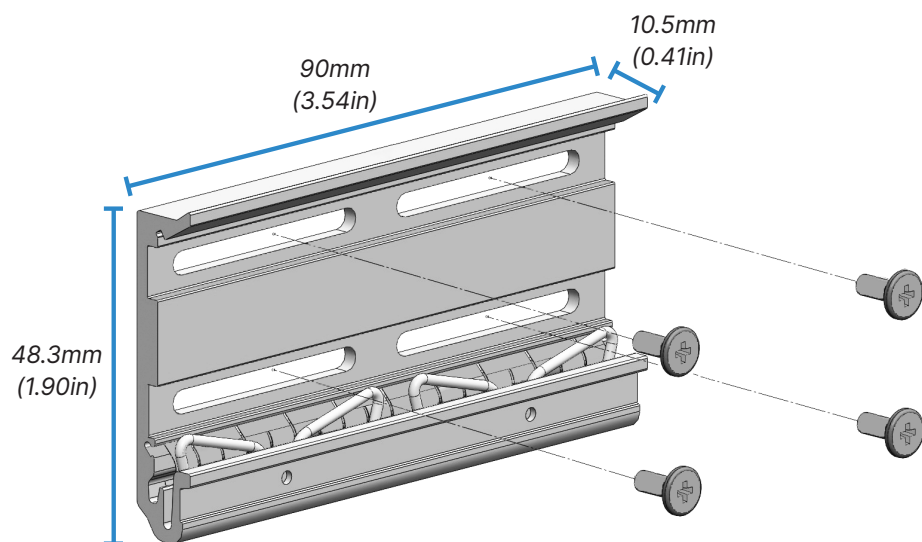




DIN Rail Mounting Bracket

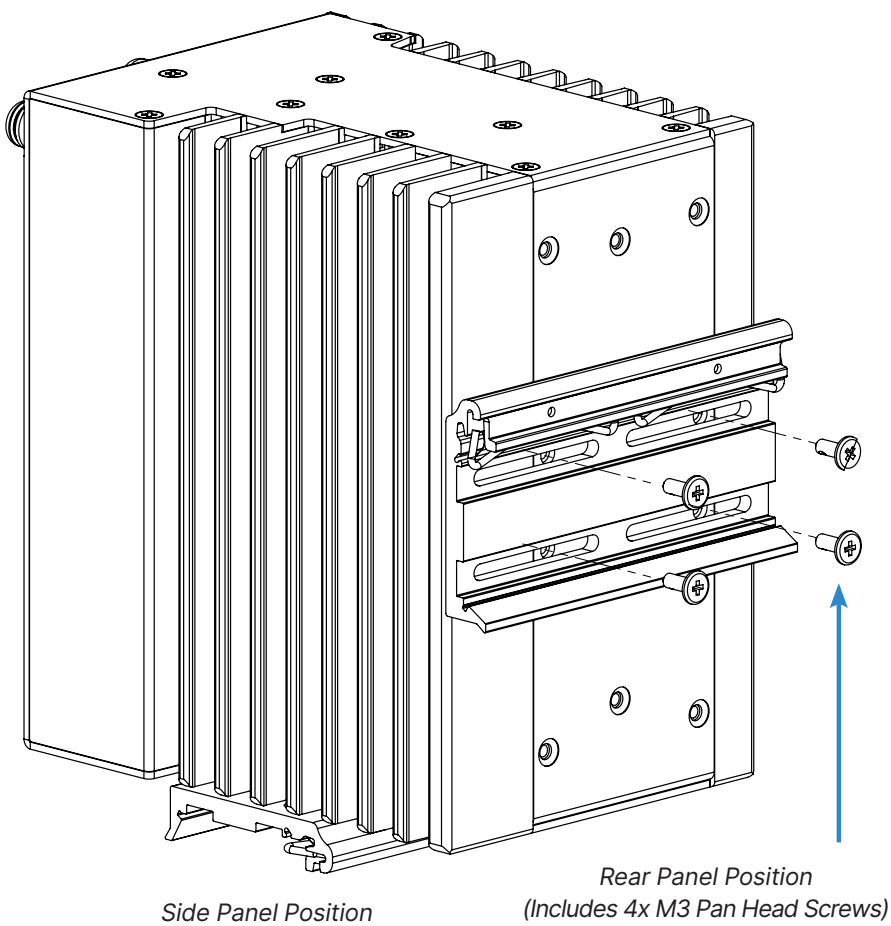




QUICKSTART GUIDE

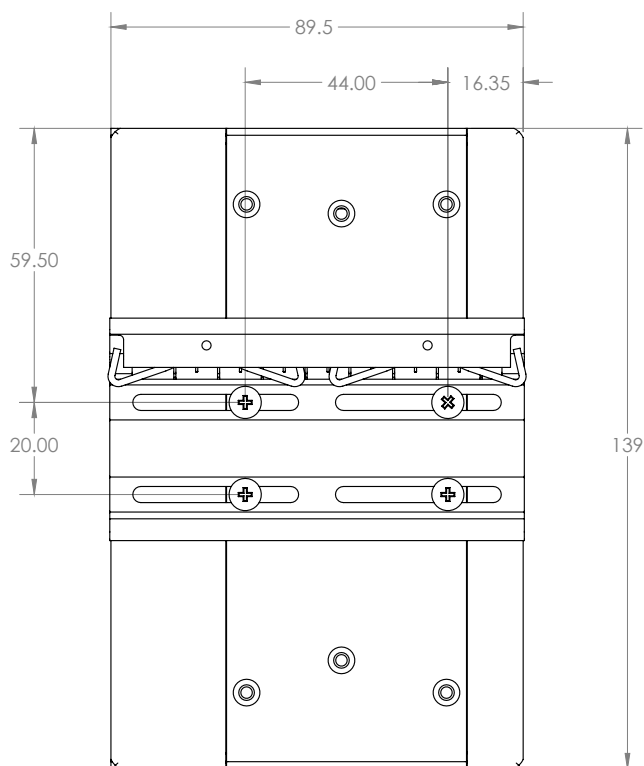


Rear Panel Position

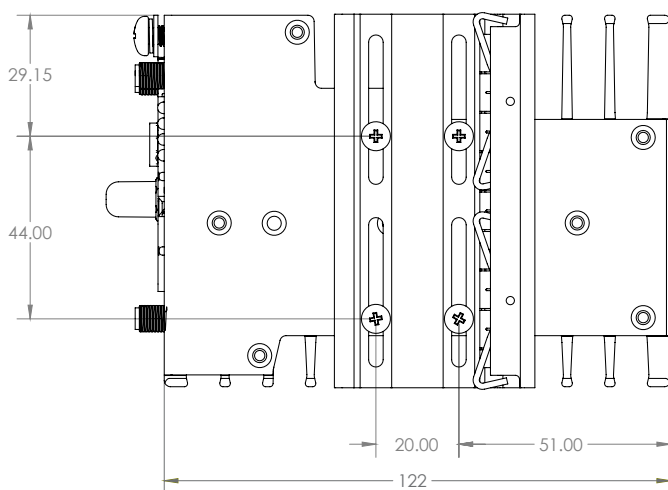

Side Panel Position



Digital I/O Connector

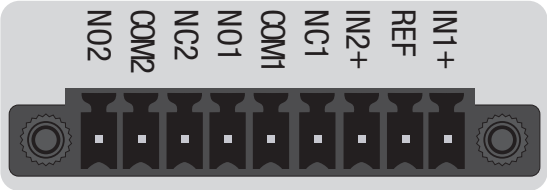

Connector	Description
NO2	Normally Open 2 Terminal
COM2	Common 2 Terminal
NC2	Normally Closed 2 Terminal
NO1	Normally Open Terminal
COM1	Common 1 Terminal
NC1	Normally Closed 1 Terminal
IN2+	Alarm Input 2
REF	Alarm Input 1/2 Reference Ground
IN1+	Alarm Input 1

Dual 5G Nano SIM Slot

SIM type is 4FF - Nano SIM. Industrial SIM card recommended for extreme temperature environments. Refer to the [datasheet](#) for supported operating temperatures. For wireless configuration, visit <https://docs.fortinet.com>



Setup

FortiExplorer Go



Install
FortiExplorer Go




Enable
Bluetooth



Follow the on-screen
instructions

GUI



Port 1




Ethernet Cable




If Static IP: 192.168.1.1/24

CLI

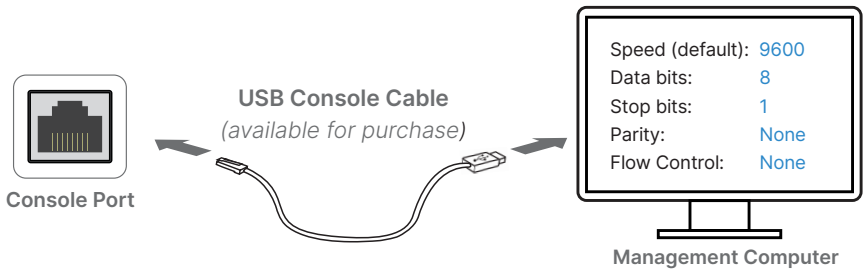

Front FGR-70G-5G

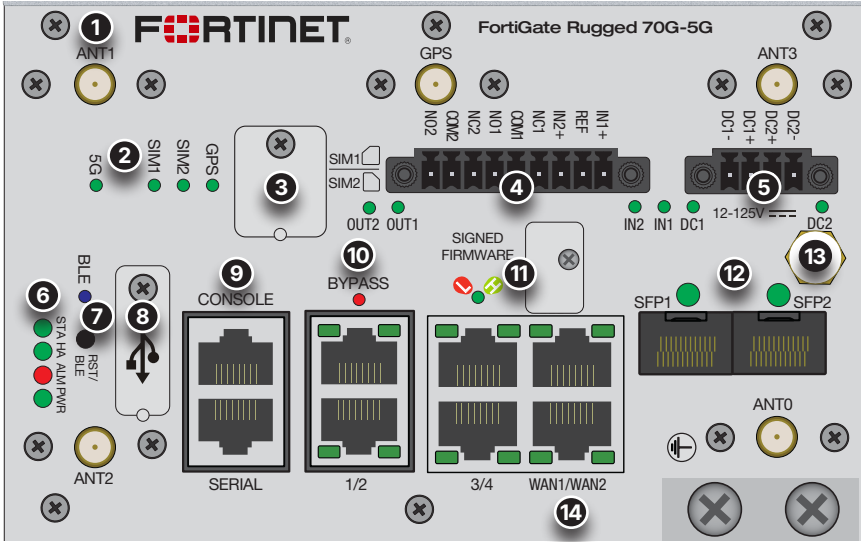

1 Antenna Connector (5x SMA)

2 5G

- **Green:** 5G connected
- **Amber:** 4G/3G connected
- **Off:** Not connected

3 5G SIM slots (2x Nano 4FF)

SIM1, SIM2

- **Green:** SIM slot active
- **Off:** SIM slot inactive

GPS

- **Green:** On
- **Off:** Off

4 Alarm Inputs (IN1, IN2)

- **Green:** Alarm defined
- **Red:** Alarm detected
- **Off:** Alarm not defined

Alarm Outputs (OUT1, OUT2)

- **Green:** Alarm defined
- **Flashing Red:** Major alarm detected
- **Red:** Minor alarm detected
- **Off:** Alarm not defined

5 Power Connectors (DC1, DC2) Alarm disabled by default

- **Green:** Power detected
- **Red:** Alarm is on; no power detected
- **Off:** No power detected

6 STA

- **Green:** Operating normally
- ⚙️ **Flashing Green:** Reset window
- **Off:** Device is off

ALM

- **Red:** Major alarm detected
- **Amber:** Minor alarm detected
- **Off:** No alarm detected

7 RST / BLE Press to enable BLE; press and hold for system reset during STA reset window

BLE

- **Blue:** BLE on
- ⚙️ **Flashing Blue:** BLE in discovery
- **Off:** BLE off

8 USB 2.0 (USB-A)

9 CONSOLE (RJ45) CLI management

SERIAL (RJ45) Data port

10 Ports 1 to 4 (RJ45)

BYPASS Ports 1 & 2 only; bypass disabled by default

- **Green:** Bypass off
- **Red:** Bypass on

Speed (Left LED)

- **Green:** 1 Gbps
- **Amber:** 100 Mbps
- **Off:** 10 Mbps or not connected

Activity/Link (Right LED)

- **Green:** Link established
- ⚙️ **Flashing Green:** Data activity
- **Off:** No link established

11 SIGNED FIRMWARE BIOS Security Level

Controlled by Signed Firmware Switch (covered),
see Admin Guide at <https://docs.fortinet.com>

- **High:** Unsigned firmware blocked (default)
- **Low:** Unsigned firmware allowed with a warning

12 SFP1 & SFP2 (SFP)

- **Green:** Link established
- ⚙️ **Flashing Green:** Data activity
- **Off:** No link established

13 BLE Antenna

14 WAN1 (Top) & WAN2 (Bottom) (RJ45)

Speed (Left LED)

- **Green:** 1 Gbps
- **Amber:** 100 Mbps
- **Off:** 10 Mbps or not connected

Activity/Link (Right LED)

- **Green:** Link established
- ⚙️ **Flashing Green:** Data activity
- **Off:** No link established



FortiGate Rugged 70G-5G

Cautions and Warnings

Environmental specifications

Ambient operating temperature: -40°C to 75°C

Refer to specific Product Model Data Sheet for Environmental Specifications (Operating Temperature, Storage Temperature, Humidity, and Altitude)
Référez à la Fiche Technique de ce produit pour les caractéristiques environnementales (Température de fonctionnement, température de stockage, humidité et l'altitude).

Safety

Warning: Equipment intended for installation in Restricted Access Location.
Avertissement: Le matériel est conçu pour être installé dans un endroit où l'accès est restreint.

A skilled person must install the equipment.
L'équipement doit être installé par une personne qualifiée.

Warning: A readily accessible disconnect device shall be incorporated in the building installation wiring.
Avertissement: Un dispositif de déconnexion facilement accessible doit être incorporé dans l'installation électrique du bâtiment.

Warning: A UL Listed external disconnect device, i.e. circuit breaker or other, with over current protection suitable for local code(rated 15A recommended) shall be installed with this equipment
Avertissement: Un dispositif de déconnexion externe homologué UL, exemple d'un disjoncteur ou autre, avec des protections de surintensité appropriées (nominal 15A recommandé) à l'installation de ce matériel.

Battery – Risk of explosion if the battery is replaced by an incorrect type. Do not dispose of batteries in a fire. They may explode. Dispose of used batteries according to your local regulations. IMPORTANT: Switzerland: Annex 4.10 of SR814.013 applies to batteries.

Batterie – Risque d'explosion si la batterie est remplacée par un type incorrect. Ne jetez pas les batteries au feu. Ils peuvent exploser. Jetez les piles usagées conformément aux réglementations locales. IMPORTANT: Suisse: l'annexe 4.10 de SR814.013 s'appliquent aux batteries.

警告
本電池如果更換不正確會有爆炸的危險
請依製造商說明書處理用過之電池

CAUTION:
There is a danger of explosion if a battery is incorrect replaced. Replace only with the same or equivalent type.
Dispose batteries of according to the manufacturer's instructions.
Disposing a battery into fire, a hot oven, mechanically crushing, or cutting it can result in an explosion.
Leaving a battery in an extremely hot environment can result in leakage of flammable liquid, gas, or an explosion.
If a battery is subjected to extremely low air pressure, it may result in leakage of flammable liquid, gas, or an explosion.

WARNUNG:
Lithium-Batterie Achtung: Explosionsgefahr bei fehlerhafter Batteriewechsel. Ersetzen Sie nur den gleichen oder gleichwertigen Typ. Batterien gemäß den Anweisungen des Herstellers entsorgen.

Beseitigung einer BATTERIE in Feuer oder einen heißen Ofen oder mechanisches Zerkleinern oder Schneiden einer BATTERIE, die zu einer EXPLOSION führen kann

Verlassen einer BATTERIE in einer extrem hohen Umgebungstemperatur, die zu einer EXPLOSION oder zum Austreten von brennbarer Flüssigkeit oder Gas führen kann

Eine BATTERIE, die einem extrem niedrigen Luftdruck ausgesetzt ist, der zu einer EXPLOSION oder zum Austreten von brennbarer Flüssigkeit oder Gas führen kann.

CAUTION: Shock Hazard. Disconnect all power sources.
ATTENTION: Risque d'électrocution. Débranchez toutes les sources d'alimentation.

Grounding — To prevent damage to your equipment, connections that enter from outside the building should pass through a lightning / surge protector, and be properly grounded. Use an electrostatic discharge workstation (ESD) and/or wear an anti-static wrist strap while you work. In addition to the grounding terminal of the plug, on the back panel, there is another, separate terminal for earthing.

Mise à la terre — Pour éviter d'endommager votre matériel, assurez-vous que les branchements qui entrent à partir de l'extérieur du bâtiment passent par un parafoudre / parasurtenseur et sont correctement mis à la terre. Utilisez un poste de travail de décharge électrostatique (ESD) et / ou portez un bracelet anti-statique lorsque vous travaillez. Ce produit possède une borne de mise à la terre qui est prévu à l'arrière du produit, à ceci s'ajoute la mise à la terre de la prise.

This product has a separate protective earthing terminal provided on the back of the product in addition to the grounding terminal of the attachment plug. This separate protective earthing terminal must be permanently connected to earth with a green with yellow stripe conductor minimum size # 20 AWG and the connection is to be installed by a qualified service personnel.
Ce produit a une borne de mise à la terre séparé sur le dos de l'appareil, en plus de la borne de mise à la terre de la fiche de raccordement. Cette borne de mise à la terre séparée doit être connecté en permanence à la terre avec un conducteur vert avec la taille bande jaune de minimum # 20 AWG et la connexion doit être installé par un personnel qualifié.

Connect to NEC Class 2 power source
Connectez-vous à une source d'alimentation NEC Classe 2

Regulatory Notices

Federal Communication Commission (FCC) – USA

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received; including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

WARNING: Any changes or modifications to this product not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



Innovation, Science and Economic Development (ISED) – Canada

CAN ICES (A) / NMB (A)

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Cet appareil numérique n'émets pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

This radio transmitter (IC: 7280B-21001T57) has been approved by ISED to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC: 7280B-21001T57) a été approuvé par ISED pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

This device and its antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with IC multi-transmitter product procedures.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

Antenna type	Connector	Gain (dBi)	Network
Monopole	I-PEX	1.53	Bluetooth

European Conformity (CE) - EU

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.



The product transmits within the frequency ranges and less than or equal to the power listed below:

Standard	Frequency Range	Transmit Power
Bluetooth	2402–2480 MHz	Less than 10 dBm (EIRP)

Standard	Frequency Range	Transmit Power
WCDMA	Band 1: 1920–1980MHz(Uplink); 2110–2170MHz(Downlink) Band 8: 880–915MHz(Uplink); 925–960MHz(Downlink)	24 dBm (Conducted)
LTE	Band 1: 1920–1980MHz(Uplink); 2110–2170MHz(Downlink) Band 3: 1710–1785MHz(Uplink); 1805–1880MHz(Downlink) Band 7: 2500–2570MHz(Uplink); 2620–2690MHz(Downlink) Band 8: 880–915MHz(Uplink); 925–960MHz(Downlink) Band 20: 832–862MHz(Uplink); 791–821MHz(Downlink) Band 28: 703–748MHz(Uplink); 758–803MHz(Downlink) Band 34: 2010–2025MHz Band 38: 2570–2620MHz Band 40: 2300–2400MHz Band 41: 2496–2690MHz Band 42: 3400–3600MHz Band 43: 3600–3800MHz Band 41: 2496–2690MHz	24 dBm (Conducted) 27 dBm (Conducted)
5G NR	n1: 1920–1980MHz(Uplink); 2110–2170MHz(Downlink) n3: 1710–1785MHz(Uplink); 1805–1880MHz(Downlink) n7: 2500–2570MHz(Uplink); 2620–2690MHz(Downlink) n8: 880–915MHz(Uplink); 925–960MHz(Downlink) n20: 832–862MHz(Uplink); 791–821MHz(Downlink) n28: 703–748MHz(Uplink); 758–803MHz(Downlink) n38: 2570–2620MHz n40: 2300–2400MHz n41: 2496–2690MHz n77: 3300–4200MHz n78: 3300–3800MHz n41: 2496–2690MHz n77: 3300–4200MHz n78: 3300–3800MHz	24 dBm (Conducted) 29 dBm (Conducted)

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Simplified EU Declaration of Conformity

This declaration is only valid for Fortinet products (including combinations of software, firmware and hardware) provided by Fortinet or Fortinet's authorized partners to the end-customer directly for use within the EU or countries that have implemented the EU Directives and/or spectrum regulation. Any Fortinet products not obtained directly from Fortinet or Fortinet's authorized partners may not comply with EU Directives and Fortinet makes no assurances for such products.

България

Този продукт е в съответствие с Директива 2014/53/EC.

Česky

Tento produkt je v souladu se směrnicí 2014/53/EU.



FortiGate Rugged 70G-5G

Dansk

Dette produkt er i overensstemmelse med direktiv 2014/53/EU.

Deutsch

Dieses Produkt entspricht der Richtlinie 2014/53/EU.

Eesti

See toode vastab direktiivile 2014/53/EL.

English

This product is in compliance with Directive 2014/53/EU.

Español

Este producto cumple con la Directiva 2014/53/UE.

Ελληνική

Το προϊόν αυτό συμμορφώνεται με την Οδηγία 2014/53/ΕΕ.

Français

Ce produit est conforme à la Directive 2014/53/UE.

Hrvatski

Ovaj proizvod je u skladu s Direktivom 2014/53/EU.

Italiano

Questo prodotto è conforme alla Direttiva 2014/53/EU.

Latviski

Šis produkts atbilst Direktīvai 2014/53/ES.

Lietuvių

Šis gaminys atitinka direktyvą 2014/53/ES.

Malti

Dan il-prodott huwa konformi mad-Direttiva 2014/53/UE.

Magyar

Ez a termék megfelel a 2014/53/EU irányelvnek.

Nederlands

Dit product is in overeenstemming met Richtlijn 2014/53/EU.

Norsk

Dette produktet er i samsvar med direktiv 2014/53/EU.

Polski

Ten produkt jest zgodny z dyrektywą 2014/53/UE.

Português

Este produto está em conformidade com a Diretiva 2014/53/UE.

Rumunski

Acest produs este în conformitate cu Directiva 2014/53/UE.

Slovensky

Tento produkt je v súlade so smernicou 2014/53/EÚ.

Slovensko

Ta izdelek je v skladu z Direktivo 2014/53/EU.

Suomi

Tämä tuote on direktiivin 2014/53/EU mukainen.

Svenska

Denna produkt överensstämmer med direktiv 2014/53/EU.

Note: The full Declaration of Conformity for this product is available in the link below:
<https://site.fortinet.com/ProductRegulatory/EU>





www.fortinet.com

July 21, 2025

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's SVP Legal and above, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

For Product License Agreement / EULA and Warranty Terms, visit <https://www.fortinet.com/content/dam/fortinet/assets/legal/EULA.pdf>

FGR-70G-5G-QSG-20250718

