


3DH5_Ant1_2402_1000~26500



3DH5_Ant1_2441_0~Reference

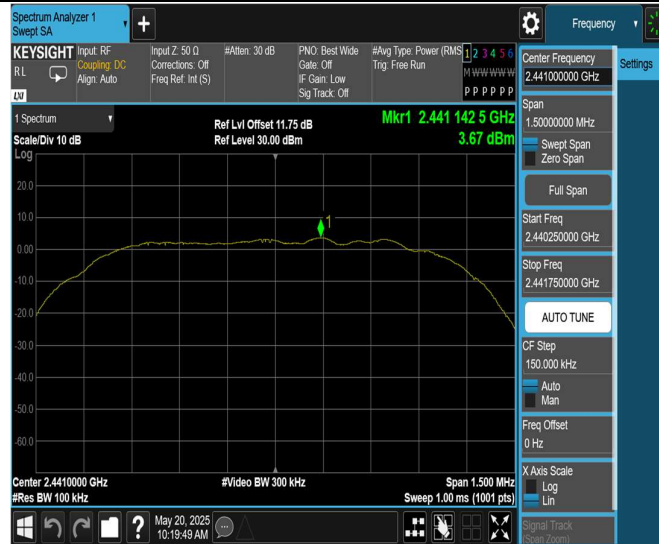

3DH5_Ant1_2441_30~1000



3DH5_Ant1_2441_1000~26500



3DH5_Ant1_2480_0~Reference



3DH5_Ant1_2480_30~1000



3DH5_Ant1_2480_1000~26500



Appendix I: Duty Cycle

Test Result


TestMode	Antenna	Frequency[MHz]	Duty Cycle [%]
DH5	Ant1	2402	100
		2441	100
		2480	100
2DH5	Ant1	2402	100.00
		2441	100.00
		2480	100.00
3DH5	Ant1	2402	100.00
		2441	100.00
		2480	100.00

Test Graphs






2DH5_Ant1_2402

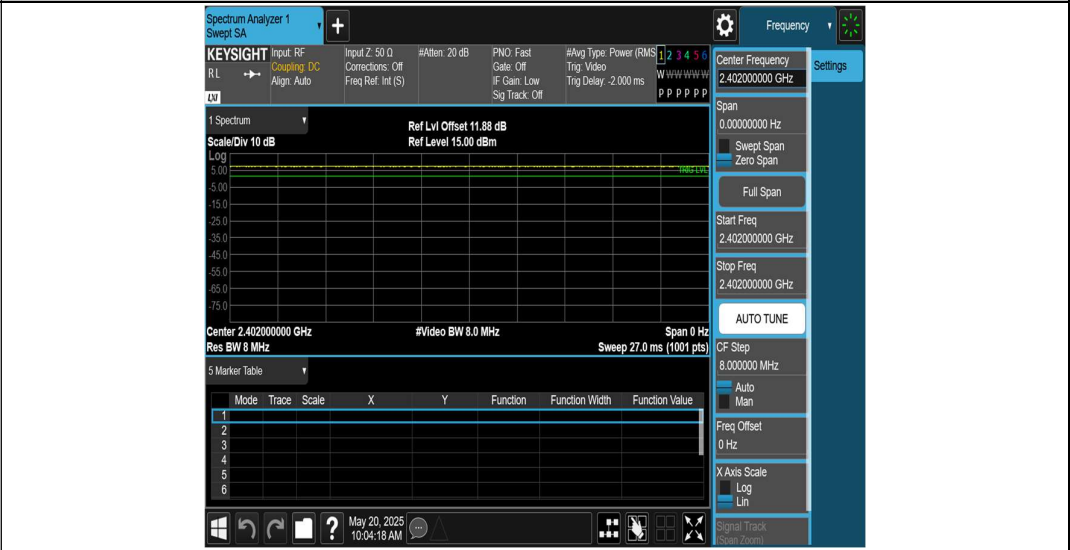

2DH5_Ant1_2441

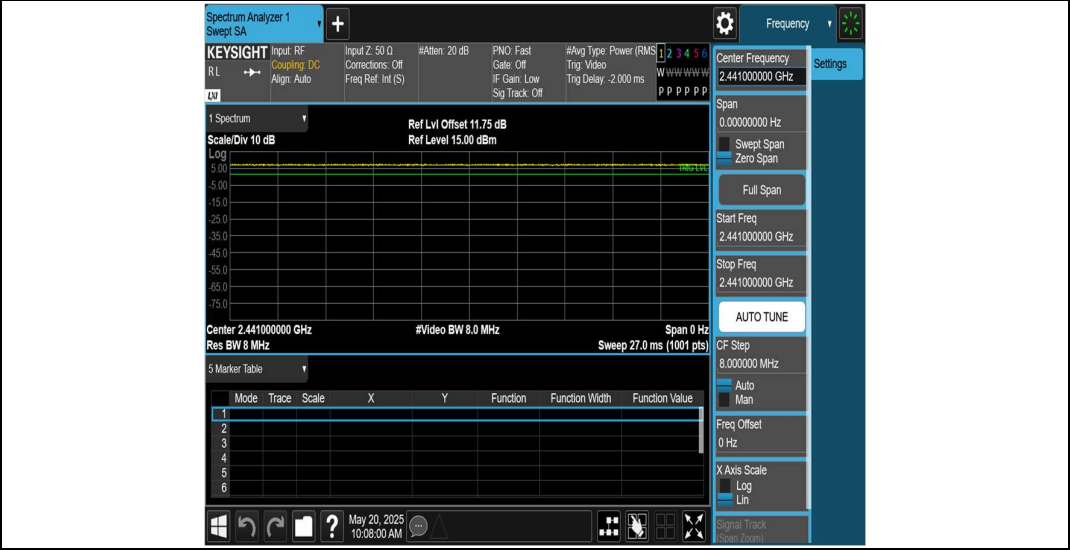


2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441

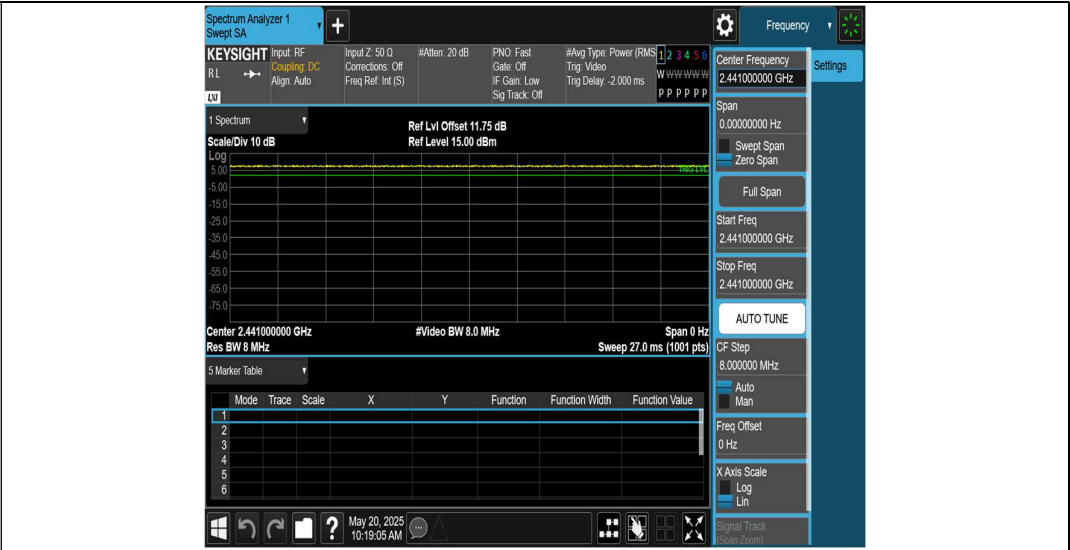

3DH5_Ant1_2480



Appendix J: Emissions in Restricted Bands

Test Result

Mode:	DH5-2402
-------	----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	44.08	74.00	29.92	40.96	54.00	13.04	150	43	Horizontal	PASS
2	2332.48	6.87	45.83	74.00	28.17	42.04	54.00	11.96	150	70	Horizontal	PASS
3	2343.04	6.90	46.26	74.00	27.74	42.46	54.00	11.54	150	70	Horizontal	PASS
4	2368.72	7.17	46.36	74.00	27.64	42.19	54.00	11.81	150	334	Horizontal	PASS
5	2386.32	7.39	46.29	74.00	27.71	42.55	54.00	11.45	150	179	Horizontal	PASS
6	2390	7.73	45.60	74.00	28.40	42.91	54.00	11.09	150	0	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	43.06	74.00	30.94	41.36	54.00	12.64	150	324	Vertical	PASS
2	2332.16	6.87	46.60	74.00	27.40	43.49	54.00	10.51	150	88	Vertical	PASS
3	2346.64	6.90	45.75	74.00	28.25	41.44	54.00	12.56	150	309	Vertical	PASS
4	2363.68	7.10	46.23	74.00	27.77	43.68	54.00	10.32	150	145	Vertical	PASS
5	2370.88	7.20	46.57	74.00	27.43	43.56	54.00	10.44	150	145	Vertical	PASS
6	2390	7.73	45.26	74.00	28.74	41.93	54.00	12.07	150	286	Vertical	PASS

Mode:	DH5-2480
-------	----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	6.54	52.46	74.00	21.54	49.74	54.00	4.26	150	126	Horizontal	PASS
2	2485.4635	6.55	52.23	74.00	21.77	48.68	54.00	5.32	150	308	Horizontal	PASS
3	2488.252	6.55	51.83	74.00	22.17	47.70	54.00	6.30	150	10	Horizontal	PASS
4	2491.75	6.57	52.42	74.00	21.58	49.27	54.00	4.73	150	296	Horizontal	PASS
5	2498.8615	6.58	53.50	74.00	20.50	49.49	54.00	4.51	150	344	Horizontal	PASS
6	2500	6.58	52.02	74.00	21.98	49.27	54.00	4.73	150	3	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	6.54	51.59	74.00	22.41	48.57	54.00	5.43	150	67	Vertical	PASS
2	2485.447	6.55	52.33	74.00	21.67	49.48	54.00	4.52	150	147	Vertical	PASS
3	2486.0245	6.55	52.71	74.00	21.29	50.74	54.00	3.26	150	207	Vertical	PASS
4	2490.892	6.56	52.97	74.00	21.03	49.11	54.00	4.89	150	339	Vertical	PASS
5	2493.136	6.56	52.54	74.00	21.46	49.95	54.00	4.05	150	181	Vertical	PASS
6	2500	6.58	52.16	74.00	21.84	48.39	54.00	5.61	150	67	Vertical	PASS

Mode:	2DH5-2402
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	43.88	74.00	30.12	40.08	54.00	13.92	150	178	Horizontal	PASS
2	2328.56	6.87	44.33	74.00	29.67	41.26	54.00	12.74	150	267	Horizontal	PASS
3	2341.2	6.89	44.71	74.00	29.29	41.91	54.00	12.09	150	143	Horizontal	PASS
4	2355.52	6.99	46.65	74.00	27.35	41.61	54.00	12.39	150	356	Horizontal	PASS
5	2360.72	7.06	44.56	74.00	29.44	41.37	54.00	12.63	150	55	Horizontal	PASS
6	2390	7.73	44.83	74.00	29.17	42.42	54.00	11.58	150	282	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	43.65	74.00	30.35	40.54	54.00	13.46	150	305	Vertical	PASS
2	2326.48	6.86	45.79	74.00	28.21	39.73	54.00	14.27	150	228	Vertical	PASS
3	2338.96	6.89	45.68	74.00	28.32	42.58	54.00	11.42	150	287	Vertical	PASS
4	2361.68	7.08	45.04	74.00	28.96	42.06	54.00	11.94	150	154	Vertical	PASS
5	2380.24	7.33	44.86	74.00	29.14	41.92	54.00	12.08	150	106	Vertical	PASS
6	2390	7.73	45.20	74.00	28.80	42.16	54.00	11.84	150	201	Vertical	PASS

Mode:	2DH5-2480
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	6.54	51.38	74.00	22.62	48.25	54.00	5.75	150	95	Horizontal	PASS
2	2484.7705	6.55	52.95	74.00	21.05	49.41	54.00	4.59	150	356	Horizontal	PASS
3	2487.7735	6.56	52.92	74.00	21.08	48.93	54.00	5.07	150	204	Horizontal	PASS
4	2489.9845	6.56	53.02	74.00	20.98	49.21	54.00	4.79	150	95	Horizontal	PASS
5	2495.7595	6.57	52.81	74.00	21.19	50.36	54.00	3.64	150	59	Horizontal	PASS
6	2500	6.58	51.34	74.00	22.66	48.17	54.00	5.83	150	282	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	6.54	50.69	74.00	23.31	48.15	54.00	5.85	150	288	Vertical	PASS
2	2487.0145	6.56	53.27	74.00	20.73	49.66	54.00	4.34	150	135	Vertical	PASS
3	2488.4995	6.55	52.39	74.00	21.61	48.44	54.00	5.56	150	285	Vertical	PASS
4	2492.8225	6.57	52.57	74.00	21.43	49.55	54.00	4.45	150	48	Vertical	PASS
5	2495.743	6.57	52.98	74.00	21.02	47.87	54.00	6.13	150	227	Vertical	PASS
6	2500	6.58	51.20	74.00	22.80	48.54	54.00	5.46	150	311	Vertical	PASS

Mode:	3DH5-2402
-------	-----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	43.90	74.00	30.10	40.92	54.00	13.08	150	140	Horizontal	PASS
2	2328.64	6.87	45.94	74.00	28.06	42.92	54.00	11.08	150	353	Horizontal	PASS
3	2336.16	6.88	46.23	74.00	27.77	44.46	54.00	9.54	150	146	Horizontal	PASS
4	2354.8	6.98	46.37	74.00	27.63	42.65	54.00	11.35	150	356	Horizontal	PASS
5	2374.32	7.25	46.55	74.00	27.45	42.30	54.00	11.70	150	0	Horizontal	PASS
6	2390	7.73	44.05	74.00	29.95	43.06	54.00	10.94	150	178	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.82	44.15	74.00	29.85	40.41	54.00	13.59	150	183	Vertical	PASS
2	2324.56	6.85	44.99	74.00	29.01	40.75	54.00	13.25	150	132	Vertical	PASS
3	2330.4	6.87	44.54	74.00	29.46	40.40	54.00	13.60	150	147	Vertical	PASS
4	2342.56	6.90	45.40	74.00	28.60	41.03	54.00	12.97	150	84	Vertical	PASS
5	2368	7.16	45.77	74.00	28.23	44.25	54.00	9.75	150	31	Vertical	PASS
6	2390	7.73	44.28	74.00	29.72	41.36	54.00	12.64	150	293	Vertical	PASS

Mode:	3DH5-2480
-------	-----------


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	6.54	51.80	74.00	22.20	48.22	54.00	5.78	150	313	Horizontal	PASS
2	2487.6745	6.56	53.62	74.00	20.38	48.63	54.00	5.37	150	95	Horizontal	PASS
3	2489.3245	6.56	53.14	74.00	20.86	50.62	54.00	3.38	150	320	Horizontal	PASS
4	2495.4955	6.57	52.29	74.00	21.71	48.17	54.00	5.83	150	210	Horizontal	PASS
5	2497.2445	6.58	52.73	74.00	21.27	48.98	54.00	5.02	150	110	Horizontal	PASS
6	2500	6.58	51.89	74.00	22.11	49.21	54.00	4.79	150	182	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	6.54	52.07	74.00	21.93	49.14	54.00	4.86	150	73	Vertical	PASS
2	2484.622	6.55	53.21	74.00	20.79	49.72	54.00	4.28	150	4	Vertical	PASS
3	2488.153	6.55	53.22	74.00	20.78	49.11	54.00	4.89	150	262	Vertical	PASS
4	2491.288	6.57	52.78	74.00	21.22	47.81	54.00	6.19	150	114	Vertical	PASS
5	2494.093	6.57	52.02	74.00	21.98	48.29	54.00	5.71	150	262	Vertical	PASS
6	2500.0000	6.58	50.99	74.00	23.01	47.58	54.00	6.42	150	102	Vertical	PASS


Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Appendix L: Radiated emissions

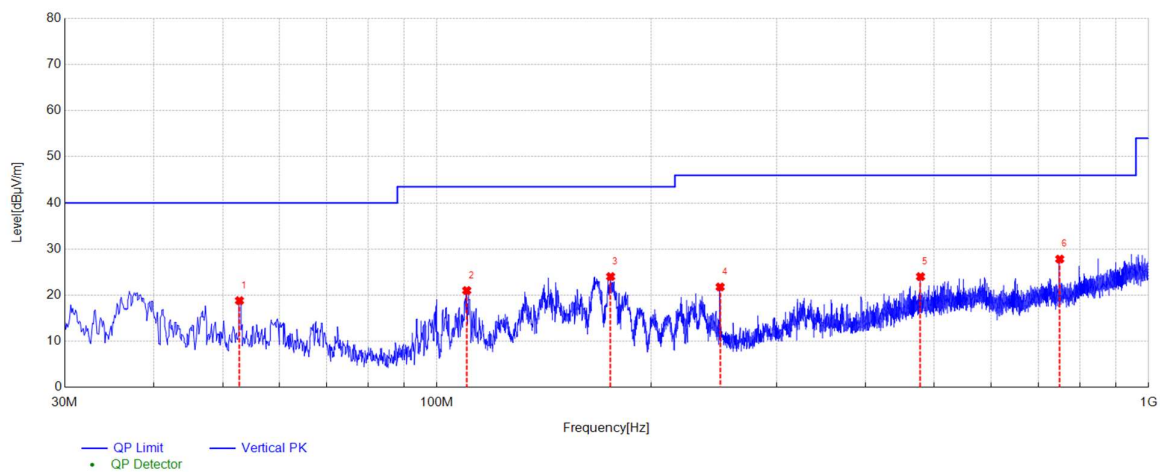

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	52.7973	18.83	-16.58	40.00	21.17	100	360	Vertical	PASS
2	110.130	21.01	-18.88	43.50	22.49	100	30	Vertical	PASS
3	175.417	24.04	-17.37	43.50	19.46	100	300	Vertical	PASS
4	250.018	21.79	-17.97	46.00	24.21	100	110	Vertical	PASS
5	478.087	24.03	-11.97	46.00	21.97	100	30	Vertical	PASS
6	750.103	27.83	-6.16	46.00	18.17	100	120	Vertical	PASS

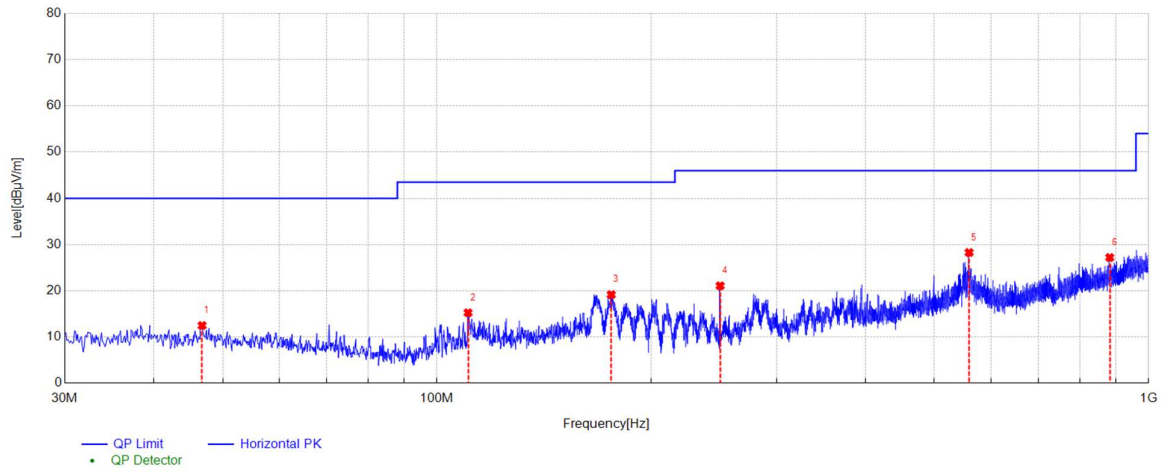

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	46.7827	12.50	-16.23	40.00	27.50	100	140	Horizontal	PASS
2	110.615	15.26	-18.84	43.50	28.24	100	10	Horizontal	PASS
3	175.805	19.18	-17.42	43.50	24.32	100	180	Horizontal	PASS
4	250.018	21.09	-17.97	46.00	24.91	100	140	Horizontal	PASS
5	559.478	28.29	-9.97	46.00	17.71	100	20	Horizontal	PASS
6	881.842	27.21	-3.56	46.00	18.79	100	280	Horizontal	PASS

Mode:	DH5-2402
-------	----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1244	40.46	0.21	74.00	33.54	150	38	Horizontal
2	1900	45.68	6.40	74.00	28.32	150	147	Horizontal
3	3768	42.92	-16.57	74.00	31.08	150	146	Horizontal
4	5115	45.01	-13.16	74.00	28.99	150	345	Horizontal
5	7965	45.80	-9.22	74.00	28.20	150	127	Horizontal
6	12945	49.80	-1.02	74.00	24.20	150	143	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1270	40.44	0.12	74.00	33.56	150	42	Vertical
2	1964	45.63	6.19	74.00	28.37	150	322	Vertical
3	5235	49.31	-12.49	74.00	24.69	150	95	Vertical
4	7095	46.23	-10.31	74.00	27.77	150	285	Vertical
5	9657	46.88	-6.36	74.00	27.12	150	243	Vertical
6	12462	51.22	-1.58	74.00	22.78	150	219	Vertical

Mode:	DH5-2441
-------	----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1210	40.66	0.36	74.00	33.34	150	322	Horizontal
2	1934	45.59	6.29	74.00	28.41	150	252	Horizontal
3	4479	43.44	-14.80	74.00	30.56	150	342	Horizontal
4	8994	45.80	-7.72	74.00	28.20	150	22	Horizontal
5	10599	47.72	-4.57	74.00	26.28	150	330	Horizontal
6	12402	50.00	-1.91	74.00	24.00	150	324	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1246	40.60	0.20	74.00	33.40	150	171	Vertical
2	1898	45.19	6.35	74.00	28.81	150	160	Vertical
3	5247	50.25	-12.49	74.00	23.75	150	171	Vertical
4	7764	45.27	-9.63	74.00	28.73	150	280	Vertical
5	10347	47.84	-5.62	74.00	26.16	150	355	Vertical
6	11715	49.83	-2.73	74.00	24.17	150	159	Vertical

Mode:	DH5-2480
-------	----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1244	40.36	0.21	74.00	33.64	150	0	Horizontal
2	1926	45.69	6.31	74.00	28.31	150	28	Horizontal
3	4635	43.14	-14.01	74.00	30.86	150	162	Horizontal
4	5247	45.51	-12.49	74.00	28.49	150	230	Horizontal
5	9015	46.66	-7.71	74.00	27.34	150	46	Horizontal
6	11487	49.01	-2.96	74.00	24.99	150	7	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1362	40.44	0.21	74.00	33.56	150	133	Vertical
2	1940	46.46	6.26	74.00	27.54	150	288	Vertical
3	5247	48.67	-12.49	74.00	25.33	150	180	Vertical
4	7092	48.89	-10.31	74.00	25.11	150	335	Vertical
5	9435	47.20	-7.02	74.00	26.80	150	132	Vertical
6	11799	49.61	-2.60	74.00	24.39	150	67	Vertical

Mode:	2DH5-2402
-------	-----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1246	41.02	0.20	74.00	32.98	150	90	Horizontal
2	1956	45.01	6.21	74.00	28.99	150	331	Horizontal
3	4740	45.76	-13.44	74.00	28.24	150	358	Horizontal
4	5247	47.31	-12.49	74.00	26.69	150	140	Horizontal
5	9681	47.37	-6.31	74.00	26.63	150	349	Horizontal
6	11295	49.16	-3.03	74.00	24.84	150	14	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1348	40.67	0.15	74.00	33.33	150	44	Vertical
2	2018	45.50	6.37	74.00	28.50	150	34	Vertical
3	4737	45.93	-13.46	74.00	28.07	150	125	Vertical
4	5247	49.94	-12.49	74.00	24.06	150	125	Vertical
5	7098	46.81	-10.32	74.00	27.19	150	323	Vertical
6	10161	47.54	-5.95	74.00	26.46	150	342	Vertical

Mode:	2DH5-2441
-------	-----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1224	39.80	0.30	74.00	34.20	150	141	Horizontal
2	2096	45.88	7.62	74.00	28.12	150	191	Horizontal
3	3891	42.59	-16.08	74.00	31.41	150	348	Horizontal
4	5244	46.13	-12.49	74.00	27.87	150	314	Horizontal
5	6612	45.59	-10.72	74.00	28.41	150	314	Horizontal
6	12249	49.26	-2.17	74.00	24.74	150	144	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1266	40.33	0.13	74.00	33.67	150	19	Vertical
2	1912	45.48	6.36	74.00	28.52	150	0	Vertical
3	4734	46.41	-13.46	74.00	27.59	150	302	Vertical
4	5244	48.76	-12.49	74.00	25.24	150	208	Vertical
5	6570	45.37	-10.66	74.00	28.63	150	288	Vertical
6	10989	48.65	-3.82	74.00	25.35	150	94	Vertical

Mode:	2DH5-2480
-------	-----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1314	40.07	0.06	74.00	33.93	150	67	Horizontal
2	2074	45.88	7.27	74.00	28.12	150	91	Horizontal
3	4728	45.29	-13.49	74.00	28.71	150	78	Horizontal
4	7266	44.75	-9.80	74.00	29.25	150	4	Horizontal
5	8937	45.75	-7.77	74.00	28.25	150	78	Horizontal
6	11256	49.04	-3.18	74.00	24.96	150	218	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1338	40.21	0.12	74.00	33.79	150	3	Vertical
2	2164	46.36	6.72	74.00	27.64	150	238	Vertical
3	5244	48.30	-12.49	74.00	25.70	150	149	Vertical
4	6561	47.97	-10.66	74.00	26.03	150	295	Vertical
5	9549	47.25	-6.73	74.00	26.75	150	91	Vertical
6	11259	48.60	-3.17	74.00	25.40	150	266	Vertical

Mode:	3DH5-2402
-------	-----------

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1362	39.91	0.21	74.00	34.09	150	32	Horizontal
2	2094	46.18	7.59	74.00	27.82	150	278	Horizontal
3	5127	44.38	-13.05	74.00	29.62	150	264	Horizontal
4	7287	46.18	-9.75	74.00	27.82	150	51	Horizontal
5	10992	47.65	-3.79	74.00	26.35	150	33	Horizontal
6	13137	49.55	-0.71	74.00	24.45	150	130	Horizontal

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1508	40.61	0.70	74.00	33.39	150	181	Vertical
2	5247	52.83	-12.49	74.00	21.17	150	67	Vertical
3	6579	45.26	-10.67	74.00	28.74	150	276	Vertical
4	8175	45.86	-9.08	74.00	28.14	150	35	Vertical
5	9420	46.94	-7.08	74.00	27.06	150	55	Vertical
6	15645	52.47	2.38	74.00	21.53	150	170	Vertical

Mode:	3DH5-2441
-------	-----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1200	39.48	0.40	74.00	34.52	150	53	Horizontal
2	1922	45.25	6.32	74.00	28.75	150	27	Horizontal
3	5247	44.92	-12.49	74.00	29.08	150	143	Horizontal
4	8382	46.52	-9.22	74.00	27.48	150	25	Horizontal
5	11070	48.70	-3.69	74.00	25.30	150	138	Horizontal
6	15567	51.44	2.68	74.00	22.56	150	163	Horizontal


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1336	40.06	0.12	74.00	33.94	150	114	Vertical
2	1890	45.64	6.18	74.00	28.36	150	277	Vertical
3	5247	47.96	-12.49	74.00	26.04	150	117	Vertical
4	7107	47.00	-10.30	74.00	27.00	150	274	Vertical
5	11250	48.77	-3.21	74.00	25.23	150	227	Vertical
6	14316	49.76	0.73	74.00	24.24	150	136	Vertical

Mode:	3DH5-2480
-------	-----------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1212	40.42	0.34	74.00	33.58	150	356	Horizontal
2	2044	46.07	6.80	74.00	27.93	150	51	Horizontal
3	4383	42.91	-15.06	74.00	31.09	150	303	Horizontal
4	4941	44.40	-13.62	74.00	29.60	150	152	Horizontal
5	7047	44.83	-10.24	74.00	29.17	150	284	Horizontal
6	11598	48.48	-3.22	74.00	25.52	150	108	Horizontal


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1336	40.04	0.12	74.00	33.96	150	344	Vertical
2	2026	45.64	6.51	74.00	28.36	150	281	Vertical
3	5235	46.98	-12.49	74.00	27.02	150	336	Vertical
4	6564	45.47	-10.66	74.00	28.53	150	162	Vertical
5	9675	46.51	-6.33	74.00	27.49	150	89	Vertical
6	12432	48.56	-1.74	74.00	25.44	150	141	Vertical

Appendix K: Conducted emission AC power port

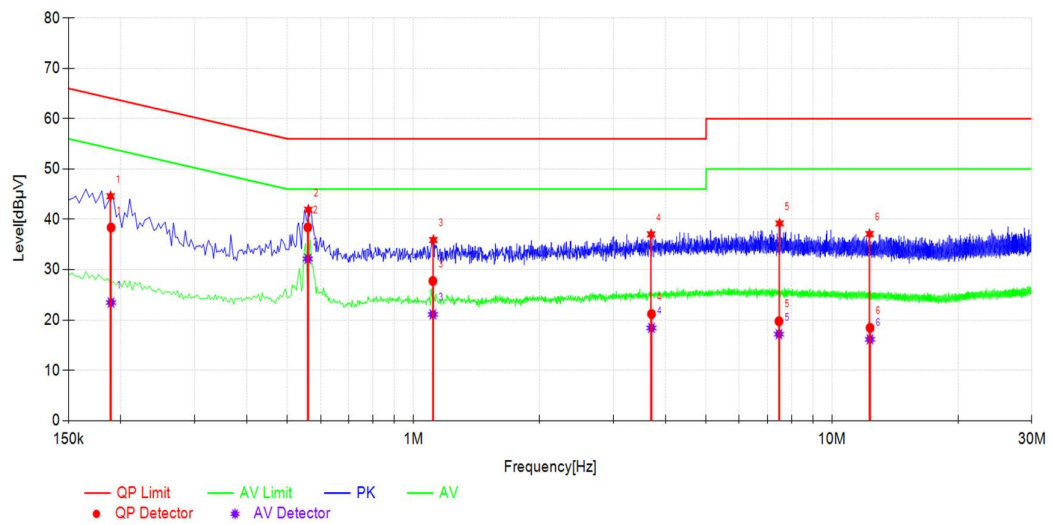

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Polarity	Verdict
1	0.1894	10.33	38.38	64.06	25.68	23.48	54.06	30.58	L1	PASS
2	0.5591	10.25	38.43	56.00	17.57	32.16	46.00	13.84	L1	PASS
3	1.1125	10.35	27.77	56.00	28.23	21.12	46.00	24.88	L1	PASS
4	3.7033	10.30	21.20	56.00	34.80	18.43	46.00	27.57	L1	PASS
5	7.4669	10.42	19.77	60.00	40.23	17.20	50.00	32.80	L1	PASS
6	12.3224	10.50	18.45	60.00	41.55	16.17	50.00	33.83	L1	PASS

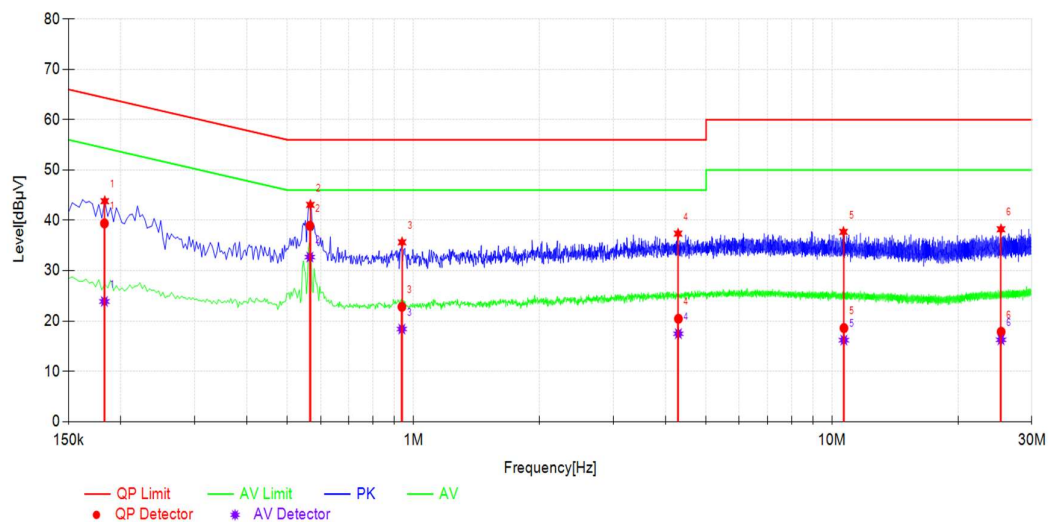

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Polarity	Verdict
1	0.1826	10.35	39.40	64.37	24.97	23.89	54.37	30.48	N	PASS
2	0.5655	10.25	38.94	56.00	17.06	32.71	46.00	13.29	N	PASS
3	0.9380	10.26	22.83	56.00	33.17	18.41	46.00	27.59	N	PASS
4	4.2941	10.40	20.46	56.00	35.54	17.49	46.00	28.51	N	PASS
5	10.6738	10.47	18.60	60.00	41.40	16.21	50.00	33.79	N	PASS
6	25.3415	10.75	17.87	60.00	42.13	16.28	50.00	33.72	N	PASS