

AP220 Instruction Guide

Content

- 1. Equipment list**
- 2. Connecting Way**
- 3. Installation and Debugging**
 - 1) Notice before installation**
 - 2) Installation example (Ceiling)**
 - 3) Debugging**
- 4. Connecting device**

1. Equipment list

1).



2).



3)



4)



5)




6)



- 1) 1*AP device
- 2) 1*Ceiling Base
- 3) 1*POE adapter
- 4) 1*AC power line
- 5) 1*2m HSYV
- 6) 3*screw

2. Connecting Way


1) Standard POE switch power supply(Not require POE adapter)

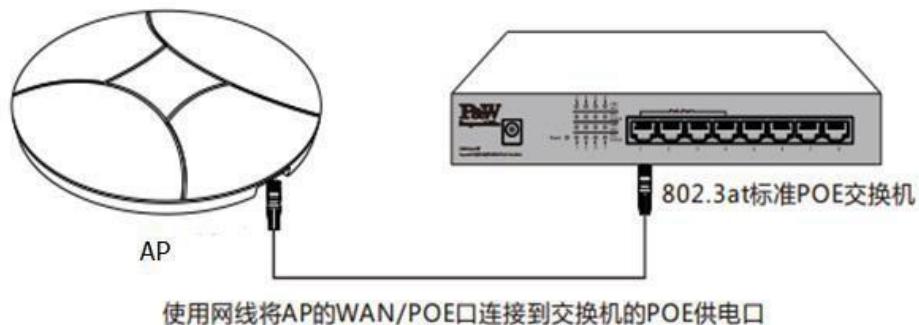

使用网线将AP的WAN/POE口连接到交换机的POE供电口

(Connect the WAN/POE of AP to the POE power supply of switch with wire)

2) POE adapter power supply

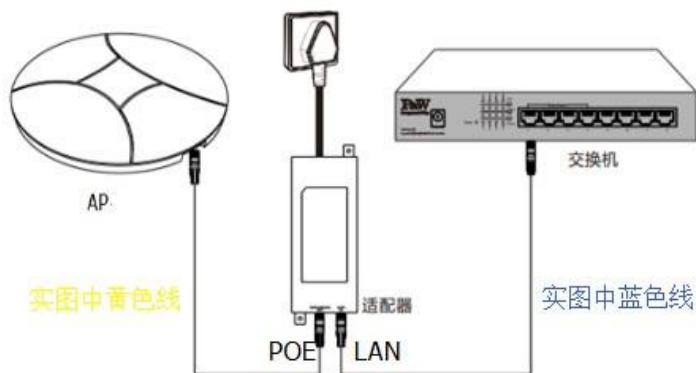

实图中黄色线

POE LAN


实图中蓝色线

3 Installation And Debugging

1) Notice before installation


- Network condition : Get close to the network port (DHCP)
- Power condition : Get close to the 220V AC/DC power outlet
- Site selection : Avoid the exposure of the device and wire
- Internet connection : DHCP
- Inspection : Ensure all equipment parts are intact before installation


2) Example (Ceiling)

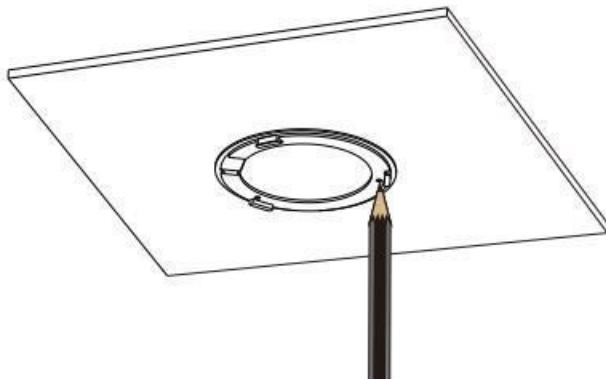

1、install the ceiling base on the ceiling, use a pencil to mark three screw holes on the ceiling.



2、Marked locations, drill three holes of 5mm diameter in marked place

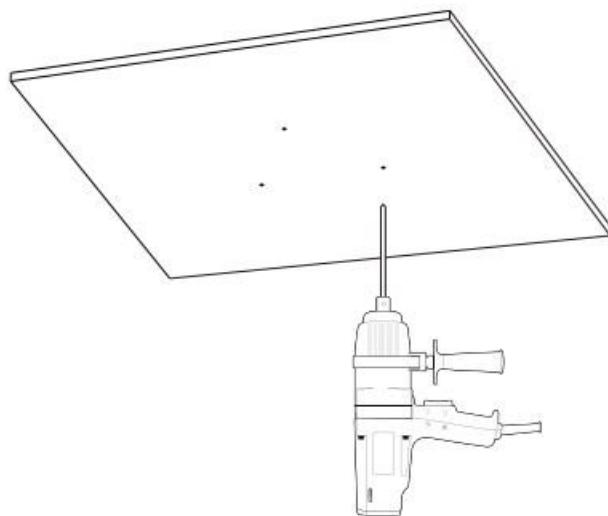

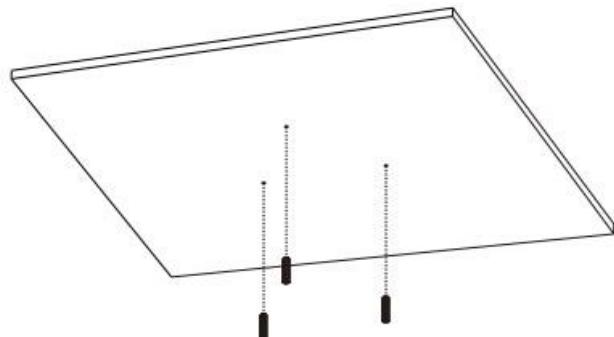

3、insert the expansion bolt to the drilled holes

4、use a screwdriver to tighten the screw into the expansion bolt

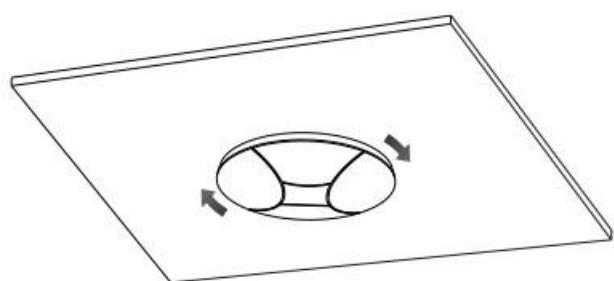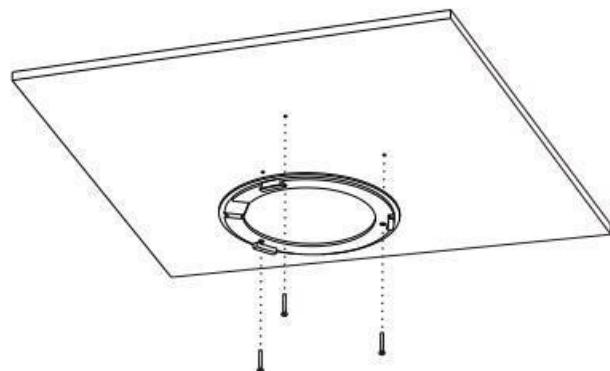

5、After connecting the WAN/POE port with wire, install the AP into the base and turn it clockwise to fixed.

3) Debugging

Open only one AP device to see if it works



Ensure SSID of the each device is your shop name.



Ensure the phone interface automatically jump to the home page after Wi-Fi connection



Inform the technical staff and wait for confirmation



Record the shop name, label of the AP, installation site, device serial number, and the Mac address

4. Connecting device



1, open the phone Wi-Fi connection interface, select the appropriate SSID connection

2. Enter the phone number, get verification code by SMS, then click Connect Now



3. After Certification, automatically jump to the home page.

§ 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

***RF warning for Mobile device:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.